


T3



Walk-behind Floor Scrubber

- Just-scrubbed floors immediately dry and safe for traffic with FaST®
- 75% lower sound level (68.5 dBA)
- Easily cleanable, sanitary Hygenic® solution and recovery tanks

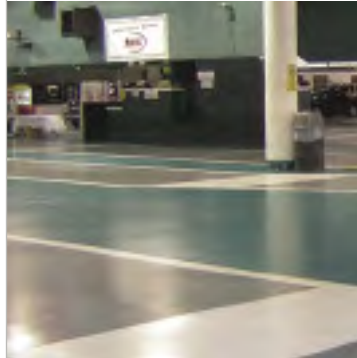

FaST
Foam Scrubbing Technology

The Safe Scrubbing Alternative®

A high-performance scrubber to match your higher standards.

The T3 scrubber delivers an advanced state of safety and cleanliness with award-winning FaST technology and a sound level 75% quieter than leading competitive models.

CREATE A CLEAN, SAFE AND HEALTHY ENVIRONMENT

Improve environmental health in your facility

Exclusive Hygenic tanks allow for easy access and sanitization, reducing mold, bacteria and other contaminants that can grow in enclosed tanks.

Quietly clean in noise-sensitive environments

At only 68.5 decibels, the T3 is 75% quieter than leading competitive models – comparable to normal conversation levels.

Leave behind no cleaning solution

Even around 180-degree turns, the T3's equal-pressure, parabolic squeegee recovers all cleaning solution from the floor.



NFSI-Certified FaST: The Safe Scrubbing Alternative®

Equip your T3 with optional FaST (Foam-activated Scrubbing Technology) – the first scrubbing system certified high-traction by the National Floor Safety Institute.

FaST foam not only removes existing soil, but also old detergent residues, increasing traction 21% and reducing the risk of slip-and-falls.

Operators are safer – they never handle chemicals thanks to the FaST-PAK® detergent.

Using up to 70% less water, floors dry faster, increasing safety and productivity.

Maximize productivity, cleaning more than 10.75 ft² on just one tablespoon of water with FaST technology.



Reach a new standard of safety and cleanliness with the T3.

Eliminate the need for follow-up passes and non-productive mop-ups with the fully self-adjusting splash skirt that captures 100% of scrub deck overspray.



Scrub for up to 80 minutes on a single tank – up to 90% longer than comparable machines – when you equip the T3 with Green Seal certified FaST.



Easily train new operators to use the simple, intuitive control panel.



Save time and storage space with the on-board charger.



Eliminate operator contact with toxic wastewater and prevent clogged hoses/drains with the convenient debris tray.



ENGINEERED FOR SAFETY

Minimize the risk of slip-and-fall injuries and help control insurance costs. Floors are clean, dry and safe for foot traffic almost immediately when scrubbed with FaST.

Reduce operator fatigue and increase productivity. Ergonomic design makes cleaning with the T3 more comfortable for your staff.

Increase scrubbing effectiveness and quality. Clear sight lines and simple controls mean operators can focus solely on their cleaning environment.





FaST-PAK® CLEANING CONCENTRATE

Easy-to-handle FaST-PAK cartridges are safe to use on a variety of floors, effectively cleaning light-to-heavy soils and grease.

Available in FaST 365 daily cleaner, 665 heavy duty cleaner, or 965 heavy duty degreaser.

Tested Safe for Floor Finishes

The nationally-recognized independent testing laboratory, ASPEN, determined that FaST:

- Performs as well as or better than conventional scrubbing;
- Effects on finish gloss are the same as conventional scrubbing.

For a copy of test results, please call toll-free 800.553.8033.



FaST is the only scrubbing system certified by the NFSI to increase floor traction up to 21%.

T3 WALK-BEHIND FLOOR SCRUBBER

FEATURES	T3 17 in Pad Assist	T3 20 in Pad Assist (20 in w/Drive)
Productivity (per hour)		
Theoretical Max	20,230 ft ² / 1,900 m ²	23,800 ft ² / 2,200 m ²
Estimated Coverage* (Conventional)	8,440 ft ² / 780 m ²	10,125 ft ² / 940 m ² (16,065 ft ² / 1,490 m ²)
Estimated Coverage* (FaST)	11,250 ft ² / 1,050 m ²	13,500 ft ² / 1,260 m ² (21,420 ft ² / 2,000 m ²)
Brush/Pad Drive System		
Cleaning path	17 in / 430 mm	20 in / 510 mm
Brush motor horsepower	1.0 hp	1.0 hp
Brush RPM	230 rpm	230 rpm
Brush/pad pressure	50 lbs / 23 kg & 90 lbs / 41 kg	50 lbs / 23 kg & 90 lbs / 41 kg
Solution Delivery System		
Solution tank description	Full access & cleanable	Full access & cleanable
Solution capacity	10.5 gal / 40 L	10.5 gal / 40 L
Recovery System		
Recovery tank description	Full access & cleanable	Full access & cleanable
Recovery tank capacity <small>(includes demisting chamber)</small>	15 gal / 57 L	15 gal / 57 L
Vacuum motor	0.5 hp – two stage	0.5 hp – two stage
Vac motor CFM	65 cfm / 1.84 cmm	65 cfm / 1.84 cmm
Vac motor sealed waterlift	40 in / 1,020 mm	40 in / 1,020 mm
Battery System		
System voltage	24 volt	24 volt
Battery amp hour rating	105 AH @ 20 hr	130 AH @ 20 hr (155 AH @ 20 hr)
Battery run time <small>(continuous cleaning rating)</small>	2.5 hours	2.5 hours (3 hours)
Dimensions/Weights		
Product height	43 in / 1,090 mm	43 in / 1,090 mm
Product length	48 in / 1,220 mm	50.25 in / 1,280 mm
Product width <small>(with squeegee)</small>	30 in / 760 mm	30 in / 760 mm
Product weight <small>(with batteries)</small>	319 lbs / 145 kg	343 lbs / 156 kg (391 lbs / 177 kg)
Total Power Consumption		
Power consumption amps	27 amp nominal	29 amp nominal (30 amp nominal)
Decibel Rating		
Operator's position	68.5 dBA	68.5 dBA
Warranty		
10/3/3	A minimum of ten (10) years on rotationally molded polyethylene housings and parts free from defects and workmanship under normal use and service. The non-polyethylene parts a three (3) year—or 2,500 hours of operation—warranty under normal use and service. On-site service labor coverage of warranty items for three (3) years.	

**Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.*

SEEING IS BELIEVING

See for yourself how the T3 scrubber can help you reach a higher standard of cleanliness and safety in your facility.

Factory Cleaning Equipment, Inc.
1578A Beverly Court
Aurora, IL 60502

800-793-3790
www.thesweeper.com