



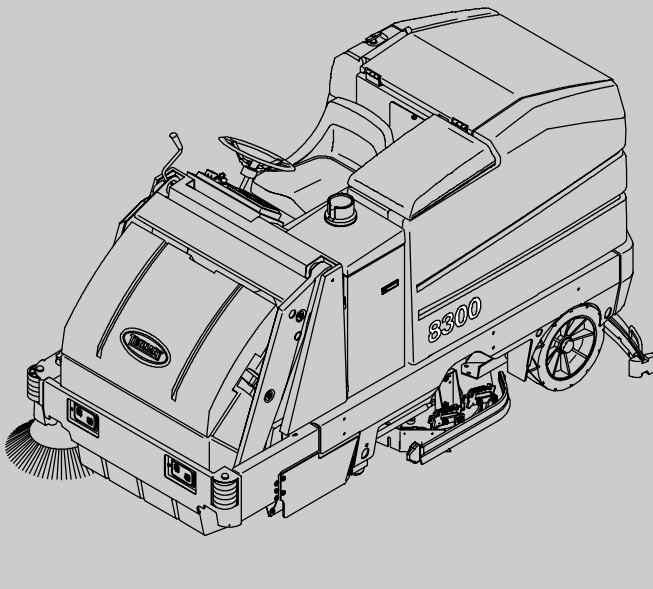

8300

Sweeper Scrubber Parts Manual



EaST
Foam Scrubbing Technology

The Safe Scrubbing Alternative®

ES® Extended Scrub System

North America / International

www.tennantco.com

330630
Rev. 09 (09-2007)



When ordering replacement parts, use the illustrated parts list section in this manual. Before ordering parts or supplies, be sure to have your machine model number and serial number available. Only use TENNANT Company supplied or equivalent parts. Parts and supplies may be ordered online, by phone, or mail from any authorized parts and service center, distributor or from any of the manufacturer's subsidiaries.

This machine will provide excellent service. However, the best results will be obtained at minimum costs if:

- The machine is operated with reasonable care.
- The machine is maintained regularly - per the machine maintenance instructions provided.
- The machine is maintained with manufacturer supplied or equivalent parts.

MACHINE DATA

Please fill out at time of installation for future reference.

Model No.- _____

Serial No.- _____

Machine Options - _____

Sales Rep. - _____

Sales Rep. phone no. - _____

Customer Number - _____

Installation Date - _____

Machine Data Plate



Tennant Company
PO Box 1452
Minneapolis, MN 55440
Phone: (800) 553-8033 or (763) 513-2850
www.tennantco.com

Thermo-Sentry, SmartRelease, SuperScrub, and MaxPro are US registered and unregistered trademarks of Tennant Company.

Specifications and parts are subject to change without notice.

Copyright © 2000 - 2002, 2004 - 2007 TENNANT Company, Printed in U.S.A.


HOW TO USE THIS MANUAL

This section on *HOW TO USE THIS MANUAL* will tell you how to:

- Find important machine information for ordering correct repair parts.
- Find TENNANT part numbers.
- Order TENNANT parts and supplies.

IMPORTANT INFORMATION


When placing an order for parts, the machine model and machine serial number are important. Refer to the *MACHINE DATA* box which is filled out during the installation of your machine. The *MACHINE DATA* box is located on the inside of the front cover of this manual.

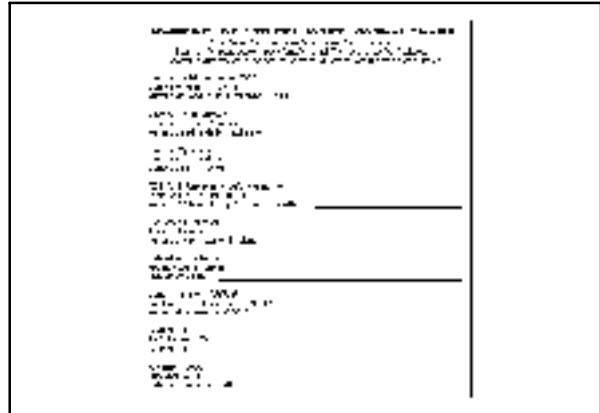

The model number of your machine is on the side of the machine.



The serial number of your machine is printed on the machine data plate located as shown.

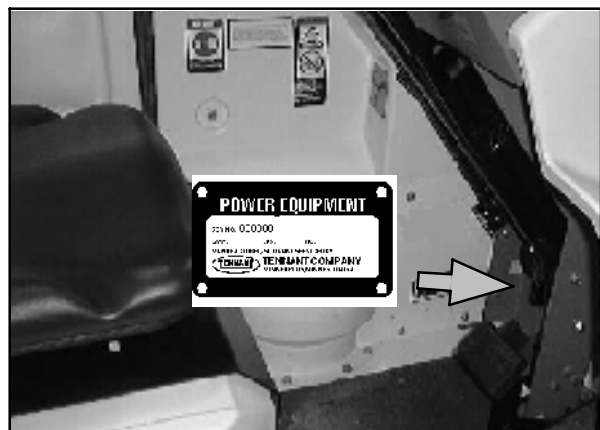

HOW TO USE THIS MANUAL

FINDING A TENNANT PART NUMBER

This manual contains the following sections:

- HOW TO USE THIS MANUAL
- STANDARD PARTS
- OPTIONS
- BREAKDOWNS
- CROSS REFERENCE

The STANDARD PARTS section lists repair parts for standard machines. They are grouped in this general order:

- General wear parts.
- Machine frame and related parts.
- Machine propelling system.
- Scrubbing components.
- Sweeping components.
- Electrical parts.

The OPTION section lists repair parts of options.


The BREAKDOWN section lists available repair parts of major components.

All sections in this manual consist of parts illustrations and corresponding parts lists.

The parts illustrations are numbered with **Ref** numbers which refer to corresponding parts lists.

The parts lists include a number of columns of information:


- **Ref** – column refers to the reference number on the parts illustration.
▽ – indicates the part is an assembly.
▲ – indicates the part is included in the assembly listed just before it.
- **TENNANT Part No.** – column lists the TENNANT part number for the part.
- **Serial Number** – column indicates the set of machines the part number is applicable to. Serial numbers change when the machine design has been modified. The most current design of the machine is shown in the main illustration, older designs are boxed in a corner of the illustration.
- **Description** – column is a brief description of the part.
- **Qty.** – column lists the quantity of that part used in that area of the machine.

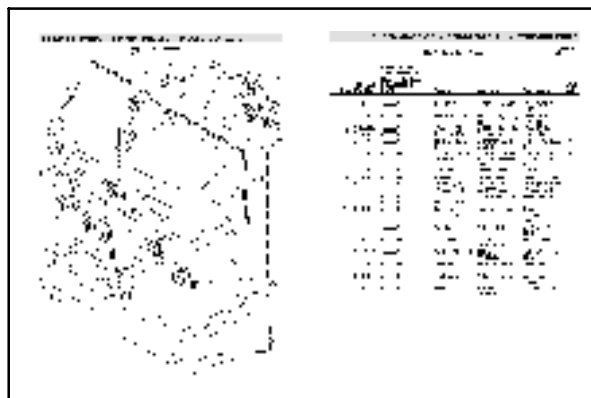

TENNANT Part No.		Serial Number		Description		Qty.	
Ref.	Part No.	Serial No.	Part No.	Description	Qty.	Ref.	Part No.
1	1000	1000	1000	1000	1	1	1000
2	1001	1001	1001	1001	1	2	1001
3	1002	1002	1002	1002	1	3	1002
4	1003	1003	1003	1003	1	4	1003
5	1004	1004	1004	1004	1	5	1004
6	1005	1005	1005	1005	1	6	1005
7	1006	1006	1006	1006	1	7	1006
8	1007	1007	1007	1007	1	8	1007
9	1008	1008	1008	1008	1	9	1008
10	1009	1009	1009	1009	1	10	1009
11	1010	1010	1010	1010	1	11	1010
12	1011	1011	1011	1011	1	12	1011
13	1012	1012	1012	1012	1	13	1012
14	1013	1013	1013	1013	1	14	1013
15	1014	1014	1014	1014	1	15	1014
16	1015	1015	1015	1015	1	16	1015
17	1016	1016	1016	1016	1	17	1016
18	1017	1017	1017	1017	1	18	1017
19	1018	1018	1018	1018	1	19	1018
20	1019	1019	1019	1019	1	20	1019
21	1020	1020	1020	1020	1	21	1020
22	1021	1021	1021	1021	1	22	1021
23	1022	1022	1022	1022	1	23	1022
24	1023	1023	1023	1023	1	24	1023
25	1024	1024	1024	1024	1	25	1024
26	1025	1025	1025	1025	1	26	1025
27	1026	1026	1026	1026	1	27	1026
28	1027	1027	1027	1027	1	28	1027
29	1028	1028	1028	1028	1	29	1028
30	1029	1029	1029	1029	1	30	1029
31	1030	1030	1030	1030	1	31	1030
32	1031	1031	1031	1031	1	32	1031
33	1032	1032	1032	1032	1	33	1032
34	1033	1033	1033	1033	1	34	1033
35	1034	1034	1034	1034	1	35	1034
36	1035	1035	1035	1035	1	36	1035
37	1036	1036	1036	1036	1	37	1036
38	1037	1037	1037	1037	1	38	1037
39	1038	1038	1038	1038	1	39	1038
40	1039	1039	1039	1039	1	40	1039
41	1040	1040	1040	1040	1	41	1040
42	1041	1041	1041	1041	1	42	1041
43	1042	1042	1042	1042	1	43	1042
44	1043	1043	1043	1043	1	44	1043
45	1044	1044	1044	1044	1	45	1044
46	1045	1045	1045	1045	1	46	1045
47	1046	1046	1046	1046	1	47	1046
48	1047	1047	1047	1047	1	48	1047
49	1048	1048	1048	1048	1	49	1048
50	1049	1049	1049	1049	1	50	1049
51	1050	1050	1050	1050	1	51	1050
52	1051	1051	1051	1051	1	52	1051
53	1052	1052	1052	1052	1	53	1052
54	1053	1053	1053	1053	1	54	1053
55	1054	1054	1054	1054	1	55	1054
56	1055	1055	1055	1055	1	56	1055
57	1056	1056	1056	1056	1	57	1056
58	1057	1057	1057	1057	1	58	1057
59	1058	1058	1058	1058	1	59	1058
60	1059	1059	1059	1059	1	60	1059
61	1060	1060	1060	1060	1	61	1060
62	1061	1061	1061	1061	1	62	1061
63	1062	1062	1062	1062	1	63	1062
64	1063	1063	1063	1063	1	64	1063
65	1064	1064	1064	1064	1	65	1064
66	1065	1065	1065	1065	1	66	1065
67	1066	1066	1066	1066	1	67	1066
68	1067	1067	1067	1067	1	68	1067
69	1068	1068	1068	1068	1	69	1068
70	1069	1069	1069	1069	1	70	1069
71	1070	1070	1070	1070	1	71	1070
72	1071	1071	1071	1071	1	72	1071
73	1072	1072	1072	1072	1	73	1072
74	1073	1073	1073	1073	1	74	1073
75	1074	1074	1074	1074	1	75	1074
76	1075	1075	1075	1075	1	76	1075
77	1076	1076	1076	1076	1	77	1076
78	1077	1077	1077	1077	1	78	1077
79	1078	1078	1078	1078	1	79	1078
80	1079	1079	1079	1079	1	80	1079
81	1080	1080	1080	1080	1	81	1080
82	1081	1081	1081	1081	1	82	1081
83	1082	1082	1082	1082	1	83	1082
84	1083	1083	1083	1083	1	84	1083
85	1084	1084	1084	1084	1	85	1084
86	1085	1085	1085	1085	1	86	1085
87	1086	1086	1086	1086	1	87	1086
88	1087	1087	1087	1087	1	88	1087
89	1088	1088	1088	1088	1	89	1088
90	1089	1089	1089	1089	1	90	1089
91	1090	1090	1090	1090	1	91	1090
92	1091	1091	1091	1091	1	92	1091
93	1092	1092	1092	1092	1	93	1092
94	1093	1093	1093	1093	1	94	1093
95	1094	1094	1094	1094	1	95	1094
96	1095	1095	1095	1095	1	96	1095
97	1096	1096	1096	1096	1	97	1096
98	1097	1097	1097	1097	1	98	1097
99	1098	1098	1098	1098	1	99	1098
100	1099	1099	1099	1099	1	100	1099

NOTE: If a service kit is installed on your machine, be sure to keep the **INSTRUCTION BULLETIN** which came with the kit. It contains repair parts numbers needed for ordering future parts.

NOTE: Fasteners used in this machine may be metric or non-metric. Take care when replacing hardware to replace with same thread size.

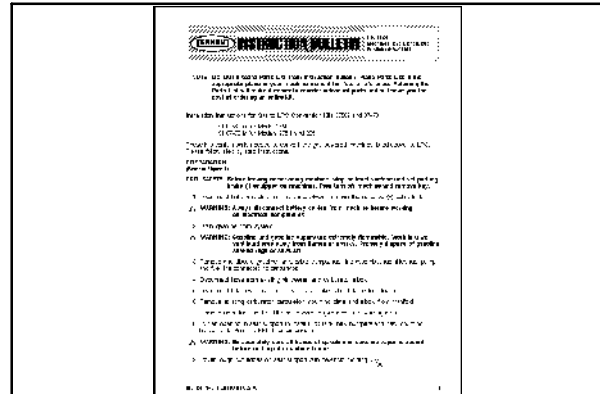

PLACING AN ORDER

Orders may be placed by phone, fax, or by mail. Phone orders may need written confirmation. Follow the steps below to insure prompt delivery:

1. Identify the model number of your machine.
2. Identify the serial number of your machine.
3. Find the part number of the part you need. Do not order by page number or reference number. If you are not able to find the part number, call your TENNANT representative for help or send the old part as a sample.
4. Determine the quantity of the part you need.
5. Provide the following company information:
 - Company name
 - Customer ID Number
 - Shipping address
 - Billing address
 - First and last name of person ordering parts
 - Telephone number
 - Purchase order number
6. Provide definitive shipping instructions.

HOW TO USE THIS MANUAL

Any claim for loss or damage to a shipment in transit should be filed promptly with the transportation company making the delivery. Shipments will be complete unless the packing list or order acknowledgement indicates items back ordered.

If parts received are suspected to be incorrect or defective, please contact the TENNANT representative from whom you ordered the part. They will give authorization for return and/or handle replacement shipments when required.

SECTION 2

Contents	Page
Fig. 1 - General Recommended Maintenance Items	2-3
Fig. 2 - Brushes, Replacement for MaxPro 1000	2-6
Fig. 3 - Brushes, Replacement for MaxPro 1200	2-8
Fig. 4 - Main Frame Group	2-10
Fig. 5 - Covers Group, Top and Side	2-12
Fig. 6 - Covers Group, Rear	2-14
Fig. 7 - Electrical Instrument Panel Group	2-16
Fig. 8 - Power Steering Group	2-18
Fig. 9 - Seat Group	2-20
Fig. 10 - Directional Control Group	2-22
Fig. 11 - Wheel Group, Front Drive	2-24
Fig. 12 - Brake Pedal Group	2-26
Fig. 13 - Wheel and Brake Group, Rear	2-28
Fig. 14 - Solution Tank Group	2-30
Fig. 15 - FaST Solution Pump Group	2-32
Fig. 16 - FaST Air Pump and Detergent Group	2-34
Fig. 17 - FaST Foam Filter Group	2-36
Fig. 18 - Solution Control Group	2-38
Fig. 19 - Recovery Tank Group	2-40
Fig. 20 - Recovery Tank Drain Assembly	2-42
Fig. 21 - Scrubber Vacuum Fan Group	2-44
Fig. 22 - Scrub Head Lift Group	2-46
Fig. 23 - Max Pro 1000 (Disc-Brush) Scrub Head Frame Group	2-48
Fig. 24 - Max Pro 1000 (Disc-Brush) Scrub Head Linkage Group	2-50
Fig. 25 - Max Pro 1000 (Disc-Brush) Solution Valve Group (Non FaST)	2-52
Fig. 26 - Max Pro 1000 (Disc-Brush) Solution Valve Group (FaST)	2-54
Fig. 27 - Max Pro 1000 (Disc-Brush) Edge Scrub Group	2-56
Fig. 28 - Max Pro 1000 (Disc-Brush) Right Side Squeegee Group	2-58
Fig. 29 - Max Pro 1000 (Disc-Brush) Left Side Squeegee Group	2-60
Fig. 30 - Squeegee Linkage Group, Rear	2-62
Fig. 31 - Squeegee Lift Group, Rear	2-64
Fig. 32 - Max Pro 1000 Rear Squeegee Group	2-66
Fig. 33 - Sweeper Main Brush Doors Group	2-68
Fig. 34 - Sweeper Side Brush Motor and Pivot Group	2-70
Fig. 35 - Sweeper Side Brush Lift Group	2-72
Fig. 36 - Sweeper Main Brush Drive Group	2-74
Fig. 37 - Sweeper Main Brush Idler Group	2-76
Fig. 38 - Sweeper Main Brush Lift Group	2-78

Contents	Page
Fig. 39 - Hopper and Bumper Group	2-80
Fig. 40 - Sweeper Main Brush Skirts Group	2-82
Fig. 41 - Hopper Lift Arms Group	2-84
Fig. 42 - Hopper Chain and Cover Group	2-86
Fig. 43 - Hopper Filter Box Group	2-88
Fig. 44 - Sweeper Vacuum Fan Group	2-90
Fig. 45 - Hydraulic Power Unit and Solenoid Valve Group	2-92
Fig. 46 - Hydraulic Schematic	2-93
Fig. 47 - Hydraulic Hose Group	2-94
Fig. 48 - Electrical Control Box Circuit Breaker Group	2-96
Fig. 49 - Electrical Control Box Contactor Group (000000-003545)	2-98
Fig. 50 - Electrical Control Box Contactor Group (003546-)	2-100
Fig. 51 - Electrical Control Box Wires Group (000000-003545)	2-102
Fig. 52 - Electrical Control Box Wires Group (003546-)	2-104
Fig. 53 - Electrical Circuit Board Group	2-106
Fig. 54 - Electrical Group, FaST	2-107
Fig. 55 - Electrical Schematic	2-108
Fig. 56 - Electrical Wire Harnesses Group	2-112
Fig. 57 - Electrical Wire Harness Group, FaST	2-128
Fig. 58 - Label Group	2-129

Fig. 1 - General Recommended Maintenance Items

8300

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
	387660	(000000-	) Tire Assy, Solid, 16.2x6.0 5.7bc/5bolt	1
	387014	(000000-	) Tire Assy, 16 X 5 X 12.12	2
	58327	(000000-	) Belt, V, [Hc41] 41.0l	2
	386626	(000000-	) Flap, Front	1
	386828	(000000-	) Skirt, Recirculation	1
	386829	(000000-	) Skirt, Recirculation	1
	360686	(000000-	) Belt, V, [3v] 33.5l	1
	386981	(000000-	) Seal, Hppr, Vertical	2
	386982	(000000-	) Seal, Hppr, Horiz	2
	363796	(000000-	) Seal, Vacfan, [8010]	1
	387059	(000000-	) Skirt, Lh	1
	387055	(000000-	) Skirt, Rh	1
▽	386024	(000000-	) Kit, Maint, 800hr, [8300-Mp1000-Disk]	1
▲	386284	(000000-	) Blade, Sqge, Rear	1
▲	386283	(000000-	) Blade, Sqge, Front	1
▲	386387	(000000-	) Skirt, Front, Scrub Head, 2-Brush, Ele	1
▲	386388	(000000-	) Skirt, Rear, Scrub Head, 2-Brush, Ele	1
▲	387294	(000000-	) Skirt, Side, Scrbr Head, Ele	1
▲	386260	(000000-	) Squeegee, Side	2
▲	20833	(000000-	) Wheel, 3.0d 1.38w 0.50b	1
▲	71101	(000000-	) Cable, .12d, 13.3l, .2clevis/.2clevis	1
▲	387023	(000000-	) Hose, Vacuum	1
▲	386267	(000000-	) Hose, Vacuum, 91.0l	1
▲	375213	(000000-	) Filter, Pkg, Dust, Panl, 81plts	1
▲	1037822	(000000-	) Filter, Panl, Dust, 2.0 X 06.1 X 07.6	1
▲	66213	(000000-	) Kit, Brake	1
▲	386223	(000000-	) Gasket, Tank, Recovery	1
▲	79320	(000000-	) Gasket, Cap, Drain	2
▲	223264	(000000-	) Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h	1
▲	386323	(000000-	) Gasket, Mtg, Fan	1
▽	386025	(000000-	) Kit, Maint, 800hr, [8300-Mp1200-Disk]	1
▲	386834	(000000-	) Blade, Sqge, Rear 48.0l	1
▲	386833	(000000-	) Blade, Sqge, Front 48.0l	1
▲	386825	(000000-	) Skirt, Front, Scrub Head, 3-Brush, Ele	1
▲	386826	(000000-	) Skirt, Rear, Scrub Head, 3-Brush, Ele	1
▲	386260	(000000-	) Squeegee, Side	2
▲	20833	(000000-	) Wheel, 3.0d 1.38w 0.50b	1
▲	71101	(000000-	) Cable, .12d, 13.3l, .2clevis/.2clevis	1
▲	387023	(000000-	) Hose, Vacuum	1
▲	386267	(000000-	) Hose, Vacuum, 91.0l	1
▲	375213	(000000-	) Filter, Pkg, Dust, Panl, 81plts	1
▲	1037822	(000000-	) Filter, Panl, Dust, 2.0 X 06.1 X 07.6	1
▲	66213	(000000-	) Kit, Brake	1
▲	386223	(000000-	) Gasket, Tank, Recovery	1
▲	79320	(000000-	) Gasket, Cap, Drain	2
▲	223264	(000000-	) Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h	1
▲	386323	(000000-	) Gasket, Mtg, Fan	1

STANDARD PARTS

Fig. 1 - General Recommended Maintenance Items

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386026	(000000-	) Kit, Maint, 800hr, [8300-Mp1000-Cyl]	1
▲	386284	(000000-	) Blade, Sqge, Rear	1
▲	386283	(000000-	) Blade, Sqge, Front	1
▲	20833	(000000-	) Wheel, 3.0d 1.38w 0.50b	1
▲	71101	(000000-	) Cable, .12d, 13.3l, .2clevis/.2clevis	1
▲	387023	(000000-	) Hose, Vacuum	1
▲	386267	(000000-	) Hose, Vacuum, 91.0l	1
▲	386053	(000000-	) Belt, Drive	1
▲	375213	(000000-	) Filter, Pkg, Dust, Panl, 81plts	1
▲	1037822	(000000-	) Filter, Panl, Dust, 2.0 X 06.1 X 07.6	1
▲	66213	(000000-	) Kit, Brake	1
▲	386223	(000000-	) Gasket, Tank, Recovery	1
▲	79320	(000000-	) Gasket, Cap, Drain	2
▲	223264	(000000-	) Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h	1
▲	386323	(000000-	) Gasket, Mtg, Fan	1
▽	386027	(000000-	) Kit, Maint, 800hr, [8300-Mp1200-Cyl]	1
▲	386834	(000000-	) Blade, Sqge, Rear 48.0l	1
▲	386833	(000000-	) Blade, Sqge, Front 48.0l	1
▲	20833	(000000-	) Wheel, 3.0d 1.38w 0.50b	1
▲	71101	(000000-	) Cable, .12d, 13.3l, .2clevis/.2clevis	1
▲	387023	(000000-	) Hose, Vacuum	1
▲	386267	(000000-	) Hose, Vacuum, 91.0l	1
▲	386053	(000000-	) Belt, Drive	1
▲	375213	(000000-	) Filter, Pkg, Dust, Panl, 81plts	1
▲	1037822	(000000-	) Filter, Panl, Dust, 2.0 X 06.1 X 07.6	1
▲	66213	(000000-	) Kit, Brake	1
▲	386223	(000000-	) Gasket, Tank, Recovery	1
▲	79320	(000000-	) Gasket, Cap, Drain	2
▲	223264	(000000-	) Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h	1
▲	386323	(000000-	) Gasket, Mtg, Fan	1
▽	387507	(000000-	) Kit, Maint, 800hr [8300-Mp1200-Disk-Vac]	1
▲	386284	(000000-	) Blade, Sqge, Rear	1
▲	386283	(000000-	) Blade, Sqge, Front	1
▲	386387	(000000-	) Skirt, Front, Scrub Head, 2-Brush, Ele	1
▲	386388	(000000-	) Skirt, Rear, Scrub Head, 2-Brush, Ele	1
▲	387294	(000000-	) Skirt, Side, Scrbr Head, Ele	1
▲	386260	(000000-	) Squeegee, Side	1
▲	20833	(000000-	) Wheel, 3.0D 1.38W 0.50B	1
▲	71101	(000000-	) Cable, .12d, 13.3l, .2clevis/.2clevis	1
▲	387023	(000000-	) Hose, Vacuum	1
▲	1005026	(003546-	) Kit, Modif, Ftg Location, [Discvac]	1
▲	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	1
▲	387545	(000000-	) Blade Assy, Sqge, Side	1
▲	387546	(000000-	) Blade, Squeegee	1
▲	375213	(000000-	) Filter, Pkg, Dust, Panl, 81plts	1
▲	1037822	(000000-	) Filter, Panl, Dust, 2.0 X 06.1 X 07.6	1
▲	66213	(000000-	) Kit, Brake	1
▲	386223	(000000-	) Gasket, Tank, Recovery	1

Fig. 1 - General Recommended Maintenance Items

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▲	79320	(000000-	) Gasket, Cap, Drain	2
▲	223264	(000000-	) Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h	1
▲	386323	(000000-	) Gasket, Mtg, Fan	1
▲	58327	(000000-	) Belt, V, [Hc41] 41.0l	1
▲	385938	(000000-	) Brush, Conveyor, Cyl, 35l, 4sr	1
▲	386626	(000000-	) Flap, Front	1
▲	386828	(000000-	) Skirt, Recirculation	1
▲	386829	(000000-	) Skirt, Recirculation	1
▲	360686	(000000-	) Belt, V, [3v] 33.5l	1
▲	387408	(000000-	) Seal, Vac Fan	1
▲	387413	(000000-	) Seal	1
▲	387406	(000000-	) Seal	1
▲	387407	(000000-	) Seal	2
	386514	(000000-003545	) Hose, Vacuum, 58.5l	1
	387256	(000000-003545	) Hose, Vacuum, 35.0l	1
	387517	(000000-003545	) Hose Assy, W/2 Cuff, 1.0d 41.0l	1

Fig. 2 - Brushes, Replacement for MaxPro 1000

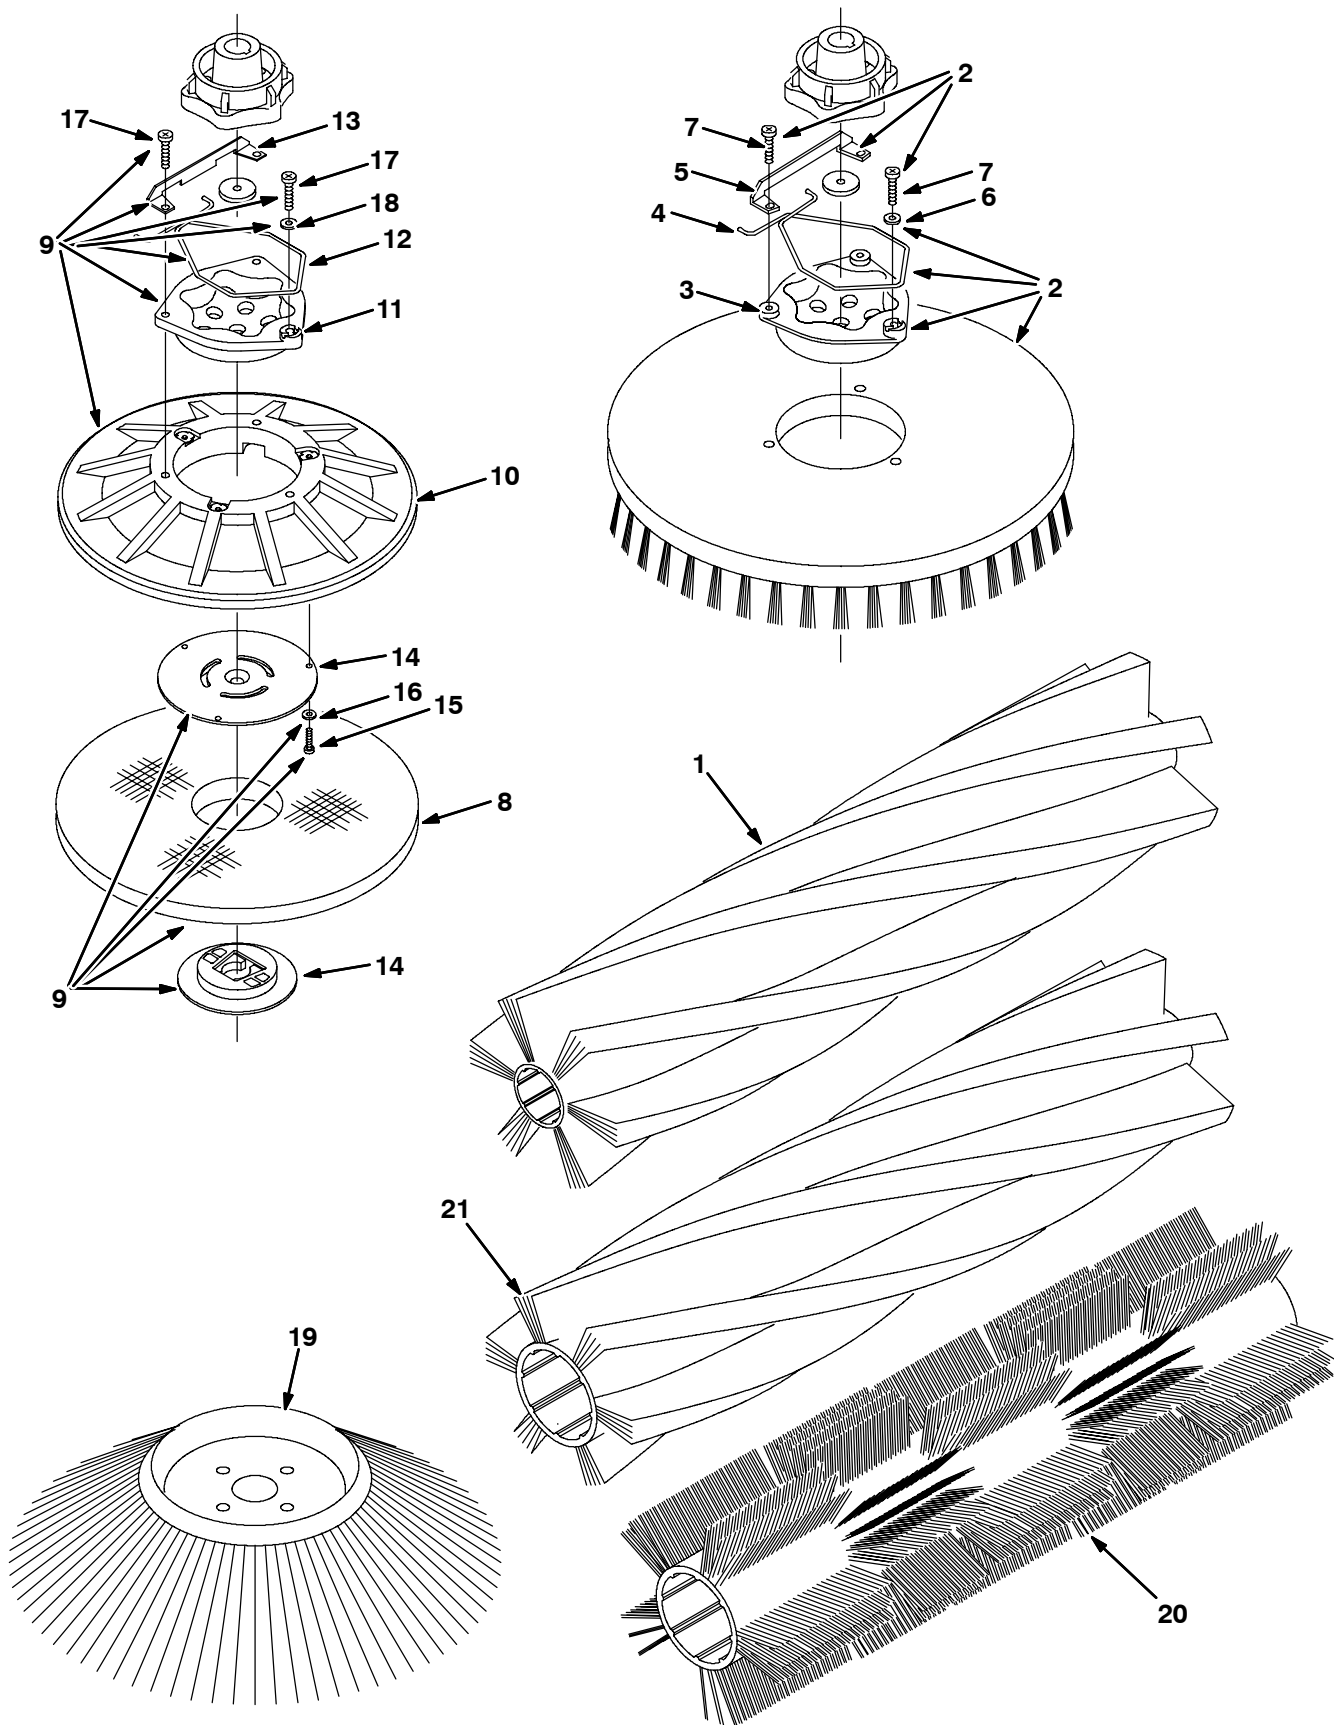


Fig. 2 - Brushes, Replacement for MaxPro 1000

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
	1	386230	(000000-	) Brush, Scrub, 39l, 20sr, Pyp, Spl	2
	1	386240	(000000-	) Brush, Scrub, 39l, 20sr, Super Abr, Spl	2
	1	386250	(000000-	) Brush, Scrub, 39l, 20sr, Nyl, Spl	2
▽	2	14967	(000000-	) Brush Assy, Disk, Scb, 20.0 D, Nyl	2
▲	3	15539	(000000-	) Adaptor, Brush	1
▲	4	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	5	24299	(000000-	) Bracket, Retainer, Spring	1
▲	6	01684	(000000-	) Washer, Flt, .25 Ss	1
▲	7	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
▽	2	14953	(000000-	) Brush Assy, Disk, Scb, 20.0 D, Pyp	2
▲	3	15539	(000000-	) Adaptor, Brush	1
▲	4	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	5	24299	(000000-	) Bracket, Retainer, Spring	1
▲	6	01684	(000000-	) Washer, Flt, .25 Ss	1
▲	7	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
▽	2	378951	(000000-	) Brush Assy, Disk, Scb, 20.0D, Super Abr	2
▲	3	15539	(000000-	) Adaptor, Brush	1
▲	4	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	5	24299	(000000-	) Bracket, Retainer, Spring	1
▲	6	01684	(000000-	) Washer, Flt, .25 Ss	1
▲	7	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
	8	17260	(000000-	) Pad, Polish, 20.0d, White	2
	8	17261	(000000-	) Pad, Buff, 20.0d, Red	2
	8	17262	(000000-	) Pad, Scrub, 20.0d, Blue	2
	8	17263	(000000-	) Pad, Strip, 20.0d, Brown	2
▽	9	370020	(000000-	) Disk Assy, Pad Drive, 20d	2
▲	10	370080	(000000-	) Disk, Pad Drive, W/ Face, 20d	1
▲	11	15539	(000000-	) Adaptor, Brush	1
▲	12	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	13	24299	(000000-	) Bracket, Retainer, Spring	1
▲	14	370090	(000000-	) Device, Centering	1
▲	15	09198	(000000-	) Screw, Pan, M04 X 0.7 X 35, Ss	3
▲	16	41579	(000000-	) Washer, Flt, #08 Ss	3
▲	17	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
▲	18	01684	(000000-	) Washer, Flt, .25 Ss	1
	19	87419	(000000-	) Brush Assy - S.sw - 19.0 Dia, Polypr	1
	20	385936	(000000-	) Brush, Swp, 36L, Window, Pp, Spl	1
	21	385935	(000000-	) Brush, Swp, 36l, 6dr, Spl	1

Fig. 3 - Brushes, Replacement for MaxPro 1200

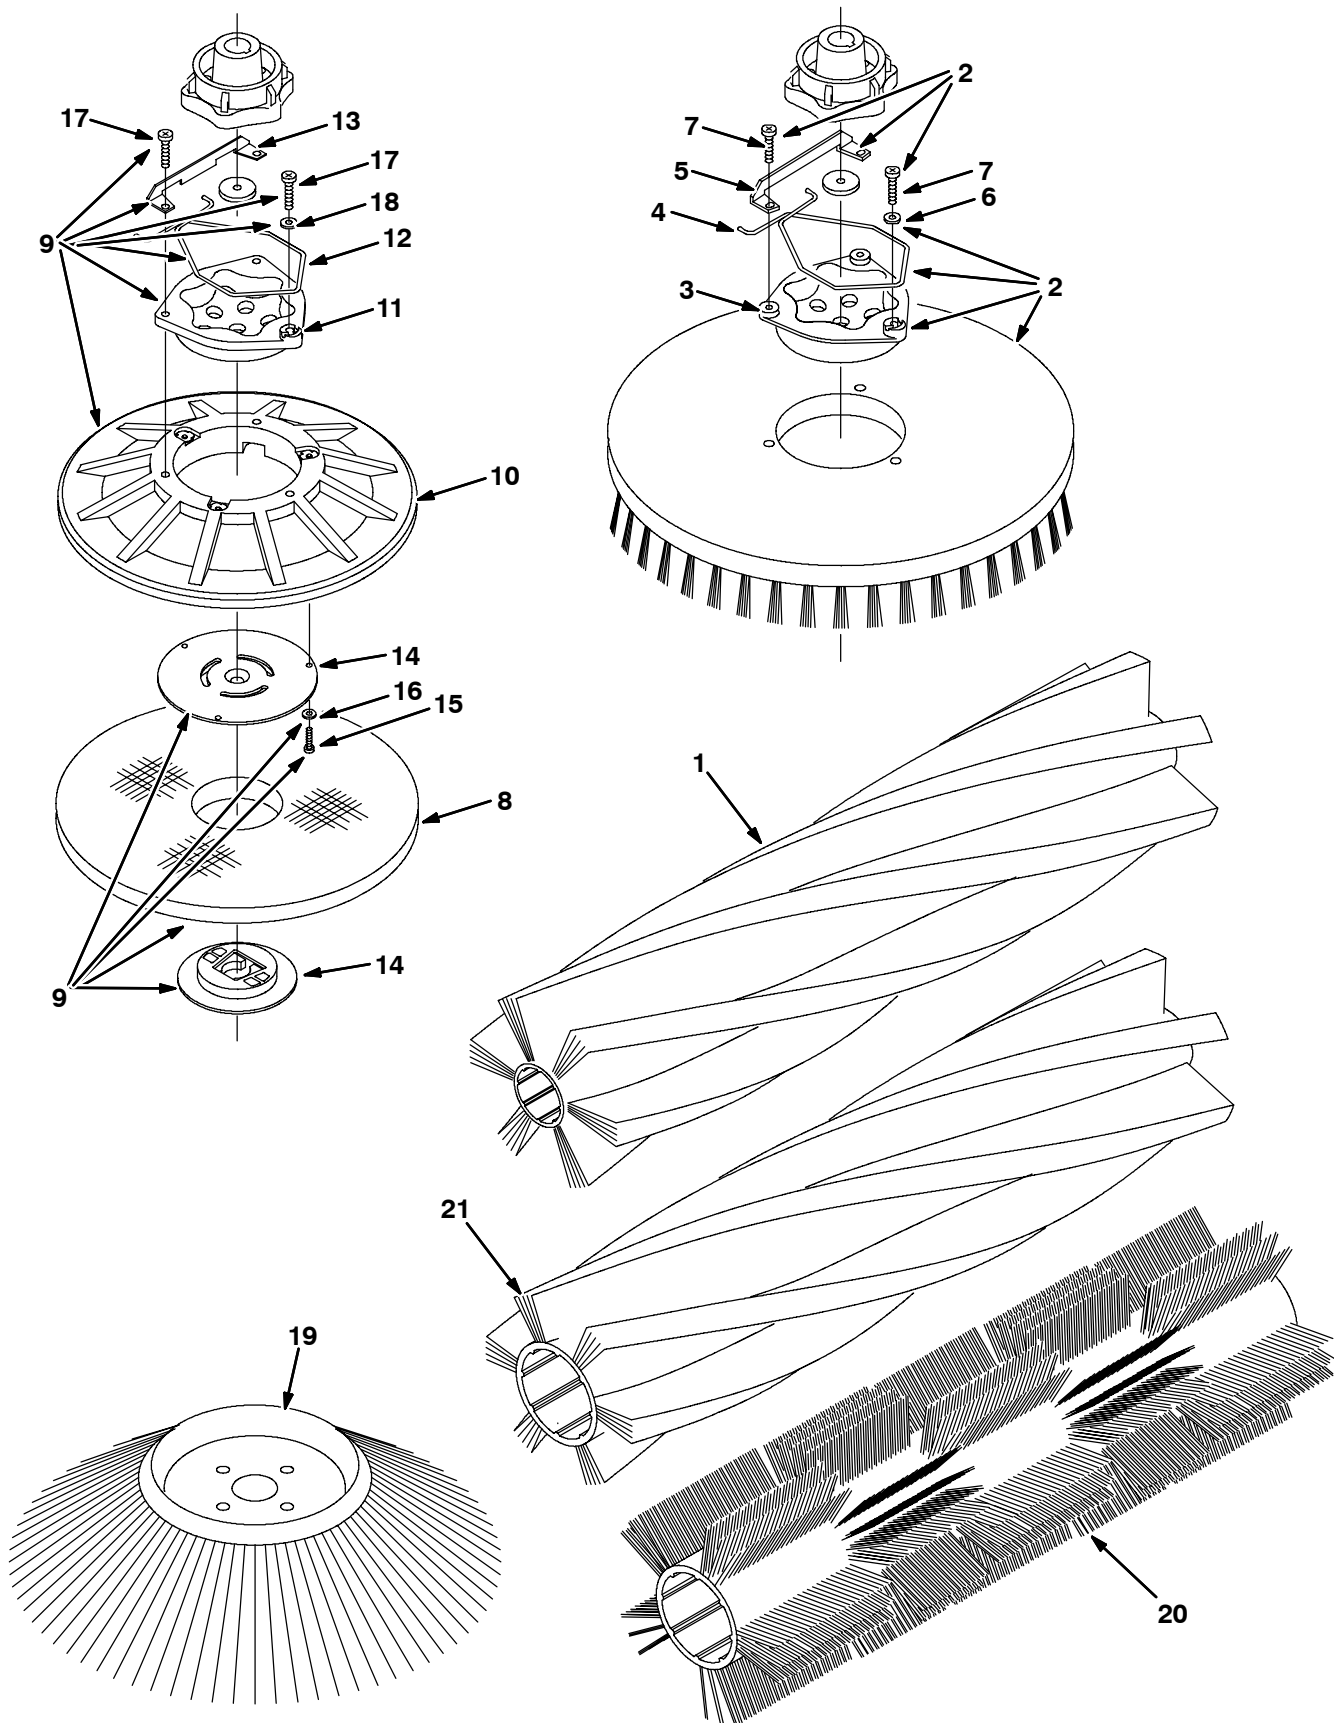


Fig. 3 - Brushes, Replacement for MaxPro 1200

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽ ▲	1	386231	(000000-	) Brush, Scrub, 47l, 20sr, Pyp, Spl	2
	1	386241	(000000-	) Brush, Scrub, 47l, 20sr, Super Abr, Spl	2
	1	386251	(000000-	) Brush, Scrub, 47l, 20sr, Nyl, Spl	2
	2	05724	(000000-	) Brush Assy, Disk, Scb, 16.0 D, Nyl	3
	3	15539	(000000-	) Adaptor, Brush	1
▲	4	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	5	24299	(000000-	) Bracket, Retainer, Spring	1
▲	6	01684	(000000-	) Washer, Flt, .25 Ss	1
▲	7	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
▽	2	05726	(000000-	) Brush Assy, Disk, Scb, 16.0 D, Super Abr	3
▲	3	15539	(000000-	) Adaptor, Brush	1
▲	4	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	5	24299	(000000-	) Bracket, Retainer, Spring	1
▲	6	01684	(000000-	) Washer, Flt, .25 Ss	1
▲	7	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
▽	2	30241	(000000-	) Brush Assy, Disk, Scb, 16.0 D, Pyp	3
▲	3	15539	(000000-	) Adaptor, Brush	1
▲	4	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	5	24299	(000000-	) Bracket, Retainer, Spring	1
▲	6	01684	(000000-	) Washer, Flt, .25 Ss	1
▲	7	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
	8	63248-1	(000000-	) Pad, Strip, 16.0d, Brown	3
	8	63248-2	(000000-	) Pad, Scrub, 16.0d, Blue	3
	8	63248-3	(000000-	) Pad, Buff, 16.0d, Red	3
	8	63248-4	(000000-	) Pad, Polish, 16.0d, White	3
▽	9	397916	(000000-	) Disk Assy, Pad Drive, 16d	3
▲	10	397976	(000000-	) Disk, Pad Drive, W/ Face, 16d	1
▲	11	15539	(000000-	) Adaptor, Brush	1
▲	12	14838	(000000-	) Spring, Wir, 0.16d, Brush Retaining	1
▲	13	24299	(000000-	) Bracket, Retainer, Spring	1
▲	14	370095	(000000-	) Device, Centering	1
▲	15	09198	(000000-	) Screw, Pan, M04 X 0.7 X 35, Ss	3
▲	16	41579	(000000-	) Washer, Flt, #08 Ss	3
▲	17	32746	(000000-	) Screw, Pan, M06 X 1.0 X 35, Ss	3
▲	18	01684	(000000-	) Washer, Flt, .25 Ss	1
	19	87419	(000000-	) Brush Assy - S.sw - 19.0 Dia, Polypr	1
	20	385936	(000000-	) Brush, Swp, 36L, Window, Pp, Spl	1
	21	385935	(000000-	) Brush, Swp, 36l, 6dr, Spl	1

Fig. 4 - Main Frame Group

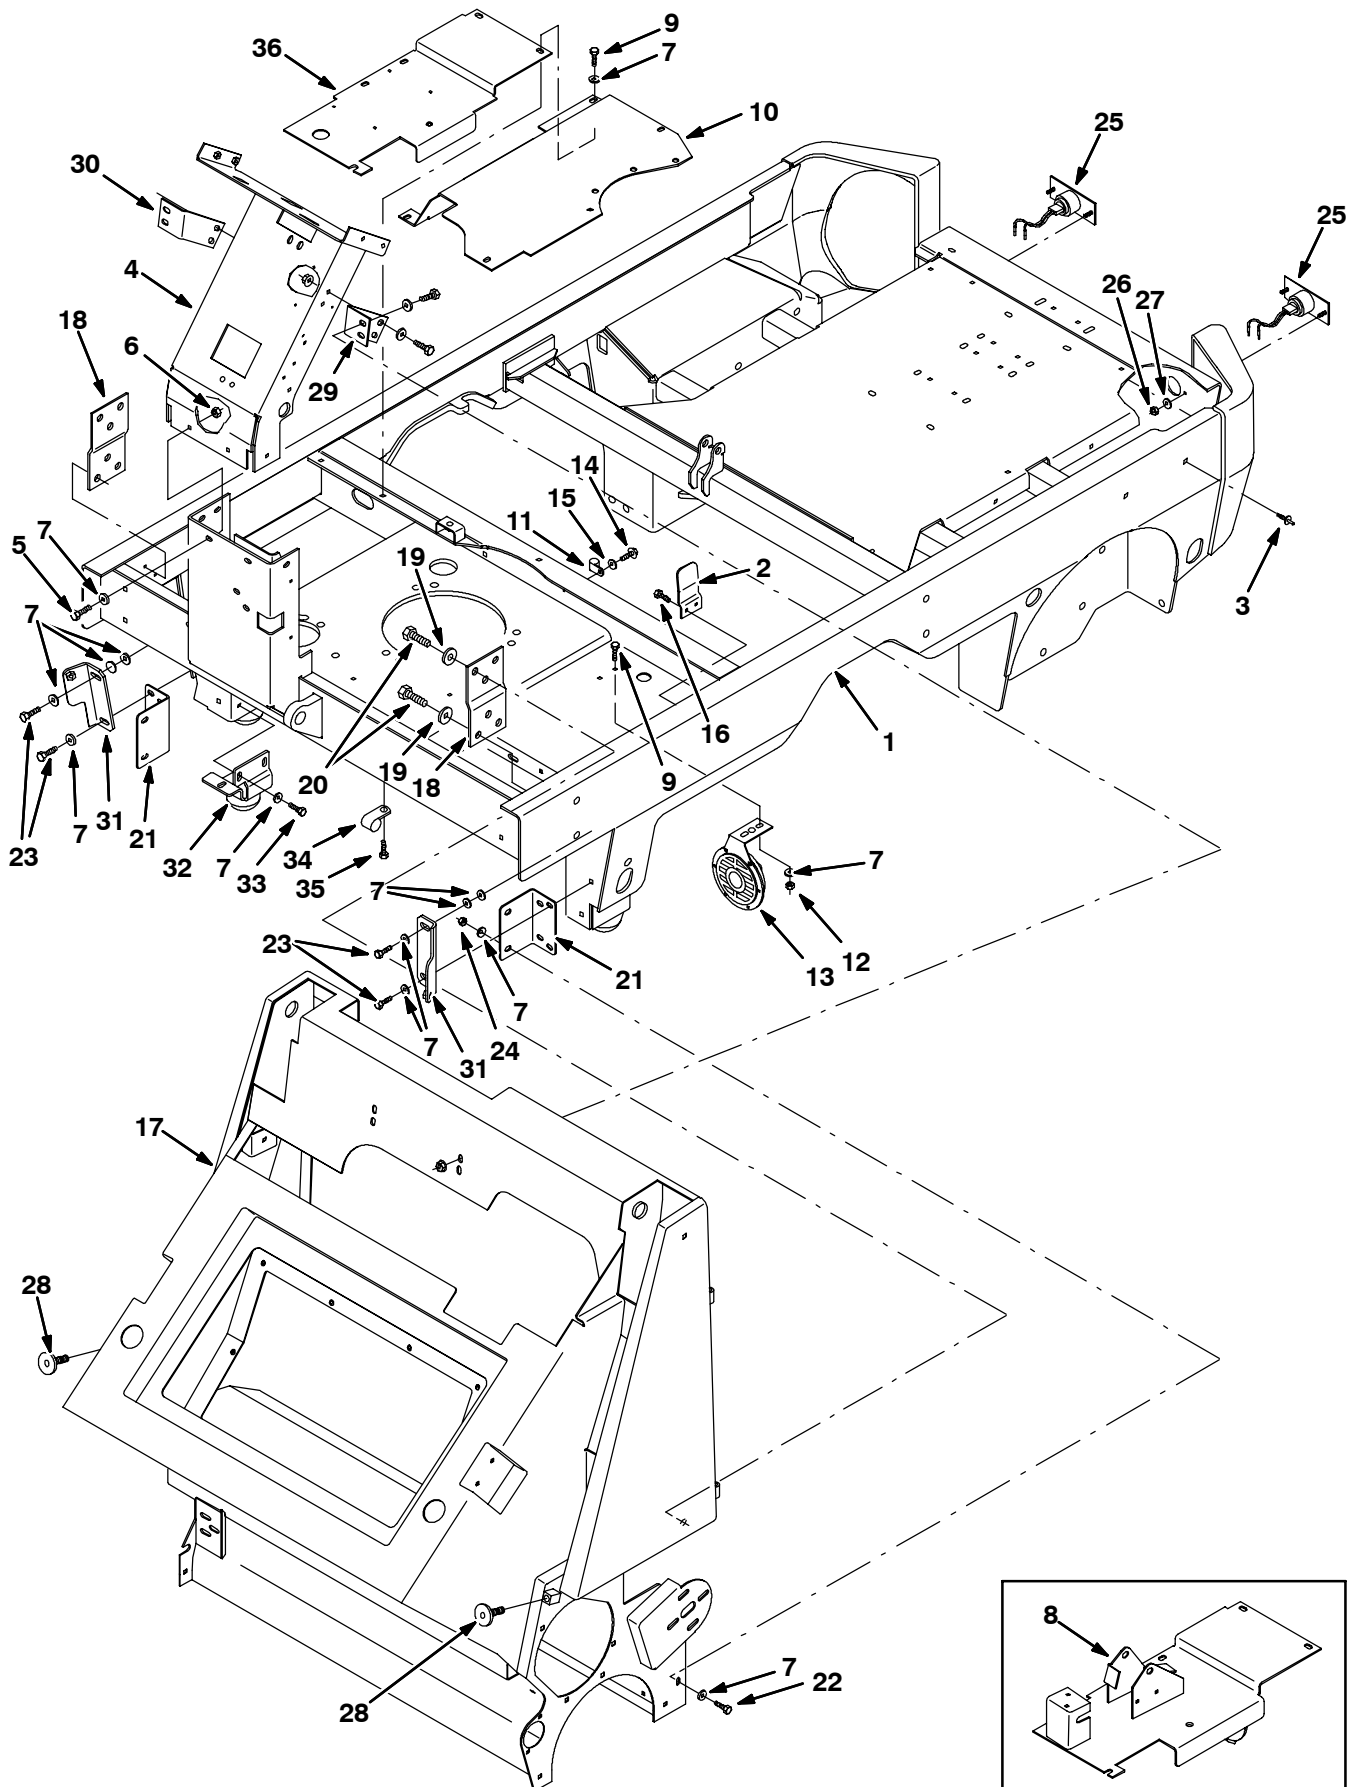


Fig. 4 - Main Frame Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386200	(000000-	) Frame	1
2	386923	(000000-	) Plate, Cover	1
3	365252	(000000-	) Rivet, Plstc, .25 D X 0.75	24
4	386450	(000000-	) Channel Wldt, Steering	1
5	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	5
6	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI	5
7	32491	(000000-	) Washer, Flt, .31 Std	31
8	386157	(000000-003797	) Plate Wldt, Floor	1
9	16735	(000000-	) Screw, Hex, M08 X 1.25 X 16, 8.8	12
10	386159	(000000-	) Plate, Floor, Upper	1
11	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	1
12	07791	(000000-	) Nut, Hex, Flng, M08 X 1.25	2
13	369702	(000000-	) Horn, 36vdc, Dba	1
14	12459	(000000-	) Screw, Hex, M06 X 1.0 X 20, Fmg	1
15	01684	(000000-	) Washer, Flt, .25 Ss	1
16	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	2
17	386757	(000000-	) Frame	1
18	386475	(000000-	) Bracket, Mtg	2
19	32493	(000000-	) Washer, Flt, .50 Std	12
20	41345	(000000-	) Screw, Hex, M12 X 1.75 X 25, 8.8	12
21	386911	(000000-	) Angle, Rh	2
22	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	4
23	39277	(000000-	) Screw, Hex, M08 X 1.25 X 25, 8.8	6
24	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI	4
▽	25	87346	(000000-) Taillight, 12vdc, 3.6 X 1.9,Rework87277	2
▲		87948	(000000-) Lamp	1
▲		87949	(000000-) Lampholder	1
26	01713	(000000-	) Nut, Hex, Std, #10-32, 2	4
27	32980	(000000-	) Washer, Lock, Int, #10	4
28	387138	(000000-	) Stop	2
29	387040	(000000-	) Bracket, Lh	1
30	387041	(000000-	) Bracket, Rh	1
31	387087	(000000-	) Bracket, Latch, Door	2
32	387361	(000000-	) Cup Wldt, Skid	1
33	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	3
34	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	2
35	361339	(000000-	) Screw, Hex, M06 X 1.0 X 16, Fmg	2
36	387654	(003798-	) Plate, Floor	1

Fig. 5 - Covers Group, Top and Side

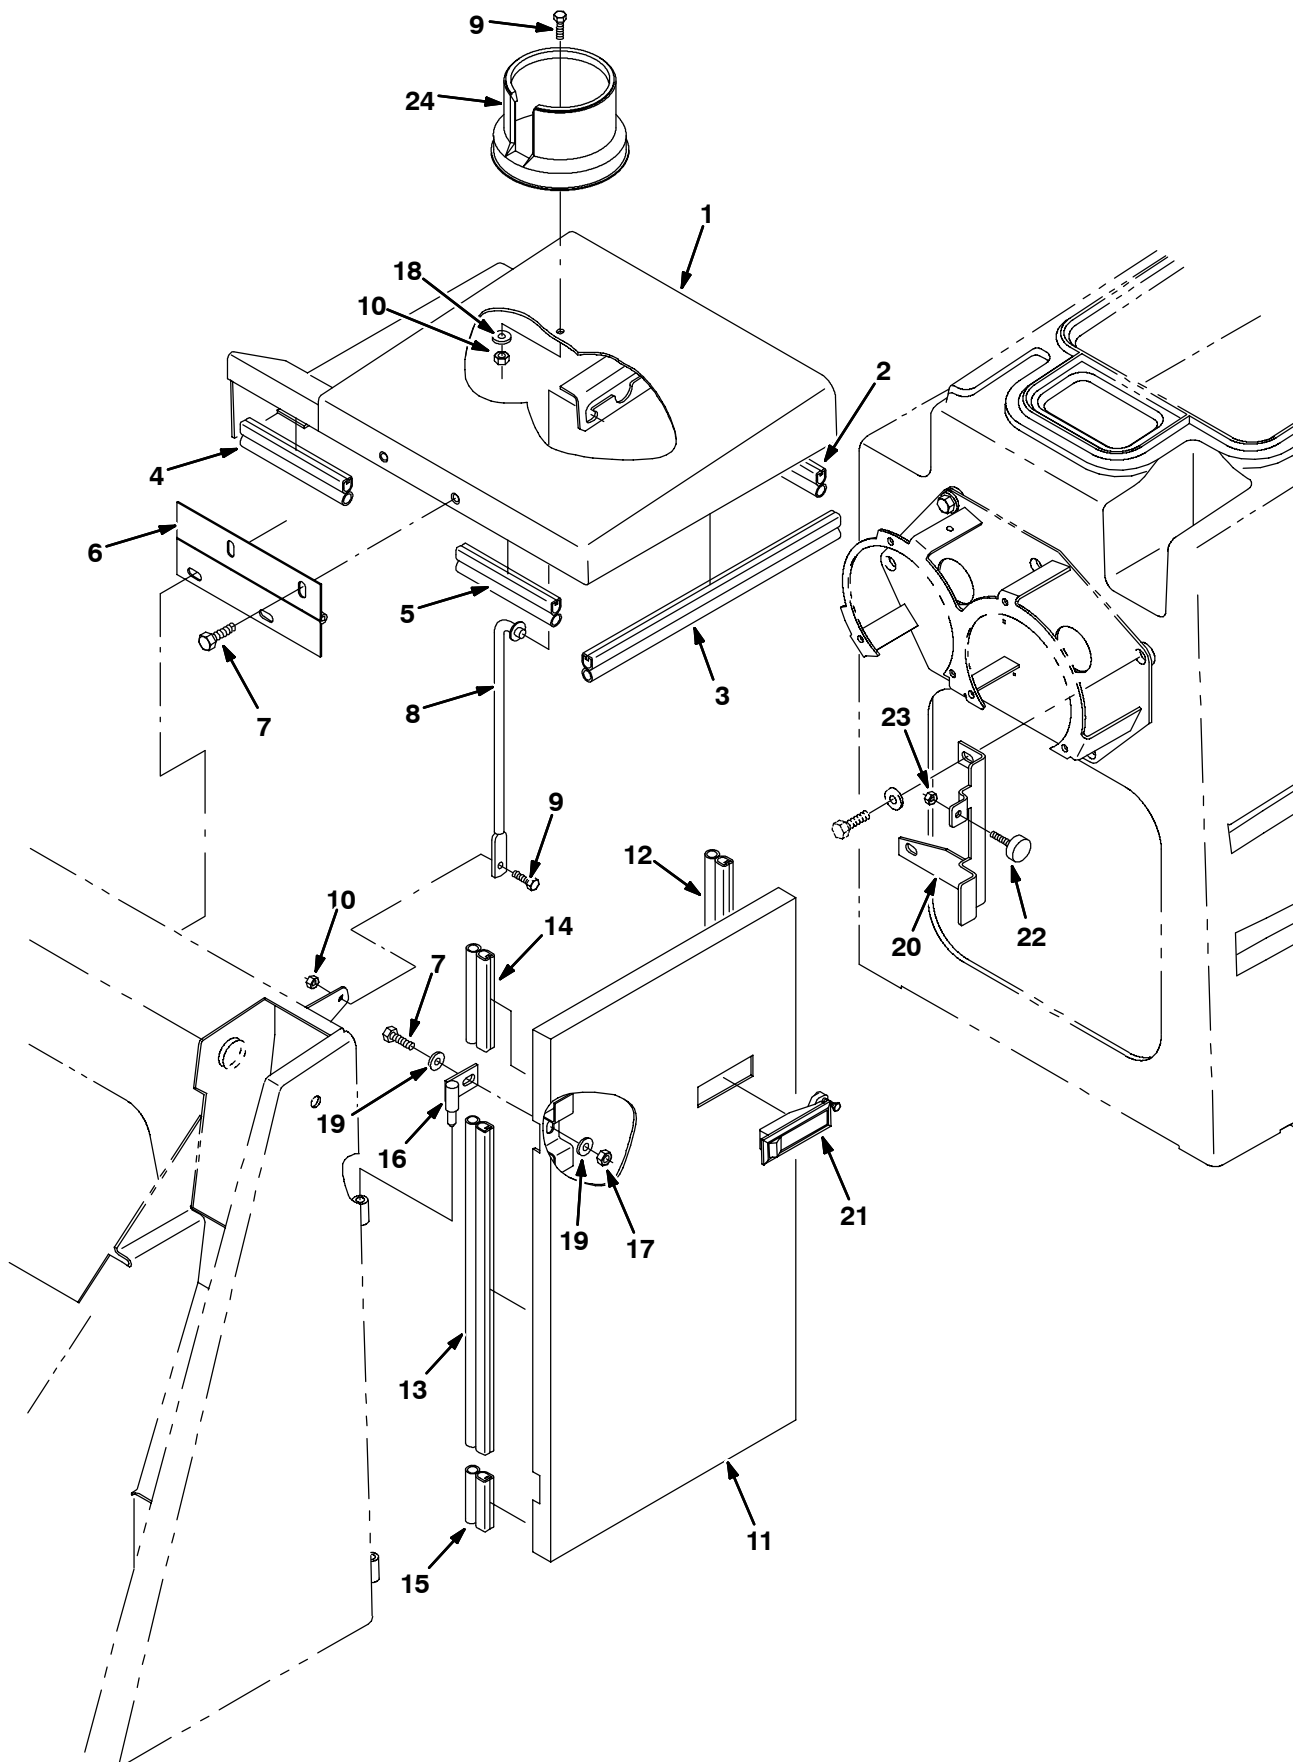


Fig. 5 - Covers Group, Top and Side

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386767	(000000-	) Cover Wldt, Top	1
2	387071	(000000-	) Seal, Bulb, [Sd-504], 21.70l	1
3	387072	(000000-	) Seal, Bulb, [Sd-504], 13.80l	1
4	387073	(000000-	) Seal, Bulb, [Sd-504], 5.70l	1
5	387074	(000000-	) Seal, Bulb, [Sd-504], 5.30l	1
6	386565	(000000-	) Hinge	1
7	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	4
8	386769	(000000-	) Rod Wldt, Cover	1
9	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	2
10	08708	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI	2
11	386979	(000000-	) Door Wldt, Side	1
12	387075	(000000-	) Seal, Bulb, [Sd-504], 25.00l	1
13	387076	(000000-	) Seal, Bulb, [Sd-504], 15.60l	1
14	387077	(000000-	) Seal, Bulb, [Sd-504], 4.20l	1
15	387078	(000000-	) Seal, Bulb, [Sd-504], 2.40l	1
16	386774	(000000-	) Pin Wldt, Hinge	2
17	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	2
18	41178	(000000-	) Washer, Flat, .25 Fender	1
19	32491	(000000-	) Washer, Flt, .31 Std	4
20	386777	(000000-	) Plate, Mtg, Door	1
21	64533	(000000-	) Latch, Trigger	1
22	20802	(000000-	) Bumper, Rbr, 1.00d 0.38t .25-20	1
23	01690	(000000-	) Nut, Hex, Std, .25-20, Ss	1
24	223599	(000000-	) Cup Holder	1

Fig. 6 - Covers Group, Rear

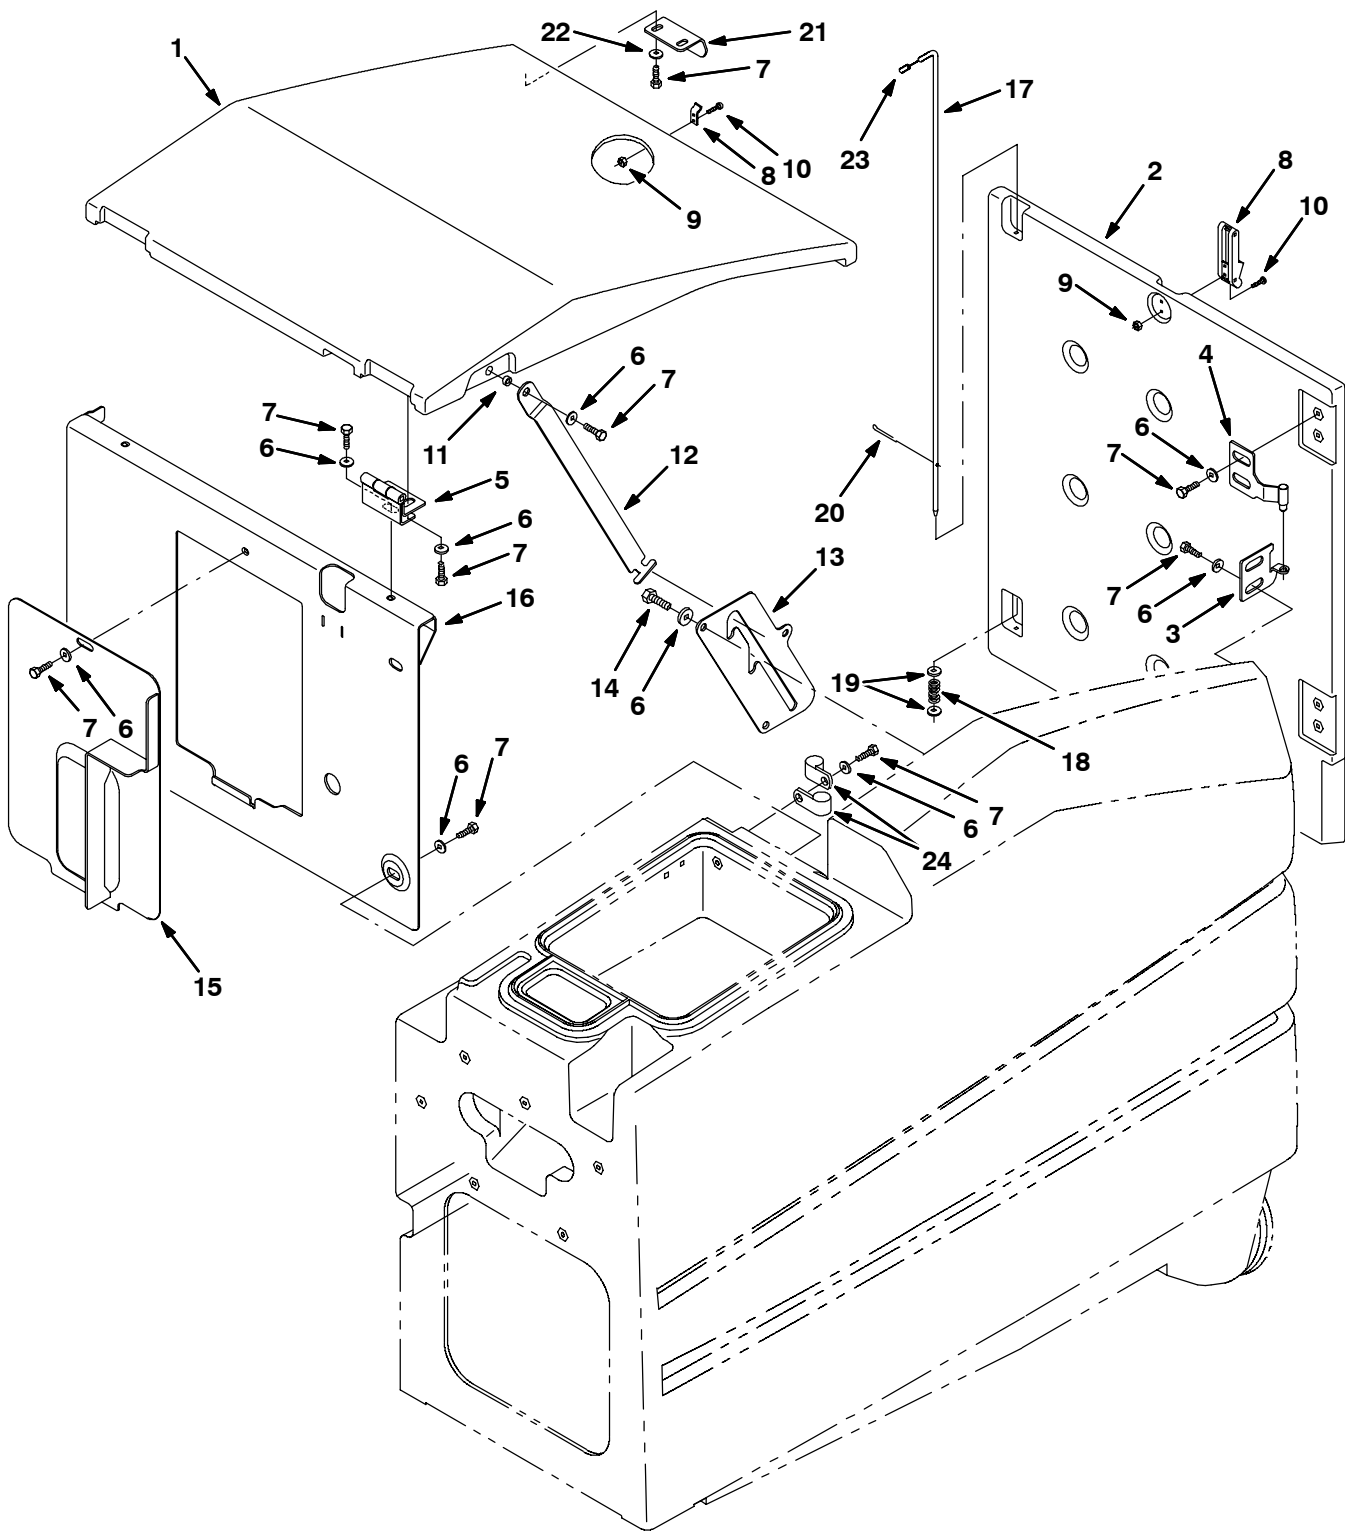


Fig. 6 - Covers Group, Rear

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386201	(000000-	) Cover, Tank, Top	1
2	386202	(000000-	) Cover, Rear	1
3	386993	(000000-	) Plate, Hinge	2
4	386995	(000000-	) Hinge Wldt, W/ Pin	2
5	386437	(000000-	) Hinge Assy	2
6	01685	(000000-	) Washer, Flt, .31 Ss	24
7	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	23
8	49800	(000000-	) Latch	1
9	02850	(000000-	) Nut, Hex, Lock, M04 X 0.7, NI	4
10	49697	(000000-	) Screw, Pan, M04 X 0.7 X 10, Ss	4
11	360801	(000000-	) Sleeve	1
12	386461	(000000-	) Rod	1
13	386413	(000000-	) Plate	1
14	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	3
15	386433	(000000-	) Cover Wldt	1
16	387348	(000000-	) Panel Wldt, Front W/ Label	1
17	386761	(000000-	) Rod, Rear Door	1
18	54743	(000000-	) Spring, Cmpr, 0.36od .04wir 2.5l	1
19	01684	(000000-	) Washer, Flt, .25 Ss	2
20	08178	(000000-	) Pin, Cotter, .062 X 0.75	1
21	386634	(000000-	) Bracket	1
22	01684	(000000-	) Washer, Flt, .25 Ss	2
23	386973	(000000-	) Cap, Vyl, .234id .750l .04	1
24	82829	(000000-	) Clamp, Cable, Stl, 0.63d X 0.75w, 1h	2

Fig. 7 - Electrical Instrument Panel Group

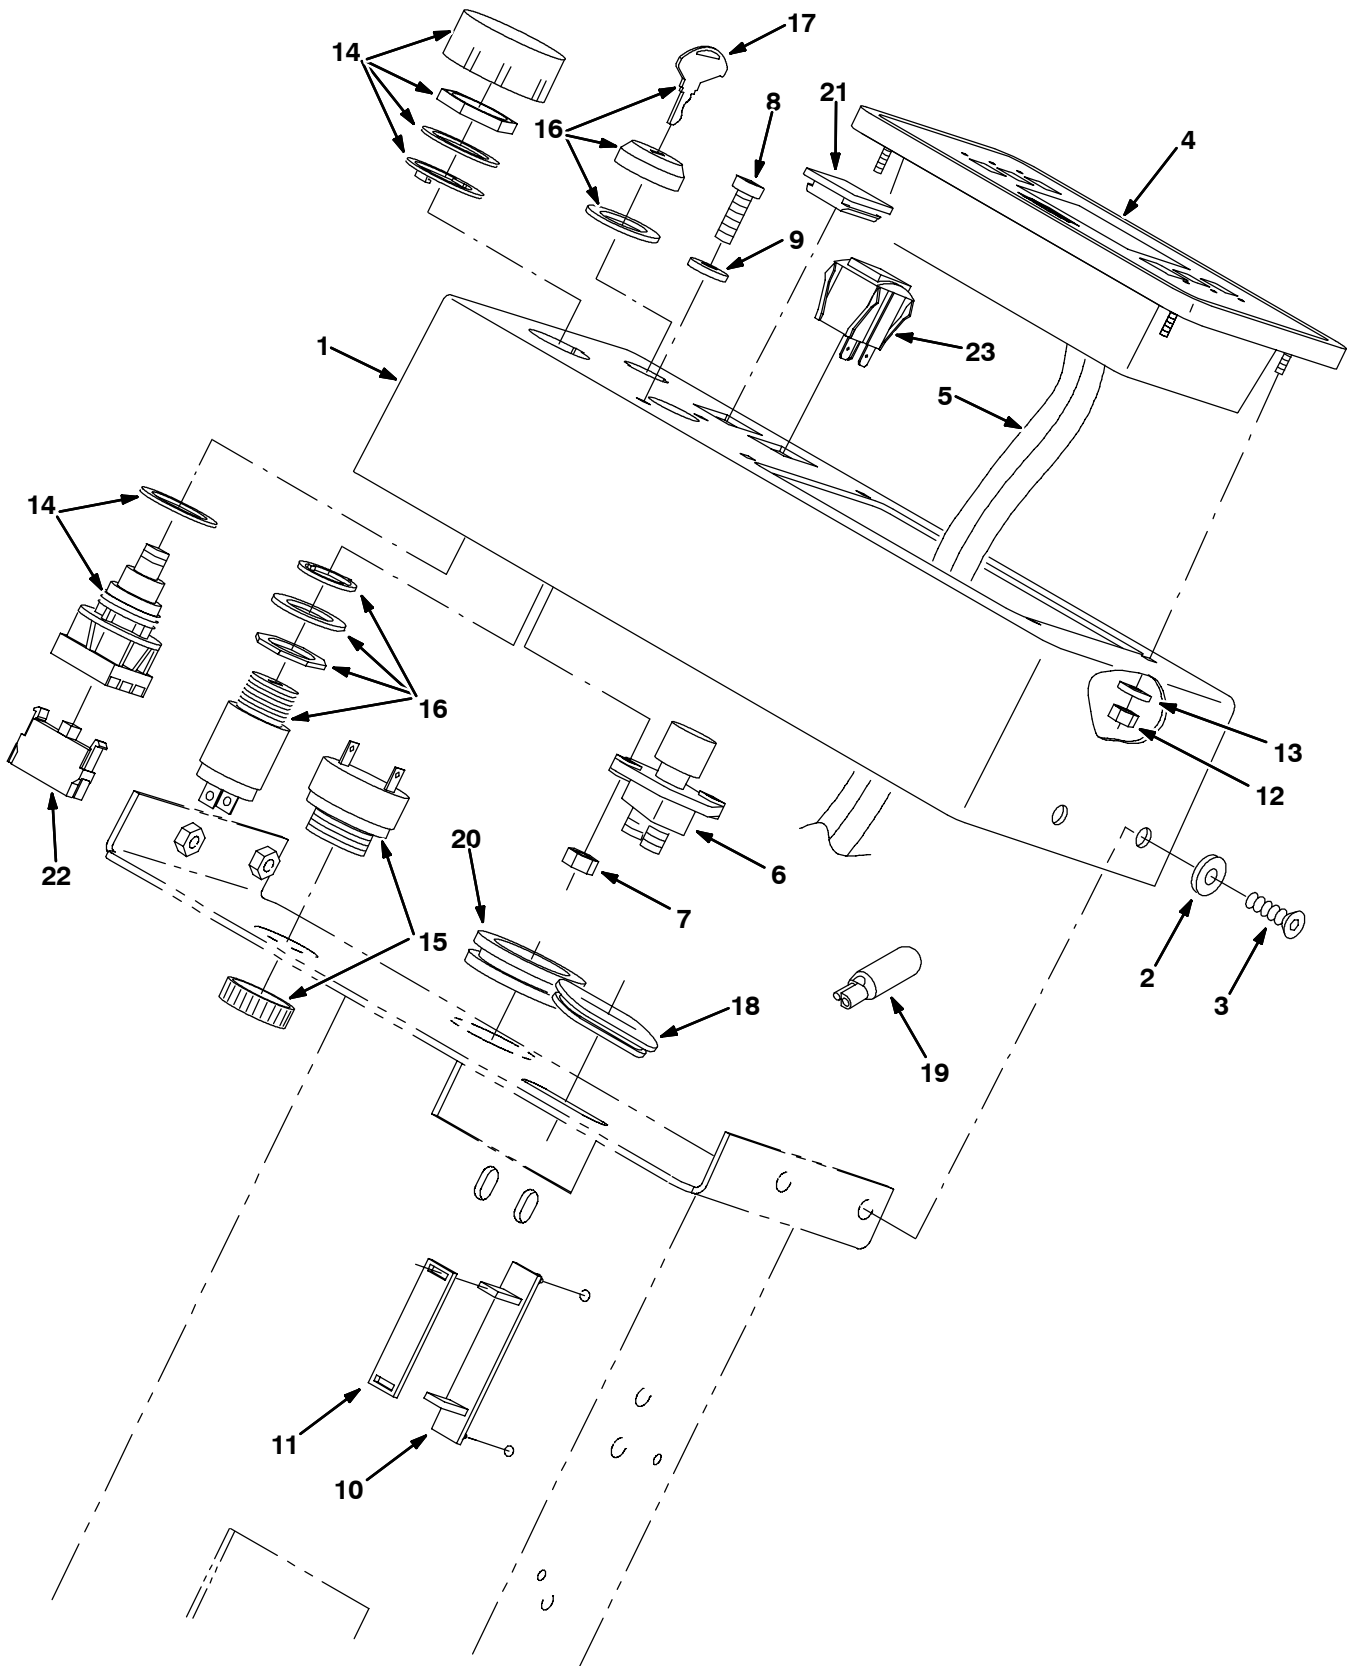


Fig. 7 - Electrical Instrument Panel Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386129	(000000-	) Panel, Instmt	1
2	386924	(000000-	) Washer, Finish, M06, PI	4
3	16879	(000000-	) Screw, Flat, M06 X 1.0 X 20, 10.9	4
▽ 4	391953	(000000-	) Panel Assy, Touch [8300]	1
▲ 5	386311	(000000-	) Cable, Ribbon, 34 Conductor	1
6	44078	(000000-	) Switch	1
7	08708	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI	2
8	09007	(000000-	) Screw, Hex, M06 X 1.0 X 25, Ss	2
9	32483	(000000-	) Washer, Flt, .25 Sae	2
10	386808	(000000-	) Clamp, Ribbon Cable	1
11	386809	(000000-	) Clamp, Ribbon Cable, Hold-Down	1
12	06549	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI	4
13	19066	(000000-	) Washer, Flt, #10	4
14	78553	(000000-	) Switch	1
15	386346	(000000-	) Alarm, Warning, 10-48vdc	1
▽ 16	361076	(000000-	) Switch, Start	1
▲ 17	361144	(000000-	) Key, Ignition	1
18	27928	(000000-	) Grommet, Ribbon Cable, .63 X 1.81	1
19	222290	(000000-	) Diode, Ele, Plug	7
20	10632-13	(000000-	) Grommet, Rbr, 1.50id, F/ 1.8h, .31matl	1
21	222534	(000000-	) Button, Plug, 1.1 X 1.1h, Black, Plstc	2
22	65665	(000000-	) Contact, Switch	1
23	360520	(000000-	) Switch, Rocker	1

Fig. 8 - Power Steering Group

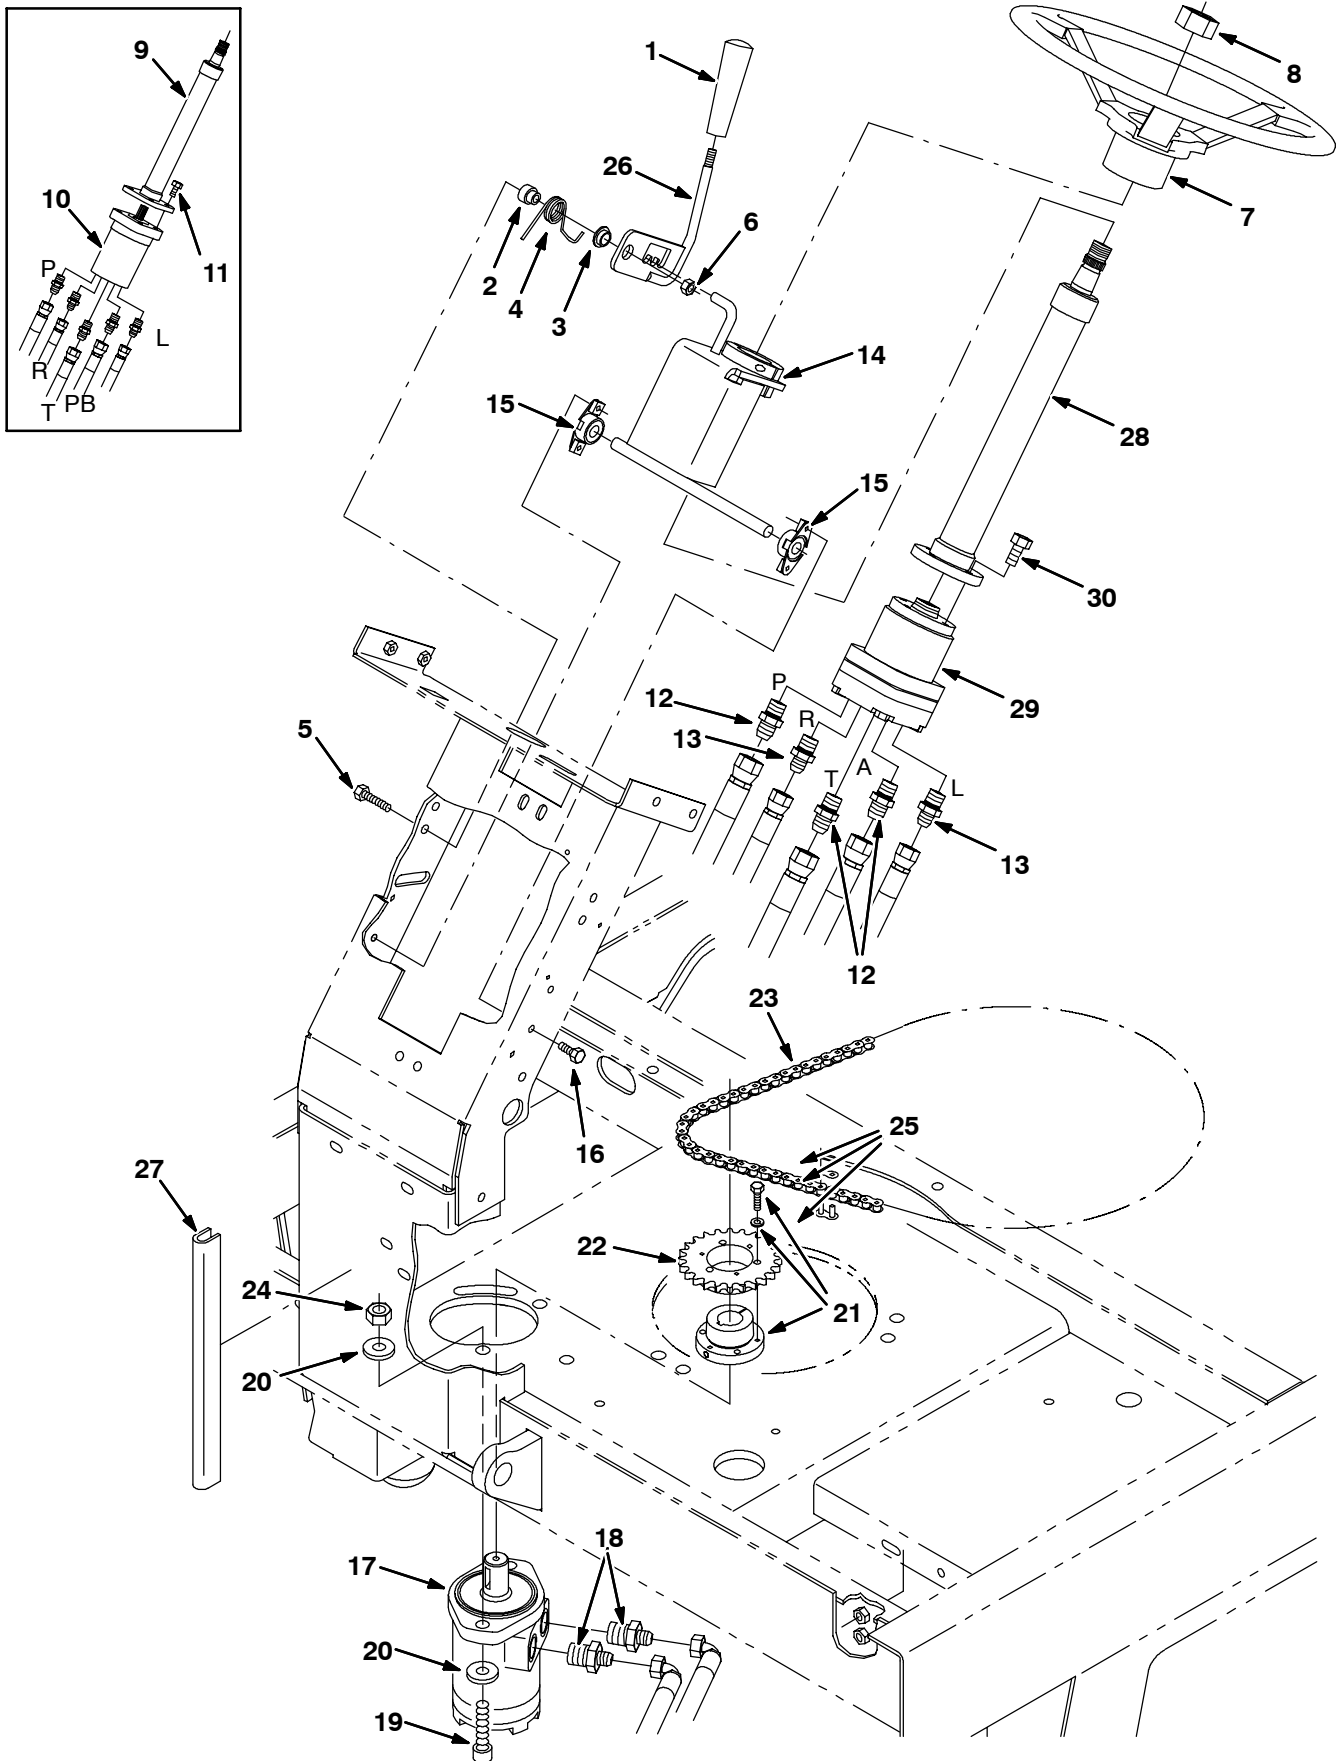


Fig. 8 - Power Steering Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	59940	(000000-	) Knob	1
2	386149	(000000-	) Pin	1
3	386217	(000000-	) Bearing, Flange	1
4	386150	(000000-	) Spring, Torsion	1
5	06946	(000000-	) Screw, Hex, M06 X 1.0 X 35, 8.8	1
6	08708	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI	1
7	1036255	(000000-	) Wheel, Steering, 14.0d, Taper Bore	1
8	56185	(000000-	) Nut, Hex, Jam, M20 X 1.5	1
▽ 9	386702	(000000-003713	) Column, Steering (Replaced by 387653)	1
▲	74142	(000000-003713	) Cap, Tube	1
10	386701	(000000-003713	) Steer-Control, Hyd (Replaced by 387653)	1
11	06960	(000000-003713	) Screw, Hex, M10 X 1.5 X 16, 8.8	4
12	56690	(000000-	) Fitting, Hyd, Str, Jm06/Om06	3
13	55685	(000000-	) Fitting, Hyd, Str, Jm04/Om06	2
14	386204	(000000-	) Bracket Wldt, Steering, Tilt	1
15	70709	(000000-	) Bushing Assy, Flng, 2 Hole, 0.50b	2
16	06942	(000000-	) Screw, Hex, M06 X 1.0 X 16, 8.8	4
17	386703	(000000-	) Motor, Hyd (See Breakdowns)	1
18	57984	(000000-	) Fitting, Hyd, Str, Jm04/Om10	2
19	387393	(000000-	) Screw, Soc, M12 X 1.75 X 45	2
20	32486	(000000-	) Washer, Flt, .50 Sae	4
21	386215	(000000-	) Bushing, Taper Lock	1
22	386214	(000000-	) Sprocket, #40 24-Tooth	1
23	386216	(000000-	) Chain, Roller, #40 X 109 Pitches	1
24	08711	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI	2
25	07112	(000000-	) Link, Chain, Roller, #40	1
26	386209	(000000-	) Handle Wldt, Steering, Tilt	1
27	387454	(000000-	) Molding, Trim, .19-.31 12.00	1
▽ 28	373496	(003714-	) Column, Steering, #14.0L .81D 36Tooth	1
▲	74142	(003714-	) Cap, Tube	1
29	373495	(003714-	) Steer-Control, Hyd (See Breakdowns)	1
30	11329	(003714-	) Screw, Hex, M6X1.0X16, Ss, NI	4

Fig. 9 - Seat Group

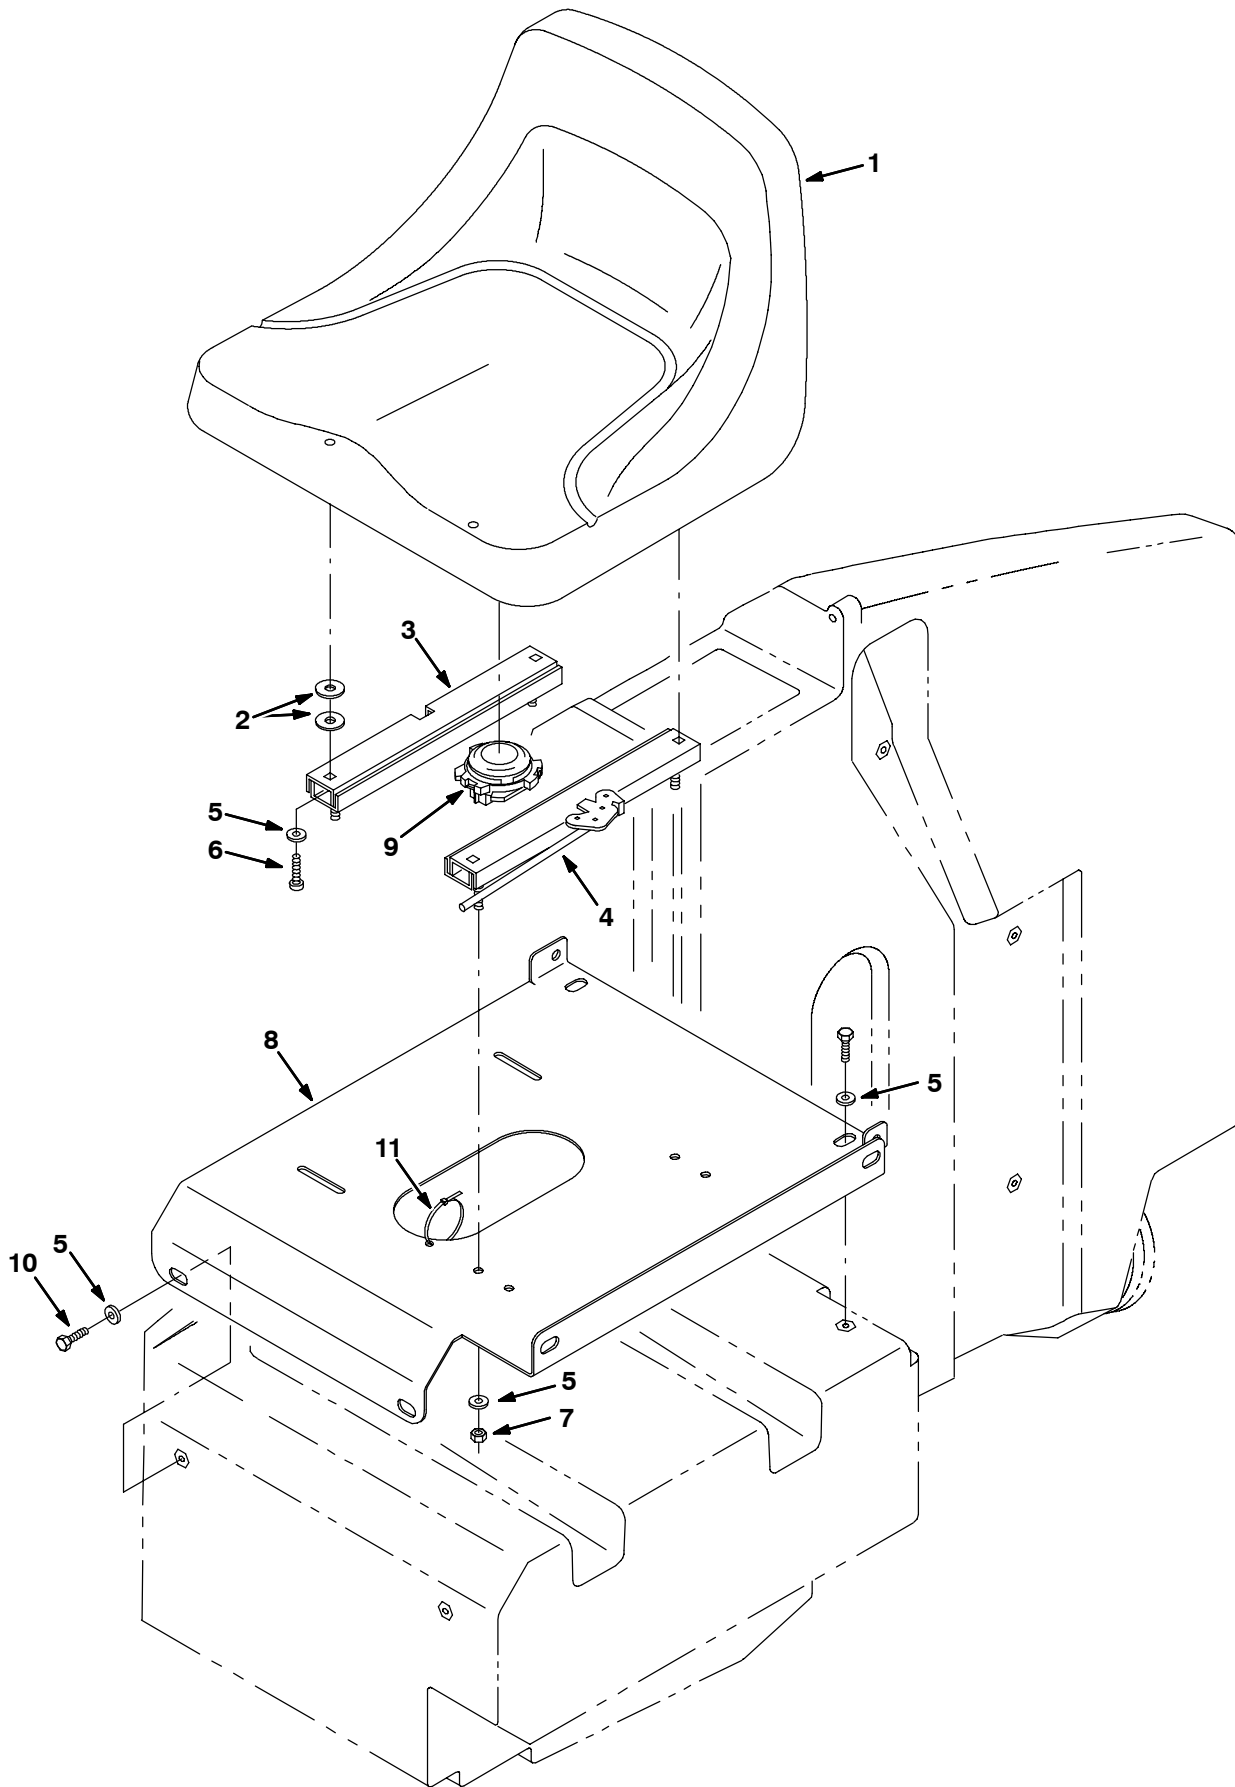


Fig. 9 - Seat Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	375411	(000000-	) Seat	1
2	13248	(000000-	) Washer	8
3	360369	(000000-	) Rail	1
4	360370	(000000-	) Rail	1
5	01685	(000000-	) Washer, Flt, .31 Ss	14
6	25537	(000000-	) Screw, Pan, .31-18 X 0.75, G1	4
7	32983	(000000-	) Nut, Hex, Lock, .31-18, NI	4
8	386228	(000000-	) Plate, Seat	1
9	223078	(000000-	) Switch, Seat	1
10	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	6
11	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	1

Fig. 10 - Directional Control Group

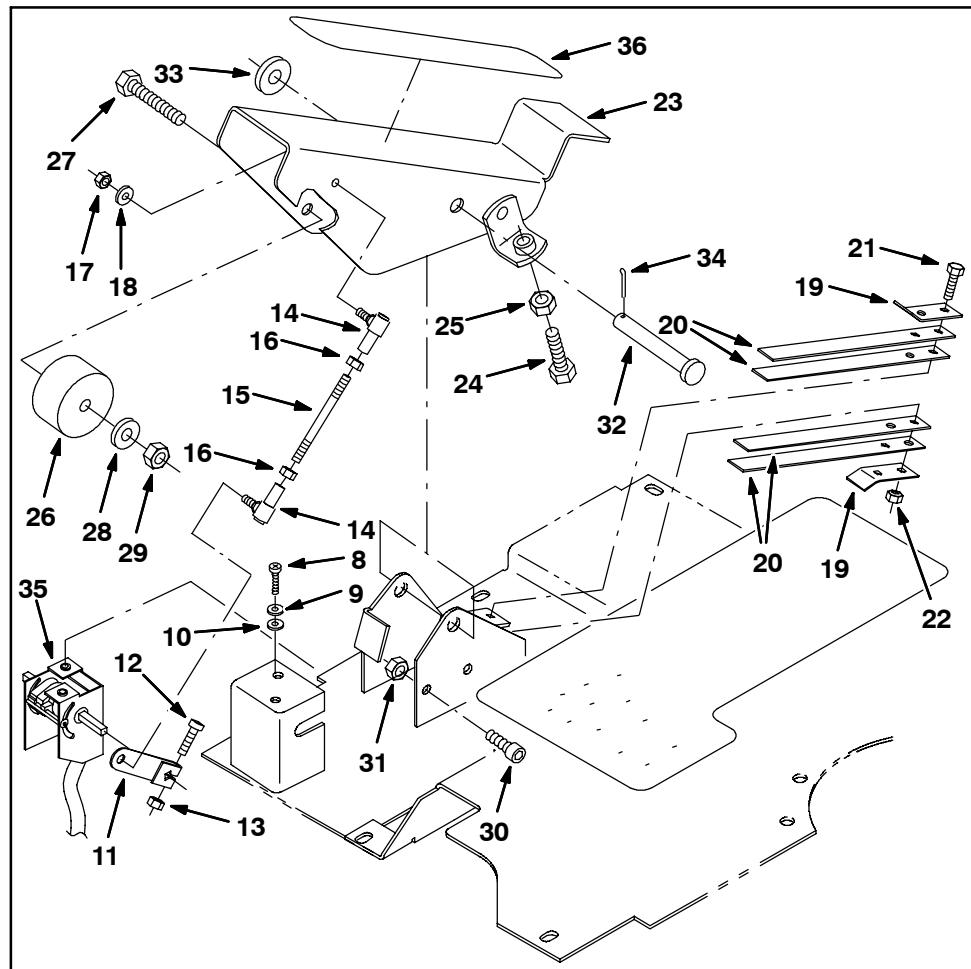
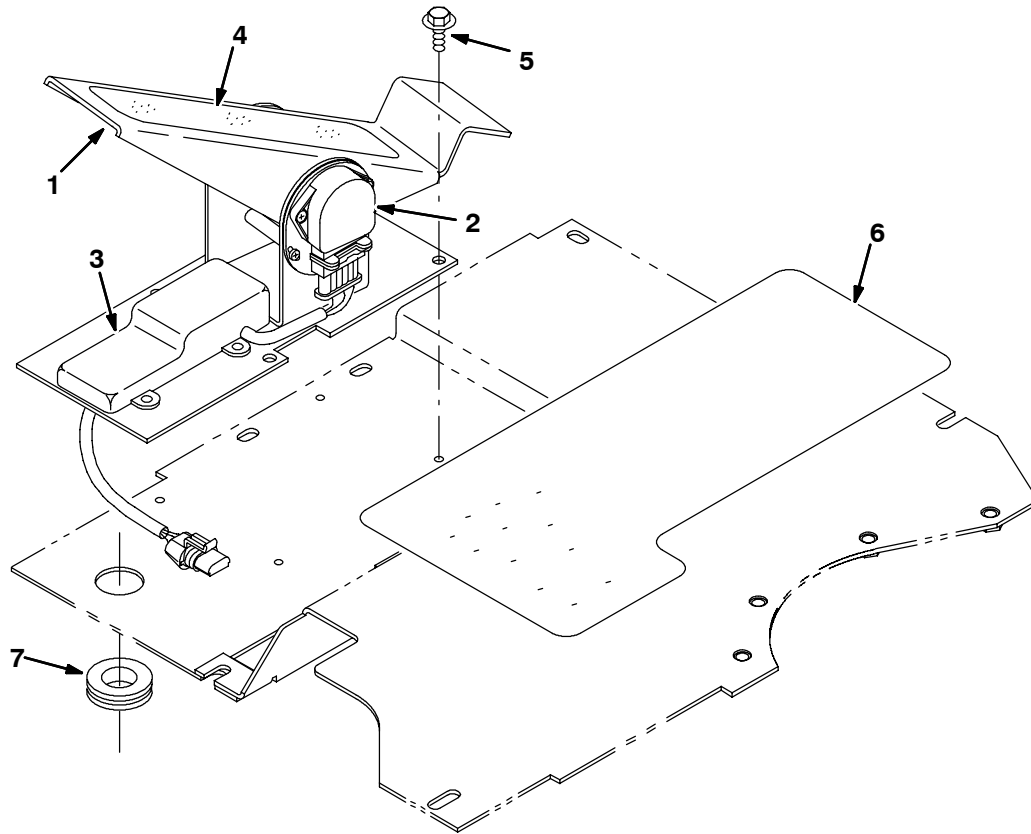


Fig. 10 - Directional Control Group

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	387700	(003798-	) Pedal Assy, Foot	1
▲	2	385726	(003798-	) Sensor, Pedal Position	1
▲	3	385727	(003798-	) Circuitboard, Pedal	1
▲	4	82839	(003798-	) Tread, Non Skid, 2.2w 11.5l	1
	5	74455	(003798-	) Screw, Hex, M06-1.0 X 12, Fmg	4
	6	387392	(003798-	) Tread, Non-Skid, 06.0w X 15.5l	1
	7	10632	(003798-	) Grommet, Rbr, 0.89id, F/ 1.2h, .14matl	1
	8	06931	(000000-003797	) Screw, Pan, M05 X 0.8 X 6, 4.8	2
	9	01683	(000000-003797	) Washer, Flt, #10 Ss	2
	10	32980	(000000-003797	) Washer, Lock, Int, #10	2
	11	223239	(000000-003797	) Arm, Cntrl, Throttle, Electronic	1
	12	39717	(000000-003797	) Screw, Pan, .25-20 X 1.00, 2	1
	13	32981	(000000-003797	) Nut, Hex, Lock, .25-20, NI	1
	14	14601	(000000-003797	) Balljoint, .25-28 Fem/.25-28mal	2
	15	223090	(000000-003797	) Rod, Thrld, 2 End, .25-28 04.4l	1
	16	01714	(000000-003797	) Nut, Hex, Std, .25-28	2
	17	13513	(000000-003797	) Nut, Hex, Lock, .25-28, NI	2
	18	32490	(000000-003797	) Washer, Flt, .25 Std	2
	19	223601	(000000-003797	) Retainer, Spring	2
	20	223600	(000000-003797	) Strip, Stl, 0.05th X 00.75w, 07.80l	4
	21	06944	(000000-003797	) Screw, Hex, M06 X 1.0 X 25, 8.8	2
	22	08708	(000000-003797	) Nut, Hex, Lock, M06 X 1.0, NI	2
	23	223320	(000000-003797	) Pedal Wldt, Accelerator	1
	24	39284	(000000-003797	) Screw, Hex, M10 X 1.5 X 35, 8.8	1
	25	39312	(000000-003797	) Nut, Hex, Std, M10 X 1.5	1
	26	87725	(000000-003797	) Spacer	1
	27	06963	(000000-003797	) Screw, Hex, M10 X 1.5 X 60, 8.8	1
	28	32485	(000000-003797	) Washer, Flt, .38 Sae	1
	29	41430	(000000-003797	) Nut, Hex, Lock, M10 X 1.5, NI	1
	30	39308	(000000-003797	) Screw, Soc, M08 X 1.25 X 25, 12.9	1
	31	08709	(000000-003797	) Nut, Hex, Lock, M08 X 1.25, NI	1
	32	06474A	(000000-003797	) Pin, Clevis, 0.50 D X 3.50l	1
	33	32486	(000000-003797	) Washer, Flt, .50 Sae	1
	34	08182	(000000-003797	) Pin, Cotter, .125 X 1.00	1
	35	223094	(000000-003797	) Box, Accelerator	1
	36	82839	(000000-003797	) Tread, Non-Skid, 02.2 11.5	1

Fig. 11 - Wheel Group, Front Drive

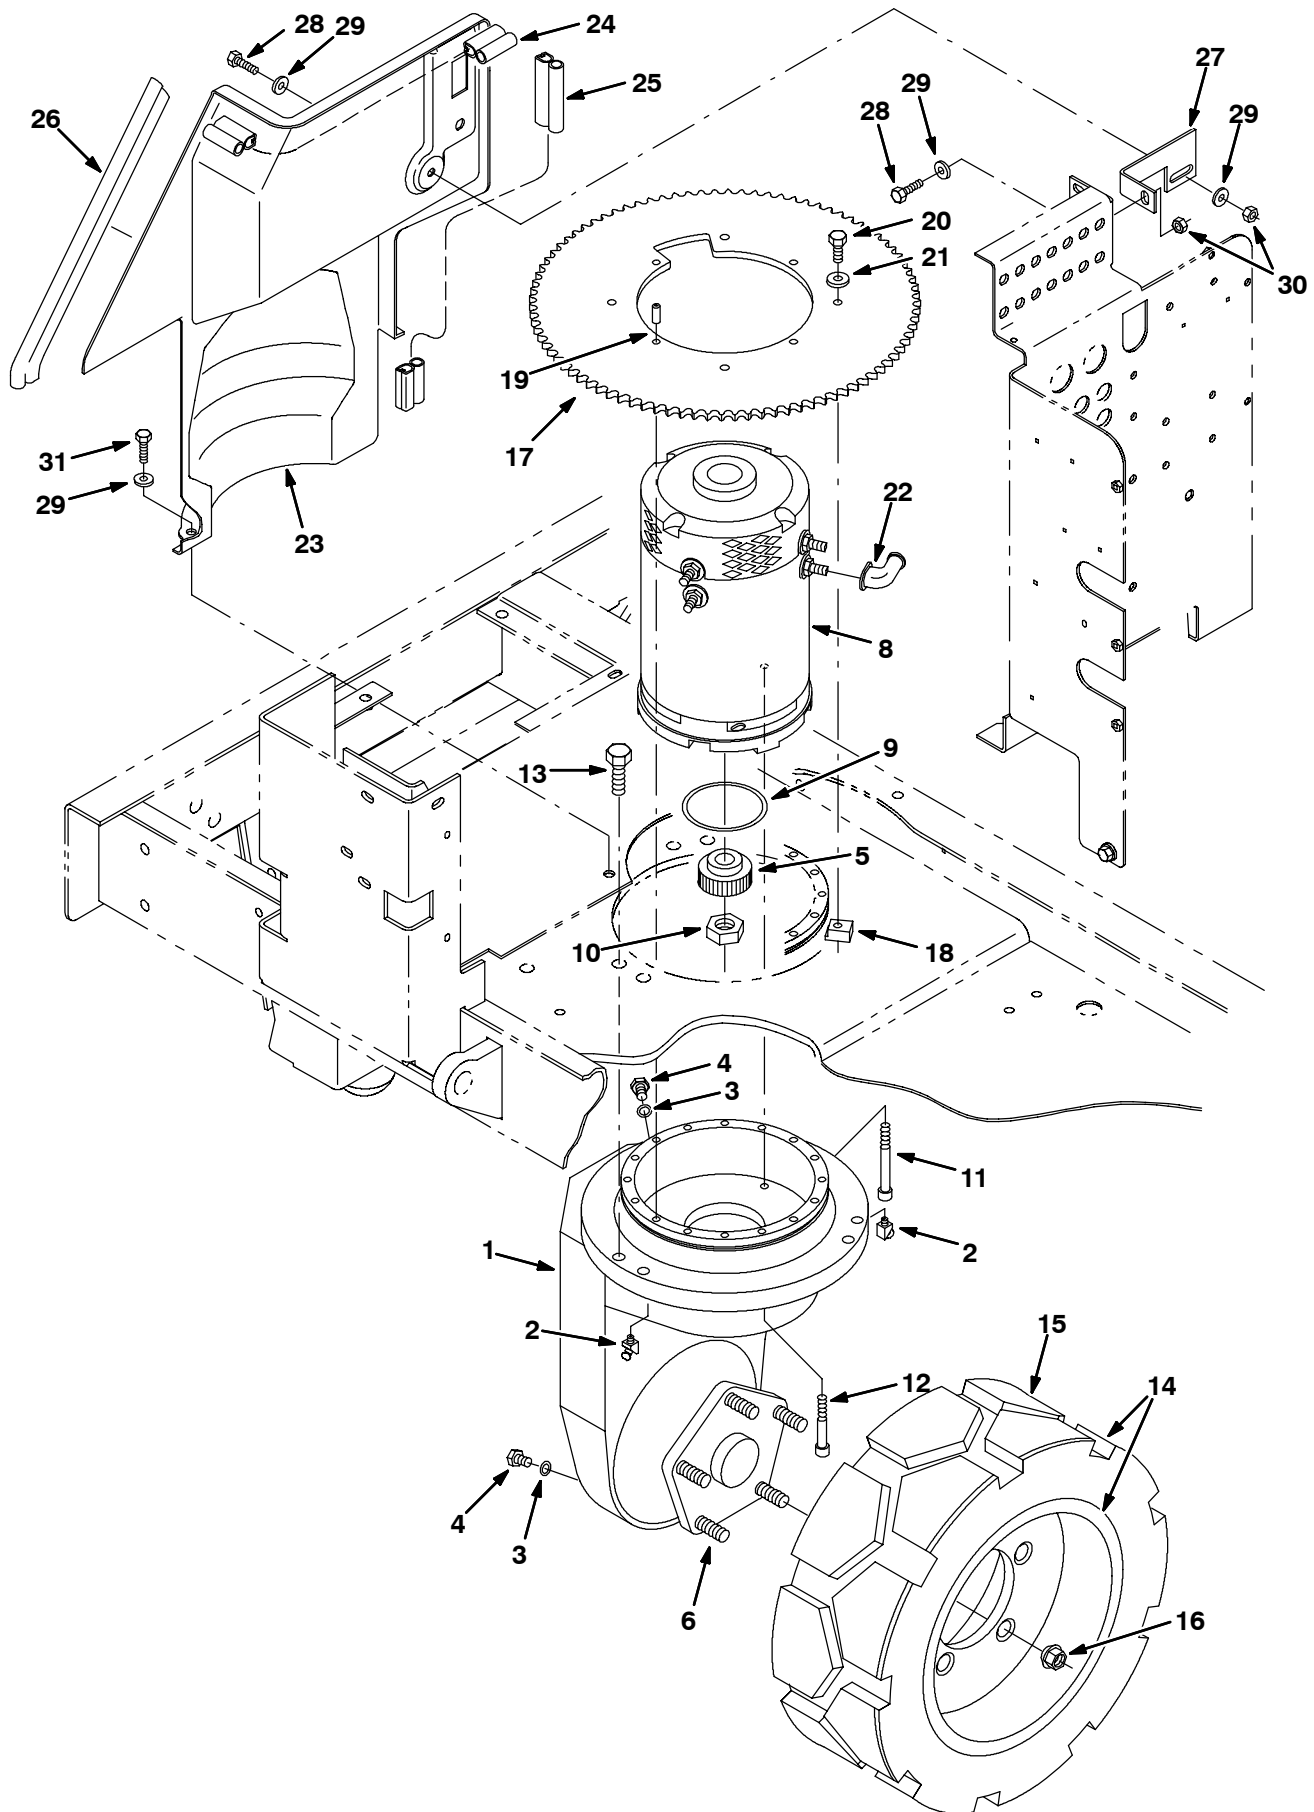


Fig. 11 - Wheel Group, Front Drive

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	87355	(000000-	) Gearbox, 90, Drive Wheel, Rear, [Hu]	1
▲	2	87839	(000000-	) Fitting, Grease	2
▲	3	87840	(000000-	) Seal, O-Ring	2
▲	4	87841	(000000-	) Plug	2
▲	5	87849	(000000-	) Gear, Drive	1
▲	6	12540	(000000-	) Bolt	5
▲	7	61791	(000000-	) Bearing	1
	8	386811	(000000-	) Motor, Ele, Vdc 3.0hp Traction,[201] (See Breakdown)	1
	9	360980	(000000-	) Seal, O-Ring, .139 X 2.98id	1
	10	43957	(000000-	) Nut, Hex, Std, .50-20	1
	11	09030	(000000-	) Screw, Soc, M08 X 1.25 X 80, 12.9	2
	12	09294	(000000-	) Screw, Soc, M08 X 1.25 X 60, 12.9	1
	13	41345	(000000-	) Screw, Hex, M12 X 1.75 X 25, 8.8	6
▽	14	387660	(000000-	) Tire Assy, Solid, 16.2X6.0 5.7Bc/5 Bolt	1
▲	15	387659	(000000-	) Tire, Solid, 16.2X6.0X11.2	1
	16	87750	(000000-	) Nut, Wheel, M14-1.5	5
	17	363385	(000000-	) Sprocket Wldt, #40, 96tooth, 7.00 B	1
	18	14150	(000000-	) Clip, Sprocket	4
	19	14296	(000000-	) Pin, Roll, .310 D X 0.75l, .312/.318	4
	20	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	4
	21	41187	(000000-	) Washer, Belleville, .38	4
	22	02076	(000000-	) Boot, 90deg .50d .57d X .84	4
▽	23	387346	(000000-	) Panel, Motor, Cover W/ Label	1
▲	24	386458	(000000-	) Seal, Bulb, [Sd-504], 15.52l	1
▲	25	386459	(000000-	) Seal, Bulb, [Sd-504], 27.90l	1
▲	26	386558	(000000-	) Seal, Bulb, [Sd-168], 12.50l	1
	27	387035	(000000-	) Bracket, Panel	1
	28	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	2
	29	32491	(000000-	) Washer, Flt, .31 Std	8
	30	07791	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI	2
	31	16735	(000000-	) Screw, Hex, M08 X 1.25 X 16, 8.8	4

Fig. 12 - Brake Pedal Group

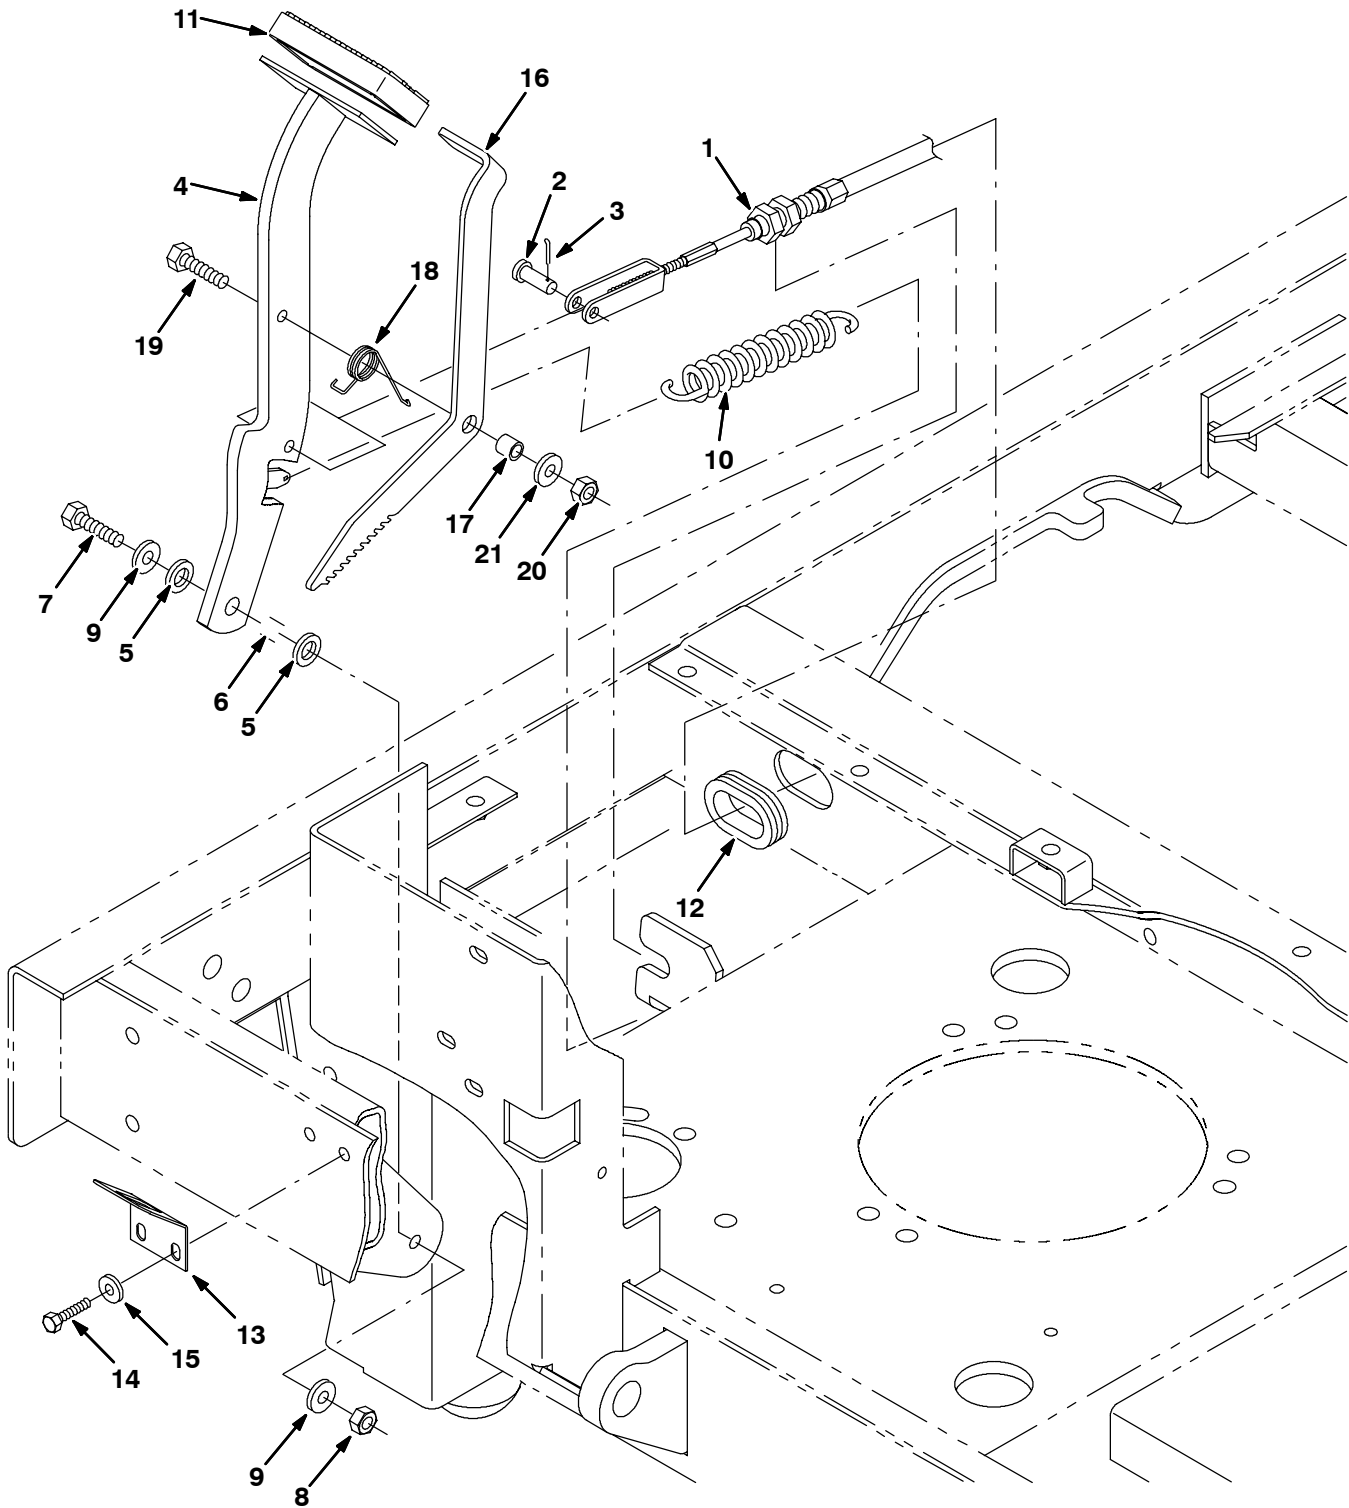


Fig. 12 - Brake Pedal Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386229	(000000-	) Cable, Pull	1
2	69582	(000000-	) Pin, Clevis, 0.31 D X 1.00l	1
3	39005	(000000-	) Pin, Cotter, .094 X 0.75	1
4	386375	(000000-	) Lever Wldt	1
5	86860	(000000-	) Bearing, Thrust	2
6	222460	(000000-	) Sleeve	1
7	09026	(000000-	) Screw, Hex, M08 X 1.25 X 40, Ss	1
8	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl, Ss	1
9	01685	(000000-	) Washer, Flt, .31 Ss	2
10	379217	(000000-	) Spring, Extn, 1.00od X 0.11wir, 5.5l	1
11	51109	(000000-	) Pad	1
12	10632-13	(000000-	) Grommet, Rbr, 1.50id, F/ 1.8h, .31matl	1
13	386915	(000000-	) Plate, Stop	1
14	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	2
15	32490	(000000-	) Washer, Flt, .25 Std	2
16	387656	(000000-	) Pedal, Brake	1
17	46563	(000000-	) Bushing, Sleeve, 0.37b 0.50d 0.50l	1
18	59009	(000000-	) Spring, Tors, 0.75id .06wir 02.8coil	1
19	06955	(000000-	) Screw, Hex, M08 X 1.25 X 35, 8.8	1
20	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl	1
21	39349	(000000-	) Washer, Flt, .31 Sae	1

Fig. 13 - Wheel and Brake Group, Rear

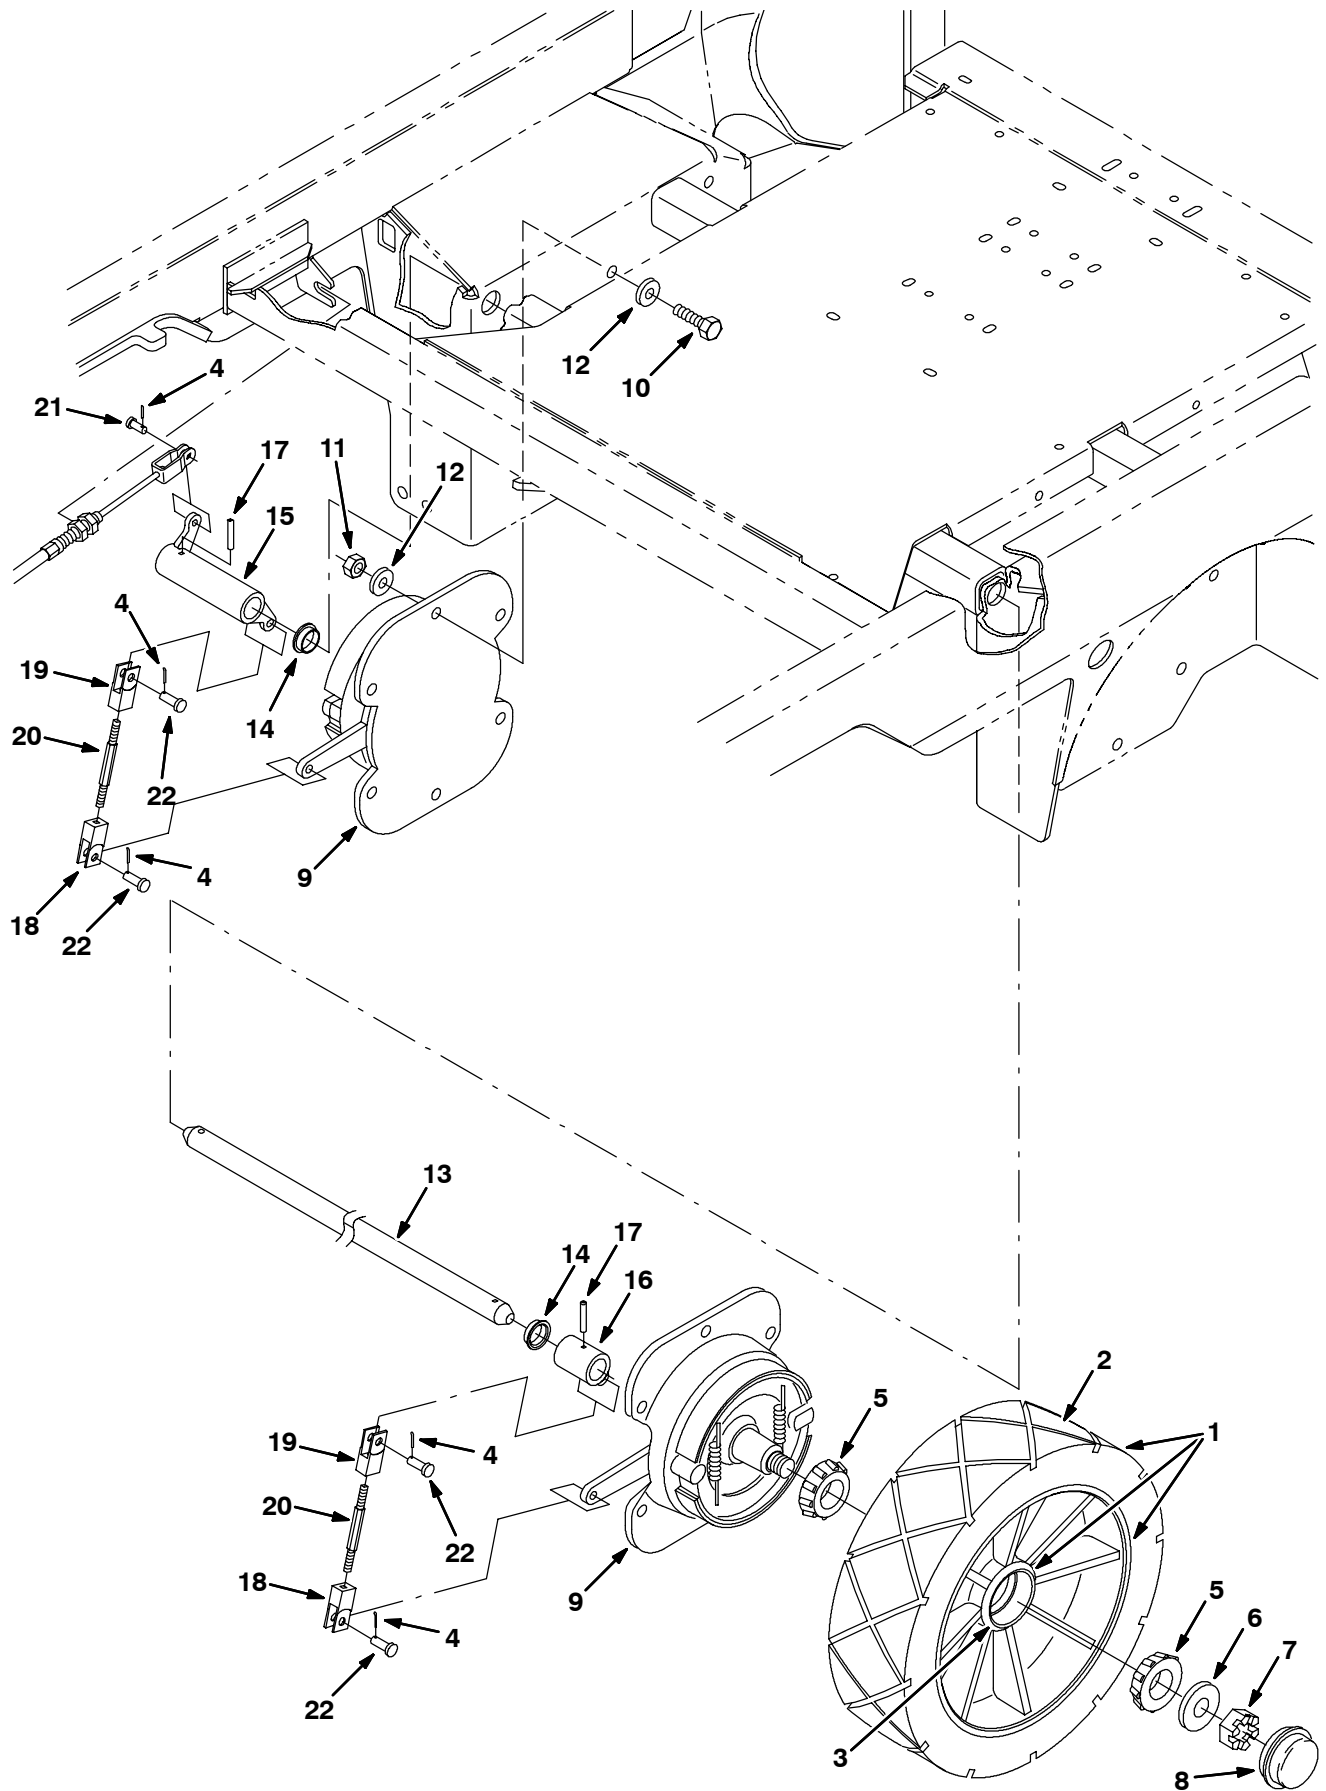


Fig. 13 - Wheel and Brake Group, Rear

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	387014	(000000-	) Tire Assy, 16 X 5 X 12.12	3
▲	2	387010	(000000-	) Tire, Solid, 16X5X12.12	2
▲	3	51338AM	(000000-	) Bearing, Cup, 2.56d 0.55w	2
	4	39005	(000000-	) Pin, Cotter, .094 X 0.75	5
	5	51339	(000000-	) Bearing, Cone, 1.38b 0.71w	4
	6	32969	(000000-	) Washer, Flat, 1.00 Sae Hard	2
	7	14242	(000000-	) Nut, Hex, Sltd, 1.00-20	2
	8	54390	(000000-	) Cap, Hub 2.567 Hole	2
▽	9	54577	(000000-	) Brake Assy	2
▲		66211	(000000-	) Brake Shoes	2
▲		66213	(000000-	) Brake Repair Kit	1
▲		70161	(000000-	) Chrome Pltd Cam Shaft	1
▲		70158	(000000-	) Return Spring-Brakes	2
	10	06969	(000000-	) Screw, Hex, M12 X 1.75 X 40, 8.8	12
	11	08711	(000000-	) Nut, Hex, Lock, M12 X 1.75,Nl	12
	12	32486	(000000-	) Washer, Flt, .50 Sae	24
	13	386367	(000000-	) Shaft	1
	14	83733	(000000-	) Bushing, Flng, 1.00b 1.13d 0.38l	2
	15	386370	(000000-	) Sleeve Wldt, Rh	1
	16	386379	(000000-	) Sleeve Wldt, Lh	1
	17	26315	(000000-	) Pin, Roll, .250 D X 1.50l, .250/.256	2
	18	1023676	(000000-	) Clevis, Adj, 0.38pin, 0.31-24, Pl	2
	19	1023677	(000000-	) Clevis, Adj, 0.38pin, 0.31-24, Lh, Pl	2
	20	386378	(000000-	) Rod, Threaded	2
	21	10120	(000000-	) Pin, Clevis, 0.31 D X 0.75l	1
	22	09088	(000000-	) Pin, Clevis, 0.37 D X 1.00l	4

Fig. 14 - Solution Tank Group

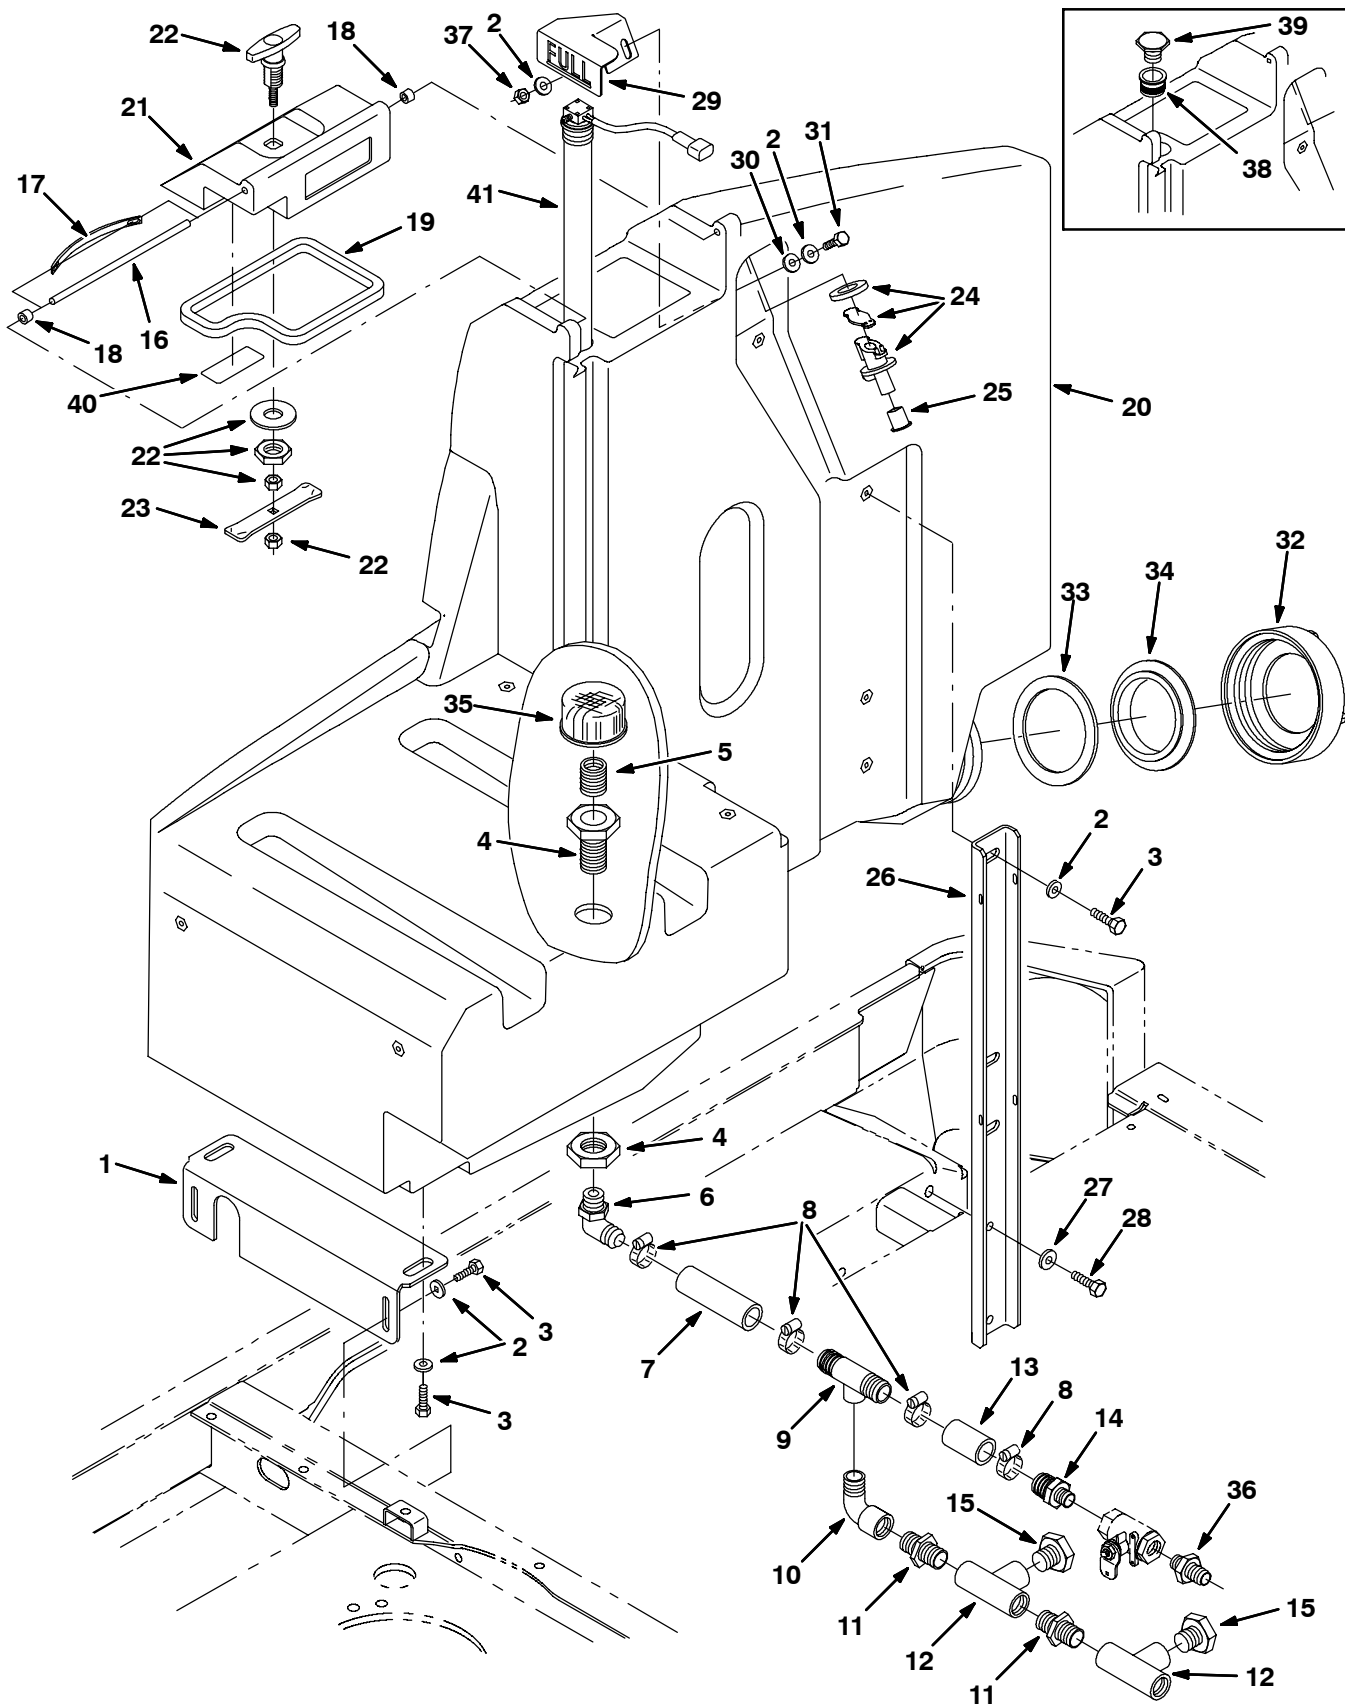


Fig. 14 - Solution Tank Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386109	(000000-	) Bracket, Mtg, Tank	1
2	01685	(000000-	) Washer, Flt, .31 Ss	9
3	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	7
4	386224	(000000-	) Fitting, Plstc, Bkhd, Pf16/Pf16	1
5	223499	(000000-	) Fitting, Plstc, Str, Pm16/Pm16 Close	1
6	365093	(000000-	) Fitting, Plstc, E90, 16bm/16pm	1
7	386420	(000000-	) Hose, Water, 1.0id 4.5l	1
8	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	4
9	365096	(000000-	) Fitting, Plstc, Tee, Bm16/Pf12/Bm16	1
10	69785	(000000-	) Fitting, Plstc, E90, Pm12/Pf12	1
11	24544	(000000-	) Fitting, Plstc, Str, Pm12/Pm12	2
12	42133A	(000000-	) Fitting, Plstc, Tee, Pf12/Pf12/Pf12	2
13	386421	(000000-	) Hose, Water, 1.0id 2.25l	1
14	57379	(000000-	) Fitting, Plstc, Str, Pm12/Bm16	1
15	75611	(000000-	) Fitting, Plstc, Plug, Pm12	2
16	386419	(000000-	) Pin, Hinge, Cover	1
17	386643	(000000-	) Spring, Cover	1
18	49740	(000000-	) Cap, Plastic	2
19	386320	(000000-	) Gasket, Cover, Tank, Solution	1
20	387684	(000000-	) Tank Kit, Soltn, W/ Label, Replmt [8300]	1
21	386162	(000000-	) Cover, Tank, Solution	1
22	386324	(000000-	) Handle	1
23	386222	(000000-	) Bar	1
24	78842	(000000-	) Kit, Valve, Check	1
25	78740	(000000-	) Plug, Cap	1
26	386160	(000000-	) Channel	1
27	01686	(000000-	) Washer, Flt, .38 Ss	2
28	77347	(000000-	) Screw, Hex, M10 X 1.5 X 35, Ss	2
29	387061	(000000-	) Bracket, Full	1
30	63416	(000000-	) Washer, 0.31b 0.88d .12, Rbr	1
31	09011	(000000-	) Screw, Hex, M08 X 1.25 X 30, Ss	1
32	23456	(000000-	) Cap, Tank, Drain, 6.17 Thread Pye	1
33	1031699	(000000-	) Gasket, .19, 4.05id 5.29od [Buna]	1
34	86636	(000000-	) Cover, Tank	1
35	20810	(000000-	) Filter, Soltn, 20mesh, Pf16 3.1d 02.3l	1
36	79273-2	(000000-	) Fitting, Plstc, Str, Bm12/Pm12	1
37	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	1
38	223528	(000000-003817	) Grommet, Level Sensing 1.6 D 9.6L	1
39	49745	(000000-003817	) Fitting, Plstc, Plug, PM16	1
40	391451	(003818-	) Label, Attention Fast Users	1
41	375431	(003818-	) Kit, Replmt, Press Switch/34" Tube	1

Fig. 15 - FaST Solution Pump Group

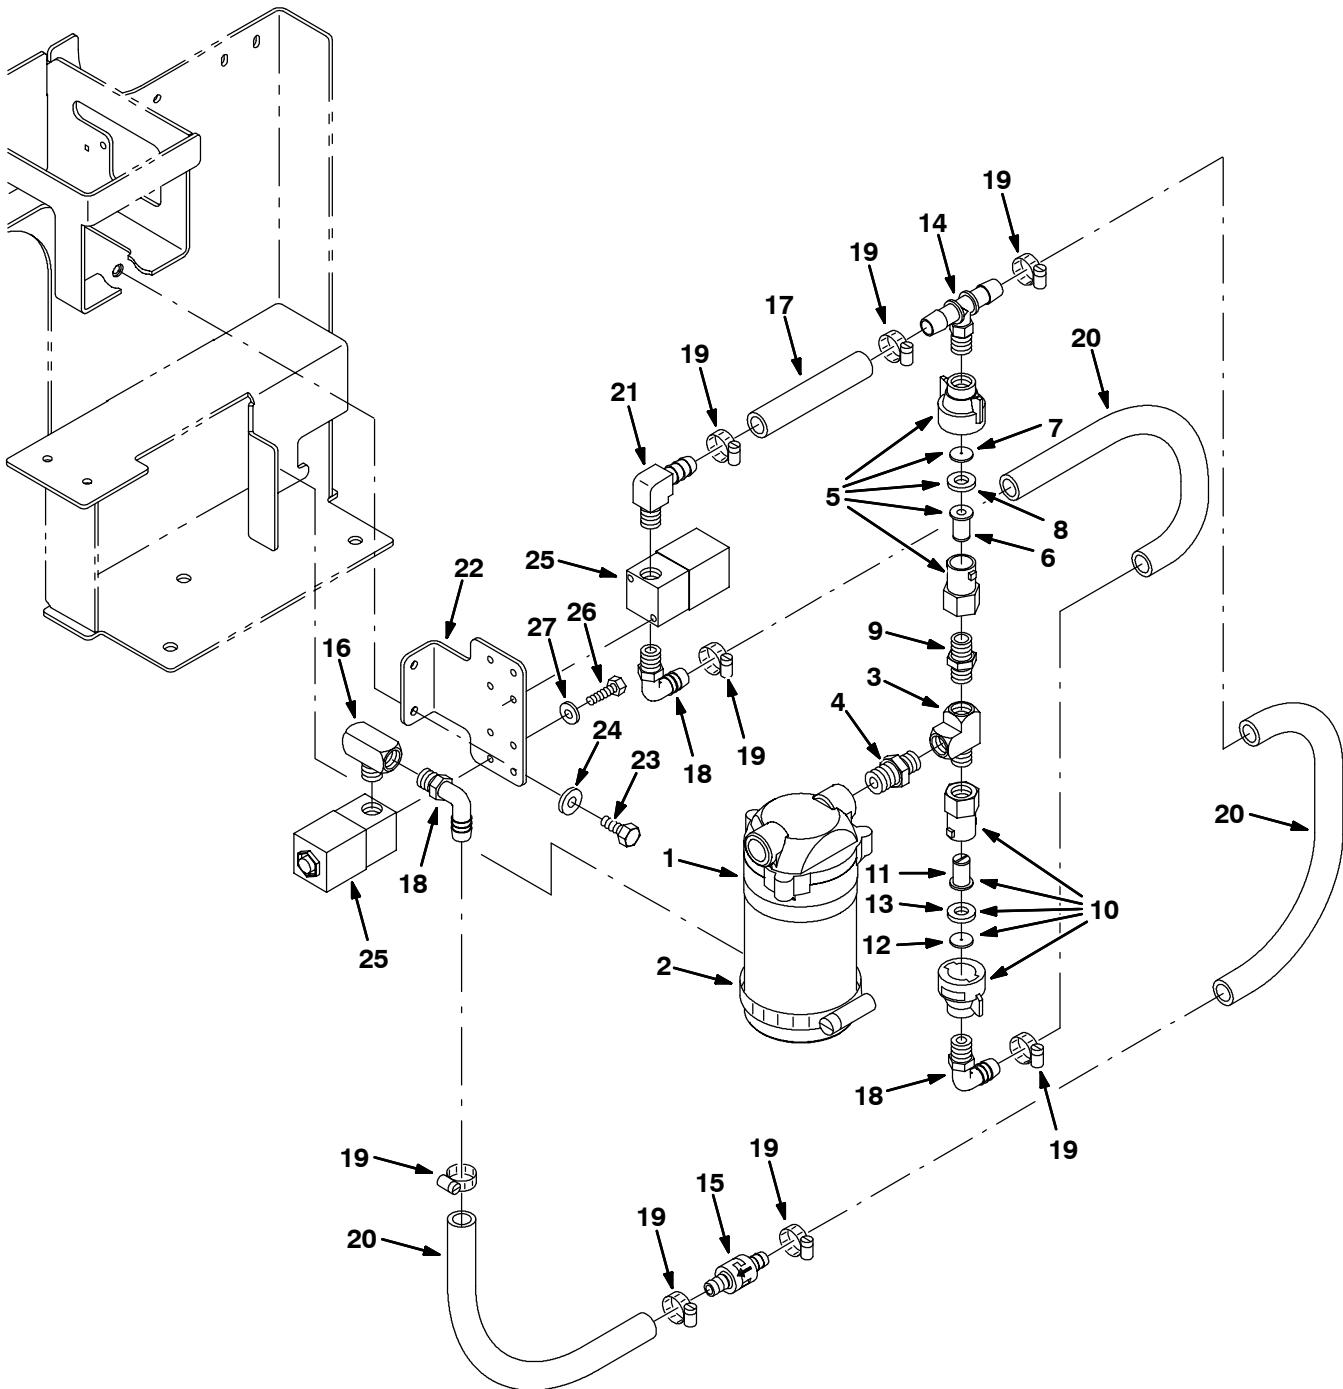


Fig. 15 - FaST Solution Pump Group

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
	1	1005866	(000000-	) Pump, Soltn, Ele, 36vdc	1
	2	43555	(000000-	) Clamp, Hose, Wormdrive, 1.62-3.50d	1
	3	24929	(000000-	) Fitting, Brs, Tee, Pf04/Pf04/Pm04	1
	4	1010835	(000000-	) Fitting, Brs, Str, Pm04/Pm06	1
▽	5	1010655	(000000-	) Fitting Assy, Cap, 0.067b, Pf04	1
▲	6	1006447	(000000-	) Screen, 50 Mesh, Ss	1
▲	7	1010658	(000000-	) Plate, Orifice, 0.067id	1
▲	8	1005508	(000000-	) Washer, Flat, 0.34b 0.75d 0.12, Viton	1
	9	398468	(000000-	) Fitting, Brs, Str, Pm04/Pm04	1
▽	10	1010660	(000000-	) Fitting Assy, Cap, 0.086b, Pf04	1
▲	11	1006447	(000000-	) Screen, 50 Mesh, Ss	1
▲	12	1010661	(000000-	) Plate, Orifice, 0.086id	1
▲	13	1005508	(000000-	) Washer, Flat, 0.34b 0.75d 0.12, Viton	1
	14	1010791	(000000-	) Fitting, Plstc, Tee, Bm08/Pm04/Bm08 Nyl	1
	15	1010614	(000000-	) Valve, Check, 2 Gpm 3" 06bm/08bm	1
	16	53268	(000000-	) Fitting, Brs, Tee, Pf04/Pm04/Pf04	1
	17	1011403	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 1 Ft	1
	18	1010713	(000000-	) Fitting, Plstc, E90, Bm08/Pm04 Nyl	3
	19	54333	(000000-	) Clamp, Hose, Wormdrive, 0.31-0.88d	8
	20	1011521	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 2 Ft	3
	21	1010836	(000000-	) Fitting, Brs, E90, Pm04/Bm08	1
	22	1013857	(000000-	) Bracket, Mtg, Valve, Solenoid	1
	23	06942	(000000-	) Screw, Hex, M6 X 1.0 X 16, 8.8	2
	24	32490	(000000-	) Washer, Flat, 0.25 Std	2
	25	1028581	(000000-	) Valve, Water, 36vdc, 6.0mm, 04pf	2
	26	09252	(000000-	) Screw, Hex, M5 X 0.8 X 20, 8.8	4
	27	19066	(000000-	) Washer, Flat, #10	4

Fig. 16 - FaST Air Pump and Detergent Group

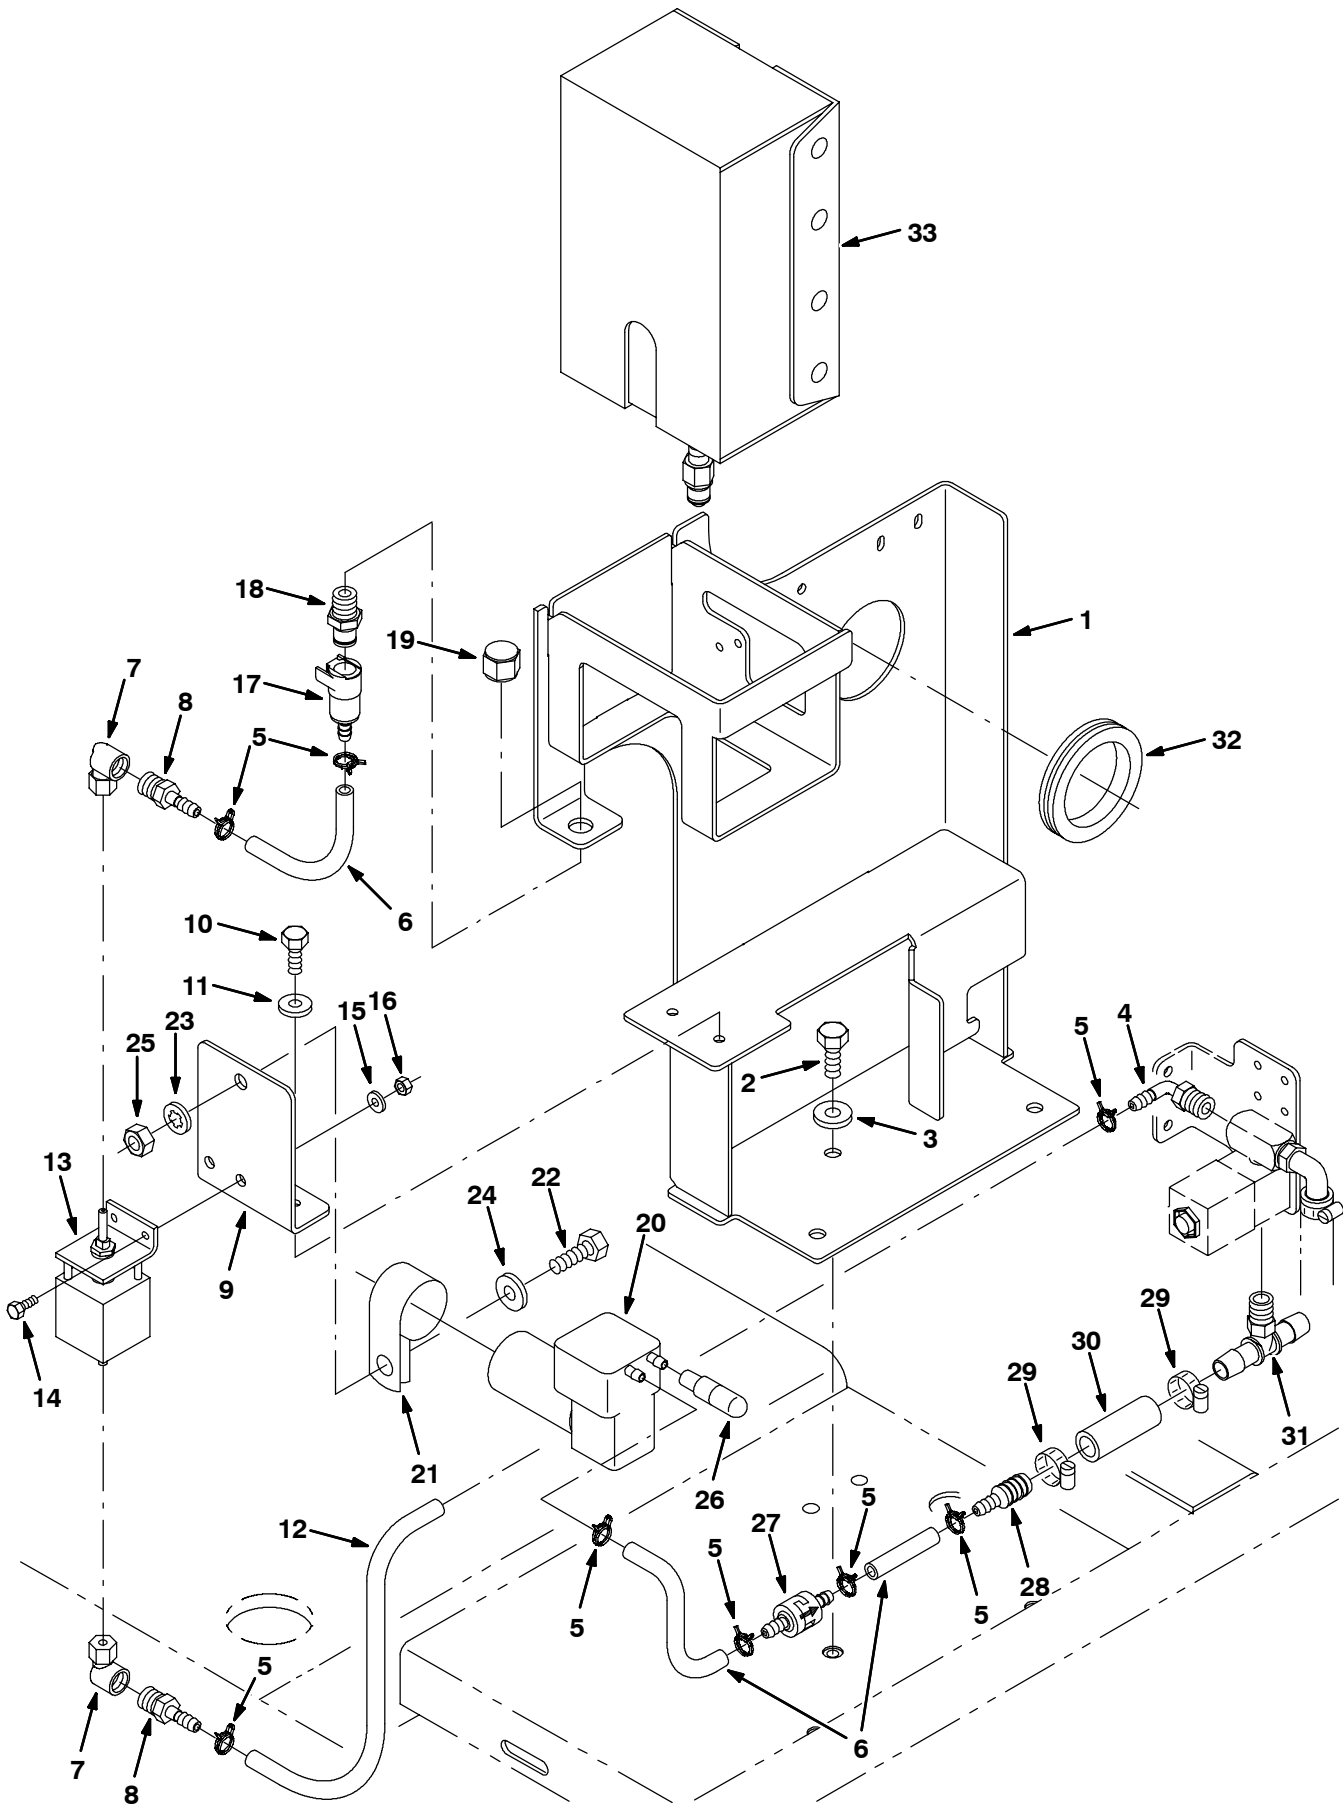


Fig. 16 - FaST Air Pump and Detergent Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	1010797	(000000-004158)	Bracket Wldt [7300/8300-FaST]	1
1	1024009	(004159-)	Bracket Wldt [7300/8300 FaST]	1
2	16931	(000000-)	Screw, Hex, M8 X 1.25 X 20, 8.8	3
3	32491	(000000-)	Washer, Flat, 0.31 Std	3
4	1011170	(000000-)	Fitting, Plstc, E90, Bm04/Pm04 Nyl	1
5	613735	(000000-)	Clamp, Hose .40 - .42 2 Wire	8
6	1014987	(000000-)	Hose, Afmkt, Pvc, Clr 0.25id 1 Ft	2
7	1014082	(000000-)	Fitting, Brs, E90, Cf03/Pf02	2
8	150525	(000000-)	Fitting 1/8mx1/4h Barb Brs	2
9	1013866	(000000-)	Bracket, Mtg, Pump, Detgt [7300/8300]	1
10	06942	(000000-)	Screw, Hex, M6 X 1.0 X 16, 8.8	2
11	32490	(000000-)	Washer, Flat, 0.25 Std	2
12	1014986	(000000-)	Hose, Afmkt, Pvc, Clr 0.25id 2 Ft	1
13	1014056	(000000-)	Pump, Detgt, 560s	1
14	09206	(000000-)	Screw, Hex, M4 X 0.7 X 12, 8.8	2
15	19064	(000000-)	Washer, Flat, #06	2
16	02850	(000000-)	Nut, Hex, Lock, M 4 X 0.7, NI	2
17	1002898	(000000-)	Coupling, Fem, W/ Valve, .25 Brb	1
18	1002899	(000000-)	Coupling, Mal, .25 Npt	1
19	1005435	(000000-)	Fitting, Plstc, Cap, Pf04	1
20	1008211	(000000-)	Pump, Air, Ele, 36vdc	1
21	53466	(000000-)	Clamp, Cable, Stl, 1.50d X 1.00w, 1h	1
22	09010	(000000-)	Screw, Hex, M8 X 1.25 X 25, Ss	1
23	32984	(000000-)	Washer, Lock, Int, .31	1
24	32491	(000000-)	Washer, Flat, 0.31 Std	1
25	08709	(000000-)	Nut, Hex, Lock, M8 X 1.25, NI	1
26	1005255	(000000-)	Filter Assy, Air, Molded Ure	1
27	1010871	(000000-)	Valve, Check, 2 Gpm 0.5psi Bm04/Bm04	1
28	25620	(000000-)	Fitting, Plstc, Str, Bm04/Bm08	1
29	54333	(000000-)	Clamp, Hose, Wormdrive, 0.31-0.88d	2
30	1011403	(000000-)	Hose, Afmkt Replmt, Pvc, Brd 0.50id 1 Ft	1
31	1010791	(000000-)	Fitting, Plstc, Tee, Bm08/Pm04/Bm08 Nyl	1
32	10632-19	(000000-)	Grommet, Rbr, 2.13id, F/ 2.5h, .12 Matl	1
33	1017015	(000000-)	Detergent Pkg, 2 Liter, Sgl, 365	1
33	1017022	(000000-)	Detergent Pkg, 2 Liter, Sgl, 665	1
33	1021878	(000000-)	Detergent Pkg, 4 Liter, Sgl [Tco 665]	1

Fig. 17 - FaST Foam Filter Group

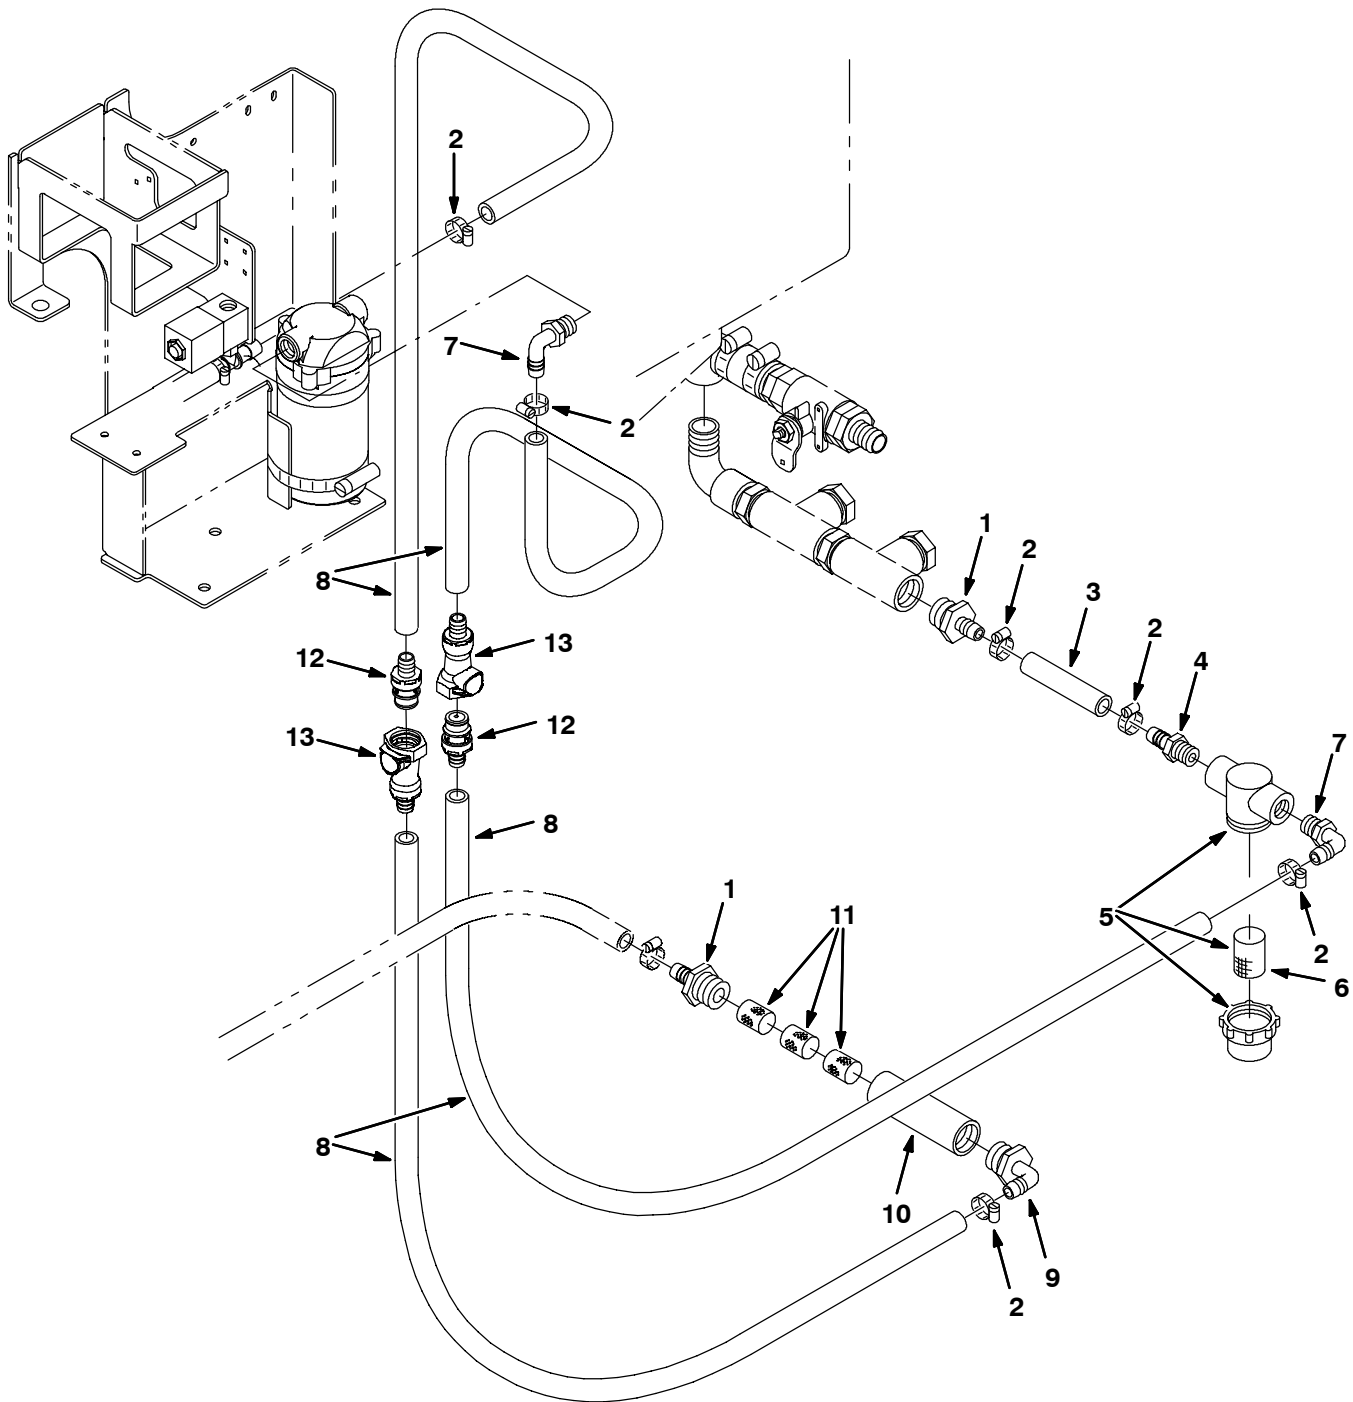


Fig. 17 - FaST Foam Filter Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	79273-1	(000000-	) Fitting, Plstc, Str, Bm08/Pm12	1
2	54333	(000000-	) Clamp, Hose, Wormdrive, 0.31-0.88d	6
3	1011403	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 1 Ft	1
4	64743	(000000-	) Fitting, Plstc, Str, Bm08/Pm06	1
▽	5	1005302	(000000-) Filter, Inline, Pf06/Pf06, 80 Mesh	1
▲	6	1005304	(000000-) Screen, Filter, 80 Mesh	1
7	64778	(000000-	) Fitting, Plstc, E90, Bm08/Pm06	2
8	1011835	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 20ft	1
9	1005552	(000000-	) Fitting, Plstc, E90, Bm08/Pm12, Nyl	1
10	1005086	(000000-	) Tube, Pvc, Shc80, Clear, 4.0l	1
11	1002789	(000000-	) Filter, Foam	3
12	1017415	(000000-	) Coupling Insert, Qm, Bm08	1
13	1017413	(000000-	) Coupling Body, Qf, Pm08	1

Fig. 18 - Solution Control Group

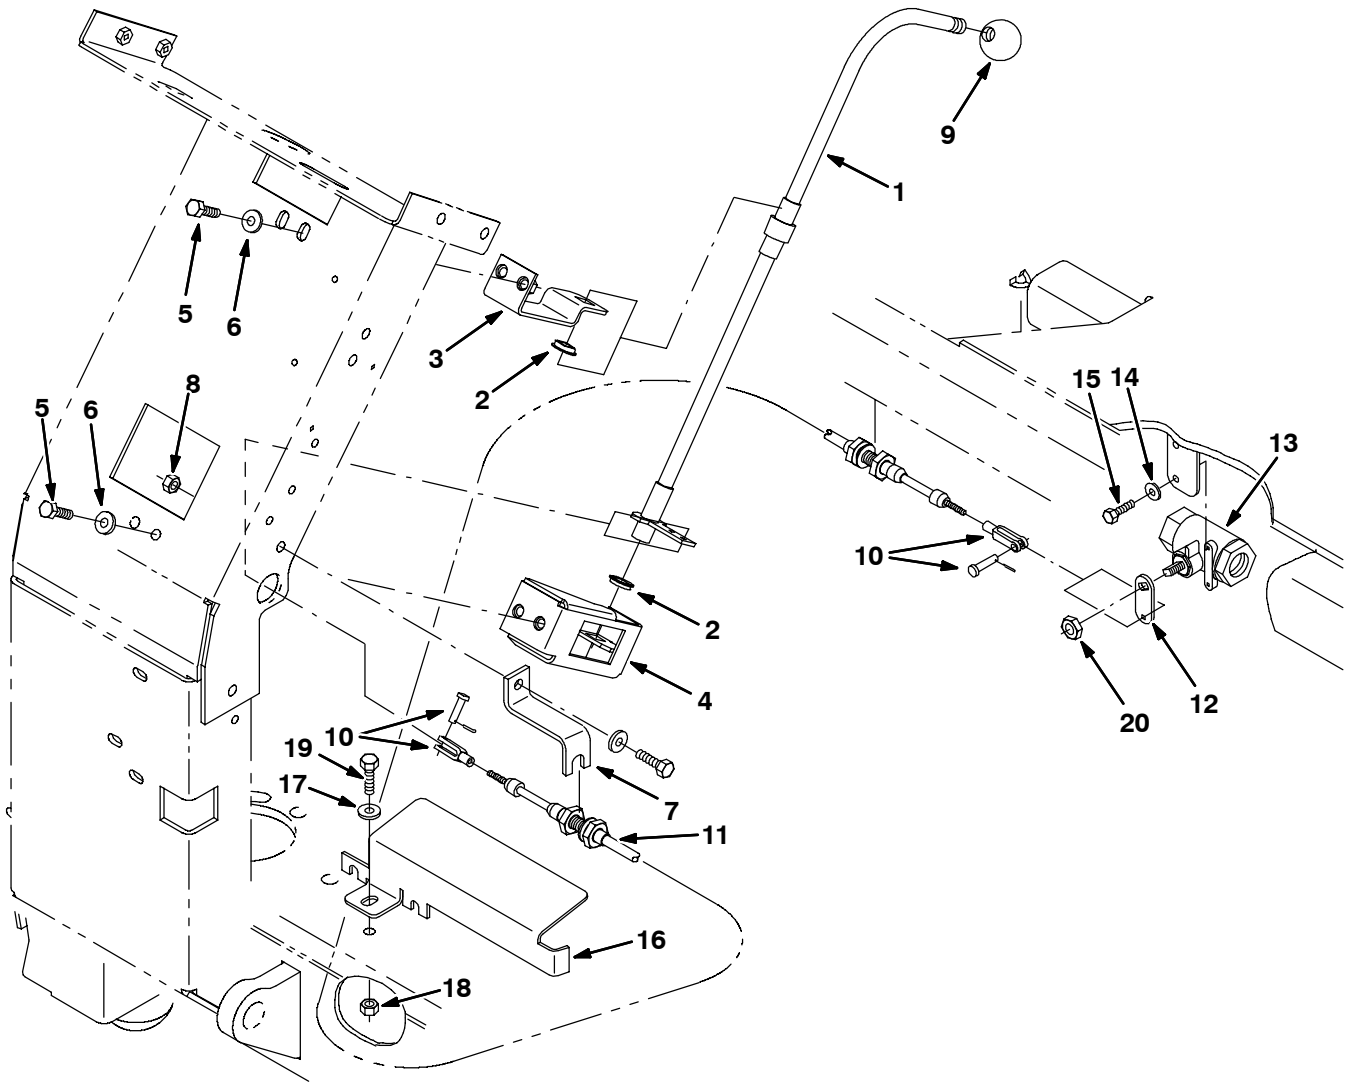


Fig. 18 - Solution Control Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386116	(000000-	) Rod Wldt	1
2	04843	(000000-	) Bushing, Flng, 0.63b 0.72d 0.25l	2
3	387382	(000000-	) Bracket, Cntrl, Water	1
4	387380	(000000-	) Bracket Wldt	1
5	16735	(000000-	) Screw, Hex, M08 X 1.25 X 16, 8.8	5
6	32491	(000000-	) Washer, Flt, .31 Std	4
7	386119	(000000-	) Bracket, Cable Cntrl	1
8	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	1
9	26156	(000000-	) Knob, 0.50-20, 1.38d, Plstc	1
10	27880	(000000-	) Clevis, Adj, 0.19pin, #10-32	2
11	386351	(000000-	) Cable, Push Pull	1
12	386429	(000000-	) Lever, Valve, Water	1
13	79350	(000000-	) Valve, Water	1
14	01683	(000000-	) Washer, Flt, #10 Ss	2
15	42011	(000000-	) Screw, Hex, #10-24 X 0.50, Ss	2
16	387425	(000000-	) Bracket, Guard	1
17	01684	(000000-	) Washer, Flt, .25 Ss	1
18	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	1
19	09007	(000000-	) Screw, Hex, M06 X 1.0 X 25, Ss	1
20	363453	(000000-	) Nut, Hex, Lock, .44-20, NI, Thin	1

Fig. 19 - Recovery Tank Group

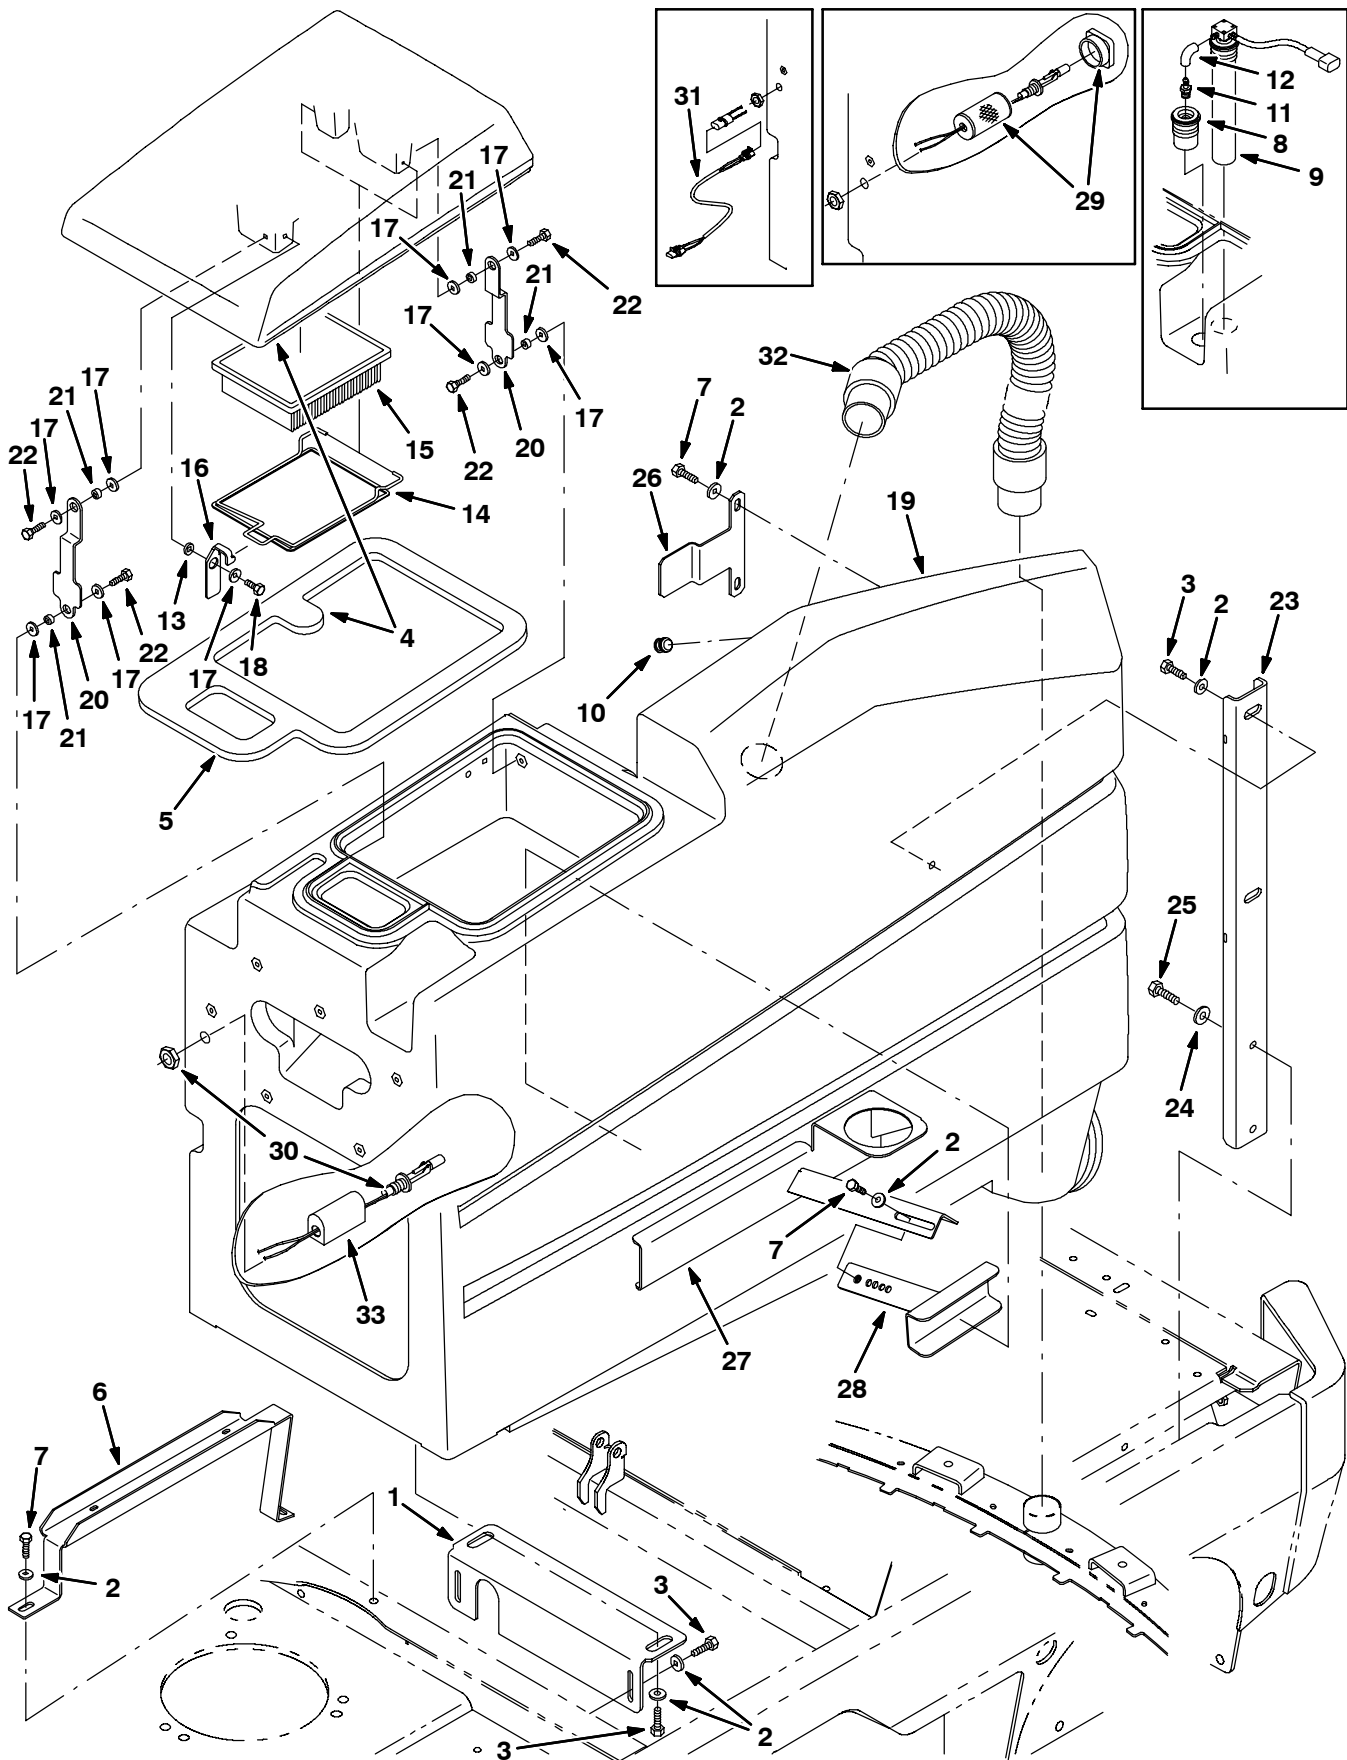


Fig. 19 - Recovery Tank Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386109	(000000-	) Bracket, Mtg, Tank	1
2	01685	(000000-	) Washer, Flt, .31 Ss	14
3	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	6
▽ 4	387593	(000000-	) Kit, Cover, Recvy, W/Gasket	1
▲ 5	386223	(000000-	) Gasket, Tank, Recovery	1
6	386330	(000000-	) Channel, Harness	1
7	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	6
8	385750	(000000-003426	) Tube Assy, 2 Inch	1
9	375429	(000000-003426	) Switch Assy, Press, 4 Inch	1
10	386424	(000000-	) Plug, Cap	1
11	386425	(000000-003426	) Fitting, Plstc, [90 Bm03/Pm02]	1
12	13292	(000000-003426	) Hose, Vacuum, 0.16id X 05.0l	2
13	386785	(000000-	) Spacer, Latch, Filter	1
14	387615	(000000-	) Bracket, Retainer, Filter	1
15	1037822	(000000-	) Filter, Panl, Dust, 2.0 X 06.1 X 07.6	1
16	386325	(000000-	) Bracket, Retaining, Filter	1
17	01683	(000000-	) Washer, Flt, #10 Ss	9
18	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	1
19	387686	(000000-	) Tank Kit, Recvy, W/ Label, Replmt [8300]	1
20	386108	(000000-	) Bar	2
21	360801	(000000-	) Sleeve	4
22	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	4
23	386160	(000000-	) Channel	1
24	01686	(000000-	) Washer, Flt, .38 Ss	2
25	77347	(000000-	) Screw, Hex, M10 X 1.5 X 35, Ss	2
26	386414	(000000-	) Bracket, Retaining	1
27	386444	(000000-	) Bracket Wldt, Tank	1
28	386445	(000000-	) Bracket Wldt, Tank	1
29	375302	(003427-004029	) Strainer, Soltn, Switch Guard (Repl. By 387649)	1
30	222822	(003427-003859	) Sensor, Level, Liquid [Magnetic]	1
30	385685	(003860-	) Sensor, Level, Liquid, 14vdc 01a .62-11	1
31	369766	(003427-003859	) Harness, Sensor, Jumper	1
32	386267	(000000-	) Hose, Vacuum, 89.0l	1
33	1019285	(004030-	) Bracket, Protector, Float Switch	1

Fig. 20 - Recovery Tank Drain Assembly

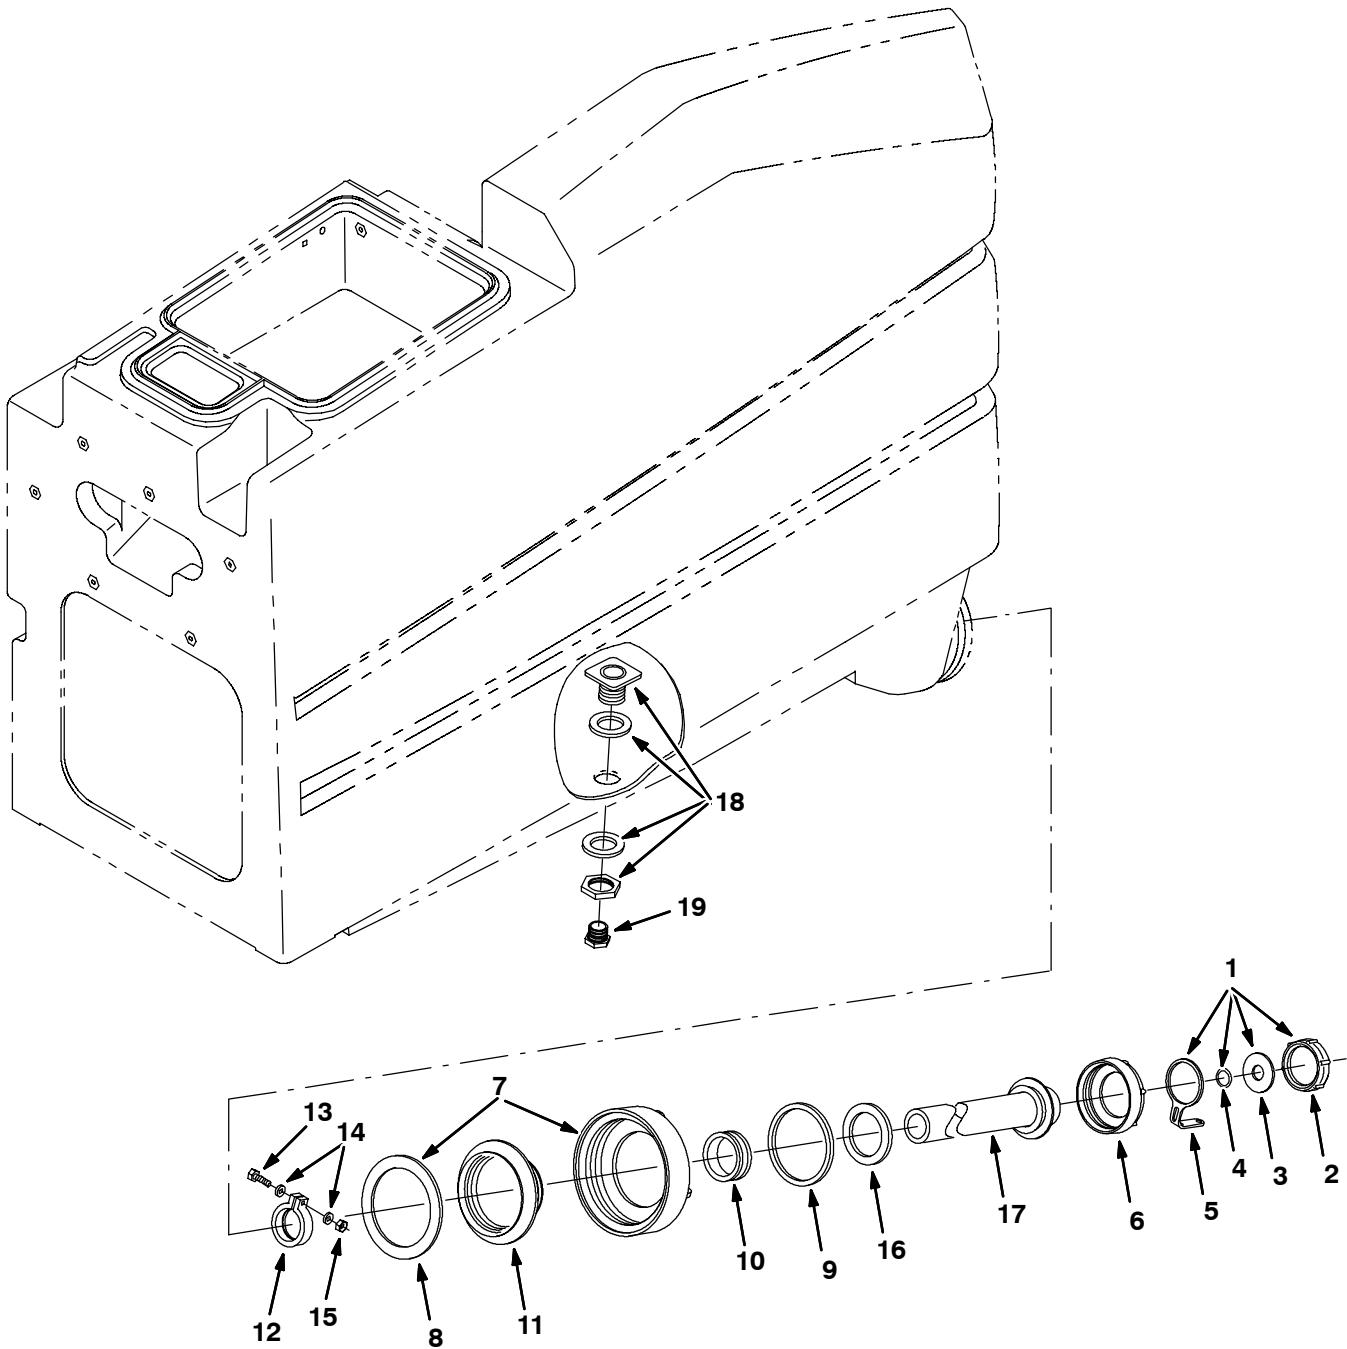


Fig. 20 - Recovery Tank Drain Assembly

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387201	(000000-	) Hose Assy, Drain	1
▲▽	1	32501	(000000-	) Kit, Cap, Drain	1
▲▲	2	32613	(000000-	) Cap, Tank, Drain, 2.25 Thread Pye	1
▲▲	3	32614	(000000-	) Gasket, Cap	1
▲▲	4	32669	(000000-	) Ring, Retaining, Ext, 0.75d, Ss	1
▲▲	5	32508	(000000-	) Strap	1
▲	6	14880	(000000-	) Cap, Tank, Drain, 3.85 Thread Pye	1
▲▽	7	24358	(000000-	) Cap, Tank	1
▲▲	8	1031699	(000000-	) Gasket, .19, 4.05id 5.29od [Buna]	1
▲	9	79320	(000000-	) Gasket, Cap, Drain	1
▲	10	41421	(000000-	) Seal	1
▲	11	14864	(000000-	) Cover, Insert	1
▲	12	41454	(000000-	) Clamp, Hose, Plstc, 1.60d X 0.62w	1
▲	13	12316	(000000-	) Screw, Hex, M05 X 0.8 X 25, Ss	1
▲	14	01683	(000000-	) Washer, Flt, #10 Ss	1
▲	15	09739	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI, Ss	1
▲	16	41451	(000000-	) Gasket, Lid	1
▲	17	386423	(000000-	) Hose Assy, Drain	1
	18	377349	(000000-	) Fitting, Plstc, Bkhd, Pf12/Pf12	1
	19	75611	(000000-	) Fitting, Plstc, Plug, Pm12	1

Fig. 21 - Scrubber Vacuum Fan Group

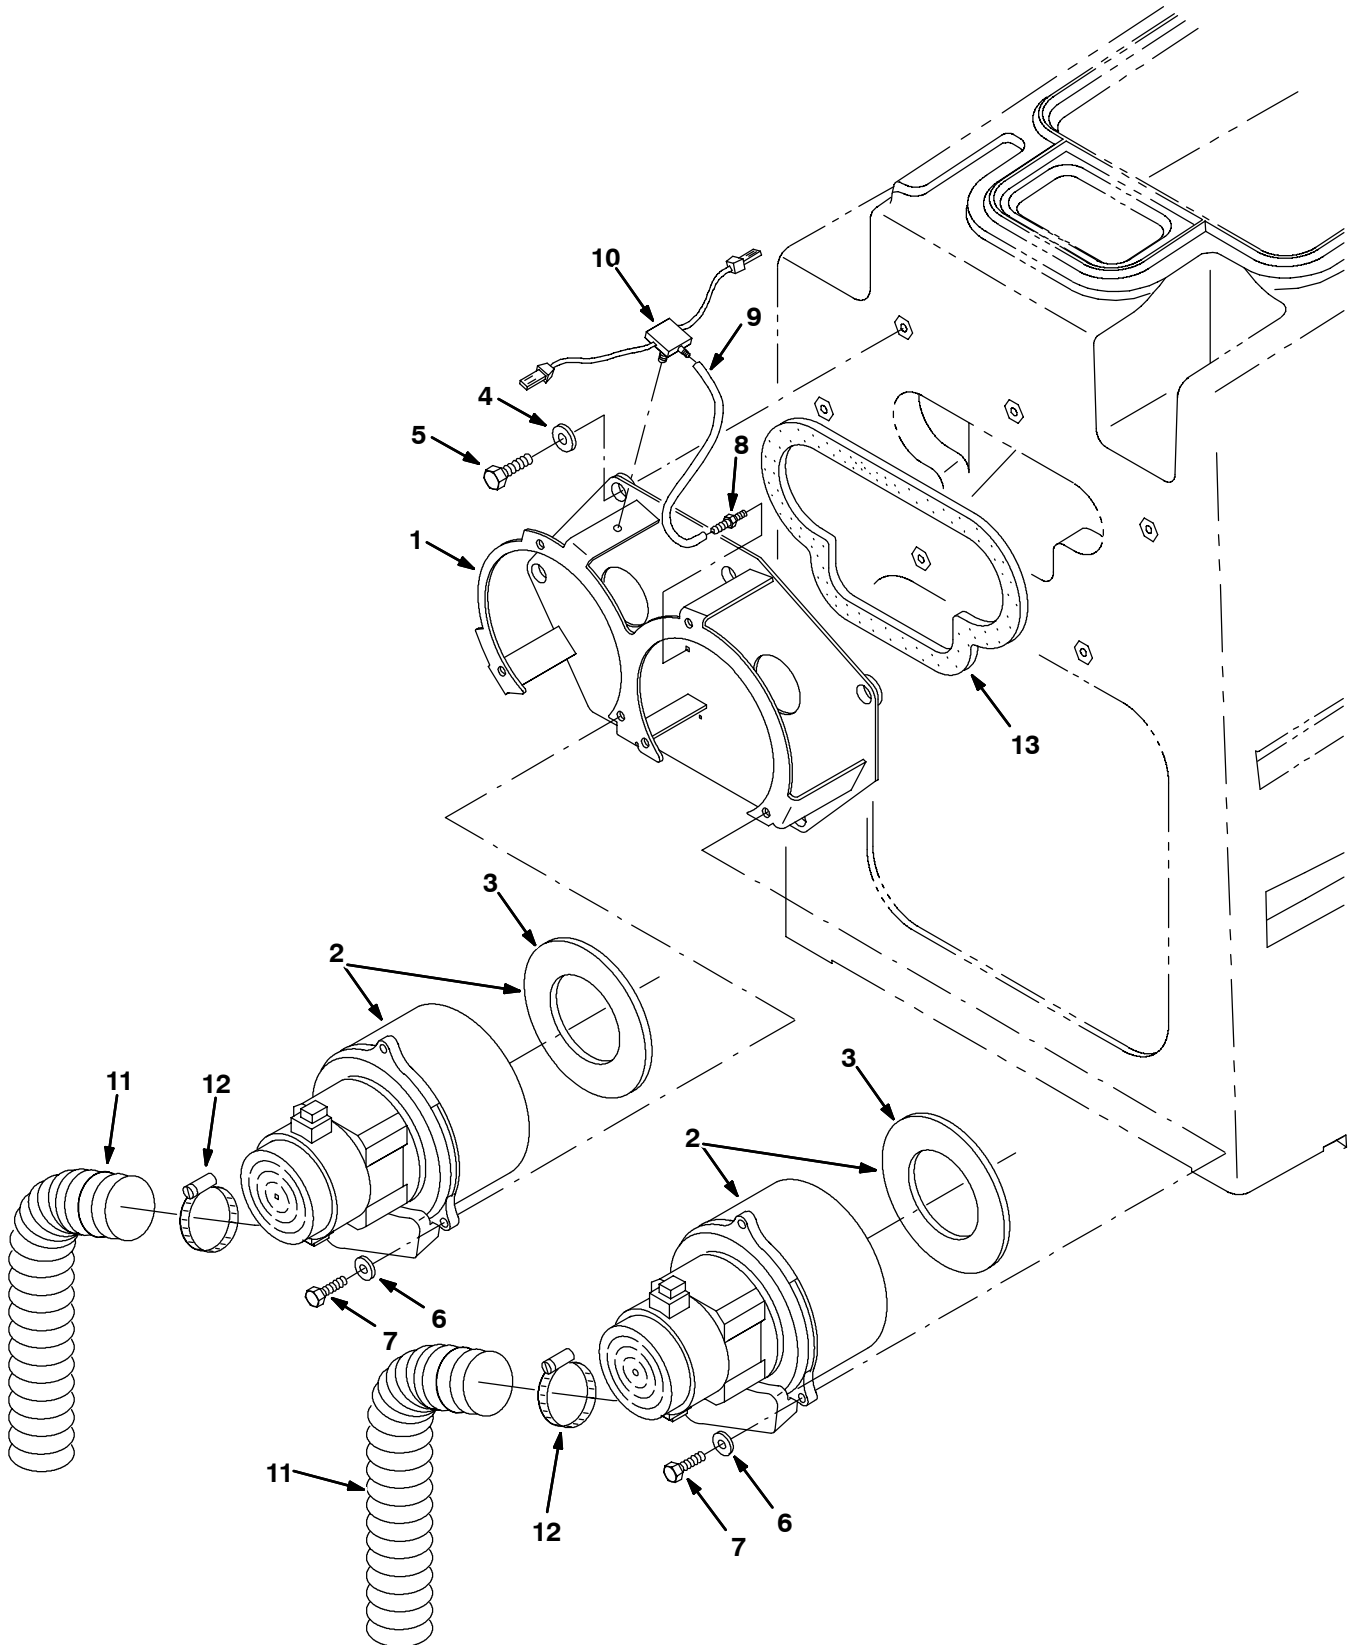


Fig. 21 - Scrubber Vacuum Fan Group

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
	1	386321	(000000-	) Bracket Wldt, Mtg, Fan	1
▽	2	17363	(000000-003389	) Fan Assy, Vacuum (See Breakdown) (Replaced by 398520)	2
▲	3	223264	(000000-003389	) Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h	1
▽	2	398520	(003390-	) Fan Assy, Vacuum (See Breakdown)	2
▲	3	223264	(003390-	) Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h	1
	4	13248	(000000-	) Washer, 0.40b 1.12d .12, Stl, Pl	6
	5	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	6
	6	01684	(000000-	) Washer, Flt, .25 Ss	6
	7	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	6
	8	40607	(000000-	) Fitting, Brs, Str, Pm02/Bm03	1
	9	13292	(000000-	) Hose, Vacuum, 0.16id X 05.0l	1
	10	386349	(000000-	) Switch, Vacuum, Dual Level	1
	11	387499	(000000-	) Hose, Vacuum	2
	12	22297	(000000-	) Clamp, Hose, Wormdrive, 1.56-2.50d	2
	13	386323	(000000-	) Gasket, Mtg, Fan	1

Fig. 22 - Scrub Head Lift Group

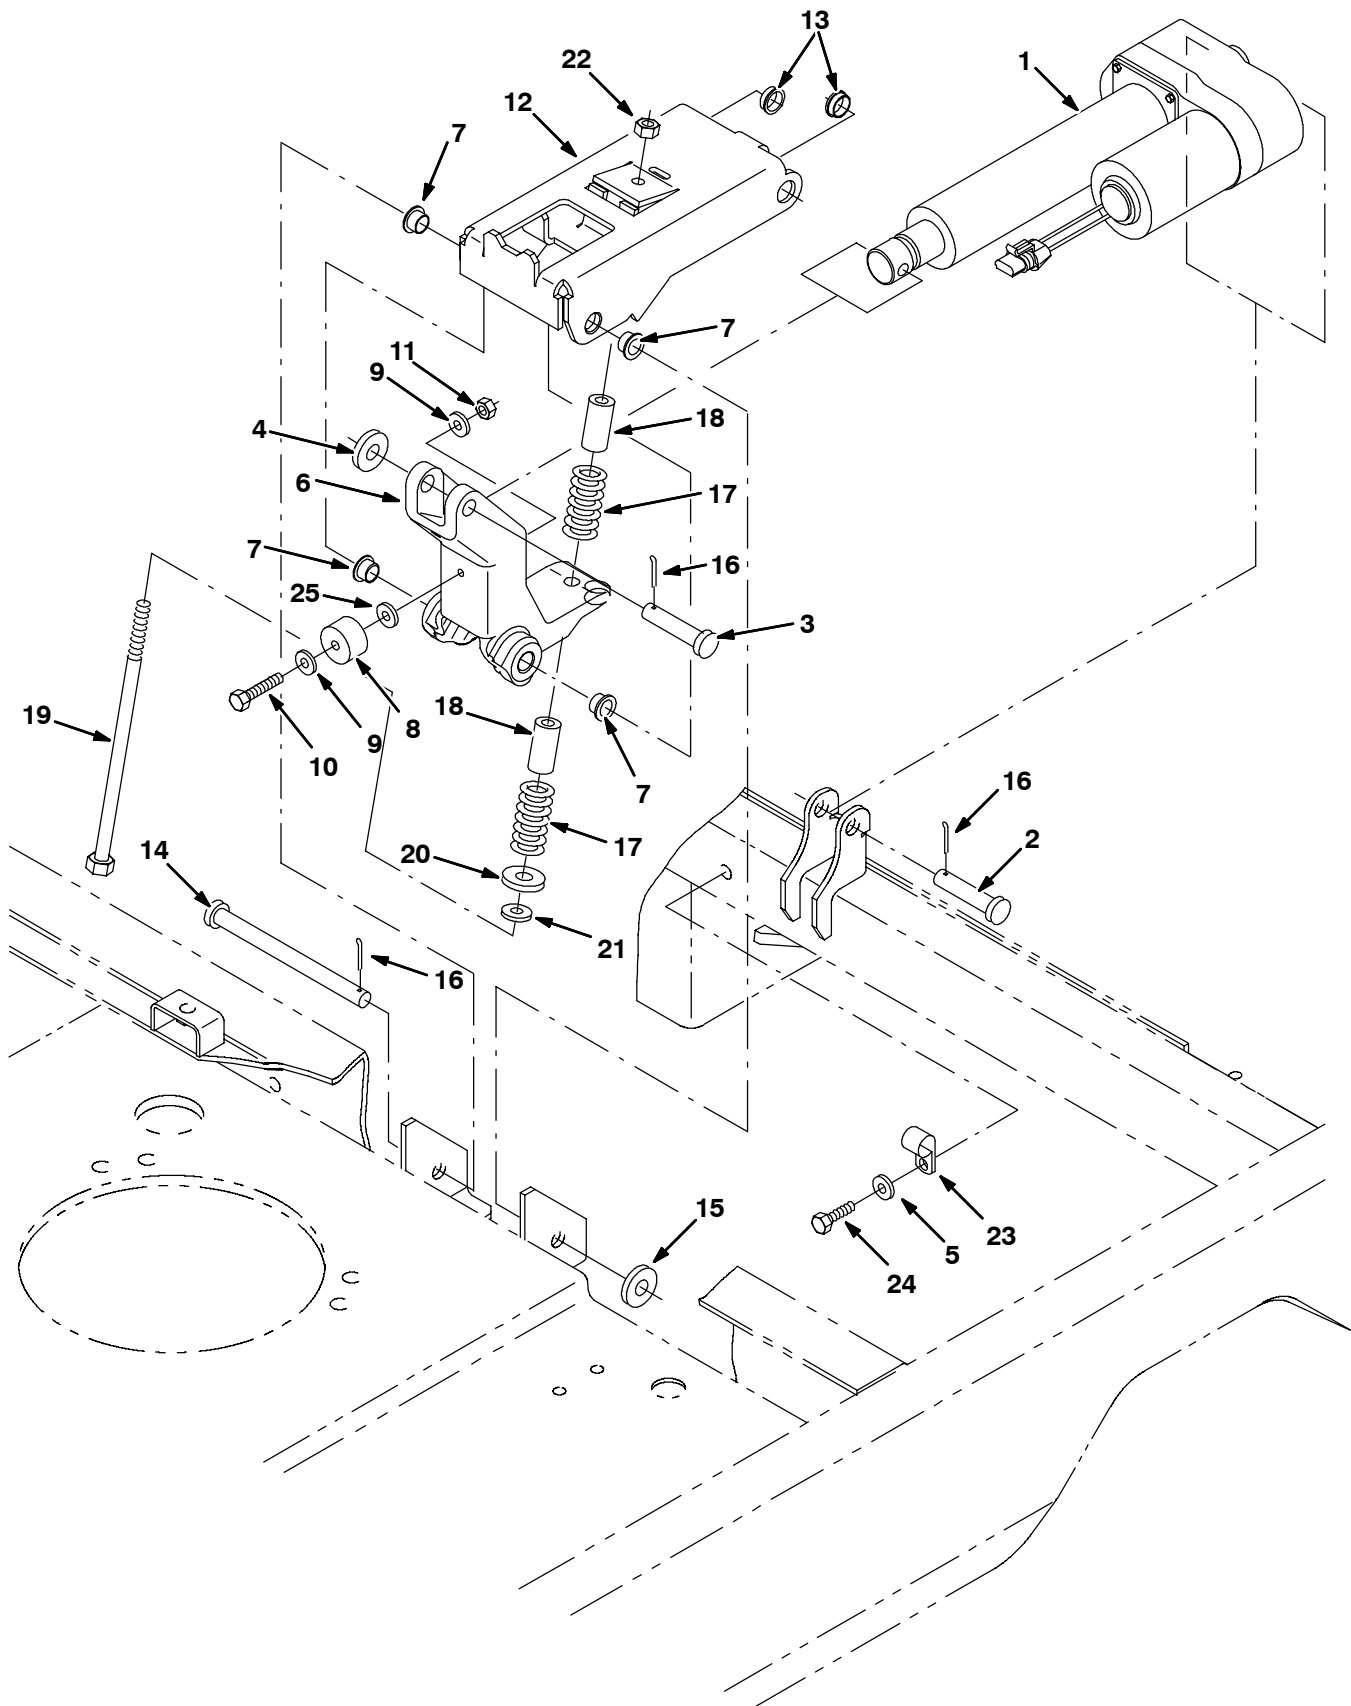


Fig. 22 - Scrub Head Lift Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386985	(000000-	) Actuator, 36vdc, 7.0stroke, 700lb	1
2	43290	(000000-	) Pin, Clevis, 0.50 D X 1.75l	1
3	06279	(000000-	) Pin, Clevis, 0.50 D X 2.50l	1
4	32493	(000000-	) Washer, Flt, .50 Std	1
5	01684	(000000-	) Washer, Flt, .25 Ss	1
6	387097	(000000-	) Bellcrank, Head Lift	1
7	15648	(000000-	) Bushing, Flng, 0.50b 0.59d 0.38l	4
8	386988	(000000-	) Bumper, Rbr, 1.19d .72l	1
9	01683	(000000-	) Washer, Flt, #10 Ss	2
10	24199	(000000-	) Screw, Hex, M05 X 0.8 X 16, Ss	1
11	09739	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI, Ss	1
12	386031	(000000-	) Arm Wldt, Lift, Scrub Head, [7300]	1
13	04843	(000000-	) Bushing, Flng, 0.63b 0.72d 0.25l	2
14	51225	(000000-	) Pin, Clevis, 0.50 D X 5.50l	1
15	41619	(000000-	) Washer, Flt, .50 Ss	1
16	08182	(000000-	) Pin, Cotter, .125 X 1.00	3
17	386049	(000000-	) Spring, Cmpr, 1.5 Od .75id X 2.5l	2
18	386961	(000000-	) Sleeve, .38b X .75d X 1.5l, Bronze	2
19	14455	(000000-	) Screw, Hex, M08 X 1.25 X 160, 8.8	1
20	41619	(000000-	) Washer, Flt, .50 Ss	1
21	01685	(000000-	) Washer, Flt, .31 Ss	1
22	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	1
23	26395-1	(000000-	) Clamp, Cable, Stl, 0.56d X 0.38w, 1h	1
24	12459	(000000-	) Screw, Hex, M06 X 1.0 X 20, Fmg	1
25	13248	(000000-	) Washer, Flat, 0.40b 1.12d .12, Stl, PI	1

Fig. 23 - Max Pro 1000 (Disc-Brush) Scrub Head Frame Group

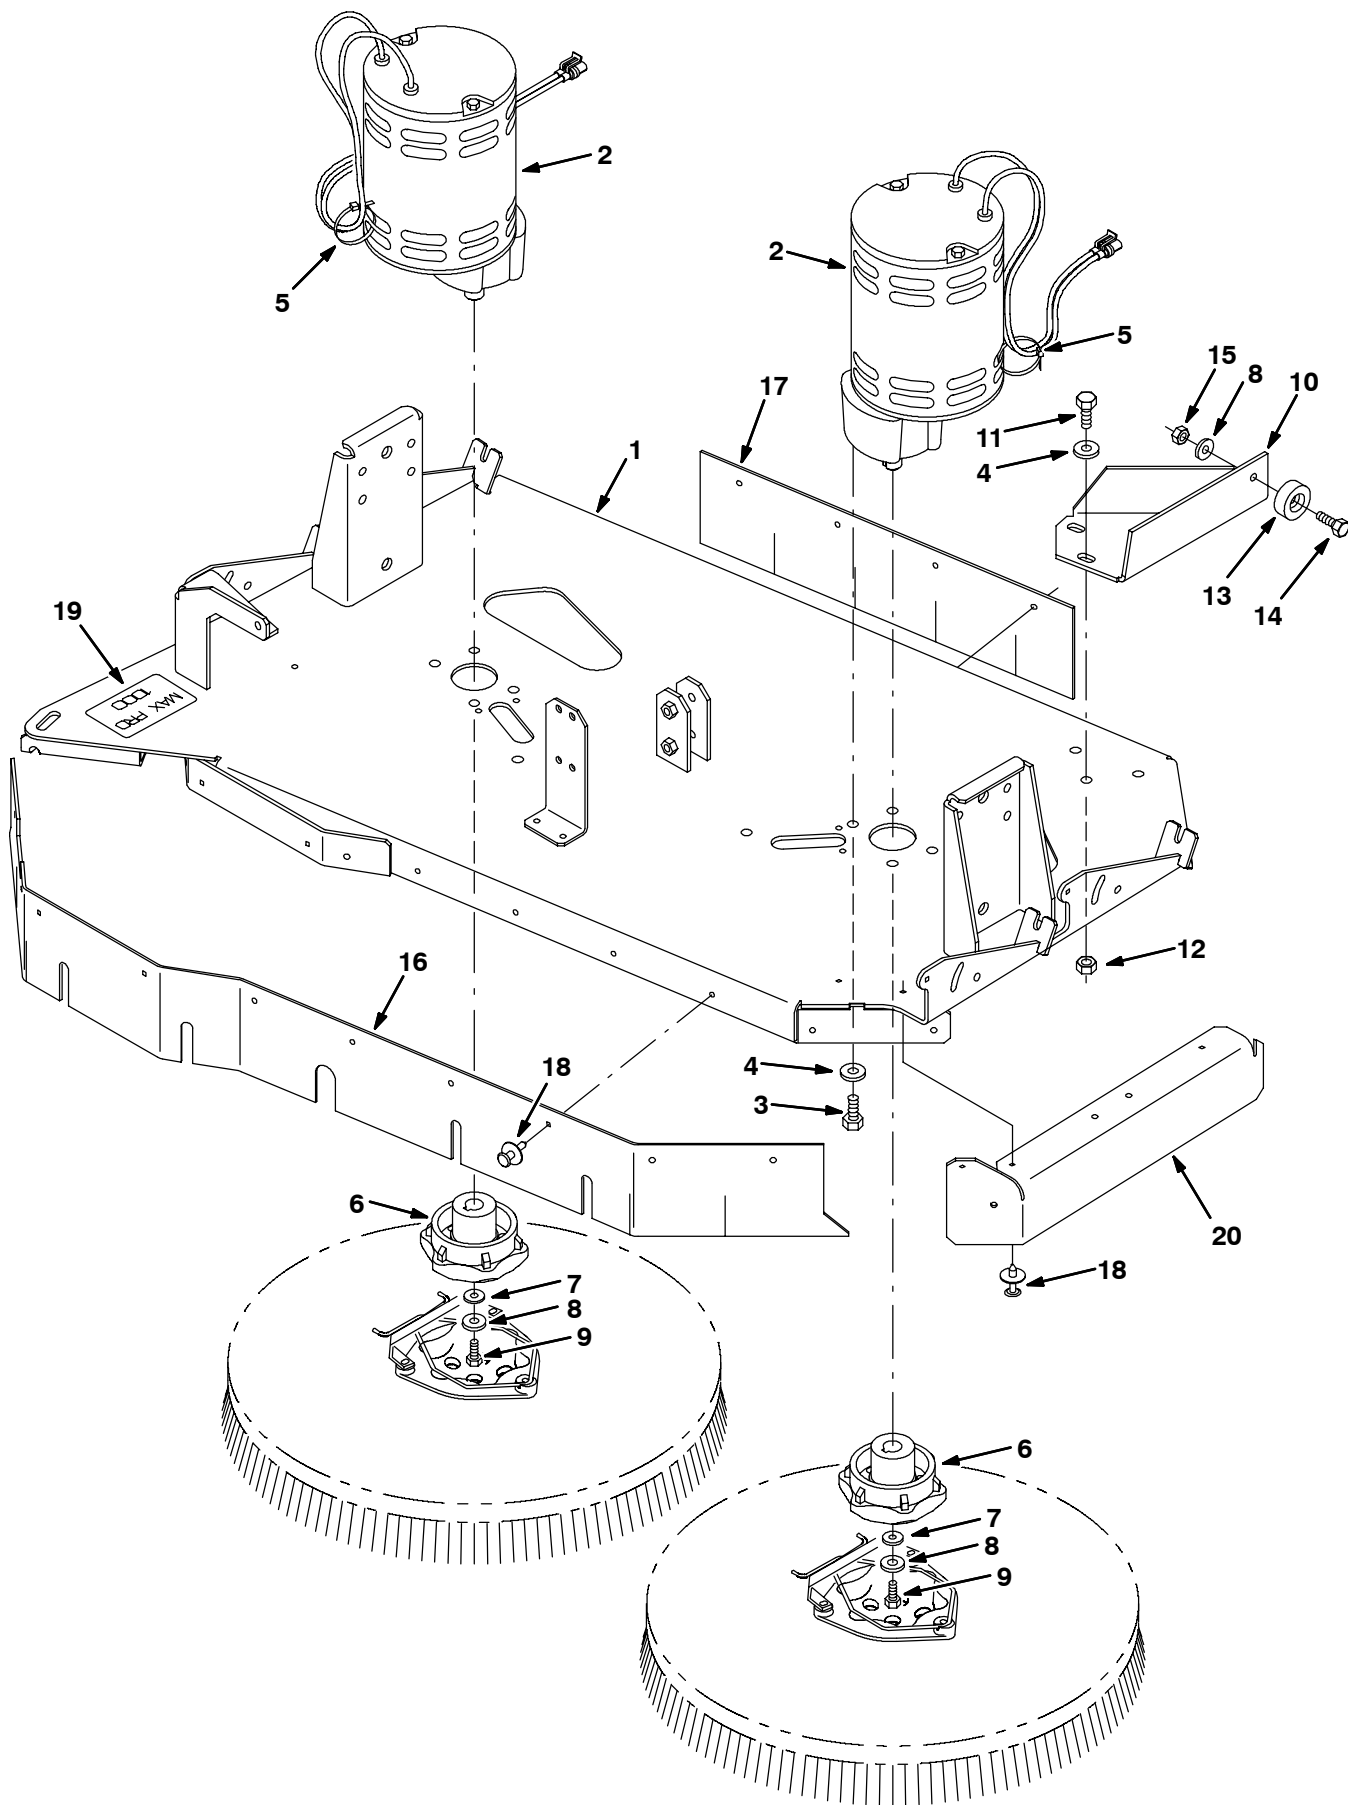


Fig. 23 - Max Pro 1000 (Disc-Brush) Scrub Head Frame Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386380	(000000-	) Frame Wldt, Scb Head, 2-Brush, Ele	1
2	386687	(000000-	) Motor, Ele, 36vdc 1.00hp 0300rpm, Gear (Standard) (See Breakdown)	2
2	386679	(000000-003244	) Motor, Gear, Ele, 1.5hp, 36vdc, 300rpm (Replaced by 387585AM) (See Breakdowns)	2
2	387585	(003245-	) Motor, Ele, 36vdc 1.50hp 0300rpm, Gear (Heavy Duty) (See Breakdown)	2
3	34195	(000000-	) Screw, Hex, .38-16 X 1.00, NI	8
4	01686	(000000-	) Washer, Flt, .38 Ss	11
5	49263	(000000-	) Tie, Cable, Nyl, 11.4l .19w 3.0 Max D	2
6	377364	(000000-	) Hub, Drive, Brush, Disk, 0.75B 6T	2
7	41186	(000000-	) Washer, Belleville, .31	2
8	01685	(000000-	) Washer, Flt, .31 Ss	3
9	32124	(000000-	) Screw, Hex, .31-18 X 1.00, Ss, NI	2
10	378976	(000000-	) Bracket, Stop, Frame	1
11	09028	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss	3
12	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	3
13	15023	(000000-	) Bumper, Pye	1
14	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	1
15	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	1
16	386387	(000000-	) Skirt, Front, Scrub Head, 2-Brush, Ele	1
17	386388	(000000-	) Skirt, Rear, Scrub Head, 2-Brush, Ele	1
18	72968	(000000-	) Rivet, Plstc, .250 X 0.898	24
19	365156	(000000-	) Label Set, Info/Hzrd, [Maxpro]	1
20	387294	(000000-	) Skirt, Side, Scrub Head, 2-Brush, Ele	2

Fig. 24 - Max Pro 1000 (Disc-Brush) Scrub Head Linkage Group

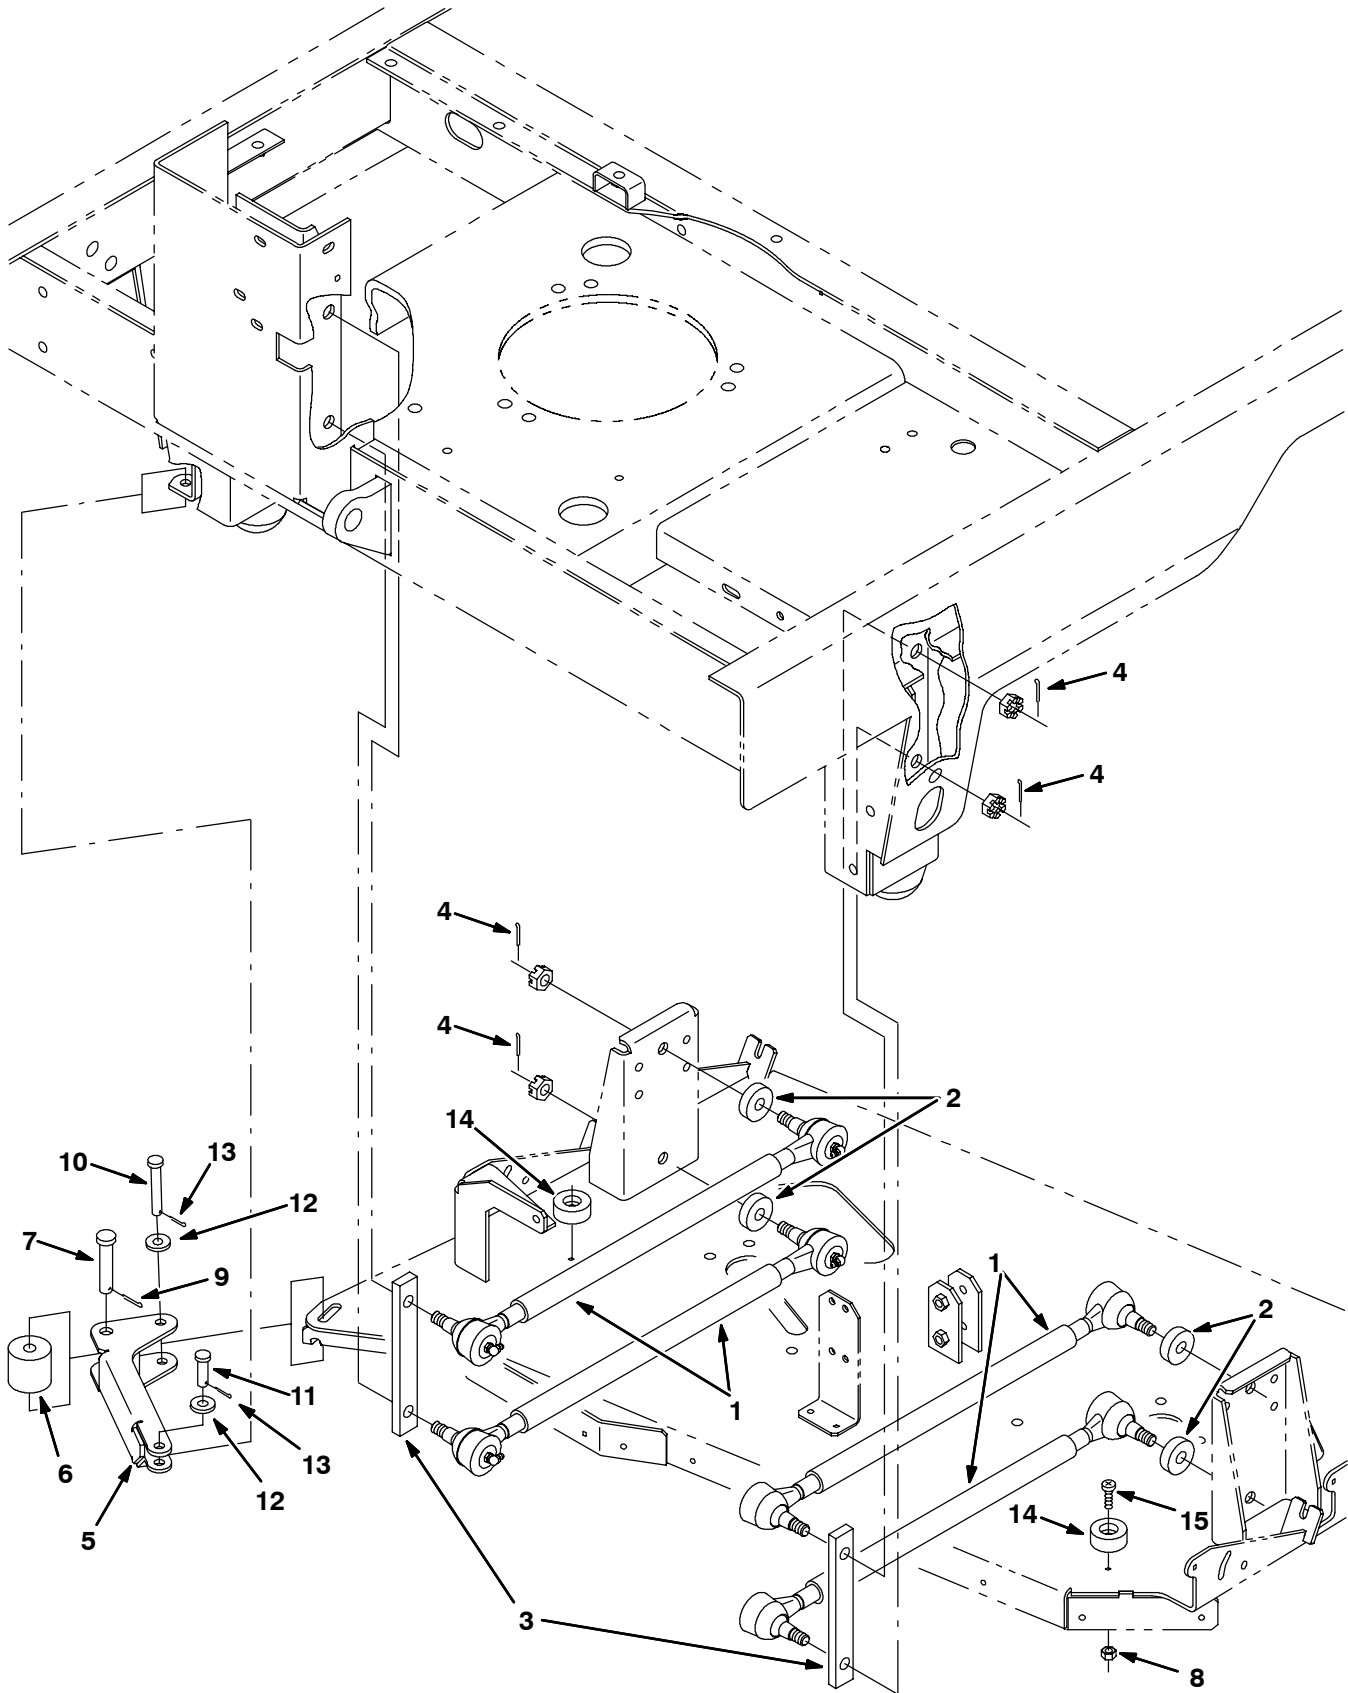


Fig. 24 - Max Pro 1000 (Disc-Brush) Scrub Head Linkage Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	14523	(000000-	) Link, Lift, Squeegee	4
2	14524	(000000-	) Spacer, Washer	4
3	24254	(000000-	) Link, .38 1.0w 07.5l 2/1.5h	2
4	08346	(000000-	) Pin, Cotter, .125 X 0.75	8
5	1001099	(000000-	) Guard, Kick In, Scb Head	1
6	72946	(000000-	) Roller	1
7	06279	(000000-	) Pin, Clevis, 0.50 D X 2.50l	1
8	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
9	08182	(000000-	) Pin, Cotter, .125 X 1.00	1
10	365180	(000000-	) Pin, Clevis, 0.38 D X 2.50l	1
11	29557	(000000-	) Pin, Clevis, 0.37 D X 1.31l	1
12	01686	(000000-	) Washer, Flt, .38 Ss	2
13	39005	(000000-	) Pin, Cotter, .094 X 0.75	2
14	364614	(000000-	) Bumper, Neo, 1.5d .63t .31h	2
15	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	2

Fig. 25 - Max Pro 1000 (Disc-Brush) Solution Valve Group (Non FaST)

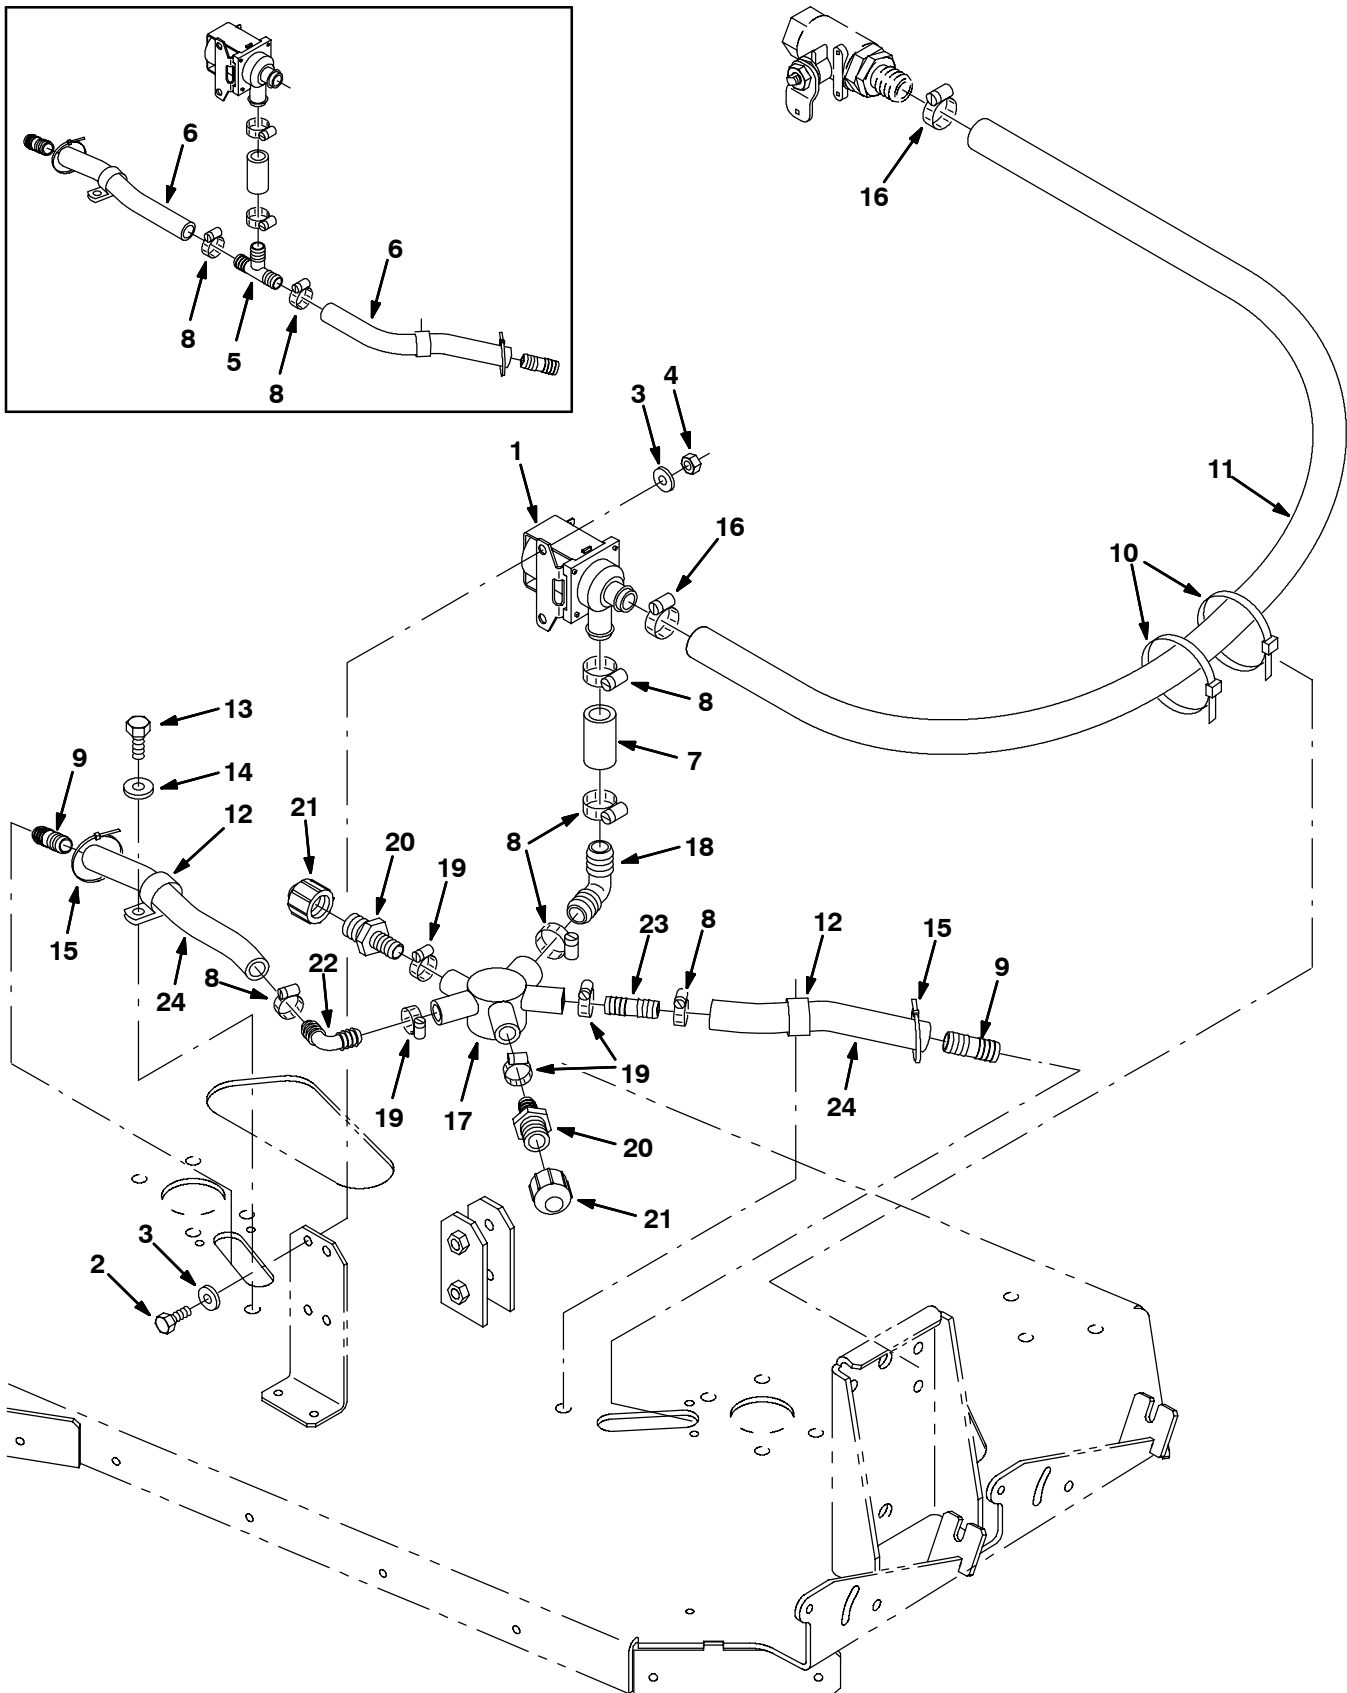


Fig. 25 - Max Pro 1000 (Disc-Brush) Solution Valve Group (Non FaST)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	32490	(000000-	) Washer, Flt, .25 Std	4
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	16356	(000000-003817	) Fitting, Plstc, Tee, Bm10/Bm10/Bm10	1
6	223699	(000000-003817	) Hose, Pvc, Brd, 0.62id 0.91od 10.30l	1
7	16914	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 02.00l	1
8	63810	(000000-	) Clamp, Hose, Wormdrive, 0.56-1.06d, .56w	6
9	365164	(000000-	) Fitting, Plstc, Str, Bm10/Bm10	2
10	44961	(000000-	) Tie, Cable, Nyl, 14.5l .30w 4.0 Max D	2
11	73474	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 44.50l	1
12	40678-1	(000000-	) Clamp, Cable, Stl, 0.88d X 0.62w, 1h	2
13	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	2
14	01685	(000000-	) Washer, Flt, .31 Ss	2
15	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	2
16	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	2
17	1012528	(003818-	) Manifold, Soltn, Cntrl	1
18	40566	(003818-	) Fitting, Plstc, E90, Bm12/Bm12	1
19	54333	(003818-	) Clamp, Hose, Wormdrive, 0.31-0.88d, .31w	4
20	79273-4	(003818-	) Fitting, Plstc, Str, Bm08/Pm08	2
21	1015558	(003818-	) Fitting, Plstc, Cap, Pf08	2
22	63987-1	(003818-	) Fitting, Plstc, E90, Bm08/Bm08	1
23	364631	(003818-	) Fitting, Plstc, Str, Bm08/Bm08	1
24	1011521	(003818-	) Hose, Afmkt, Pvc, Brd 0.50id 2ft	1

Fig. 26 - Max Pro 1000 (Disc-Brush) Solution Valve Group (FaST)

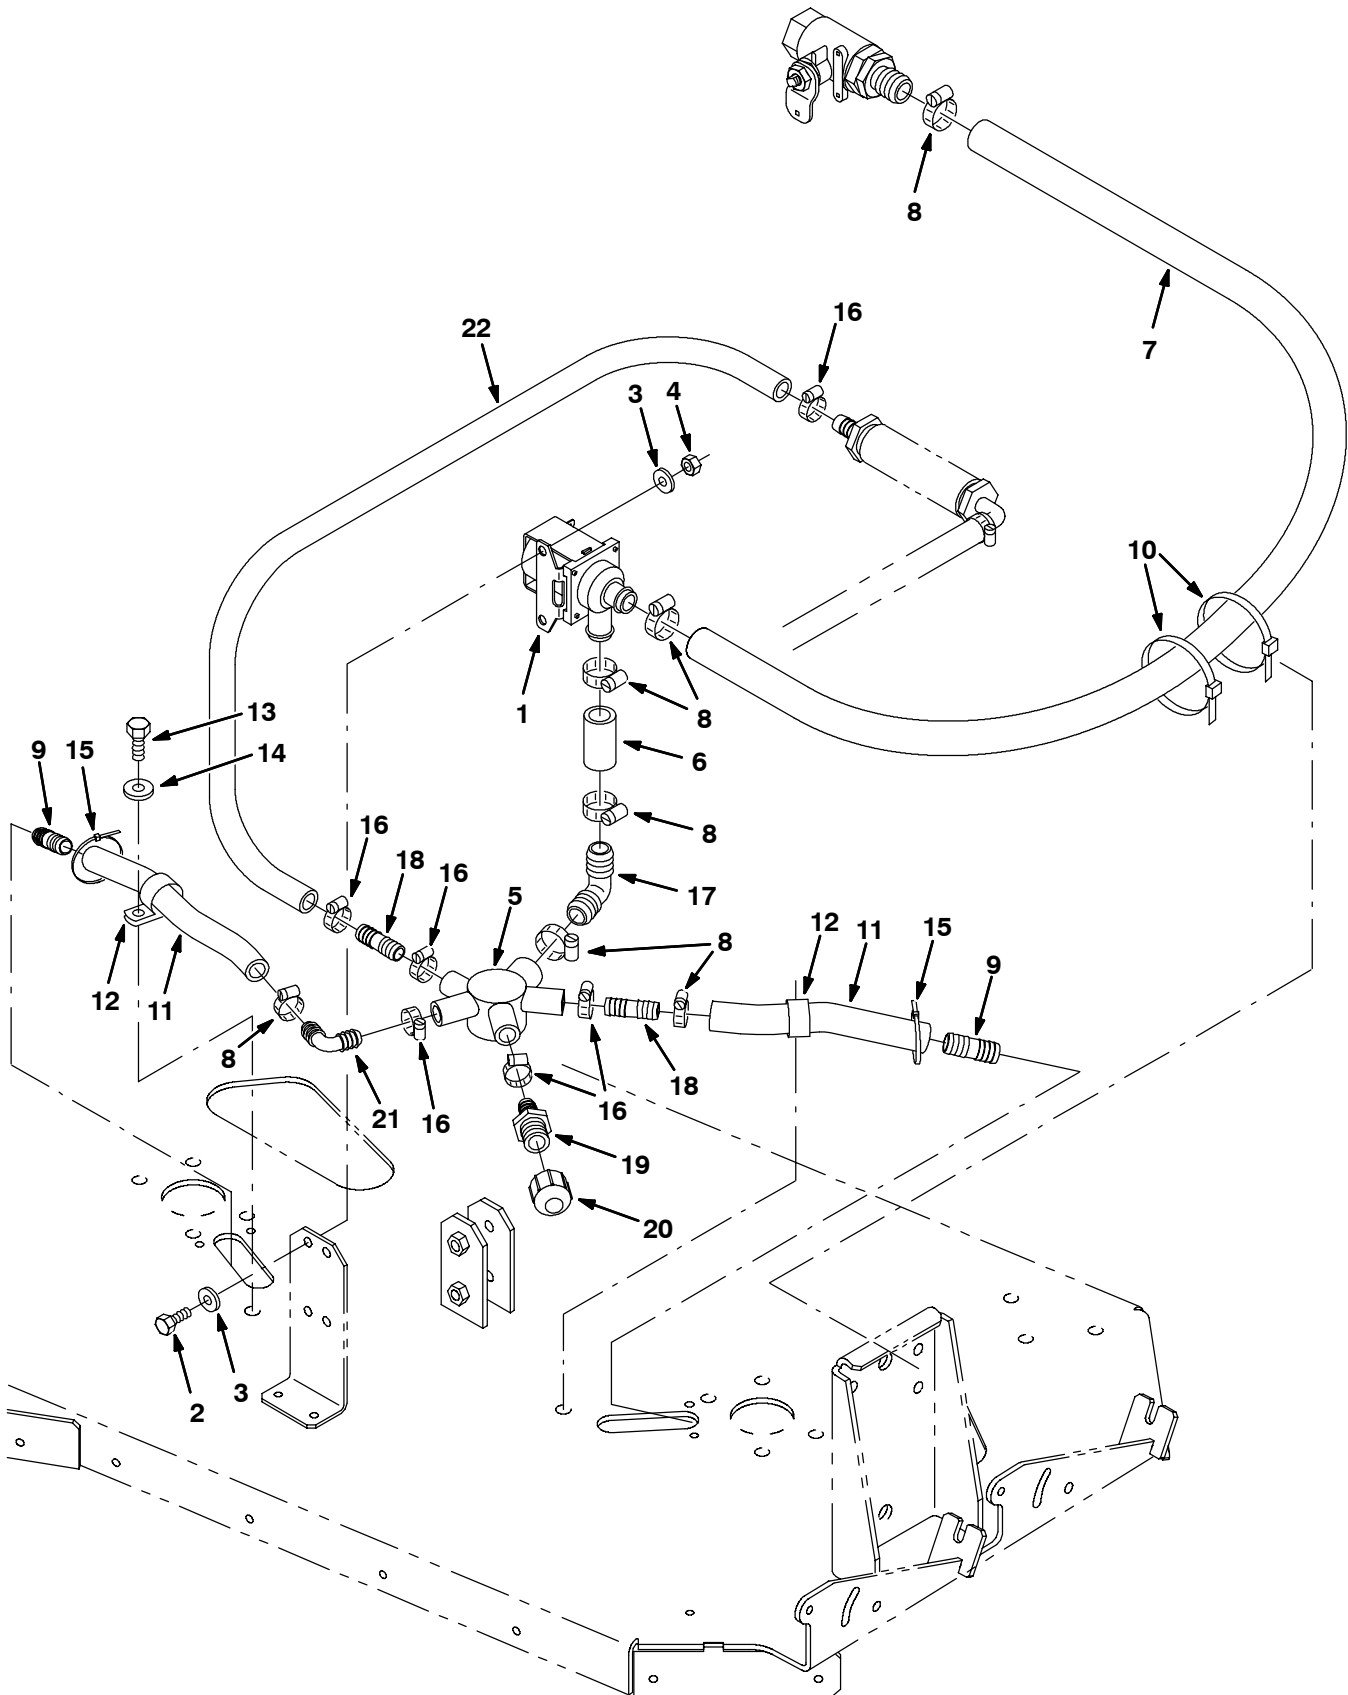


Fig. 26 - Max Pro 1000 (Disc-Brush) Solution Valve Group (FaST)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	32490	(000000-	) Washer, Flt, .25 Std	4
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	1012528	(000000-	) Manifold, Soltn, Cntrl	1
6	16914	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 02.00l	1
7	1015045	(000000-	) Hose, Afmkt, Pvc, Brd, 0.75id 8 Ft	1
8	86824	(000000-	) Clamp, Hose, Wormdrive, 0.50-1.06d	10
9	365164	(000000-	) Fitting, Plstc, Str, Bm10/Bm10	2
10	44961	(000000-	) Tie, Cable, Nyl, 14.5l .30w 4.0 Max D	2
11	73474	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 44.50l	2
12	40678-1	(000000-	) Clamp, Cable, Stl, 0.88d X 0.62w, 1h	2
13	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	2
14	01685	(000000-	) Washer, Flt, .31 Ss	2
15	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	2
16	54333	(000000-	) Clamp, Hose, Wormdrive, 0.31-0.88d	6
17	40566	(000000-	) Fitting, Plstc, E90, Bm12/Bm12	1
18	364631	(000000-	) Fitting, Plstc, Str, Bm08/Bm08	2
19	79273-4	(000000-	) Fitting, Plstc, Str, Bm08/Pm08	1
20	1015558	(000000-	) Fitting, Plstc, Cap, Pf08	1
21	63987-1	(000000-	) Fitting, Plstc, E90, Bm08/Bm08	1
22	1011403	(000000-	) Hose, Afmkt, Pvc, Brd 0.50id 1ft	1

Fig. 27 - Max Pro 1000 (Disc-Brush) Edge Scrub Group

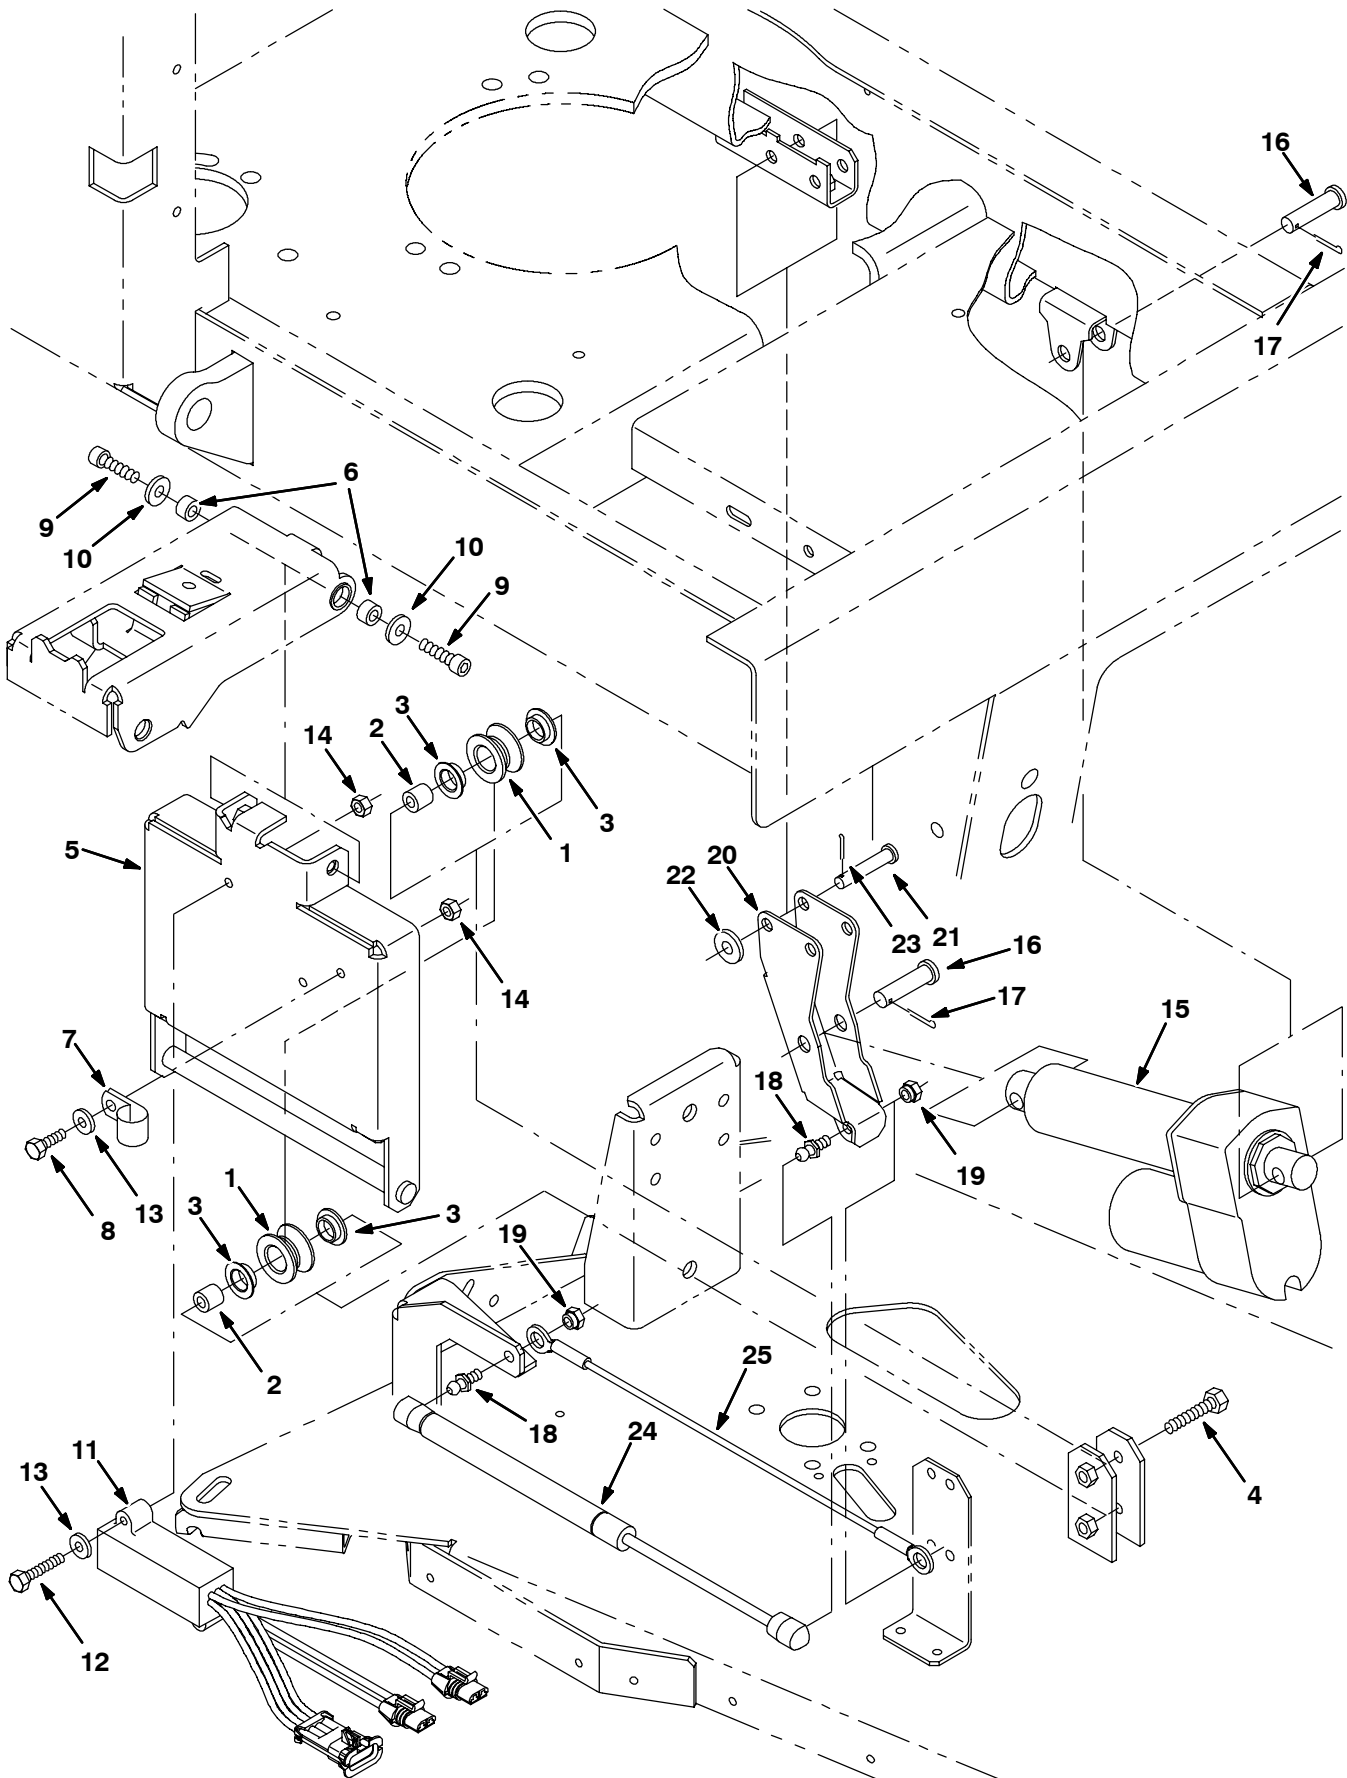


Fig. 27 - Max Pro 1000 (Disc-Brush) Edge Scrub Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	363120	(000000-	) Roller	2
2	222277	(000000-	) Sleeve	2
3	04843	(000000-	) Bushing, Flng, 0.63b 0.72d 0.25l	4
4	222505	(000000-	) Screw, Hex, M08 X 1.25 X 45, Ss	2
5	386043	(000000-	) Rail Wldt, Lift, Disk Head	1
6	222556	(000000-	) Sleeve	2
7	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	1
8	08716	(000000-	) Screw, Hex, M06 X 1.25 X 25, Ss, NI	1
9	39308	(000000-	) Screw, Hex, M08 X 1.00 X 20, Ss	2
10	01685	(000000-	) Washer, Flt, .31 Ss	2
11	363236	(000000-	) Shunt, 2 Std Mtrs, Scrub 515, Yel (For Standard Motor)	1
11	363237	(000000-	) Shunt, 2 Hd Mtrs, Scrub 515, Red (For Heavy Duty Motor)	1
12	33930	(000000-	) Screw, Hex, M06 X 1.0 X 40, Ss	2
13	01684	(000000-	) Washer, Flt, .25 Ss	3
14	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	3
15	363152	(000000-	) Actuator, 36vdc, 02.7stroke 500lb	1
16	63147	(000000-	) Pin, Clevis, 0.50 D X 1.87l	2
17	08182	(000000-	) Pin, Cotter, .125 X 1.00	2
18	58494	(000000-	) Stud, Ball, .39d .31-16, Gasspring	2
19	14725	(000000-	) Nut, Retainer, .31-18	2
20	386048	(000000-	) Arm Wldt, Pivot, Side, [7300/8300]	1
21	29584	(000000-	) Pin, Clevis, 0.37 D X 2.00l	1
22	01686	(000000-	) Washer, Flt, .38 Ss	1
23	39005	(000000-	) Pin, Cotter, .094 X 0.75	1
24	364858	(000000-	) Gasspring, 56lb, 6.3strk	1
25	364404	(000000-	) Cable, .13d, 15.5l, .50eye /.50eye	1

Fig. 28 - Max Pro 1000 (Disc-Brush) Right Side Squeegee Group

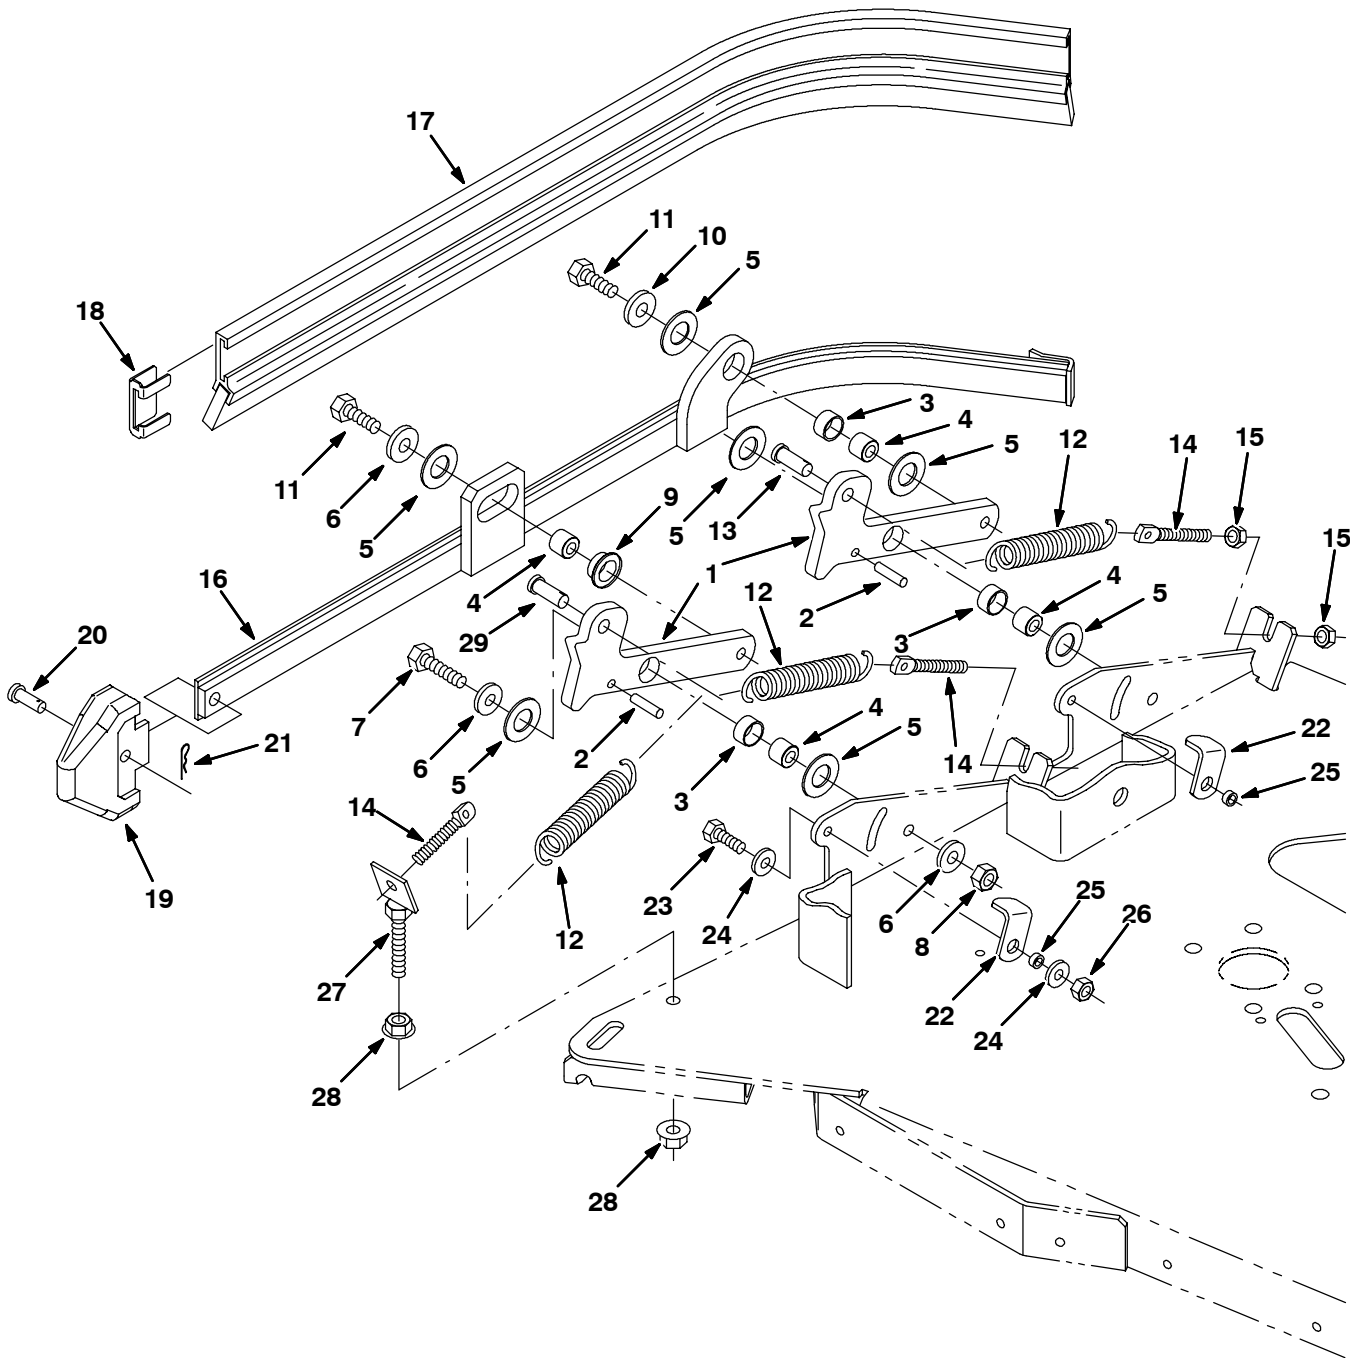


Fig. 28 - Max Pro 1000 (Disc-Brush) Right Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386390	(000000-	) Arm, Mtg, Side Sqge Frame, Ele	2
2	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
3	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
4	386356	(000000-	) Sleeve, P/M, 0.625d 0.335b 0.52l Ss	4
5	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
6	01685	(000000-	) Washer, Flt, .31 Ss	5
7	09023	(000000-	) Screw, Hex, M08 X 1.25 X 35, Ss	2
8	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	2
9	25735	(000000-	) Bushing, Flng, 0.63b 0.75d 0.38l	2
10	01686	(000000-	) Washer, Flt, .38 Ss	1
11	12333	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss, NI	2
12	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
13	76653	(000000-	) Pin, Clevis, 0.37 D X 1.00l	2
14	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
15	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
16	386263	(000000-	) Frame Wldt, Sqge, Side, Rh	1
17	386260	(000000-	) Squeegee, Side	1
18	86759	(000000-	) Retainer, Sqge	1
19	386986	(000000-	) Guide, Point, Side Sqge	1
20	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
21	86866	(000000-	) Pin, Hair Cotter, 0.38 D .072 Wir	1
22	386391	(000000-	) Latch, Double Scrub, Side Sqge	2
23	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	4
25	80491	(000000-	) Sleeve	2
26	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
27	1007632	(000000-	) Bracket Wldt, Mtg, Spring	1
28	27980	(000000-	) Nut, Hex, Flng, .38-16	2
29	29558	(000000-	) Pin, Clevis, 0.37 D X 1.50l	1

Fig. 29 - Max Pro 1000 (Disc-Brush) Left Side Squeegee Group

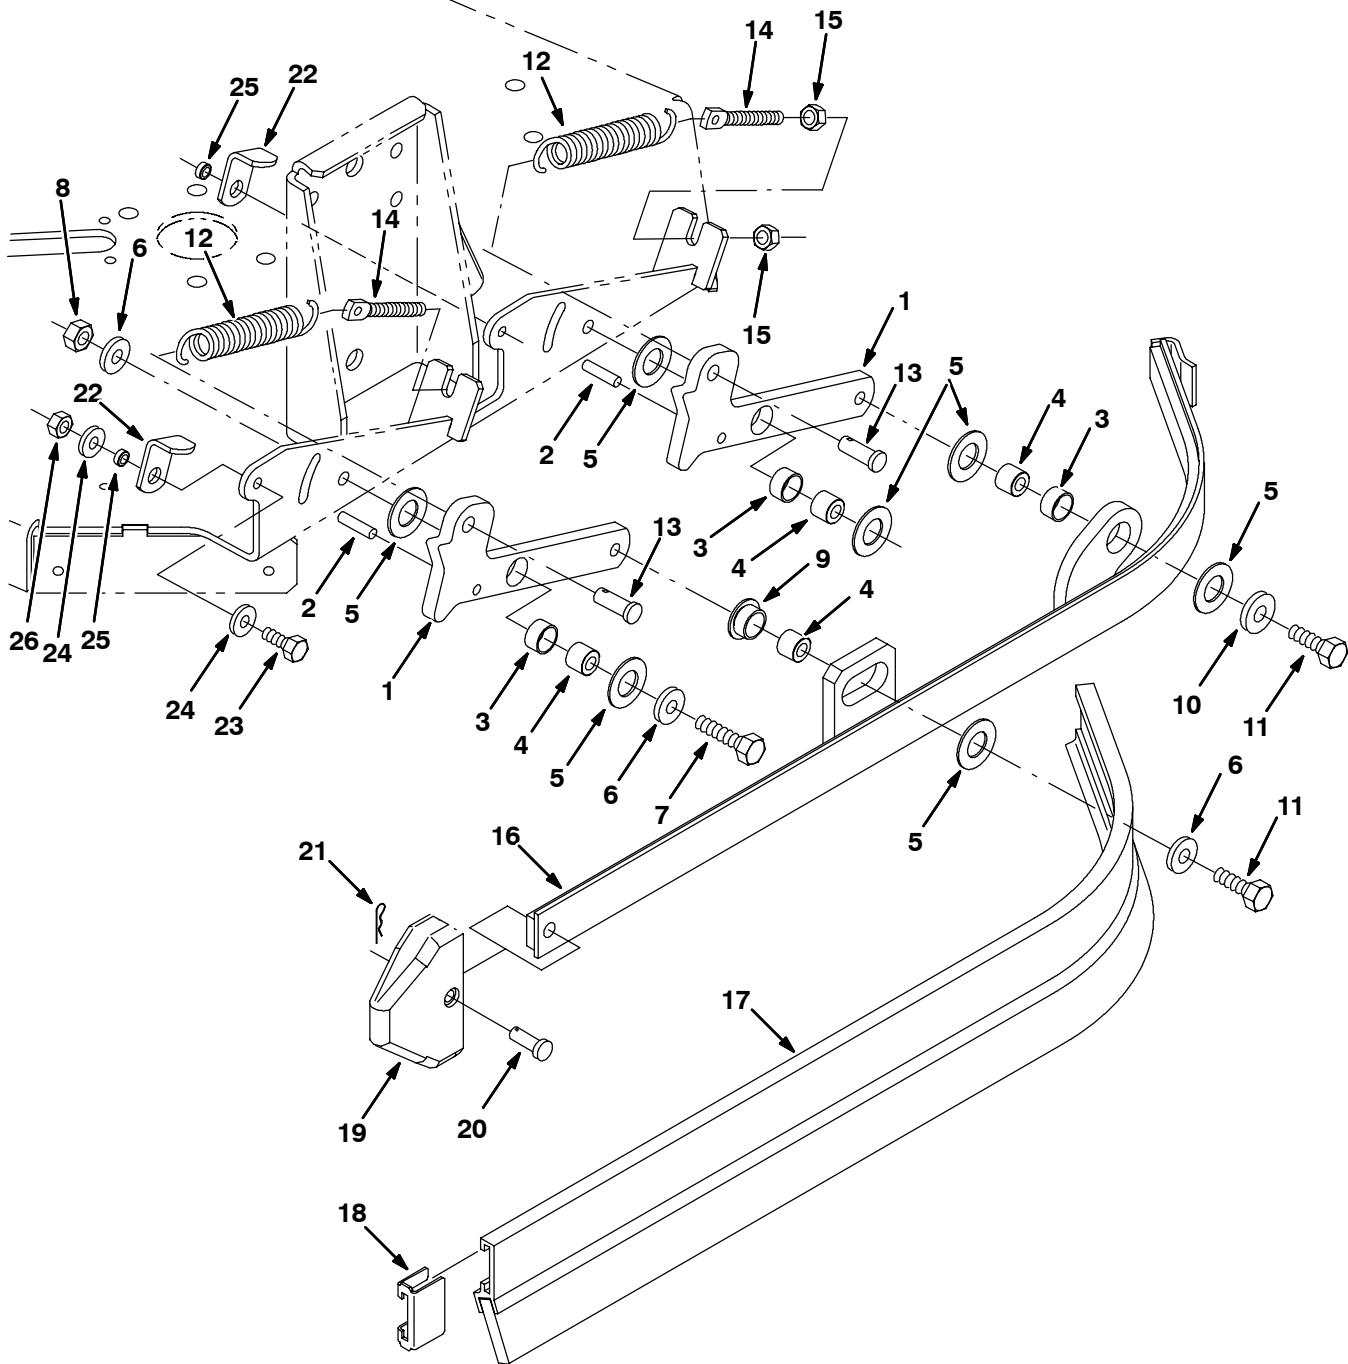


Fig. 29 - Max Pro 1000 (Disc-Brush) Left Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386390	(000000-	) Arm, Mtg, Side Sqge Frame, Ele	2
2	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
3	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
4	386356	(000000-	) Sleeve, P/M, 0.625d 0.335b 0.52l Ss	4
5	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
6	01685	(000000-	) Washer, Flt, .31 Ss	5
7	09023	(000000-	) Screw, Hex, M08 X 1.25 X 35, Ss	2
8	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	2
9	25735	(000000-	) Bushing, Flng, 0.63b 0.75d 0.38l	1
10	01686	(000000-	) Washer, Flt, .38 Ss	2
11	12333	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss, NI	2
12	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
13	76653	(000000-	) Pin, Clevis, 0.37 D X 1.00l	2
14	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
15	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
16	386262	(000000-	) Frame Wldt, Sqge, Side, Lh	1
17	386260	(000000-	) Squeegee, Side	1
18	86759	(000000-	) Retainer, Sqge	1
19	386986	(000000-	) Guide, Point, Side Sqge	1
20	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
21	86866	(000000-	) Pin, Hair Cotter, 0.38 D .072 Wir	1
22	386391	(000000-	) Latch, Double Scrub, Side Sqge	2
23	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	4
25	80491	(000000-	) Sleeve	2
26	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2

Fig. 30 - Squeegee Linkage Group, Rear

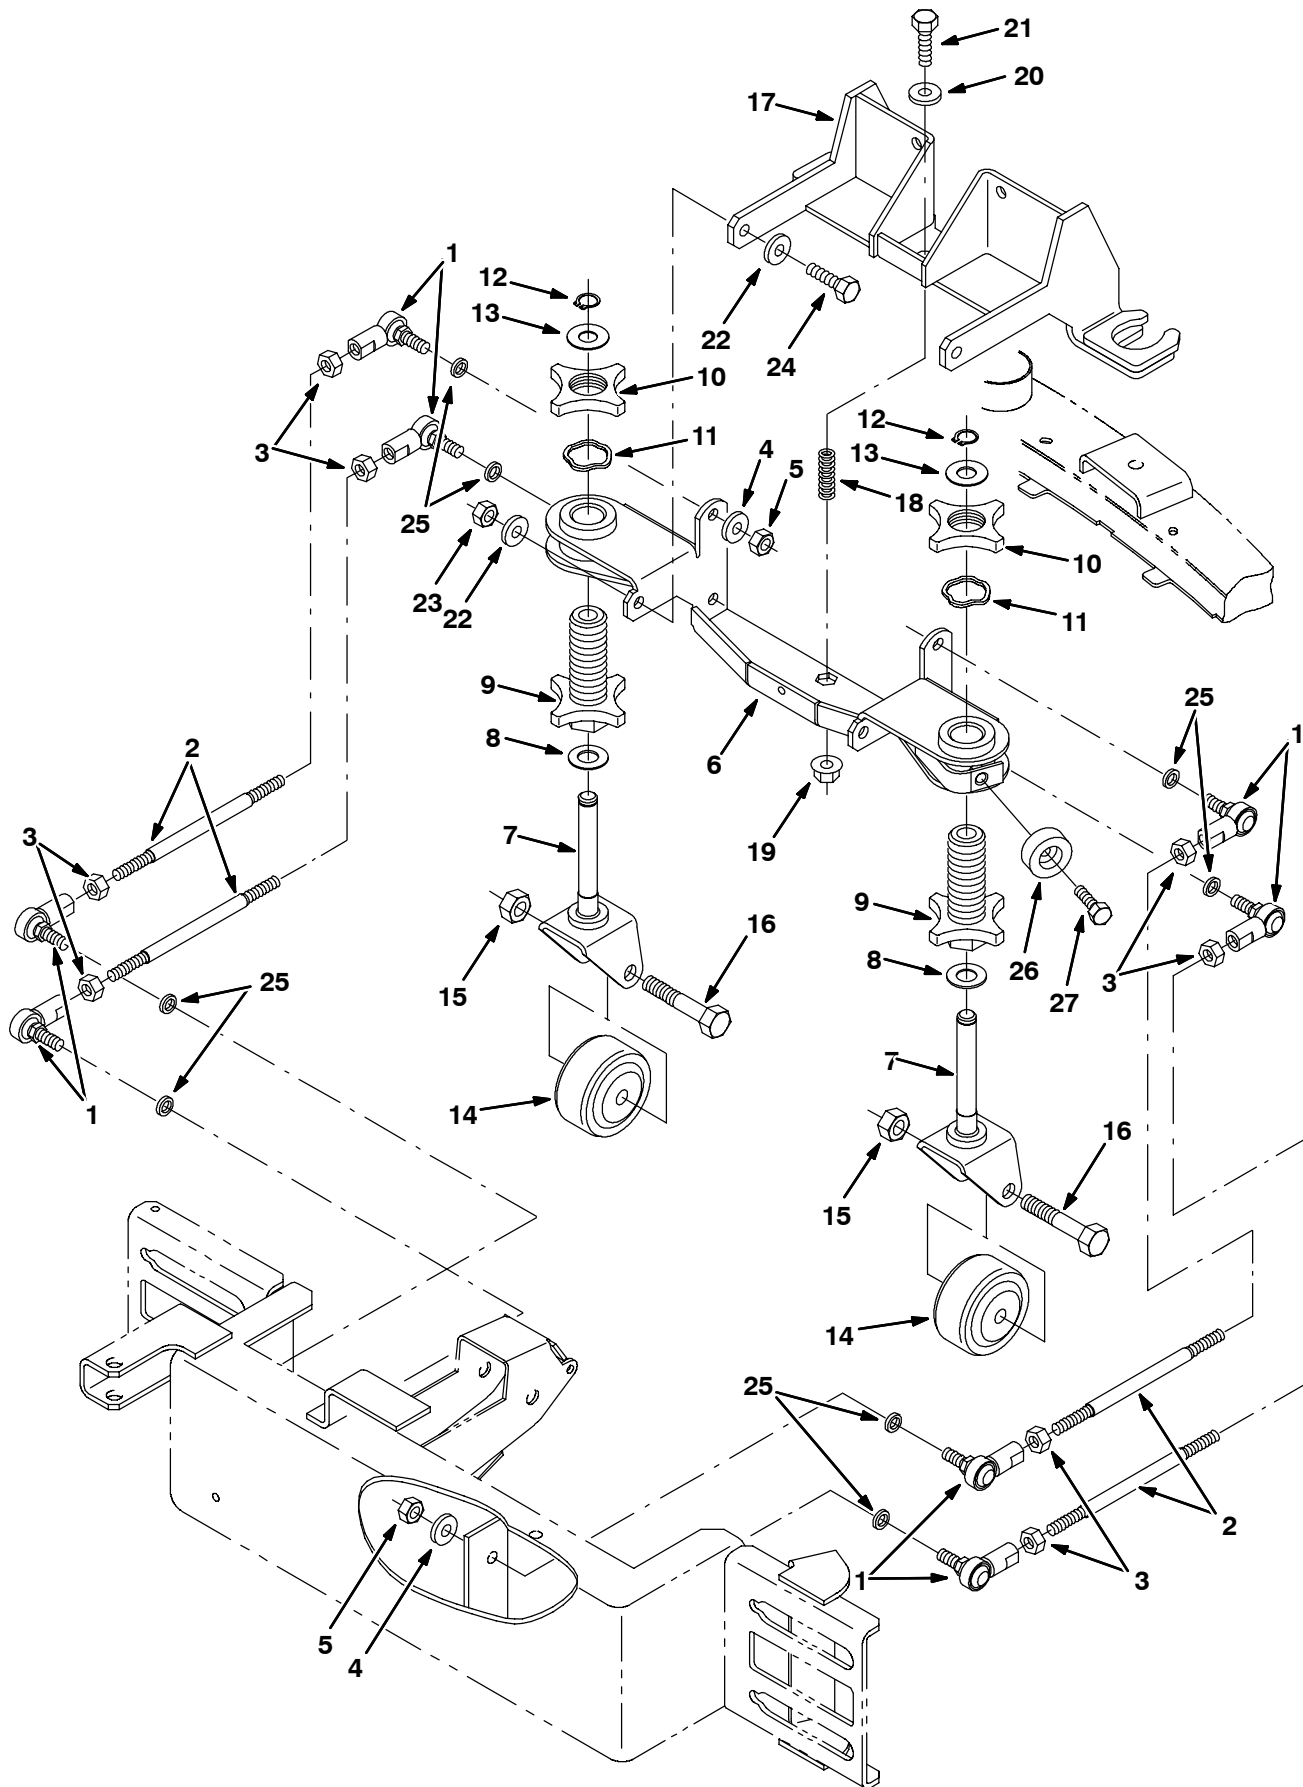


Fig. 30 - Squeegee Linkage Group, Rear

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
	1	05686	(000000-	) Rod-End, M10 X 1.5rh Fem M10 X 1.5stud	8
	2	14555	(000000-	) Rod, Thrd, 2 End M10x1.5 07.4	4
	3	32716	(000000-	) Nut, Hex, Jam, M10 X 1.5, Ss	8
	4	01686	(000000-	) Washer, Flt, .38 Ss	8
	5	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	8
	6	386256	(000000-	) Channel Wldt	1
▽		78979	(000000-	) Caster Kit, Sqge, Replmt	2
▲	7	84593	(000000-	) Pivot Wldt, Sqge Caster	1
▲	8	07450	(000000-	) Bearing, Thrust, 0.66b 1.25d 0.06w	1
▲	9	77228	(000000-	) Knob, Adj	1
▲	10	77227	(000000-	) Knob	1
▲	11	79217	(000000-	) Washer	1
▲	12	01516	(000000-	) Ring, Retaining, Ext, 0.59d, Basic	1
▲	13	77272	(000000-	) Washer, 0.60b 1.31d .10, Ss	1
▲	14	20833	(000000-	) Wheel, 3.0d 1.38w 0.50b	1
▲	15	02931	(000000-	) Nut, Hex, Lock, .50-13, NI, Ss	1
▲	16	81952	(000000-	) Screw, Hex, .50-13 X 3.00, Ss	1
	17	386252	(000000-	) Bracket Wldt, Pivot	1
	18	16816	(000000-	) Spring, Die, 1.00od 0.50id 2.00l	1
	19	07792	(000000-	) Nut, Hex, Flng, M10 X 1.5	1
	20	01686	(000000-	) Washer, Flt, .38 Ss	1
	21	04417	(000000-	) Screw, Hex, M10 X 1.5 X 60, Ss	1
	22	01686	(000000-	) Washer, Flt, .38 Ss	4
	23	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	2
	24	12317	(000000-	) Screw, Hex, M10 X 1.5 X 30, Ss	2
	25	390880	(000000-	) Spacer, .41b .63d .13l, Ss 430pm	8
	26	364614	(000000-	) Bumper, Neo, 1.5d .63t .31h	1
	27	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	1

Fig. 31 - Squeegee Lift Group, Rear

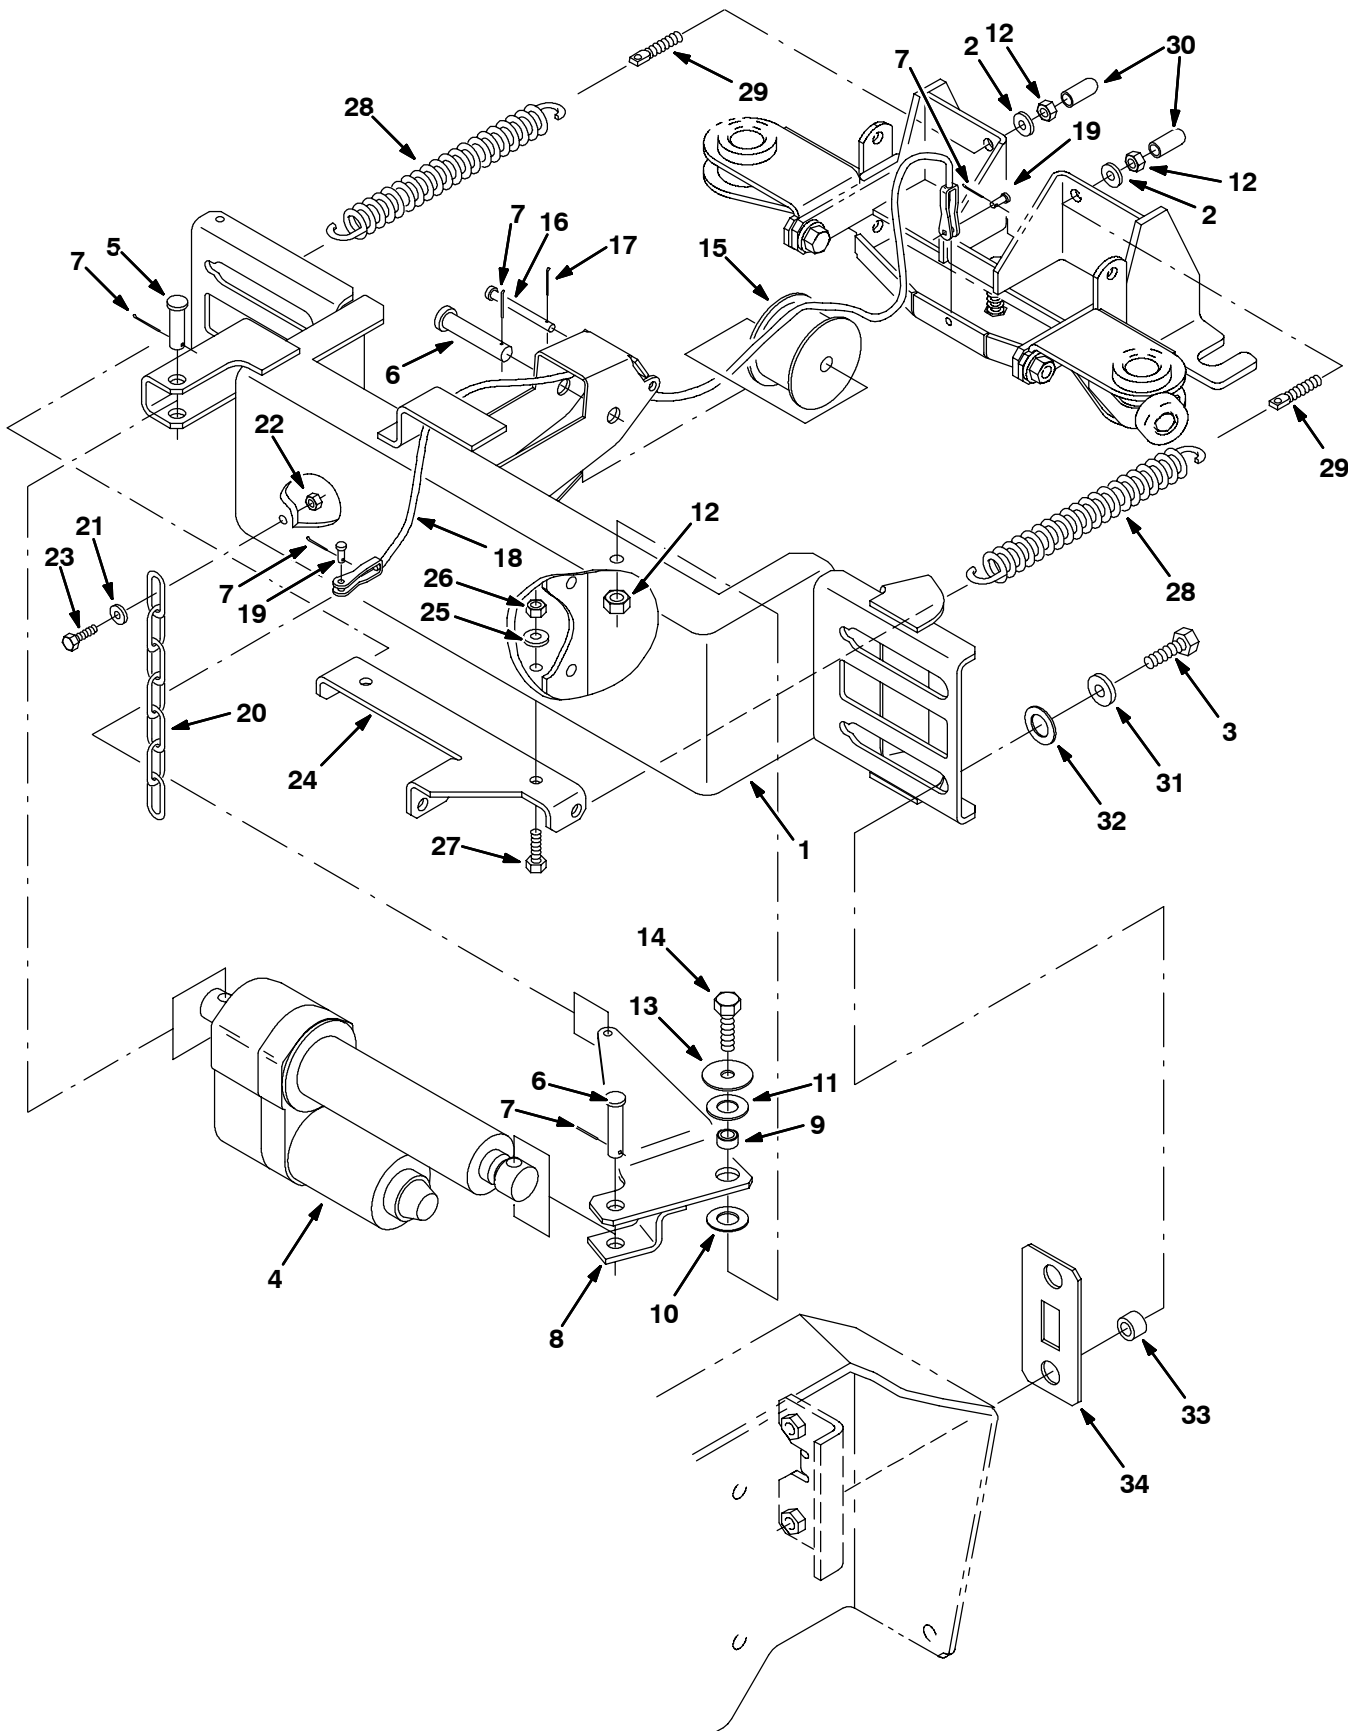


Fig. 31 - Squeegee Lift Group, Rear

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387426	(000000-	) Support Wldt	1
2	01686	(000000-	) Washer, Flt, .38 Ss	2
3	12317	(000000-	) Screw, Hex, M10 X 1.5 X 30, Ss	4
4	363151	(000000-	) Actuator, 36vdc, 02.1stroke 500lb	1
5	51534	(000000-	) Pin, Clevis, 0.50 D X 2.00l	1
6	06279	(000000-	) Pin, Clevis, 0.50 D X 2.50l	2
7	39005	(000000-	) Pin, Cotter, .094 X 0.75	5
8	386279	(000000-	) Arm Wldt	1
9	71658	(000000-	) Sleeve	1
10	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	1
11	07450	(000000-	) Bearing, Thrust, 0.66b 1.25d 0.06w	1
12	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	3
13	33948	(000000-	) Washer, Flat	1
14	04417	(000000-	) Screw, Hex, M10 X 1.5 X 60, Ss	1
15	223054	(000000-	) Drum, Cable, Lift	1
16	04733-10	(000000-	) Pin, Clevis, 0.25 D X 2.44l	1
17	08178	(000000-	) Pin, Cotter, .062 X 0.75	1
18	71101	(000000-	) Cable, .12d, 13.3l, .2clevis/.2clevis	1
19	77488	(000000-	) Pin, Clevis, 0.19 D X 0.63l	2
20	43500	(000000-	) Chain, Coil, Str, #210, 09.0l 07 Link	1
21	01684	(000000-	) Washer, Flt, .25 Ss	1
22	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	1
23	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	1
24	387432	(000000-	) Channel, Spring	1
25	01685	(000000-	) Washer, Flt, .31 Ss	2
26	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	2
27	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	2
28	71100	(000000-	) Spring, Extn, 1.69od X 0.20wir, 9.5l	2
29	386847	(000000-	) Bolt, Eye, M10x1.5 X 2.0 X .28 Eye	2
30	20806	(000000-	) Cap, Neoprene Black	2
31	32492	(000000-	) Washer, Flat, .38 Std	4
32	53782	(000000-	) Bearing, Thrust, 0.75b 1.25d 0.06w	4
33	387429	(000000-	) Sleeve, P/M, 0.745d 0.438b 0.50l 430ss	4
34	387430	(000000-	) Plate, Slide	4

Fig. 32 - Max Pro 1000 Rear Squeegee Group

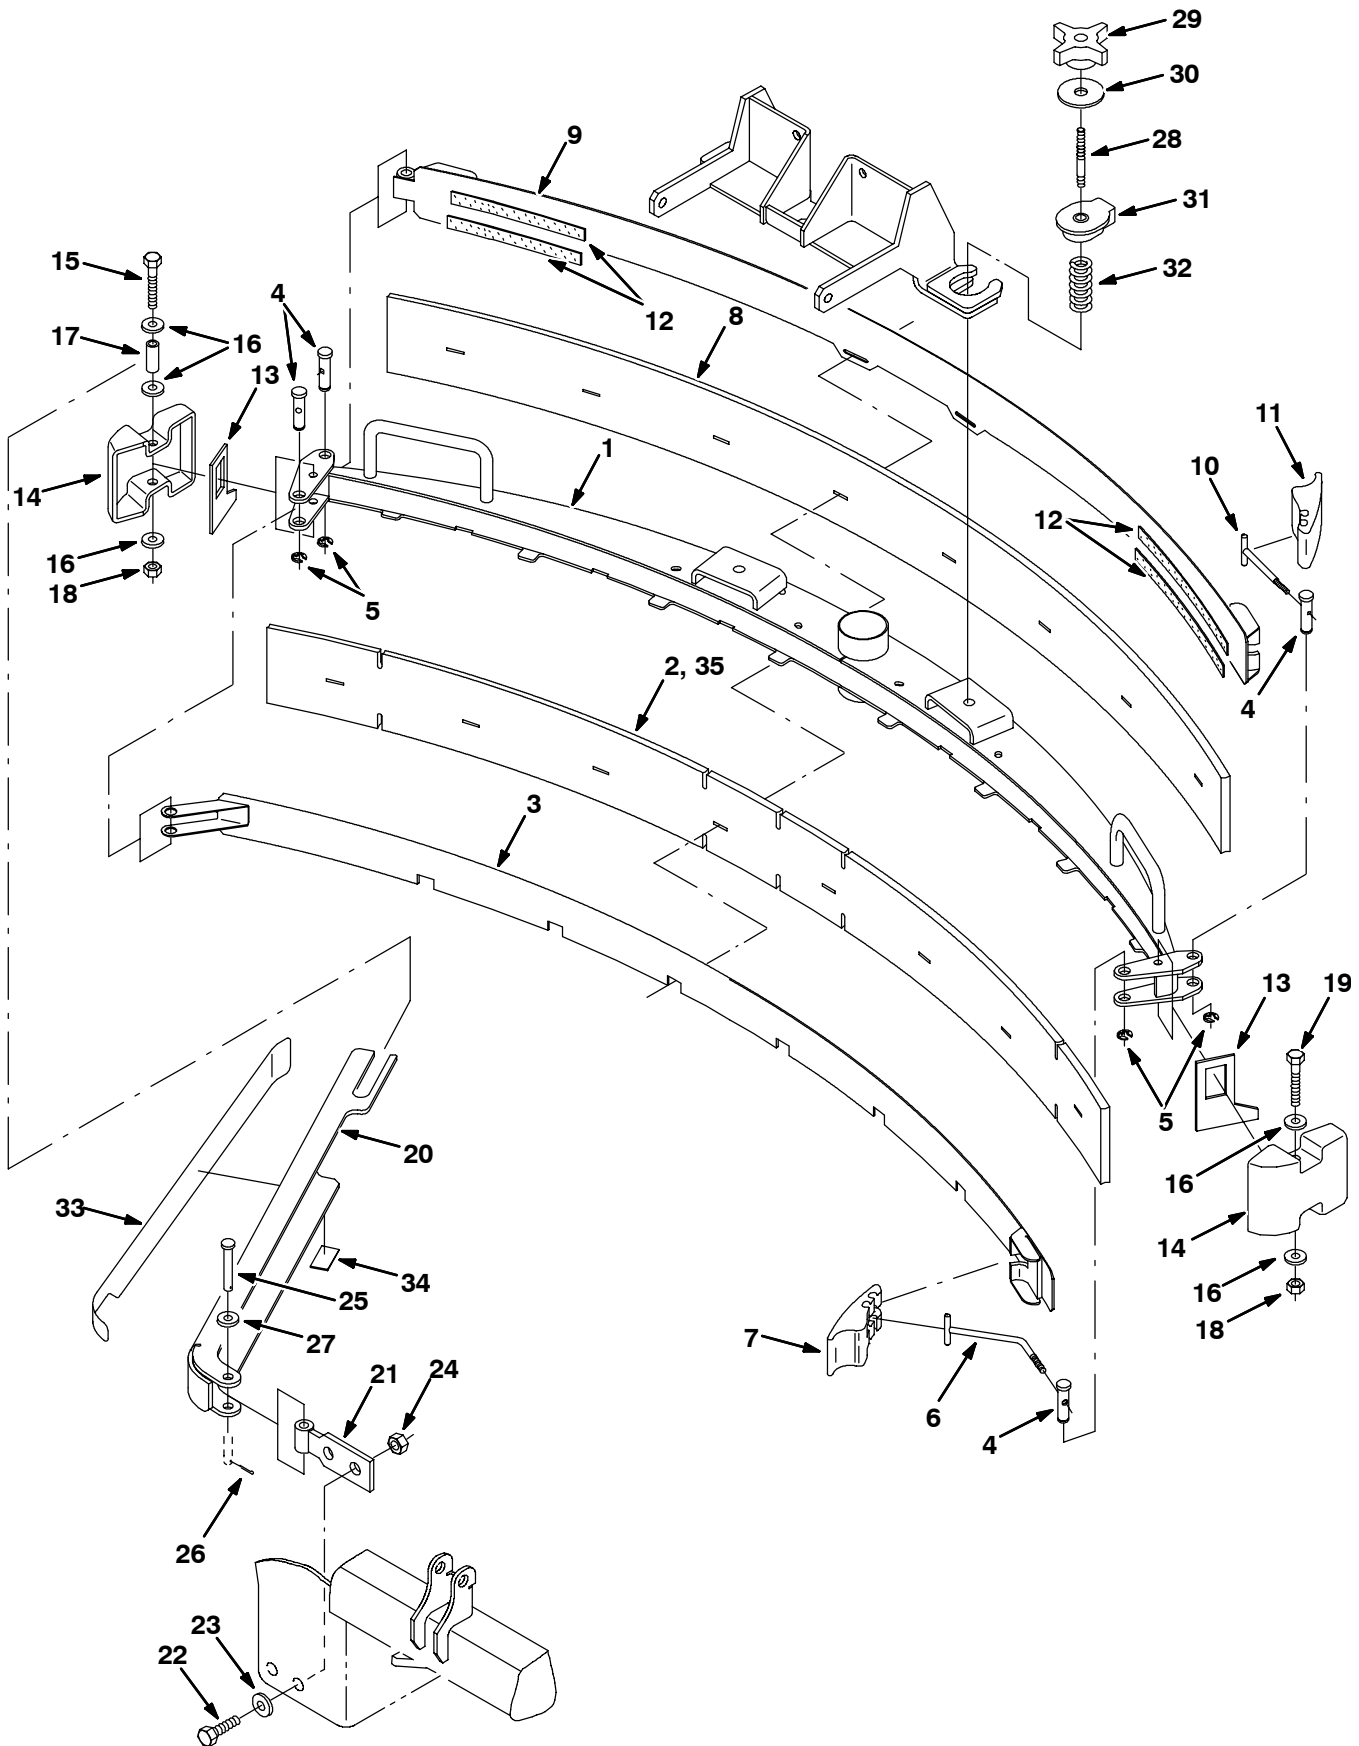


Fig. 32 - Max Pro 1000 Rear Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386860	(000000-	) Kit, Cl, Squeegee, Rear (Max Pro™ 1000)	1
▲ 1	386290	(000000-	) Frame Wldt, Sqge	1
▲ 2	386283	(000000-	) Blade, Sqge, Front	1
▲ 3	386285	(000000-	) Clamp Wldt, Front	1
▲ 4	21603	(000000-	) Pin	4
▲ 5	24555	(000000-	) Ring, Retaining, Ext	4
▲ 6	386298	(000000-	) Pin Wldt, Front	1
▲ 7	21601	(000000-	) Cam	1
▲ 8	386284	(000000-	) Blade, Sqge, Rear	1
▲ 9	386286	(000000-	) Clamp Wldt, Rear	1
▲ 10	21606	(000000-	) Bar Wldt, Retainer, Sqge, Rear	1
▲ 11	21602	(000000-	) Cam, Rear	1
▲ 12	03495	(000000-	) Strip, Nonslip	4
▲ 13	83874	(000000-	) Gasket, Sqge	2
▲ 14	386264	(000000-	) Bumper, Sqge	2
▲ 15	386299	(000000-	) Screw, Hex, M08 X 1.25 X 100, Ss	1
▲ 16	01685	(000000-	) Washer, Flt, .31 Ss	5
▲ 17	222497	(000000-	) Sleeve	1
▲ 18	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	2
▲ 19	09767	(000000-	) Screw, Hex, M08 X 1.25 X 70, Ss	1
▲ 20	386266	(000000-	) Channel Wldt	1
▲ 21	386234	(000000-	) Pivot Wldt, Guard	1
▲ 22	12309	(000000-	) Screw, Hex, M12 X 1.75 X 30, Ss	2
▲ 23	41619	(000000-	) Washer, Flt, .50 Ss	2
▲ 24	09741	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI, Ss	2
▲ 25	1039190	(000000-	) Pin, Clevis, 0.25d X 2.00l	1
▲ 26	08178	(000000-	) Pin, Cotter, .062 X 0.75	1
▲ 27	01684	(000000-	) Washer, Flt, .25 Ss	2
▲ 28	387237	(000000-	) Stud, .31-18 2.75l M8 X 1.25, Ss	2
▲ 29	370100	(000000-	) Knob, 4-Prong W/.31-18, Insert	2
▲ 30	04414	(000000-	) Washer, 0.53b 1.88d .12, Stl, Pl	2
▲ 31	387433	(000000-	) Ring, Mtg, Sqge, .50l	2
▲ 32	387500	(000000-	) Spring, Cmpr, .87od .042wir 2.0l	2
▲ 33	387448	(000000-	) Bumper, Poly-E	1
▲ 34	387438	(000000-	) Bumper, Poly-E	1
35	387257	(000000-	) Blade, Sqge, Front, Mp1000, Tile	1

Fig. 33 - Sweeper Main Brush Doors Group

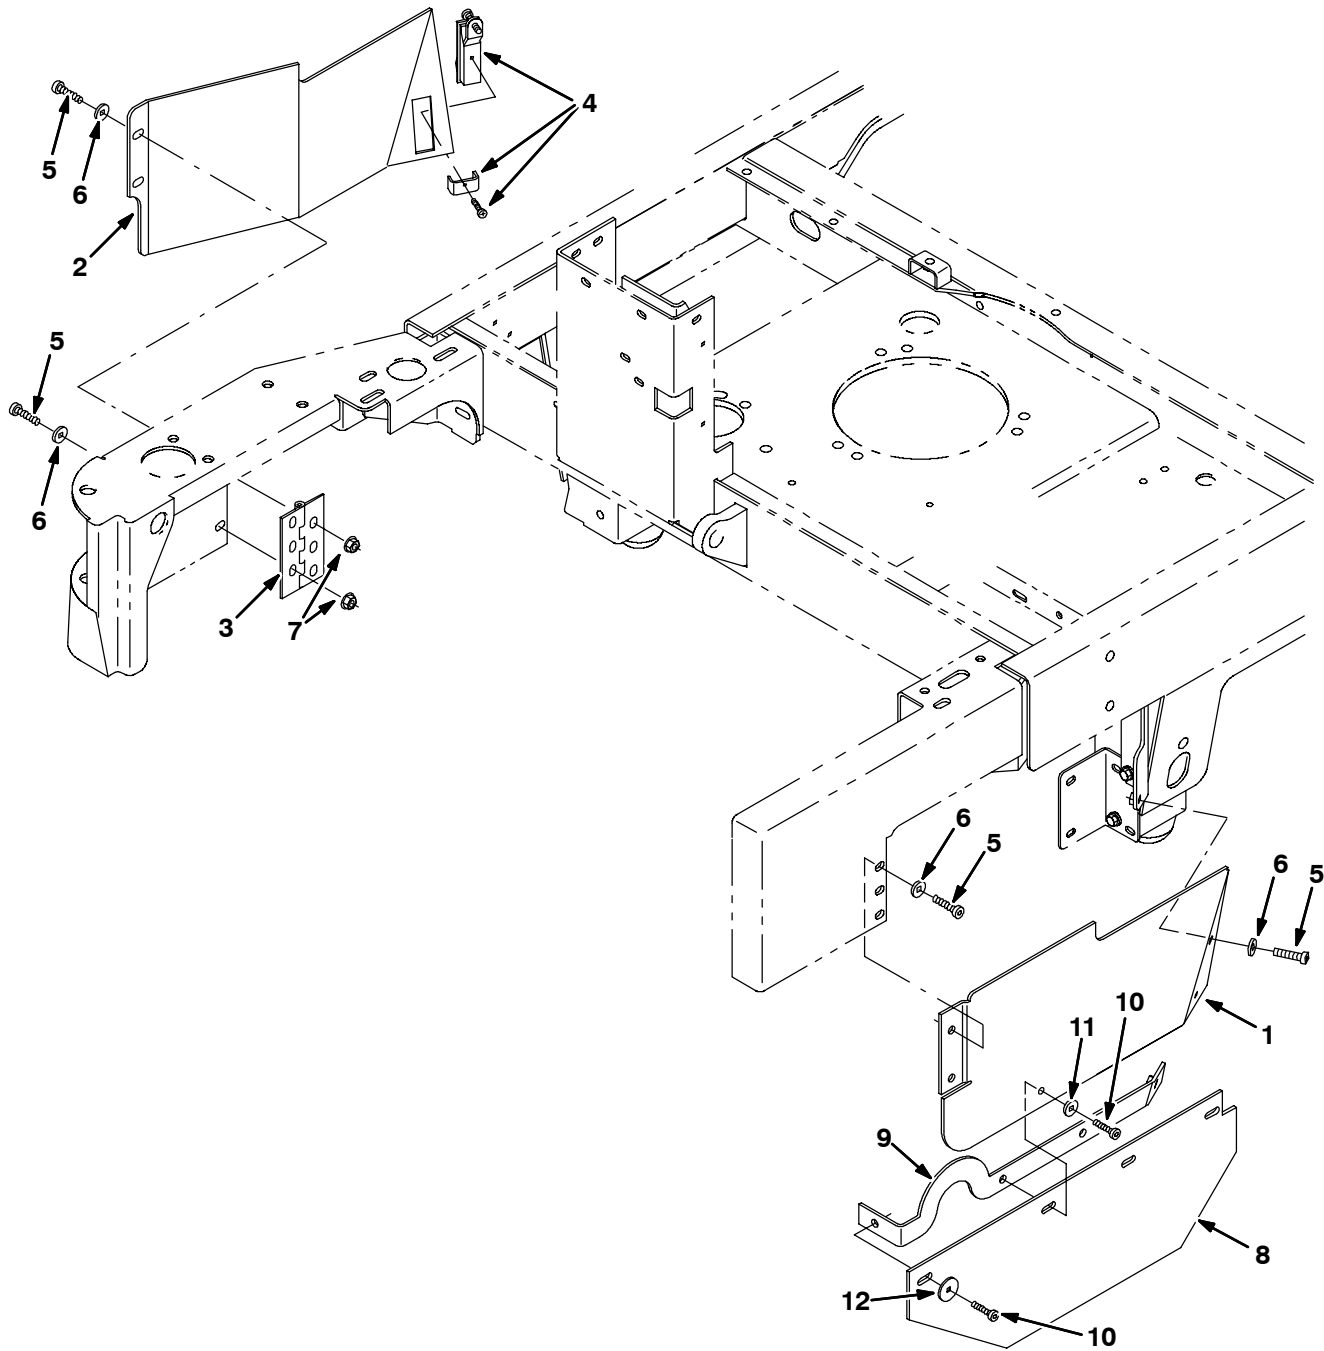


Fig. 33 - Sweeper Main Brush Doors Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387090	(000000-	) Door, Brush, Lh	1
2	387084	(000000-	) Door, Brush, Rh	1
3	363856	(000000-	) Hinge, .25pin .25 3.0w 05.0l 6/0.44h	1
4	64533	(000000-	) Latch, Trigger	1
5	76570	(000000-	) Screw, Hex, M08 X 1.25 X 30, 8.8	8
6	32491	(000000-	) Washer, Flt, .31 Std	8
7	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI	7
8	387468	(000000-	) Skirt	1
9	387476	(000000-	) Strip	1
10	223470	(000000-	) Screw, Btn, M08 X 1.25 X 25, Ss	4
11	39349	(000000-	) Washer, Flt, .31 Sae	3
12	30013	(000000-	) Washer, Flat, .31 Fender	1

Fig. 34 - Sweeper Side Brush Motor and Pivot Group


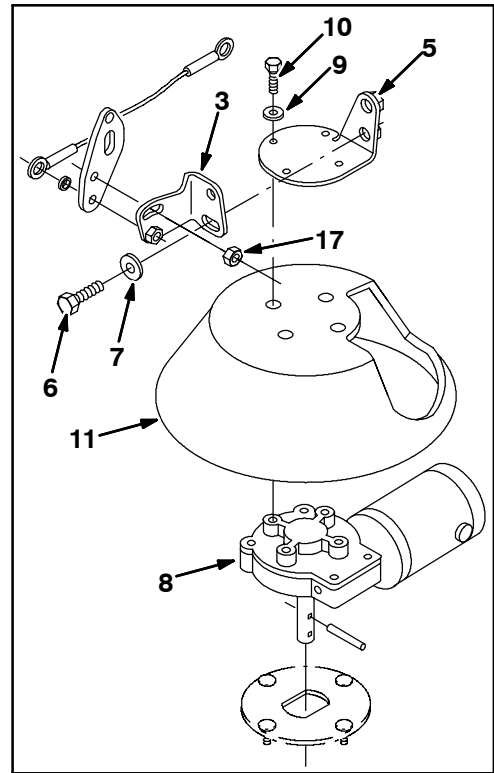
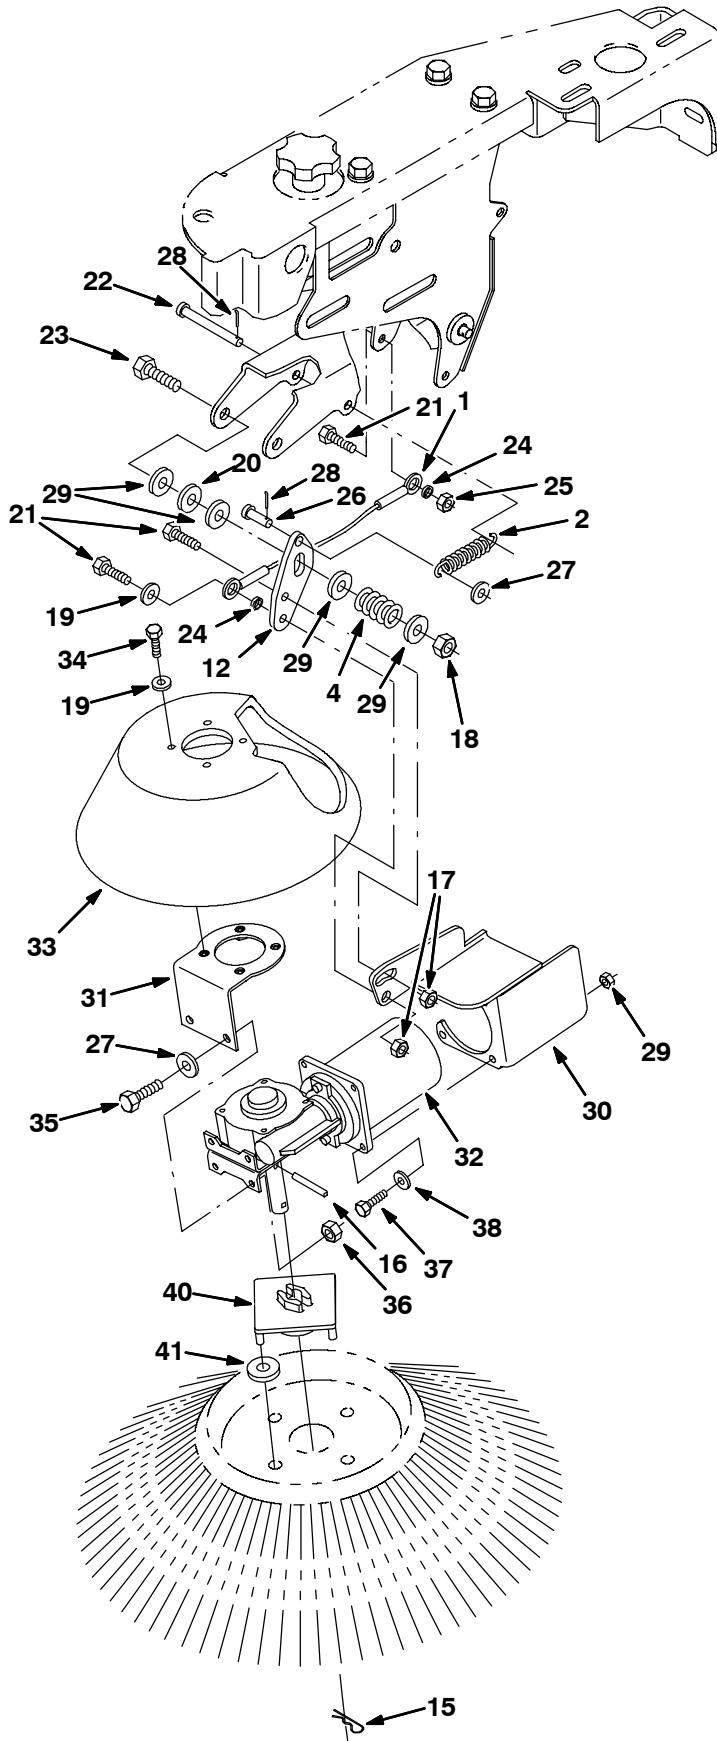


Fig. 34 - Sweeper Side Brush Motor and Pivot Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	87172	(000000-	Cable, .13d, 10.0l, .51eye / .51eye	1
2	09480	(000000-	Spring, Extn, 1.10od X 0.15wir, 3.2l	1
3	386661	(000000-003545	Bracket, Motor, Mtg	2
4	360357	(000000-	Spring, Die, 1.00od 0.50id 1.25l	2
5	386910	(000000-003545	Bracket, Motor, Mtg	1
6	09770	(000000-003545	Screw, Hex, M10 X 1.5 X 25, Ss, N	2
7	01686	(000000-003545	Washer, Flat, .38 Ss	2
▽	8	81751	(000000-003545) Motor Ele, 36Vdc, Rh Rep By 1008274	1
▲		81919	(000000-003545) Kit, Brush, Motor, Ele	1
▲		80127	(000000-003545) Cap, Brush, Motor, Ele	2
▲		369795	(000000-003545) Brushholder, Motor, Ele	2
▲		369796	(000000-003545) Clip, Motor, Ele	2
9	01684	(000000-003545	Washer, Flt, .25 Ss	4
10	15678	(000000-003545	Screw, Hex, M06 X 1.0 X 16, Ss	4
11	386666	(000000-003545	Guard, Brush, Side	1
12	386905	(000000-	Plate	1
13	386664	(000000-004071	Adapter, Brush	1
14	386663	(000000-004071	Plate, Adapter, Brush	1
15	02942	(000000-	Pin, Hair Cotter, 0.69 D .092 Wir	1
16	11398	(000000-	Pin, Roll, .250 D X 2.00l, .250/.256	1
17	07791	(000000-	Nut, Hex, Flng, M08 X 1.25	2
18	08711	(000000-	Nut, Hex, Lock, M12 X 1.75, NI	1
19	32491	(000000-	Washer, Flt, .31 Std	5
20	86860	(000000-	Bearing, Thrust	1
21	39277	(000000-	Screw, Hex, M08 X 1.25 X 25, 8.8	3
22	57598	(000000-	Pin, Clevis, 0.37 D X 3.25l	1
23	06974	(000000-	Screw, Hex, M12 X 1.75 X 80, 8.8	1
24	360801	(000000-	Sleeve	2
25	08709	(000000-	Nut, Hex, Lock, M08 X 1.25, NI	1
26	04733-2	(000000-	Pin, Clevis, 0.37 D X 0.62l	1
27	01685	(000000-	Washer, Flt, .31 Ss	3
28	39005	(000000-	Pin, Cotter, .094 X 0.75	2
29	32486	(000000-	Washer, Flt, .50 Sae	4
30	1006472	(003546-	Bracket Wldt, Mtg, Motor, [8300]	1
31	1005457	(003546-	Bracket Wldt, Mtg, Guard, Side Brush	1
32	1005523	(003546-	Motor, Gear, 36vdc, 120w, 75rpm	1
33	1005404	(003546-	Guard, Side Brush	1
34	32490	(003546-	Washer, Flat, 0.25 Std	4
35	09740	(003546-	Screw, Hex, M 8 X 1.25 X 20, Ss	2
36	07786	(003546-	Nut, Hex, Std, M08 X 1.25, Ss	2
37	08716	(003546-	Screw, Hex, M 6 X 1.0 X 20, Ss	4
38	01684	(003546-	Washer, Flat, 0.25 Ss	4
39	08708	(003546-	Nut, Hex, Lock, M 6 X 1.0, NI	3
40	1017441	(004072-	Plate, Adapter, Brush	1
41	1017802	(004072-	Washer, .625 B, 2.50 Od, .211 T, Ss	4

Fig. 35 - Sweeper Side Brush Lift Group


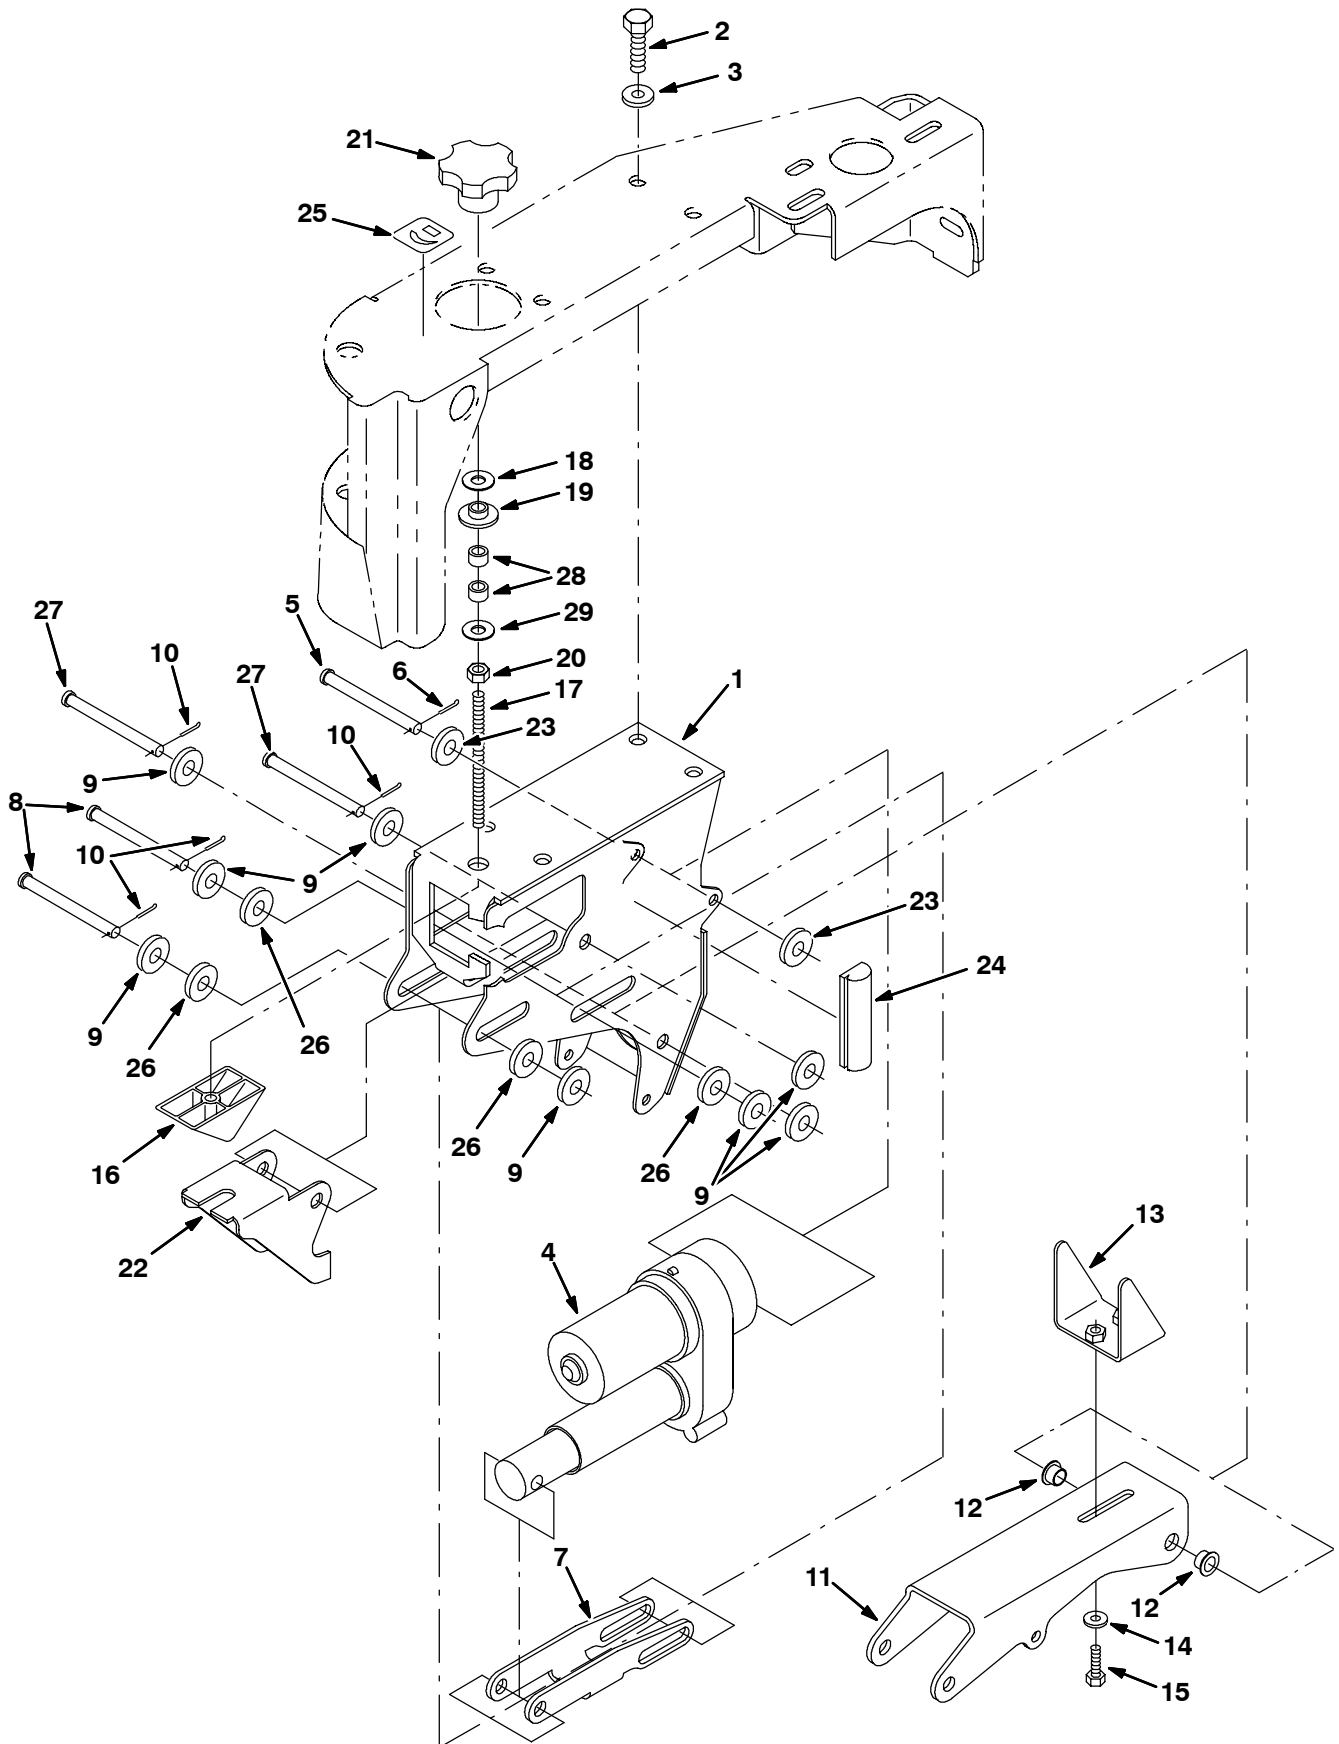


Fig. 35 - Sweeper Side Brush Lift Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386656	(000000-	) Housing Wldt, Brush, Side	1
2	09291	(000000-	) Screw, Hex, M10 X 1.5 X 20, Ss	4
3	32492	(000000-	) Washer, Flt, .38 Std	4
4	222539	(000000-	) Actuator, 36vdc, 01.8stroke 300lb	1
5	49914	(000000-	) Pin, Clevis, 0.37 D X 4.00l	1
6	39005	(000000-	) Pin, Cotter, .125 X 1.00	1
7	386657	(000000-	) Bracket	1
8	51528	(000000-	) Pin, Clevis, 0.50 D X 4.00l	2
9	32486	(000000-	) Washer, Flt, .50 Std	8
10	08182	(000000-	) Pin, Cotter, .125 X 1.00	4
11	386659	(000000-	) Channel	1
12	15648	(000000-	) Bushing, Flng, 0.50b 0.59d 0.38l	2
13	386660	(000000-	) Bracket	1
14	32491	(000000-	) Washer, Flt, .31 Std	2
15	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	2
16	386658	(000000-	) Block, Adj	1
17	387151	(000000-	) Shaft, Threaded	1
18	64489	(000000-	) Washer, 0.81b 1.24d .03, Stl, Pl	1
19	363087	(000000-	) Spacer, Flanged	1
20	25014	(000000-	) Nut, Hex, Std, M10 X 1.25	1
21	41341	(000000-	) Knob, Plastic	1
22	386909	(000000-	) Bracket, Pivot	1
23	32485	(000000-	) Washer, Flt, .38 Sae	2
24	86333	(000000-	) Duct, Vinyl 3.5l	1
25	387405	(000000-	) Label, Brush, Side, Adj	1
26	07450	(000000-	) Bearing, Thrust, 0.66b 1.25d 0.06w	4
27	222196	(000000-	) Pin, Clevis, 0.50 D X 4.00l	2
28	390879	(000000-	) Sleeve, P/M 0.625D 0.406B 0.38L 430Ss	2
29	32492	(000000-	) Washer, Flat, 0.38 Std	1

Fig. 36 - Sweeper Main Brush Drive Group

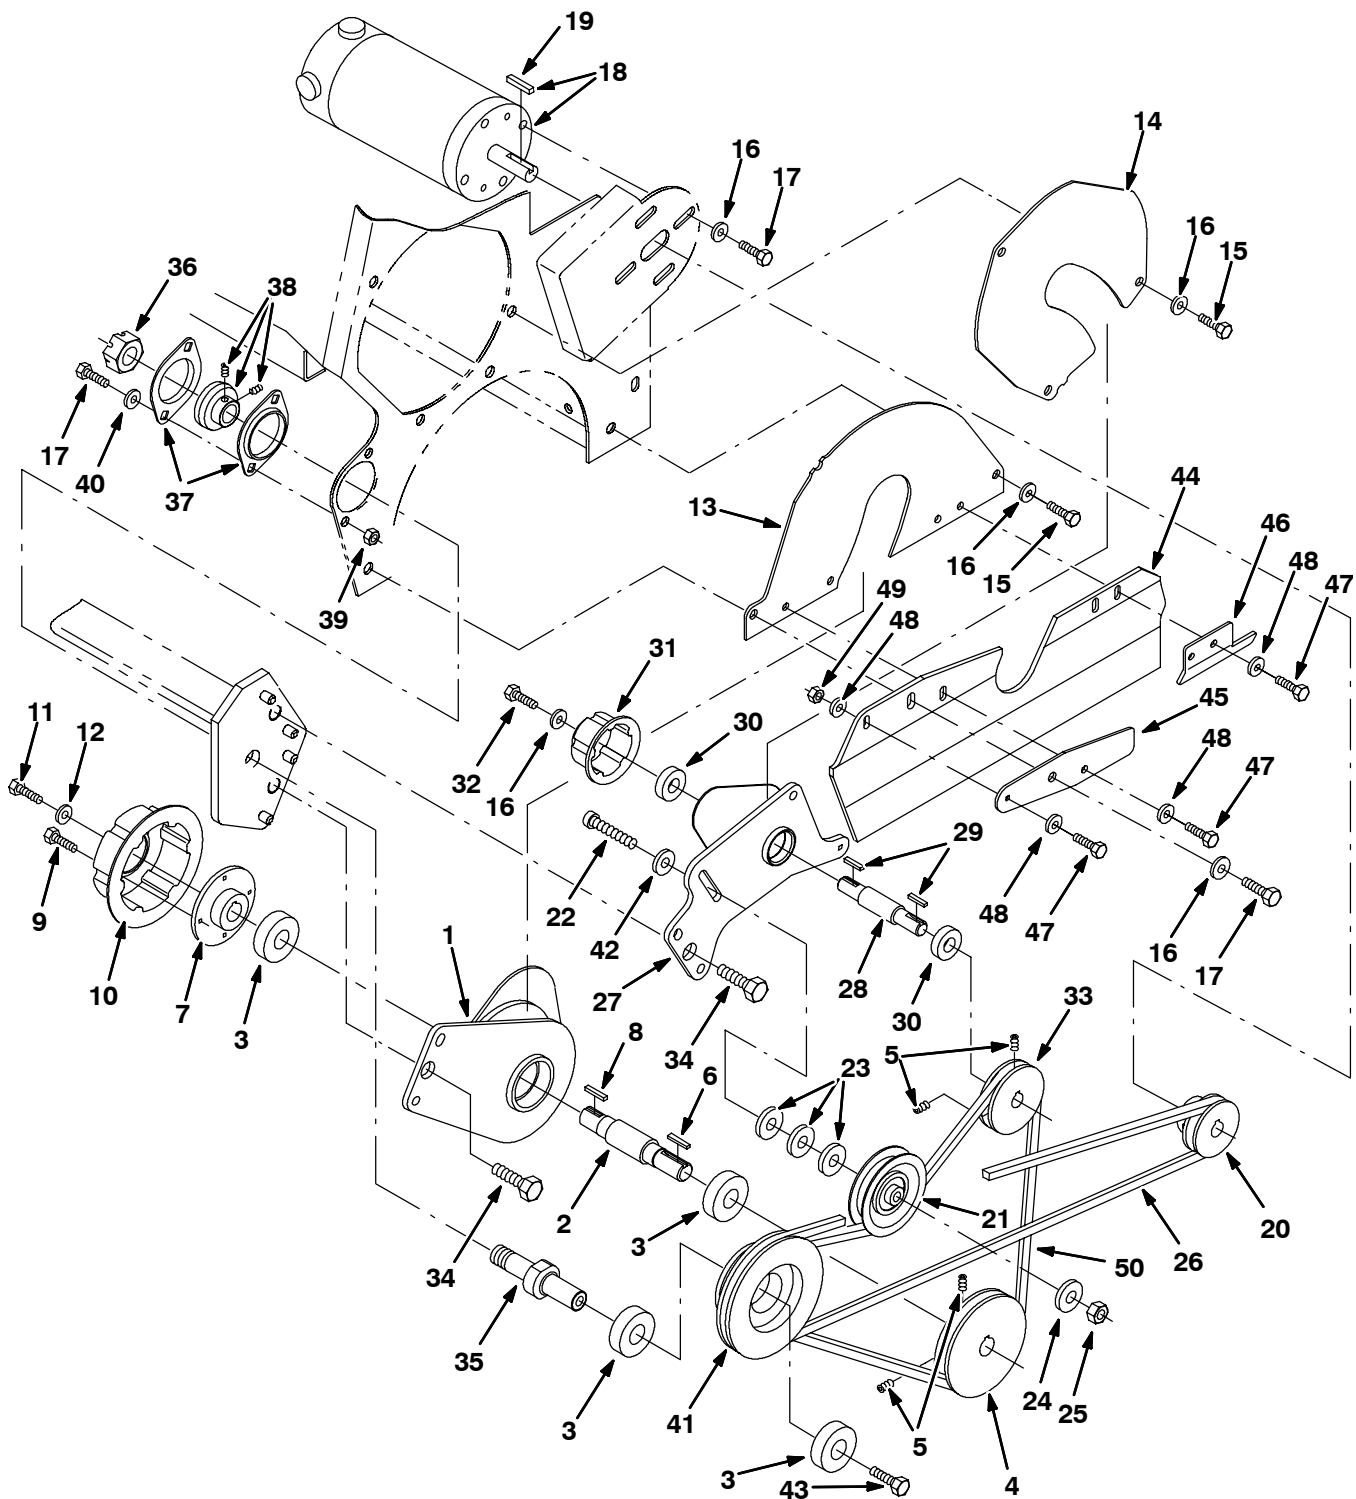

353424 - 8300

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387113	(000000-	) Arm Wldt, Brush	1
2	386360	(000000-	) Shaft	1
3	46390AM	(000000-	) Bearing, Ball, 0.79b 1.85d 0.55w	4
4	386355	(000000-	) Sheave	1
5	09162	(000000-	) Screw, Set, M06 X 1.0 X 8, NI	4

Fig. 36 - Sweeper Main Brush Drive Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
6	00912	(000000-	) Key, Sq, 0.19 X 0.19, 01.00l	2
7	386062	(000000-	) Collar Wldt	1
8	00911	(000000-	) Key, Sq, 0.19 X 0.19, 00.75l	1
9	12312	(000000-	) Screw, Hex, M05 X 0.8 X 12, 8.8	4
10	386067	(000000-	) Plug, Drive, Brush, Splined	1
11	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	1
12	32490	(000000-	) Washer, Flt, .25 Std	1
13	386897	(000000-	) Door, Brush	1
14	386891	(000000-	) Door, Brush	1
15	50388	(000000-	) Screw, Hex, M08 X 1.25 X 12, 8.8	4
16	32491	(000000-	) Washer, Flt, .31 Std	10
17	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	7
▽ 18	383709	(000000-	) Motor, Ele, 36vdc 0.9hp 1800rpm (See Breakdown)	1
▲ 19	00912	(000000-	) Key, Sq, 0.19 X 0.19, 01.00l	1
20	386353	(000000-	) Sheave	1
21	81710	(000000-	) Sheave, Flat, 2.6d 0.62w, 0.38b	1
22	19577	(000000-	) Bolt, Carriage, .38-16 X 2.00	1
23	32492	(000000-	) Washer, Flt, .38 Std	3
24	32485	(000000-	) Washer, Flt, .38 Sae	1
25	36643	(000000-	) Nut, Hex, Lock, .38-16, NI, Thin	1
26	58327	(000000-	) Belt, V, [Hc41] 41.0l	2
27	387119	(000000-	) Arm Wldt, Brush	1
28	386361	(000000-	) Shaft	1
29	00910	(000000-	) Key, Sq, 0.19 X 0.19, 00.62l	2
30	41360	(000000-	) Bearing, Ball, 0.59b 1.26d 0.35w	2
31	378805	(000000-	) Plug, Drive, Brush, Mach	1
32	11329	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss, NI	1
33	386354	(000000-	) Sheave	1
34	06977	(000000-	) Screw, Hex, M16 X 2.0 X 20, 8.8	2
35	386359	(000000-	) Pivot	1
36	39527	(000000-	) Nut, Hex, Sltd, .75-16	1
37	35973	(000000-	) Flange, Brg, 1.9id 2h	2
38	25887	(000000-	) Bearing, W/ Collar, 0.75b 1.85d 1.06w	1
39	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	2
40	39349	(000000-	) Washer, Flt, .31 Sae	2
41	386352	(000000-	) Sheave	1
42	32486	(000000-	) Washer, Flt, .50 Sae	1
43	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	1
44	387059	(000000-	) Skirt, Lh	1
45	387320	(000000-	) Retainer, Front	1
46	387403	(000000-	) Retainer	1
47	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	4
48	32483	(000000-	) Washer, Flt, .25 Sae	5
49	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	1
50	387153	(000000-	) Belt, V	1

Fig. 37 - Sweeper Main Brush Idler Group

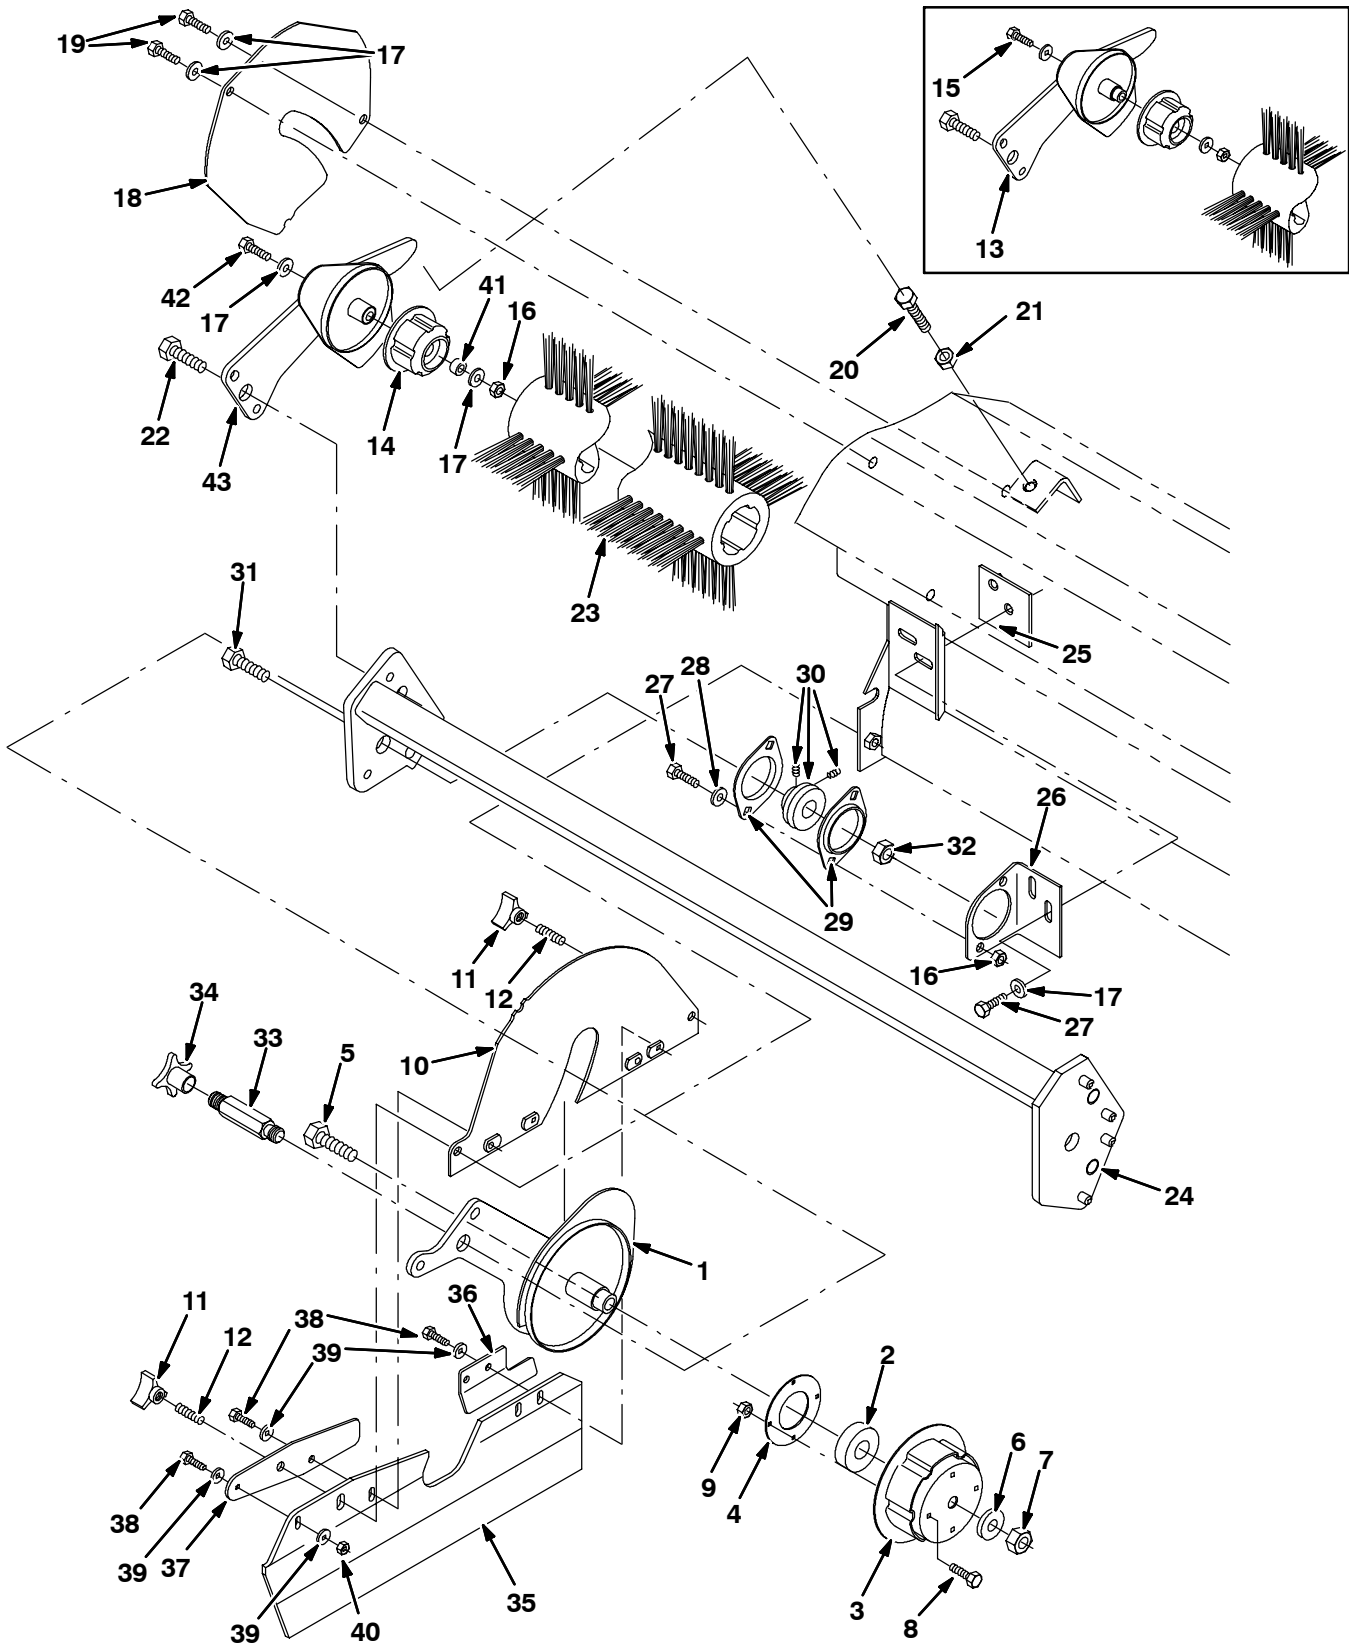


Fig. 37 - Sweeper Main Brush Idler Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387470	(000000-	) Arm Wldt, Brush	1
2	46390AM	(000000-	) Bearing, Ball, 0.79b 1.85d 0.55w	1
3	81818	(000000-	) Plug, Drive, Brush, Splined	1
4	35836	(000000-	) Retainer, Bearing	1
5	12138	(000000-	) Screw, Hex, M12 X 1.75 X 120, 8.8	1
6	32486	(000000-	) Washer, Flt, .50 Sae	1
7	09741	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI, Ss	1
8	12312	(000000-	) Screw, Hex, M05 X 0.8 X 12, 8.8	4
9	06549	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI	4
10	386900	(000000-	) Plate, Door, Brush	1
11	222470	(000000-	) Knob	2
12	30324	(000000-	) Rod, Thrd, 2 End M08x1.25 01.2	2
13	387120	(000000-003348	) Arm Wldt, Brush (Replaced by 374186)	1
14	379202	(000000-	) Plug, Idler, Brush	1
15	76570	(000000-003348	) Screw, Hex, M08 X 1.25 X 30, 8.8	1
16	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	1
17	32491	(000000-	) Washer, Flt, .31 Std	16
18	386894	(000000-	) Door, Brush	1
19	50388	(000000-	) Screw, Hex, M08 X 1.25 X 12, 8.8	2
20	09746	(000000-	) Screw, Hex, M10 X 1.5 X 90, Ss	1
21	07787	(000000-	) Nut, Hex, Std, M10 X 1.5, Ss	1
22	06977	(000000-	) Screw, Hex, M16 X 2.0 X 20, 8.8	1
23	385938	(000000-	) Conveyor, Cyl, 35L, 4Sr, Pp	1
24	386890	(000000-	) Tube Wldt, Brush	1
25	386428	(000000-	) Bracket, Bearing	1
26	386426	(000000-	) Bracket, Bearing, Mtg	1
27	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	5
28	39349	(000000-	) Washer, Flt, .31 Sae	2
29	35973	(000000-	) Flange, Brg, 1.9id 2h	2
30	25887	(000000-	) Bearing, W/ Collar, 0.75b 1.85d 1.06w	1
31	39284	(000000-	) Screw, Hex, M10 X 1.5 X 35, 8.8	1
32	39312	(000000-	) Nut, Hex, Std, M10 X 1.5	1
33	387152	(000000-	) Shaft, Threaded	1
34	77605	(000000-	) Knob, Plastic	1
35	387055	(000000-	) Skirt, Rh	1
36	387402	(000000-	) Retainer	1
37	387320	(000000-	) Retainer, Front	1
38	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	4
39	41178	(000000-	) Washer, Flat, .25 Fender	5
40	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	1
41	374185	(003349-	) Sleeve, .318B .589D .325Ss	1
42	39281	(003349-	) Screw, Hex, M08X1.25X90, 8.8	1
43	374183	(003349-	) Arm Wldt, Brush, Idler	1

Fig. 38 - Sweeper Main Brush Lift Group

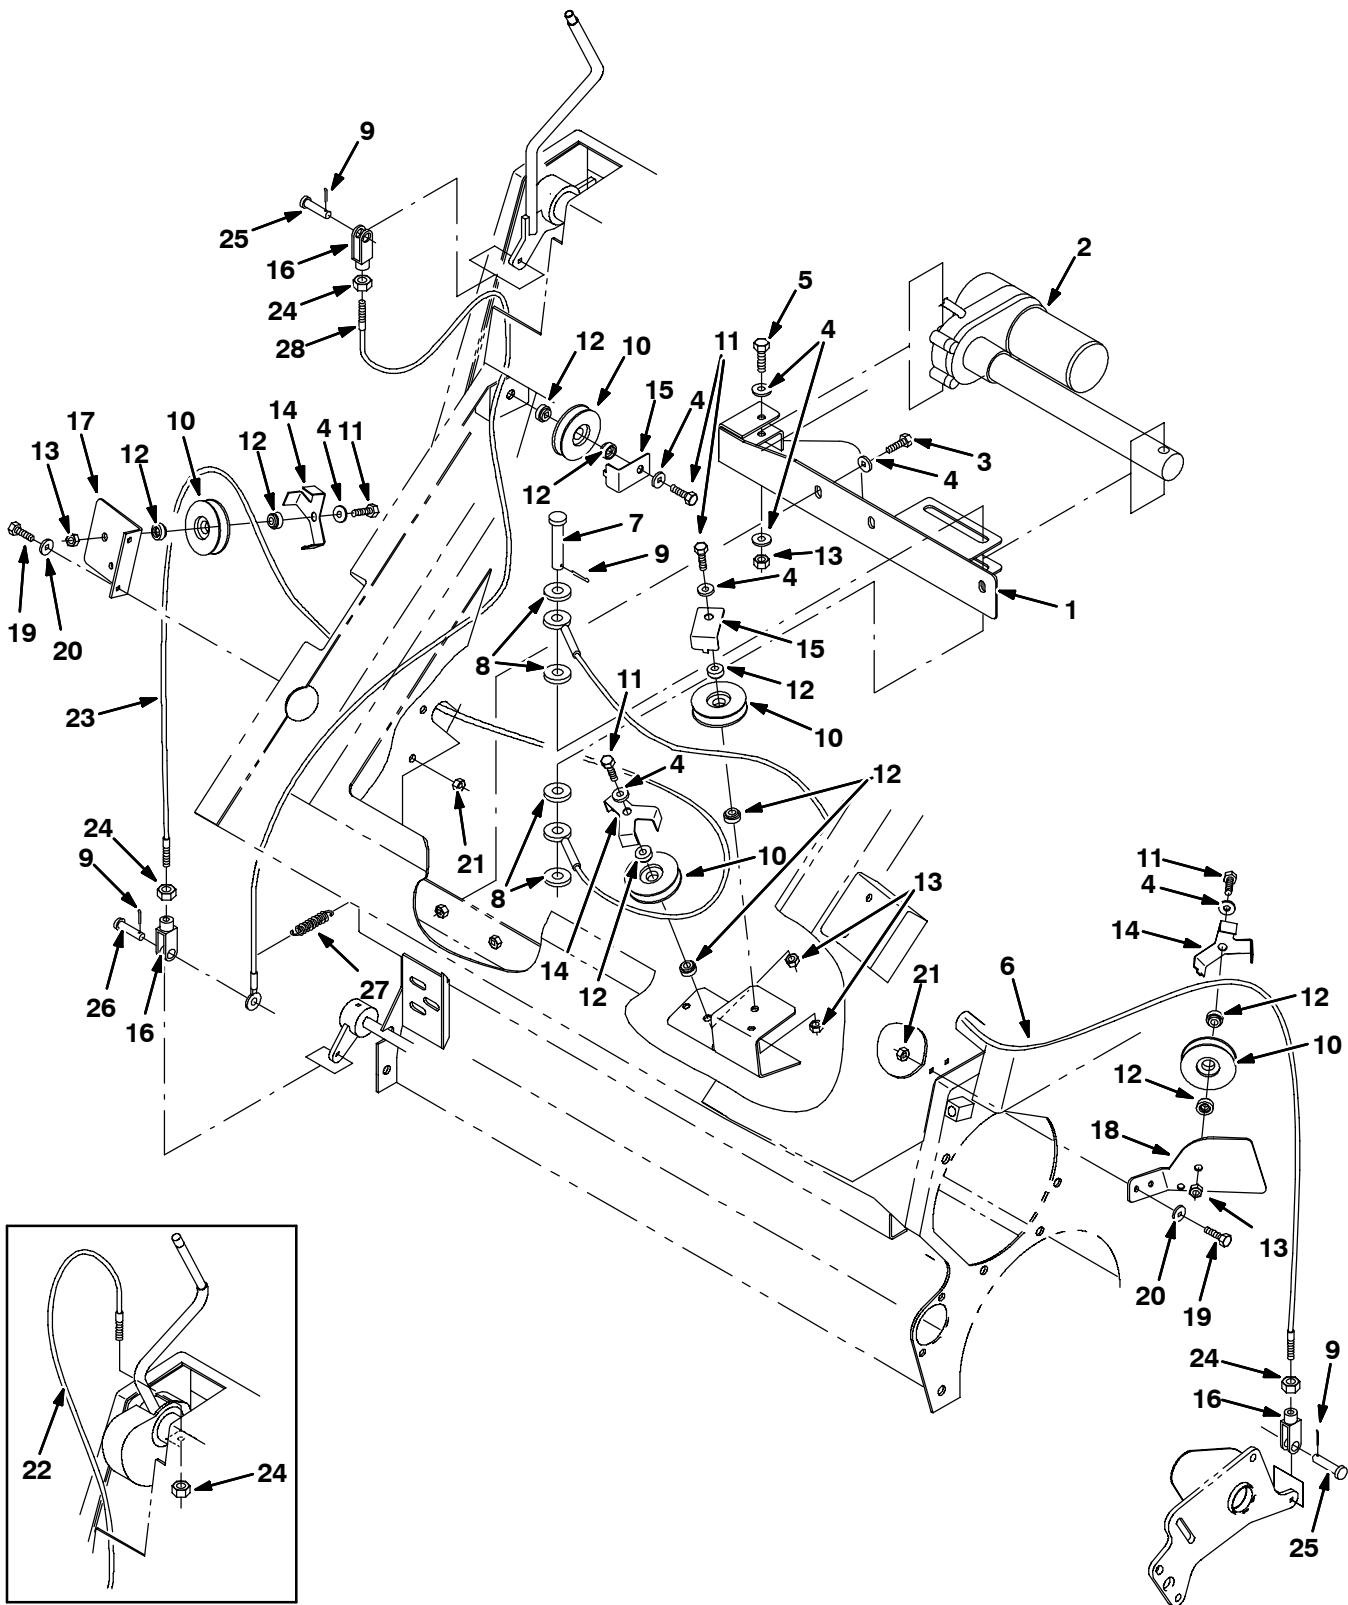


Fig. 38 - Sweeper Main Brush Lift Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387442	(000000-	) Actuator, Mount	1
2	390992	(000000-	) Actuator, 36vdc, 05.0stroke 600lb	1
3	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	3
4	32491	(000000-	) Washer, Flt, .31 Std	10
5	39278	(000000-	) Screw, Hex, M08 X 1.25 X 50, 8.8	
6	386578	(000000-	) Cable, Brush, Lift	1
7	51103	(000000-	) Pin, Clevis, 0.50 D X 2.62l	1
8	32486	(000000-	) Washer, Flt, .50 Sae	4
9	08175	(000000-	) Pin, Cotter, .125 X 1.25	4
10	80235	(000000-	) Sheave, Idler, 15mm Id, 2.44pd	5
11	41342	(000000-	) Screw, Hex, M08 X 1.25 X 40, 8.8	5
12	80487	(000000-	) Spacer, Idler .25 Lg	10
13	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl	5
14	386628	(000000-	) Angle, Cable. Keeper	3
15	386629	(000000-	) Angle, Cable, Keeper	2
16	14595-1	(000000-	) Clevis, Adj, 0.25pin, .25-28	3
17	386969	(000000-	) Angle	1
18	386972	(000000-	) Angle	1
19	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	4
20	32940	(000000-	) Clevis, Adj, 1.12pin, 1.00-14	4
21	41359	(000000-	) Nut, Hex, Std, M06 X 1.0	4
22	386577	(000000-003124	) Cable, Flap, Lift	1
23	386579	(000000-	) Cable, Flap, Lift	1
24	01714	(000000-	) Nut, Hex, Std, .25-28	4
25	14605	(000000-	) Pin, Clevis, 0.25 D X 0.75l	2
26	51727	(000000-	) Pin, Clevis, 0.25 D X 1.00l	1
27	363981	(000000-	) Spring, Extn, 0.50Od X 0.04Wir, 3.0L	1
28	387477	(003125-	) Cable, Flap, Lift	1

Fig. 39 - Hopper and Bumper Group

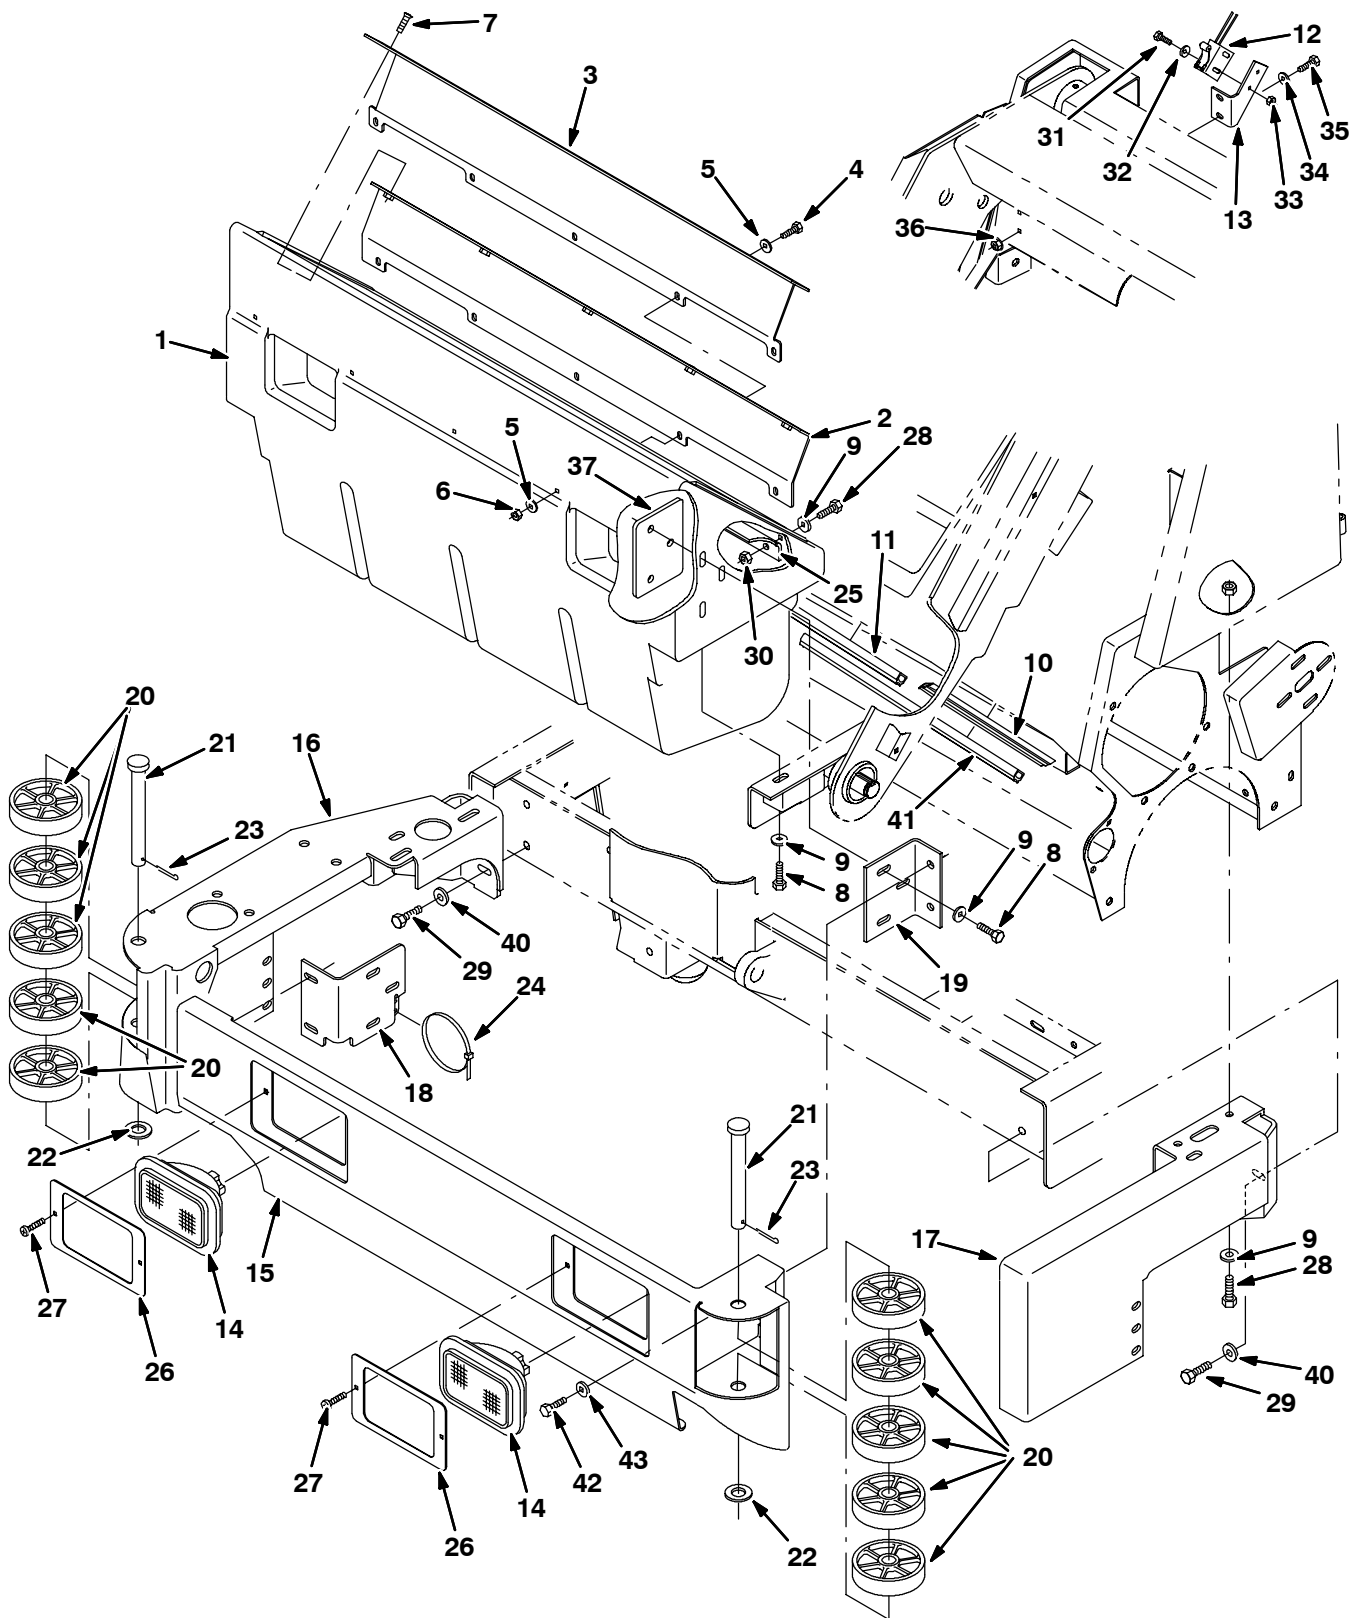


Fig. 39 - Hopper and Bumper Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386566	(000000-	) Hopper, Sweeper, [8300]	1
2	386970	(000000-	) Brace, Hppr, Internal	1
3	386971	(000000-	) Brace, Hppr, External	1
4	06944	(000000-	) Screw, Hex, M06 X 1.0 X 25, 8.8	5
5	32490	(000000-	) Washer, Flt, .25 Std	10
6	41359	(000000-	) Nut, Hex, Std, M06 X 1.0	5
7	06415	(000000-	) Screw, Flat, M06 X 1.0 X 25, 10.9	5
8	16931	(000000-	) Screw, Hex, M08 X 1.25 X 16, 8.8	8
9	32491	(000000-	) Washer, Flt, .31 Std	18
10	387407	(000000-	) Seal, Hppr, Vertical	2
11	387413	(000000-	) Seal, Hppr, Horiz	1
12	367404	(000000-	) Switch Assy, Roller, No	1
13	387295	(000000-	) Bracket, Switch	1
▽ 14	223044	(000000-	) Headlight, 36vdc, 15cp 0.7a [#0534242]	2
▲	360518	(000000-	) Lamp, 36vdc, 32cp .72a, [#sp7]	1
15	386908	(000000-	) Bumper Wldt	1
16	386752	(000000-	) Bumper Wldt, Rh	1
17	387095	(000000-	) Bumper Wldt, Lh	1
18	386570	(000000-	) Angle, Bumper, Mtg, Rh	1
19	387498	(003185-	) Bracket, Bumper	1
20	364085	(000000-	) Wheel, 4.0d 0.98w 0.78b	10
21	51414	(000000-	) Pin, Clevis, 0.75 D X 6.50l	2
22	39350	(000000-	) Washer, Flt, .75 Sae	2
23	08236	(000000-	) Pin, Cotter, .156 X 1.25	2
24	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	3
25	387019	(000000-	) Angle	1
26	363827	(000000-	) Plate, Headlight	2
27	74027	(000000-	) Screw, Pan, M06-1.0 X 12, NI	4
28	39277	(000000-	) Screw, Hex, M08 X 1.25 X 25, 8.8	8
29	39283	(000000-	) Screw, Hex, M10 X 1.5 X 25, 8.8	4
30	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	4
31	09244	(000000-	) Screw, Hex, M05 X 0.8 X 16, 8.8	2
32	19066	(000000-	) Washer, Flt, #10	2
33	06549	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI	2
34	06942	(000000-	) Screw, Hex, M06 X 1.0 X 16, 8.8	2
35	32483	(000000-	) Washer, Flt, .25 Sae	2
36	08708	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI	2
37	387319	(000000-	) Plate	2
38	06955	(000000-	) Screw, Hex, M08 X 1.25 X 35, 8.8	6
39	07791	(000000-	) Nut, Hex, Flng, M08 X 1.25	4
40	32492	(000000-	) Washer, Flt, .38 Std	4
41	387406	(000000-	) Seal, Hppr, Horiz	1
42	06955	(003185-	) Screw, Hex, M8X1.25 X 35, 8.8	2
43	32491	(003185-	) Washer, Flat, 0.31 Std	2

Fig. 40 - Sweeper Main Brush Skirts Group

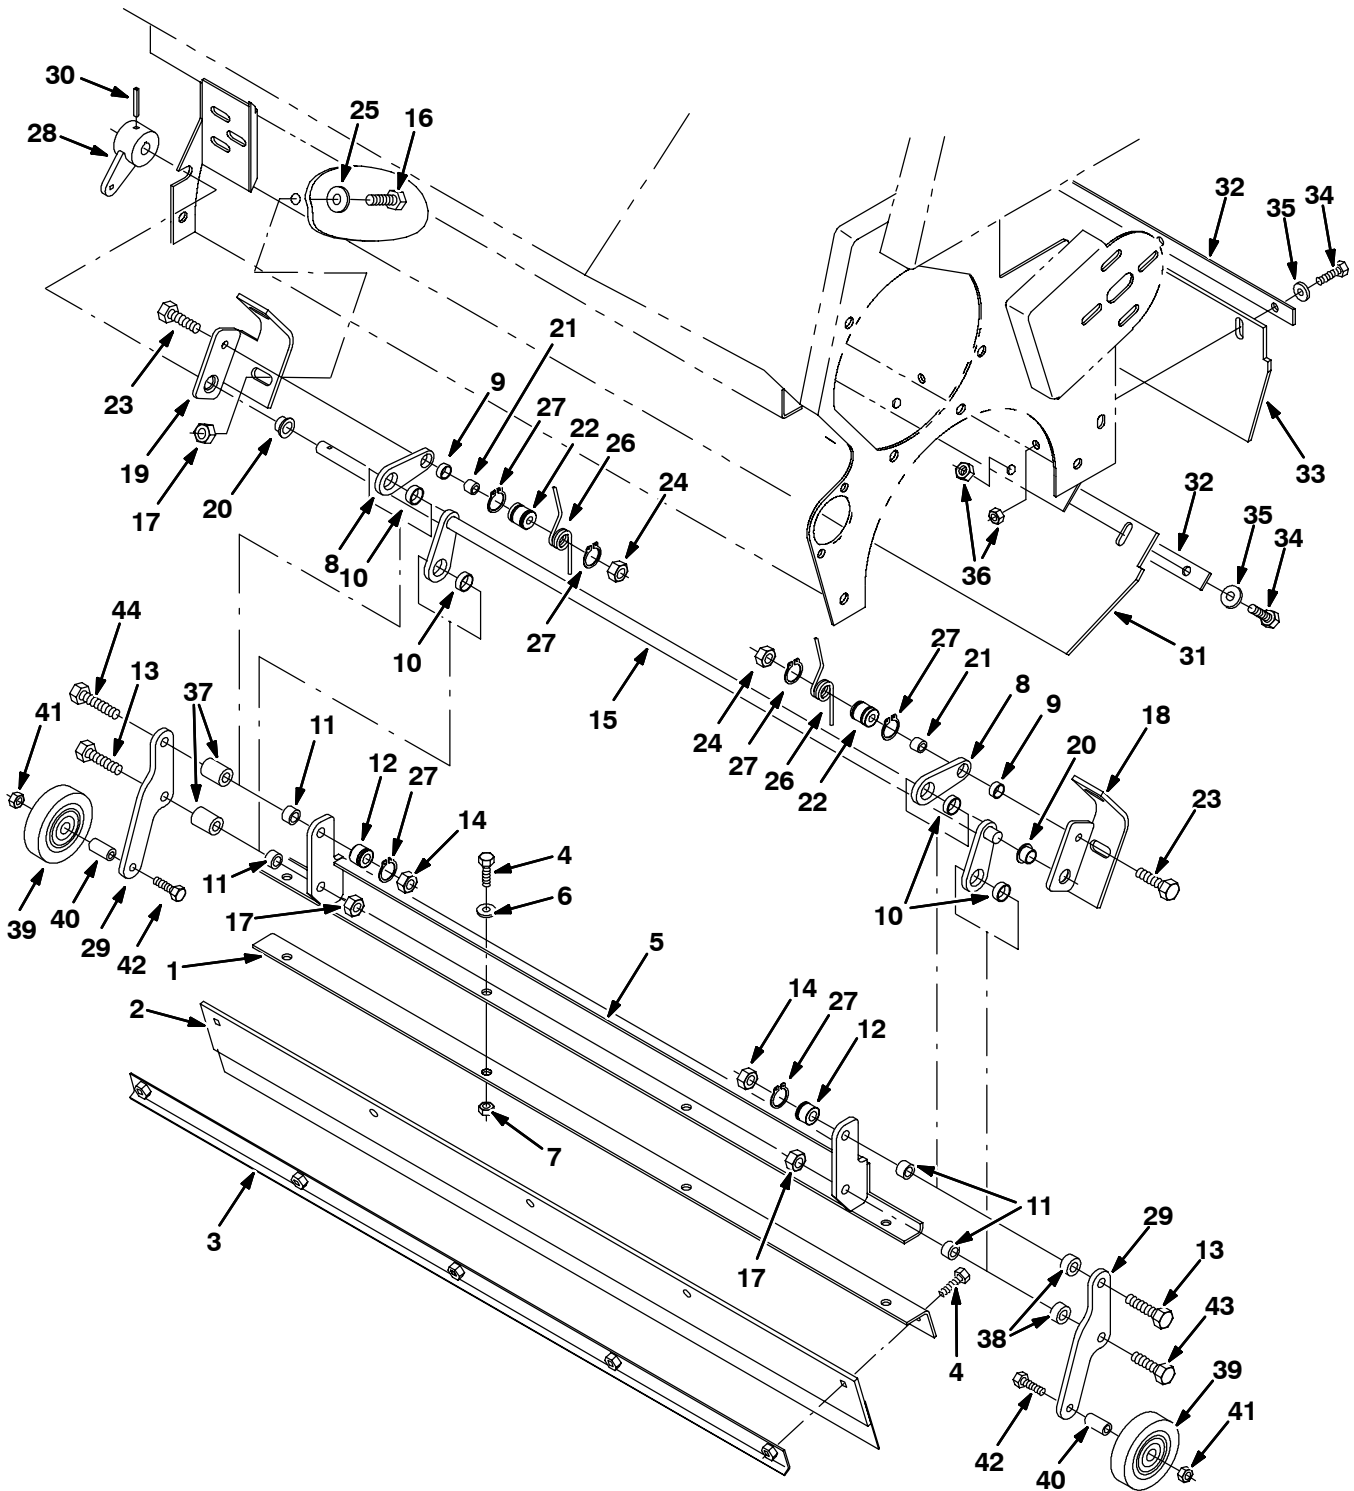


Fig. 40 - Sweeper Main Brush Skirt Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387275	(000000-	) Angle, Mtg, Front	1
2	386626	(000000-	) Flap, Front	1
3	386617	(000000-	) Strip, Flap	1
4	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	9
5	387274	(000000-	) Channel Wldt	1
6	07800	(000000-	) Washer-Flt 8.4x17 X2 M8	4
7	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
8	387233	(000000-	) Arm	2
9	367452	(000000-	) Bushing, Sleeve, 0.50b 0.59d 0.25l, Bnz	2
10	360491	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.25l	4
11	386581	(000000-	) Bearing, Sleeve, 0.62od	4
12	387268	(000000-	) Spacer, Short	2
13	06964	(000000-	) Screw, Hex, M10 X 1.50 X 70, 8.8	2
14	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	2
15	386621	(000000-	) Arm Assy, Flap, Lower	1
16	09028	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss	4
17	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	4
18	386625	(000000-	) Bar Wldt, Flap, Lh	1
19	387111	(000000-	) Bar Wldt, Flap, Rh	1
20	15648	(000000-	) Bushing, Flng, 0.50b 0.59d 0.38l	2
21	387235	(000000-	) Sleeve	2
22	387234	(000000-	) Spacer	2
23	09026	(000000-	) Screw, Hex, M08 X 1.25 X 40, Ss	2
24	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	2
25	33924	(000000-	) Washer, Flat, M10, 10.5x21x2ss	4
26	387296	(000000-	) Spring, Tors, .81ld .09W 3.0 Coil	2
27	26428	(000000-	) Ring, Retaining, Ext, 0.75d, Hd	6
28	386591	(000000-	) Arm Wldt, Flap	1
29	387397	(000000-	) Leg	1
30	26103	(000000-	) Pin, Roll, .180 D X 1.25L, .187/.192	1
31	386828	(000000-	) Skirt, Recirculation	1
32	387400	(000000-	) Strip, Recirculation Flap	1
33	386829	(000000-	) Skirt, Recirculation	1
34	76570	(000000-	) Screw, Hex, M08 X 1.25 X 30, 8.8	4
35	32491	(000000-	) Washer, Flt, .31 Std	8
36	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI	8
37	387398	(000000-	) Spacer	2
38	387399	(000000-	) Spacer	2
39	222066	(000000-	) Wheel, 3.0D 0.88W 0.50B	2
40	222496	(000000-	) Sleeve	2
41	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	2
42	09026	(000000-	) Screw, Hex, M08 X 1.25 X 40, Ss	2
43	32731	(000000-	) Screw, Hex, M10 X 1.5 X 50, Ss	1
44	06965	(000000-	) Screw, Hex, M10 X 1.5 X 80, 8.8	1

Fig. 41 - Hopper Lift Arms Group

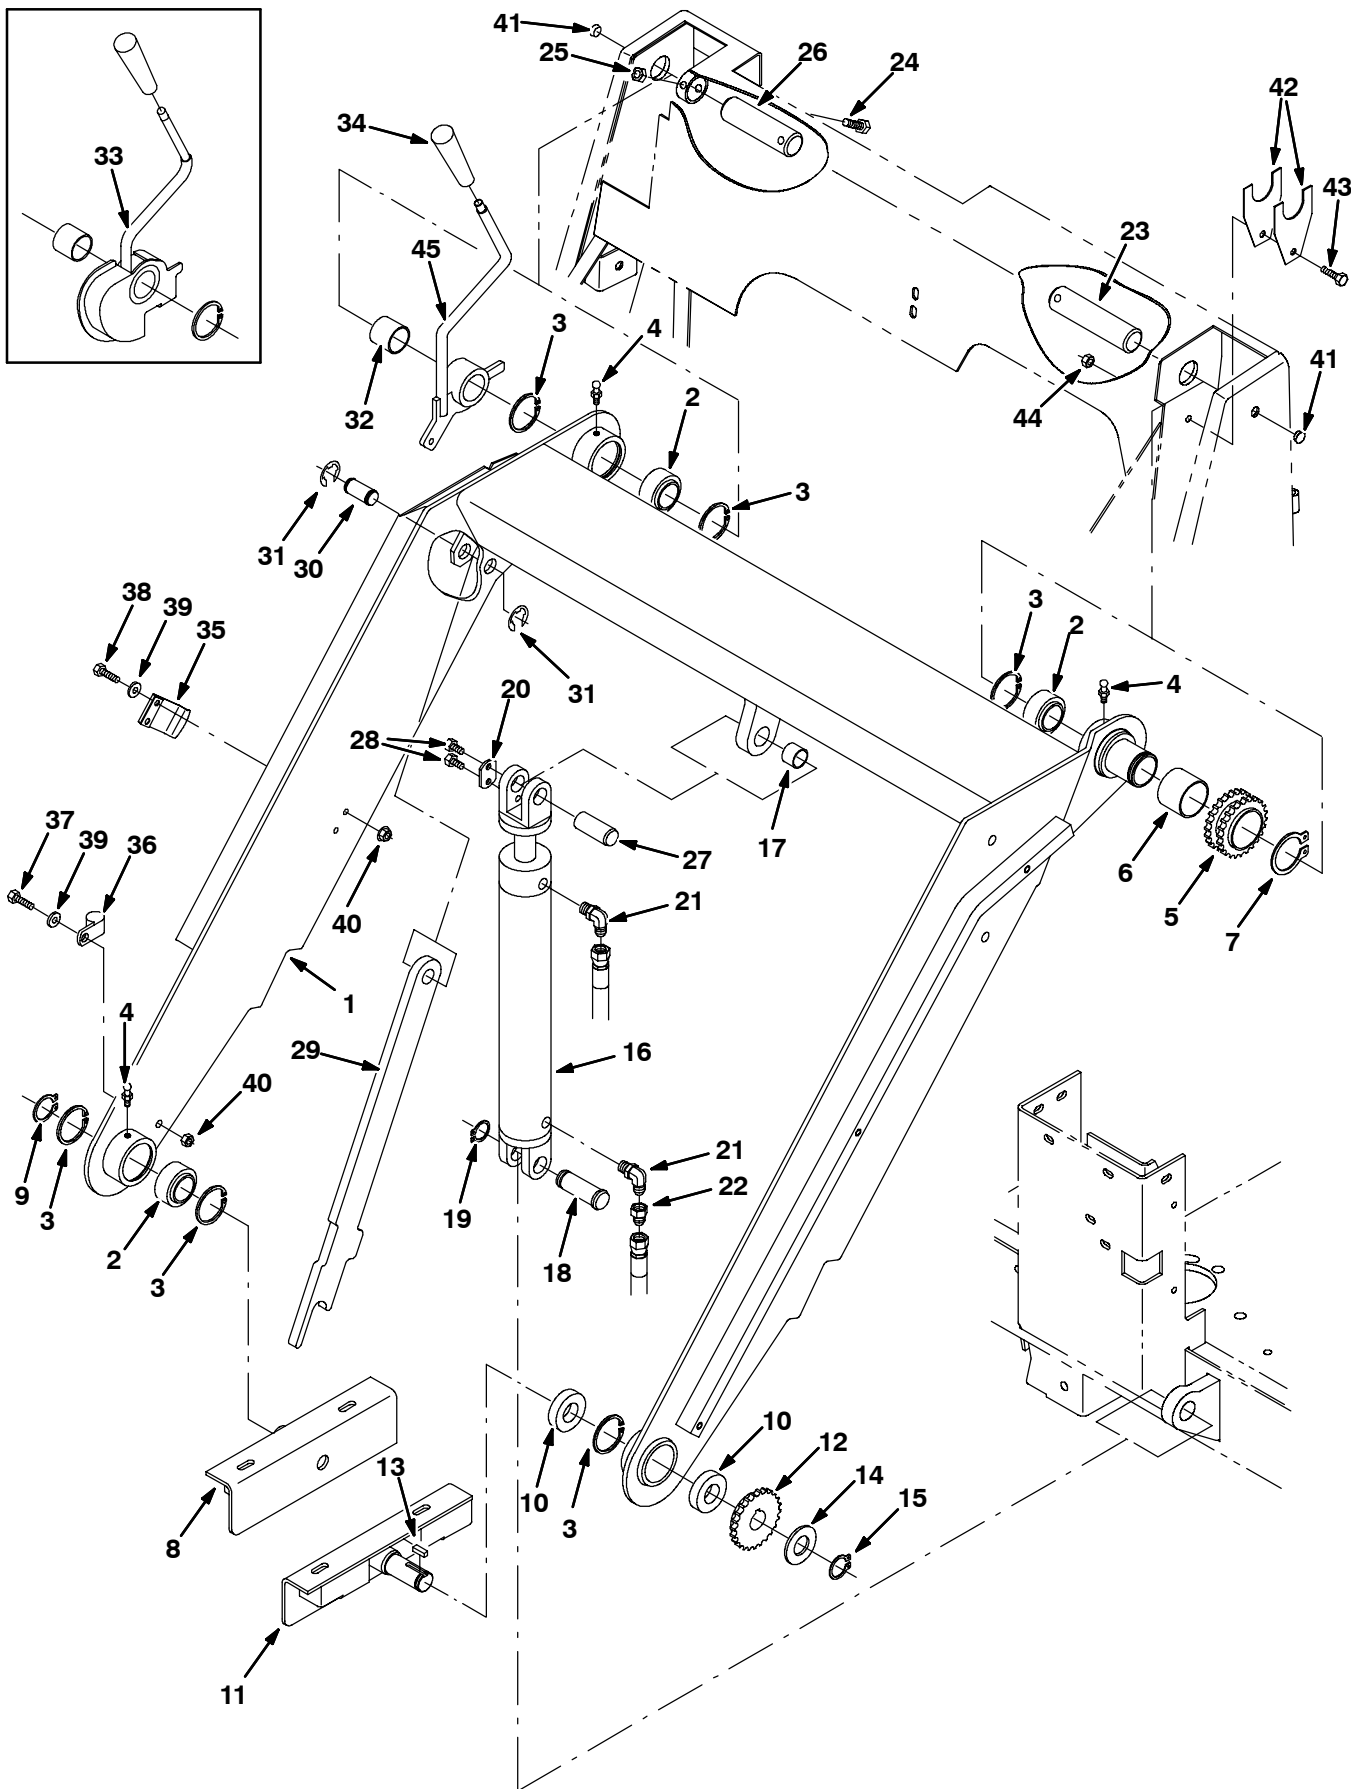


Fig. 41 - Hopper Lift Arms Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387345	(000000-	) Arm Wldt, Lift, Hopper, W/ Label, [8300]	1
2	42120-1	(000000-	) Bearing, Self Align, 1.25b 2.00d	3
3	59542	(000000-	) Ring, Retaining, Int, 2.00d	6
4	07259	(000000-	) Fitting, Grease, Str Pm04 .47l	3
5	386536	(000000-	) Sprocket Wldt	1
6	386801	(000000-	) Bearing, Sleeve, 1.75id	1
7	87147	(000000-	) Ring, Retaining, Ext, 1.75d, Hd	1
8	386696	(000000-	) Bracket, Hopper, Rh	1
9	58359	(000000-	) Retainer, Ring	1
10	386694	(000000-	) Bearing, Ball, 1.00b 2.00d 0.50w	2
11	386569	(000000-	) Bracket, Hopper, Lh	1
12	386540	(000000-	) Sprocket, Hopper	1
13	00926	(000000-	) Key, Sq, 0.25 X 0.25, 00.75l	1
14	45888	(000000-	) Washer, Flat, 1.00, Sae	1
15	386962	(000000-	) Ring, Retaining, Ext, 1.00od	1
16	379120	(000000-	) Cylinder, Hyd, 2.0b, . L,12.00strk,2500	1
17	364587	(000000-	) Bushing, Sleeve, 0.88b 1.00d 0.75l, Bnz	1
18	73077	(000000-	) Pin, Clevis	1
19	72899	(000000-	) Ring, Retaining, Ext, 0.88d	1
20	72897	(000000-	) Plate, Pin, Clevis, Upper	1
21	77097	(000000-	) Fitting, Hyd, E90, Jm04/Om04	2
22	16455	(000000-	) Fitting, Hyd, Rst, Jm04/.047	1
23	386690	(000000-	) Pin	1
24	39278	(000000-	) Screw, Hex, M08 X 1.25 X 50, 8.8	2
25	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl	2
26	386689	(000000-	) Pin	1
27	72898	(000000-	) Pin, Clevis	1
28	11329	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss, Nl	2
29	387347	(000000-	) Arm, Safety W/ Label, [8300]	1
30	387335	(000000-	) Pin, Arm, Safety	1
31	59840	(000000-	) Ring, Retaining, Ext, 0.75d	2
32	386598	(000000-	) Bearing, Sleeve, 1.25id	1
33	386599	(000000-003124	) Lever Assy, Flap	1
34	54995	(000000-	) Knob, Tapered	1
35	364672	(000000-	) Clip, Spring, Prop Arm	1
36	40678-1	(000000-	) Clamp, Cable, Stl, 0.88d X 0.62w, 1h	1
37	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	1
38	06942	(000000-	) Screw, Hex, M06 X 1.0 X 16, 8.8	2
39	32483	(000000-	) Washer, Flt, .25 Sae	3
40	07790	(000000-	) Nut, Hex, Flng, M06 X 1.0	3
41	56992	(000000-	) Button, Plug, 0.50H .03-.12 [Black Nyl]	2
42	360768	(000000-	) Plate, Spacer, Lift Arm	4
43	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	1
44	07790	(000000-	) Nut, Hex, Flng, M06 X 1.0	1
45	387472	(003125-	) Lever Wldt, Flap	1

Fig. 42 - Hopper Chain and Cover Group

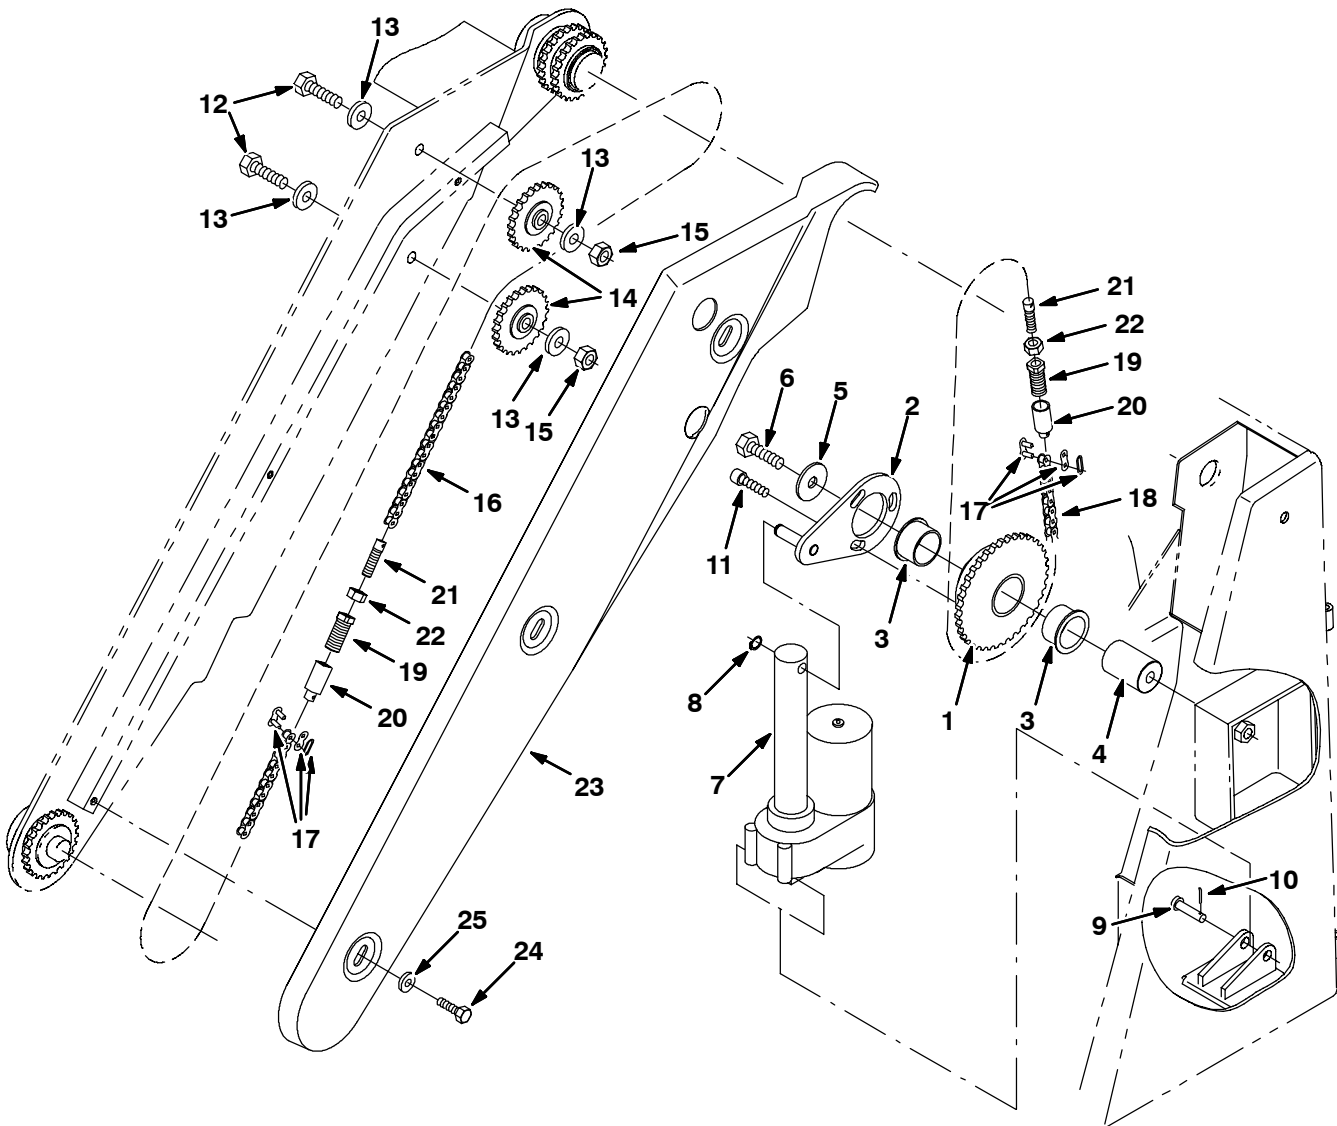


Fig. 42 - Hopper Chain and Cover Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386784	(000000-	) Hub Wldt	1
2	387036	(000000-	) Arm Wldt	1
3	54620	(000000-	) Bushing, Flng, 1.50b 1.65d 1.00l	2
4	386783	(000000-	) Shaft	1
5	51564	(000000-	) Washer, 0.53b 1.75d .12, Stl, Pl	1
6	06974	(000000-	) Screw, Hex, M12 X 1.75 X 80, 8.8	1
7	387144	(000000-	) Actuator, Rollout	1
8	70717	(000000-	) Ring, Retaining, Ext, 0.50d, Hd	1
9	17461	(000000-	) Pin, Clevis, 0.37 D X 1.75l	1
10	08179	(000000-	) Pin, Cotter, .094 X 1.00	1
11	39309	(000000-	) Screw, Soc, M10 X 1.5 X 25, 12.9	3
12	06971	(000000-	) Screw, Hex, M12 X 1.75 X 50, 8.8	2
13	32486	(000000-	) Washer, Flt, .50 Sae	4
14	386539	(000000-	) Sprocket, Idler	2
15	08711	(000000-	) Nut, Hex, Lock, M12 X 1.75,Nl	2
16	386554	(000000-	) Chain, Arm	1
17	07112	(000000-	) Link, Chain, Roller, #40	2
18	386555	(000000-	) Chain, Drive	1
19	386997	(000000-	) Housing	2
20	386998	(000000-	) Ear	2
21	386999	(000000-	) Pivot	2
22	32716	(000000-	) Nut, Hex, Jam, M10 X 1.5, Ss	2
23	387279	(000000-	) Cover, Chain	1
24	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	3
25	32491	(000000-	) Washer, Flt, .31 Std	3

Fig. 43 - Hopper Filter Box Group

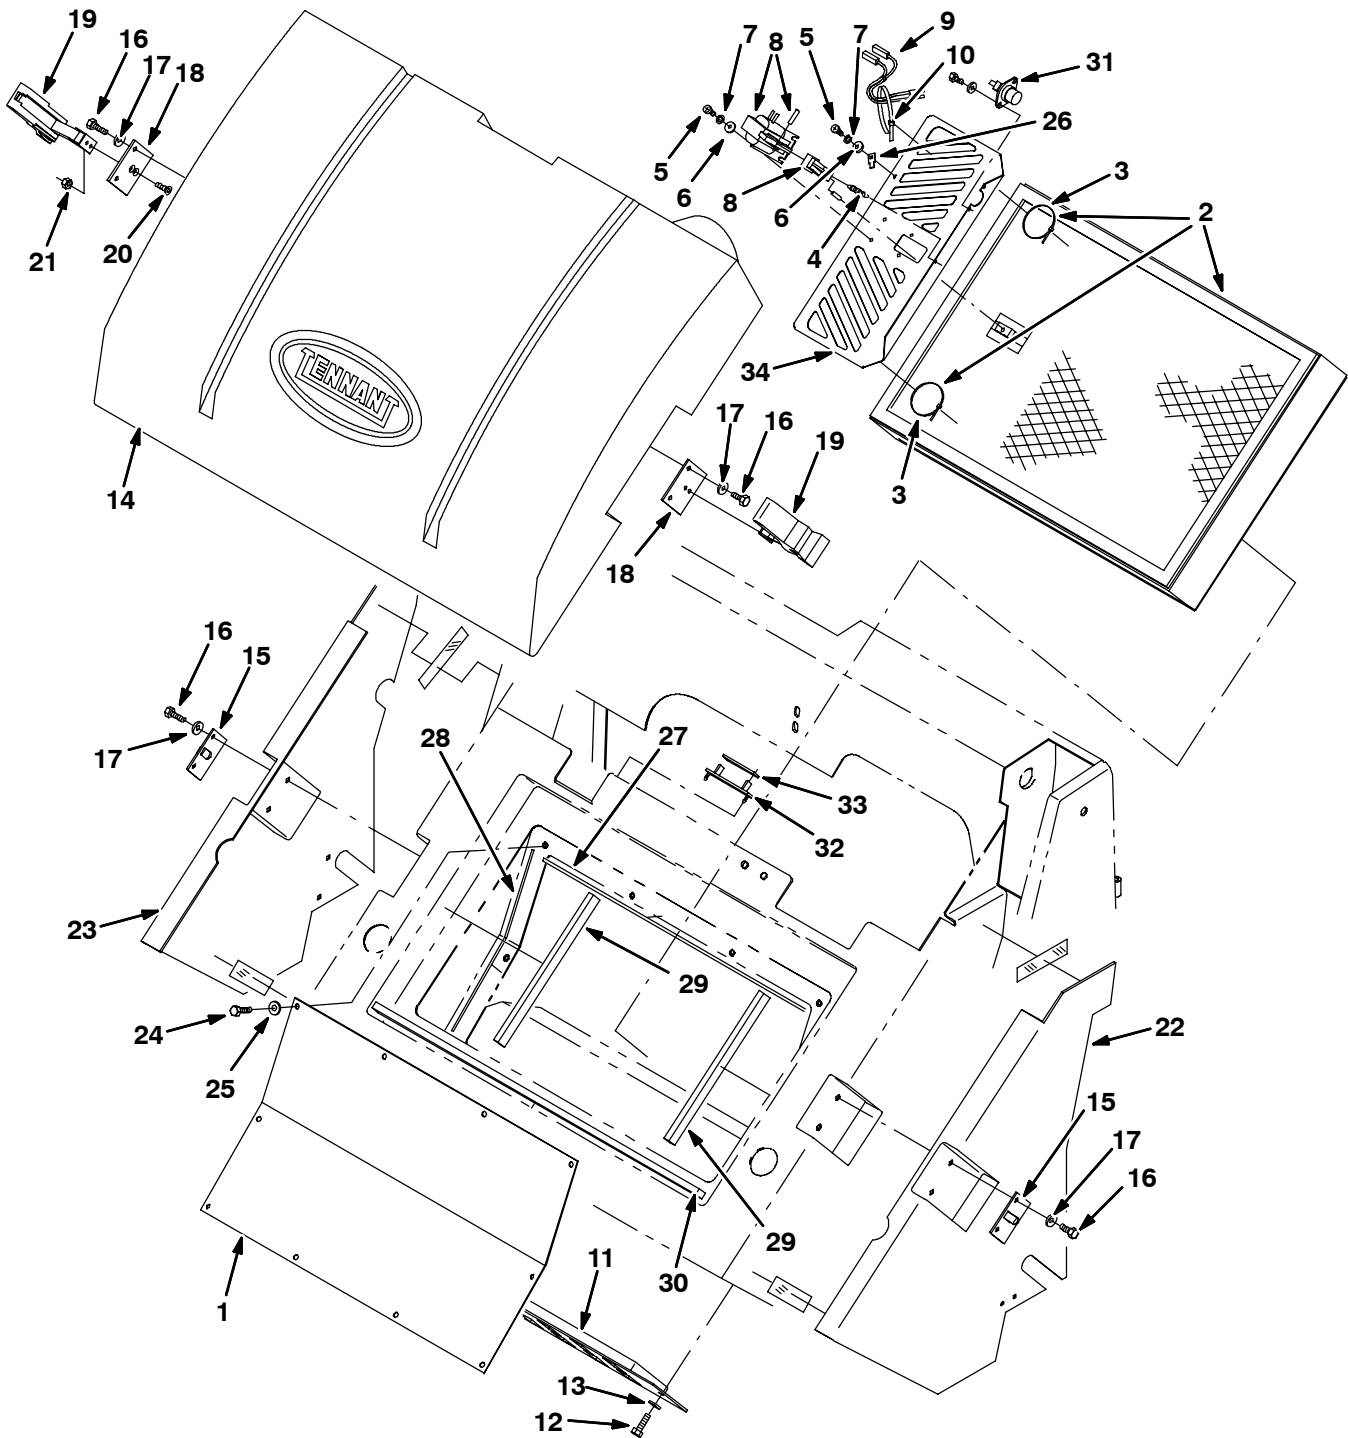


Fig. 43 - Hopper Filter Box Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386989	(000000-	) Panel, Access	1
▽ 2	375213	(000000-	) Kit, Ci, Fltr, [8300]	1
▲ 3	49266	(000000-	) Tie, Cable, Nyl, 07.3L .19W 1.8MaxD	2
4	81812	(000000-	) Spring, Extn, 0.25od X 0.03wir, 1.4l	1
5	49697	(000000-	) Screw, Pan, M04 X 0.7 X 10, Ss	5
6	19065	(000000-	) Washer, Flt, #08	5
7	32978	(000000-	) Washer, Lock, Int, #08	5
8	379891	(000000-	) Solenoid, Filter Shaker	1
9	383835	(000000-	) Harness, Solenoid, Shaker, [6200]	1
10	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	1
11	386919	(000000-	) Panel Wldt, Perma-Filter	1
12	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	2
13	32491	(000000-	) Washer, Flt, .31 Std	2
14	386463	(000000-	) Cover, Hopper	1
15	387284	(000000-	) Plate, Latch, Upper	2
16	87308	(000000-	) Screw, Hex, M06 X 1.0 X 12, 8.8	8
17	32490	(000000-	) Washer, Flt, .25 Std	8
18	387283	(000000-	) Plate, Latch, Lower	2
19	360824	(000000-	) Latch	2
20	360826	(000000-	) Screw, Flat, M05 X 0.8 X 16, 10.9	4
21	06549	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI	4
22	387542	(000000-	) Kit, Panel, Lh	1
23	387543	(000000-	) Kit, Panel, Rh	1
24	87308	(000000-	) Screw, Hex, M06 X 1.0 X 12, 8.8	10
25	32483	(000000-	) Washer, Flt, .25 Sae	10
26	68106	(000000-	) Terminal, Qdc, [.25m, Tab ,]	1
27	387384	(000000-	) Seal, Horiz	2
28	387383	(000000-	) Seal, Vertical	2
29	387385	(000000-	) Spacer, Fltr, Vertical	2
30	387386	(000000-	) Spacer, Fltr, Horiz	1
31	87546	(000000-	) Thermostat	1
32	386808	(000000-	) Clamp, Ribbon Cable	1
33	386809	(000000-	) Clamp, Ribbon Cable, Hold-Down	1
34	387404	(000000-	) Angle, Mtg, Fltr Shaker	1

Fig. 44 - Sweeper Vacuum Fan Group


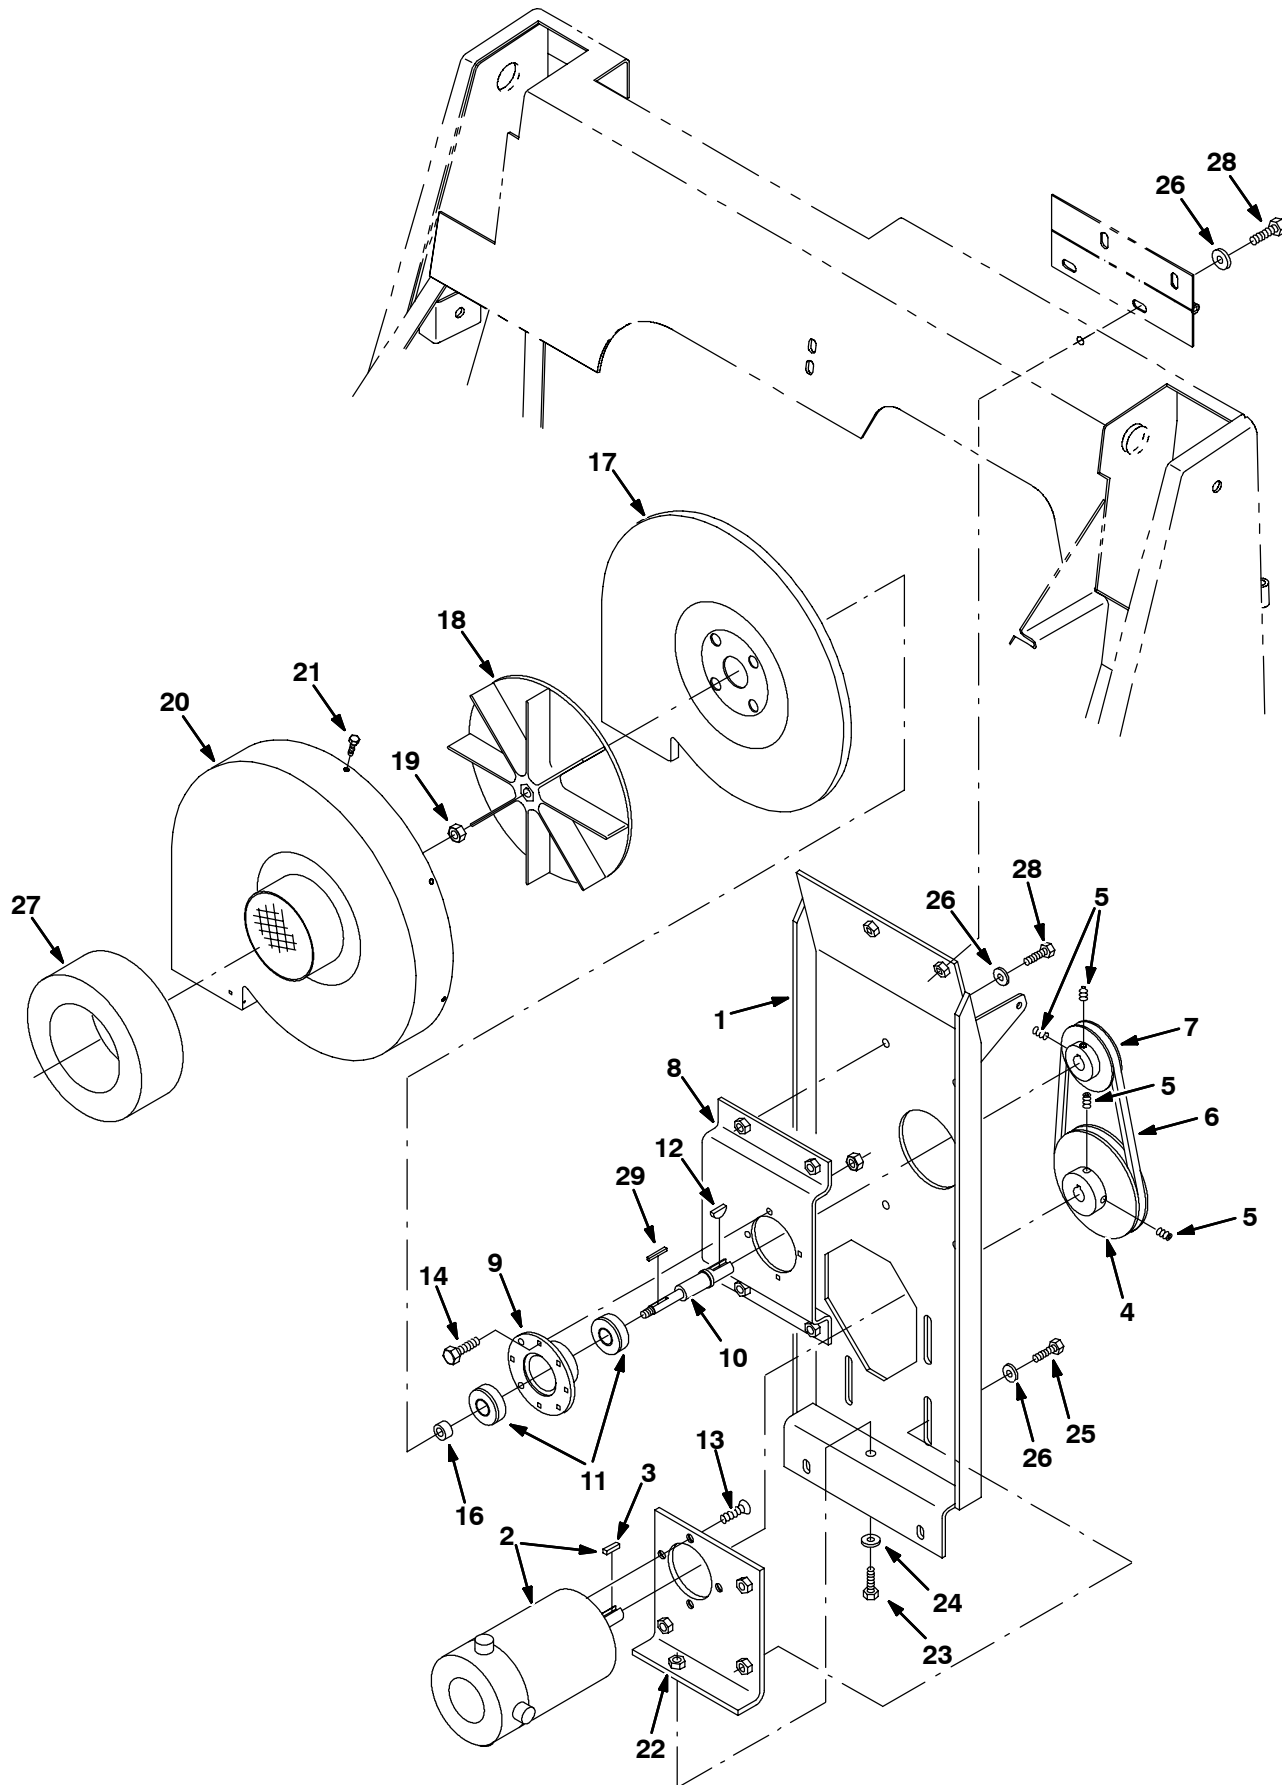


Fig. 44 - Sweeper Vacuum Fan Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386686	(000000-	) Plate Wldt	1
2	222409	(000000-003581	) Motor, Ele, 36Vdc (See Breakdown) (Repl. by 374201)	1
2	374201	(003582-	) Motor, Ele, 36Vdc 0.75 Hp 2500Rpm (See Breakdown)	1
3	00912	(000000-	) Key, Sq, 0.19 X 0.19, 01.00l	1
4	363617	(000000-	) Sheave, [3v], 1grv, 04.7pd 0.75b	1
5	39338	(000000-	) Screw, Set, .31-18 X 0.50, Soc	4
6	360686	(000000-	) Belt, V, [3v] 33.5l	1
7	360181	(000000-	) Sheave, [3v], 1grv, 02.6pd 0.63b	1
8	387081	(000000-	) Bracket	1
▽	387387	(000000-	) Bearing Assy	1
▲	9	41561	(000000-) Bushing Assy, Flng, 4 Hole, 1.57b, Stl	1
▲	10	387376	(000000-) Shaft	1
▲	11	32525	(000000-) Bearing, Ball, 0.67b 1.57d 0.47w	2
12	00500-10	(000000-	) Key, Woodruff, 0.19 0.75, [ASA#0606]	1
13	32129	(000000-	) Screw, Flat, M08 X 1.25 X 20, 10.9	4
14	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	4
15	08708	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI	4
16	10362	(000000-	) Spacer	1
17	36593	(000000-	) Housing, Vacfan, Rear, 9.0d, Impeller	1
18	74454	(000000-	) Impeller, 9.00d X 1.40w X 0.376b	1
19	87299	(000000-	) Nut, Hex, Flexlock, .31-24	1
20	387349	(000000-	) Cover, Vac Fan, W/ Label, [8300]	1
21	87838	(000000-	) Screw, Hex, #06-20 X 0.50, Fmg, [Ab]	9
22	387082	(000000-	) Angle	1
23	33401	(000000-	) Screw, Hex, M8 X 1.25 X 50, Ss, FI	1
24	32492	(000000-	) Washer, Flt, .38 Std	1
25	39277	(000000-	) Screw, Hex, M08 X 1.25 X 25, 8.8	3
26	32491	(000000-	) Washer, Flt, .31 Std	11
27	387408	(000000-	) Seal, Vac Fan	2
28	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	8
29	00954	(000000-	) Key, Sq, 0.12 X 0.12, 01.00l	1


Fig. 45 - Hydraulic Power Unit and Solenoid Valve Group

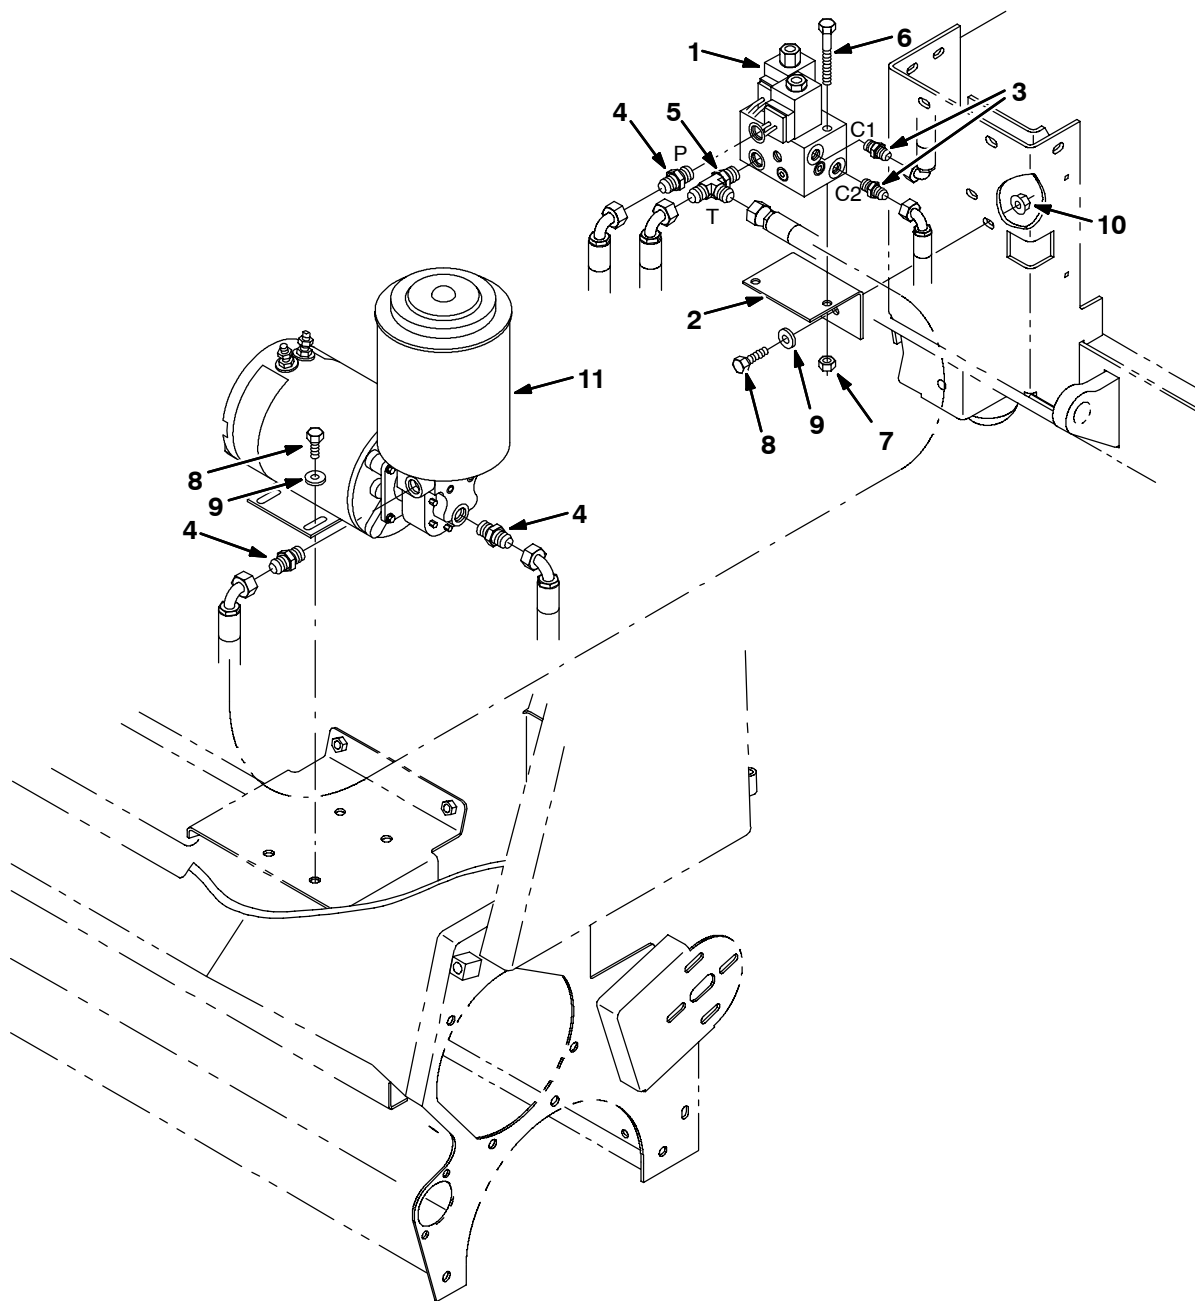

353433 - 8300

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386705	(000000-)	Valve, Hyd, Solenoid (See Breakdowns)	1
2	387351	(000000-)	Angle	1
3	55586	(000000-)	Fitting, Hyd, Str, Jm04/Om04	2
4	56690	(000000-)	Fitting, Hyd, Str, Jm06/Om06	3
5	76316	(000000-)	Fitting, Hyd, Tee, Jm06/Jm06/Om06	1
6	06958	(000000-)	Screw, Hex, M08 X 1.25 X 80, 8.8	2
7	08709	(000000-)	Nut, Hex, Lock, M08 X 1.25, NI	2
8	16931	(000000-)	Screw, Hex, M08 X 1.25 X 20, 8.8	6
9	32491	(000000-)	Washer, Flt, .31 Std	6
10	07791	(000000-)	Nut, Hex, Flng, M08 X 1.25	2
11	386704	(000000-)	Powerunit, Hyd, 36Vdc (See Breakdowns)	1

Fig. 46 - Hydraulic Schematic

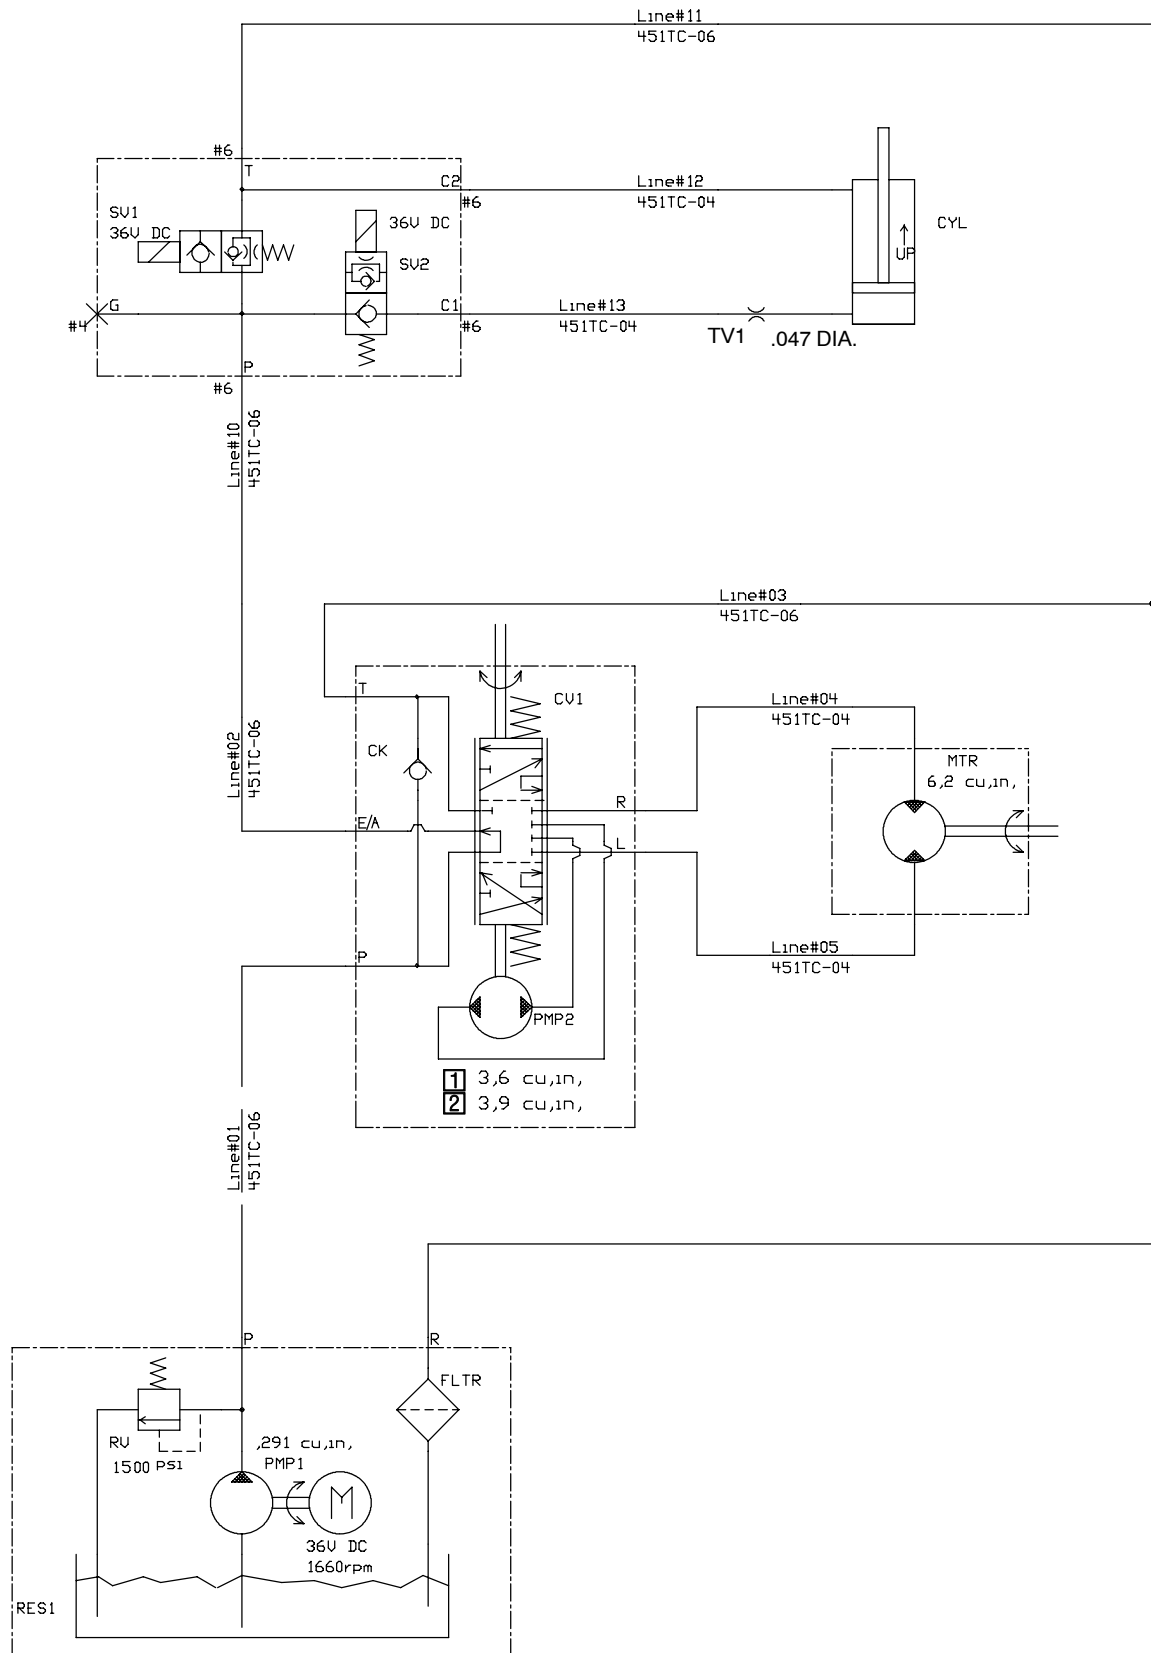

① Serial number (000000-003713)

② Serial number (003714-)

Fig. 47 - Hydraulic Hose Group

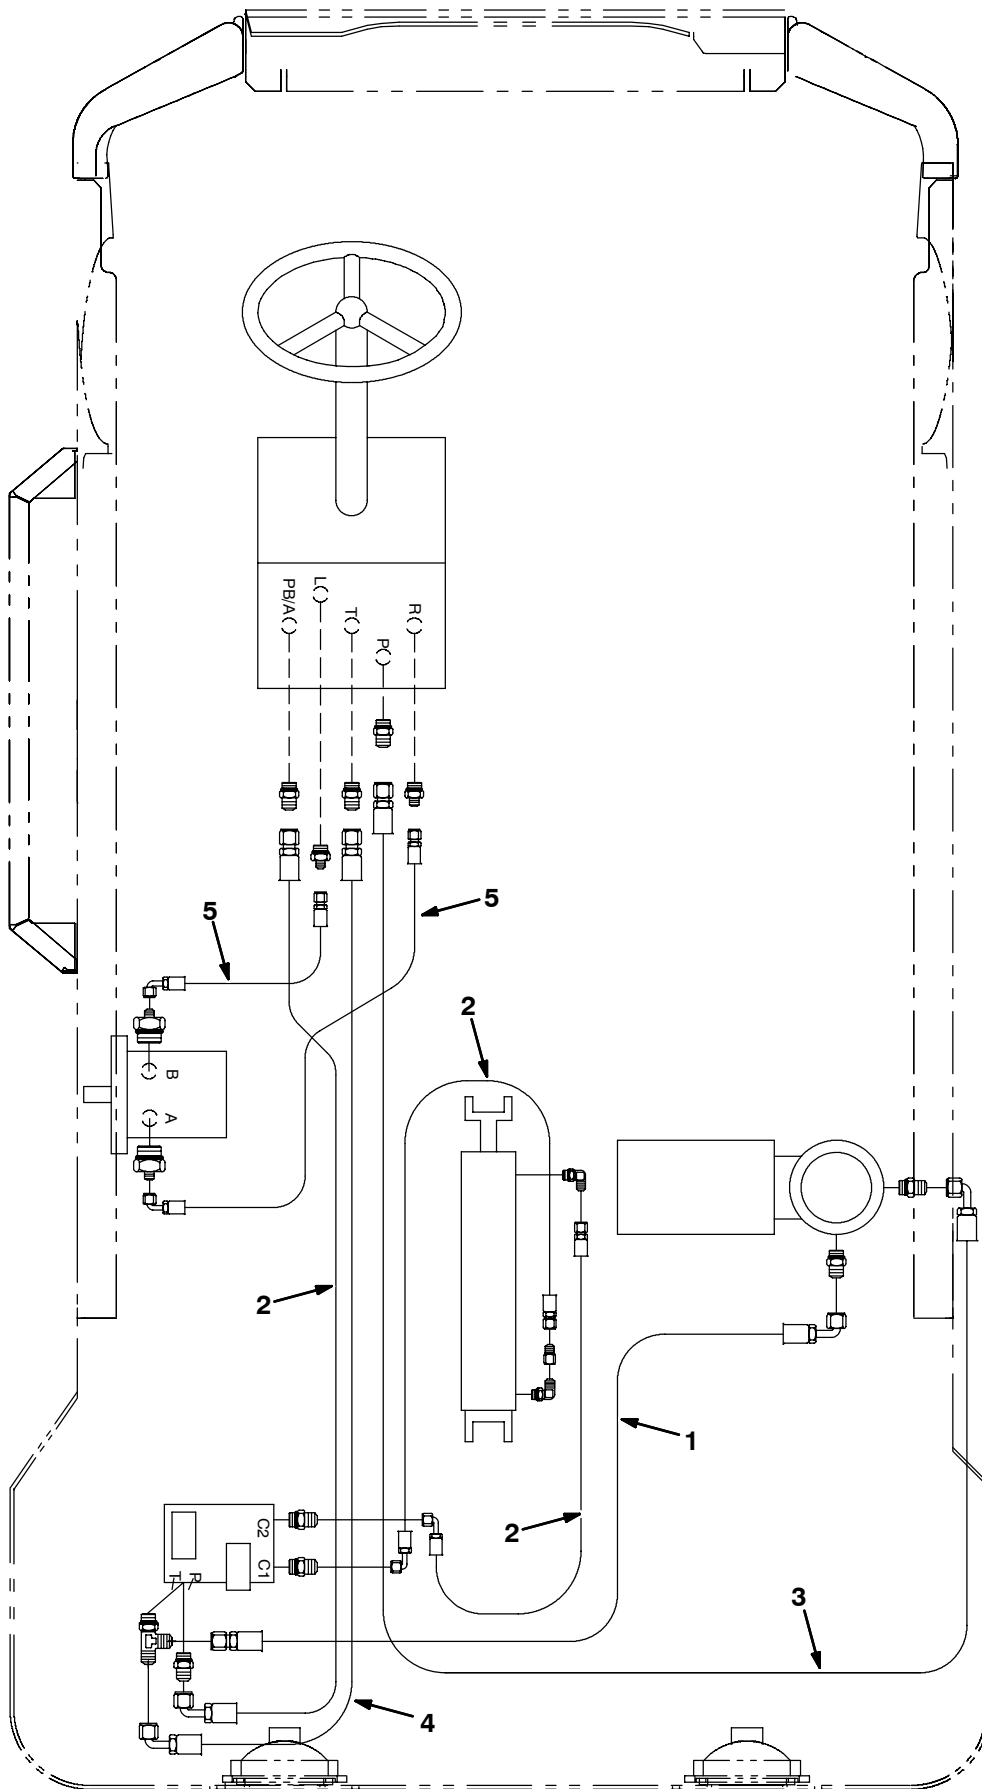


Fig. 47 - Hydraulic Hose Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	361043	(000000-	) Hose, Hyd,Med06, Jf06str /Jf06e90 , 26.0	1
2	387281	(000000-	) Hose, Hyd,Tc 04, Jf04str /Jf04e90 , 20.0	3
3	386711	(000000-	) Hose, Hyd, Tc 06, Jf str/E90 , 48.0l	1
4	387282	(000000-	) Hose, Hyd,Tc 06, Jf06str /Jf06e90 , 24.0	1
5	381867	(000000-	) Hose, Hyd,Tc 04, Jf04str /Jf04e90 , 30.0	2

Fig. 48 - Electrical Control Box Circuit Breaker Group

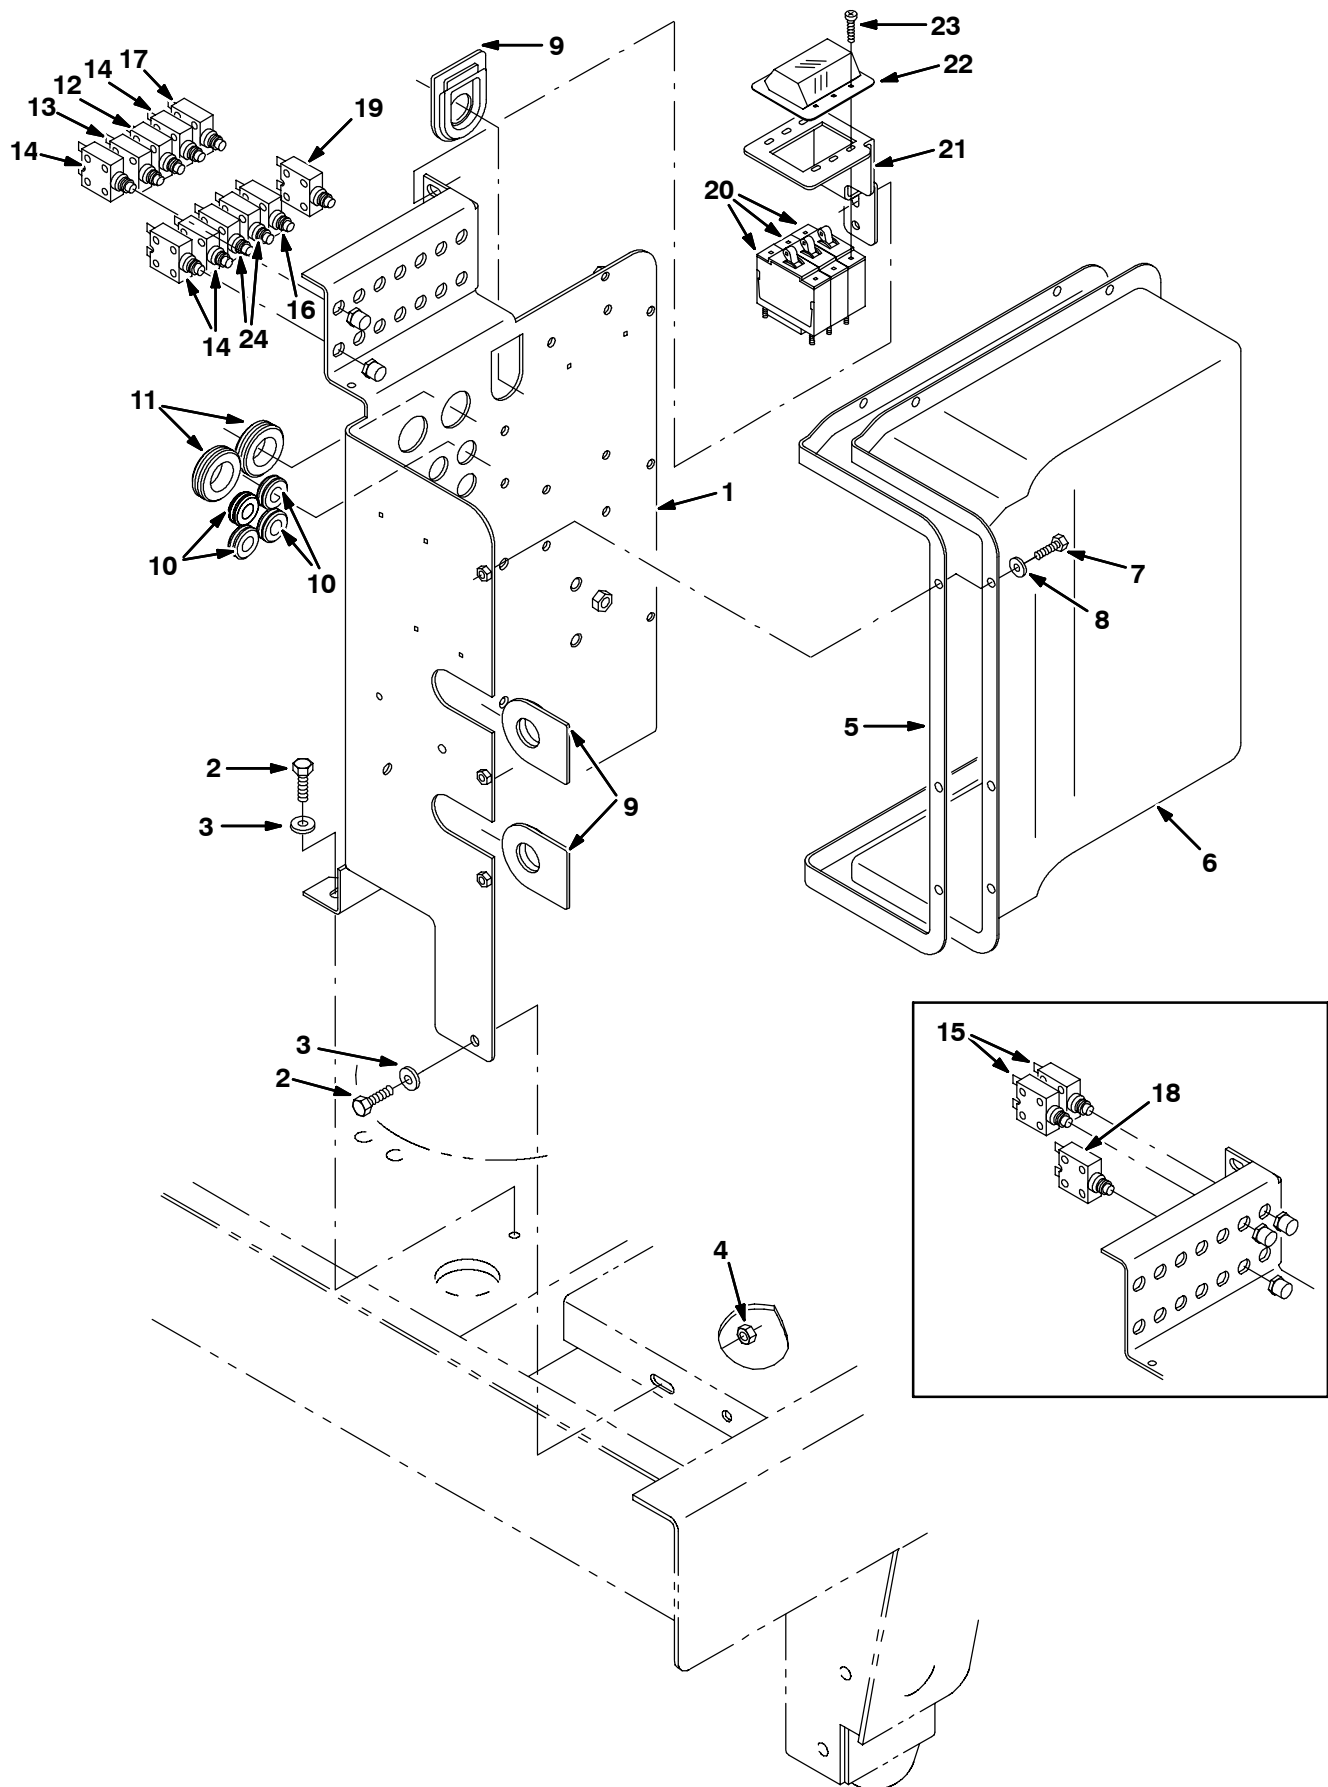


Fig. 48 - Electrical Control Box Circuit Breaker Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387453	(000000-	) Plate, Controlbox	1
2	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	3
3	32491	(000000-	) Washer, Flt, .31 Std	3
4	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	1
5	386127	(000000-	) Gasket, Cover, Controller	1
6	386128	(000000-	) Cover, Controlbox	1
7	09244	(000000-	) Screw, Hex, M05 X 0.8 X 16, 8.8	8
8	01683	(000000-	) Washer, Flt, #10 Ss	8
9	386563	(000000-	) Grommet, Rbr, 1.0b	3
10	10632-17	(000000-	) Grommet, Rbr, 0.50id, F/ 0.8h, .12matl	4
11	10632-14	(000000-	) Grommet, Rbr, 1.00id, F/ 1.4h, .12matl	2
12	383725	(000000-	) Circuitbreaker, 30.0a	1
13	383723	(000000-	) Circuitbreaker, 20.0a	1
14	383722	(000000-	) Circuitbreaker, 15.0a	4
15	383728	(000000-003545	) Circuitbreaker, 50.0a	2
16	383724	(000000-	) Circuitbreaker, 25.0a	1
17	383721	(000000-	) Circuitbreaker, 10.0a	1
18	383728	(000000-003545	) Circuitbreaker, 50.0a (Center Brush Option)	1
19	383727	(000000-	) Circuitbreaker, 40.0a (Power Steering Option)	1
20	387636	(003546-	) Circuitbreaker, 40a, (Max Pro™ 1200 Disk)	3
20	387636	(003546-	) Circuitbreaker, 40a, (Max Pro™ 1000 Disk W/Std Motor)	2
20	387637	(003546-	) Circuitbreaker, 45a, (Max Pro™ 1000 Disk W/Hd Motor)	2
20	387637	(003546-	) Circuitbreaker, 45a, (Max Pro™ 1000 Cylindrical)	2
20	387637	(003546-	) Circuitbreaker, 45a, (Max Pro™ 1200 Cylindrical)	2
21	387634	(003546-	) Bracket, Mtg, Circuitbreaker, [Hi-Mag]	1
22	387640	(003546-	) Boot, Protector, Circuitbreaker	1
23	19320	(003546-	) Screw, Pan, #06-32X0.38, 1	6
24	383723	(000000-003545	) Circuitbreaker, 20.0a [Resetable]	2
24	383725	(003546-	) Circuitbreaker, 30.0a, Resetable	2

Fig. 49 - Electrical Control Box Contactor Group (000000-003545)

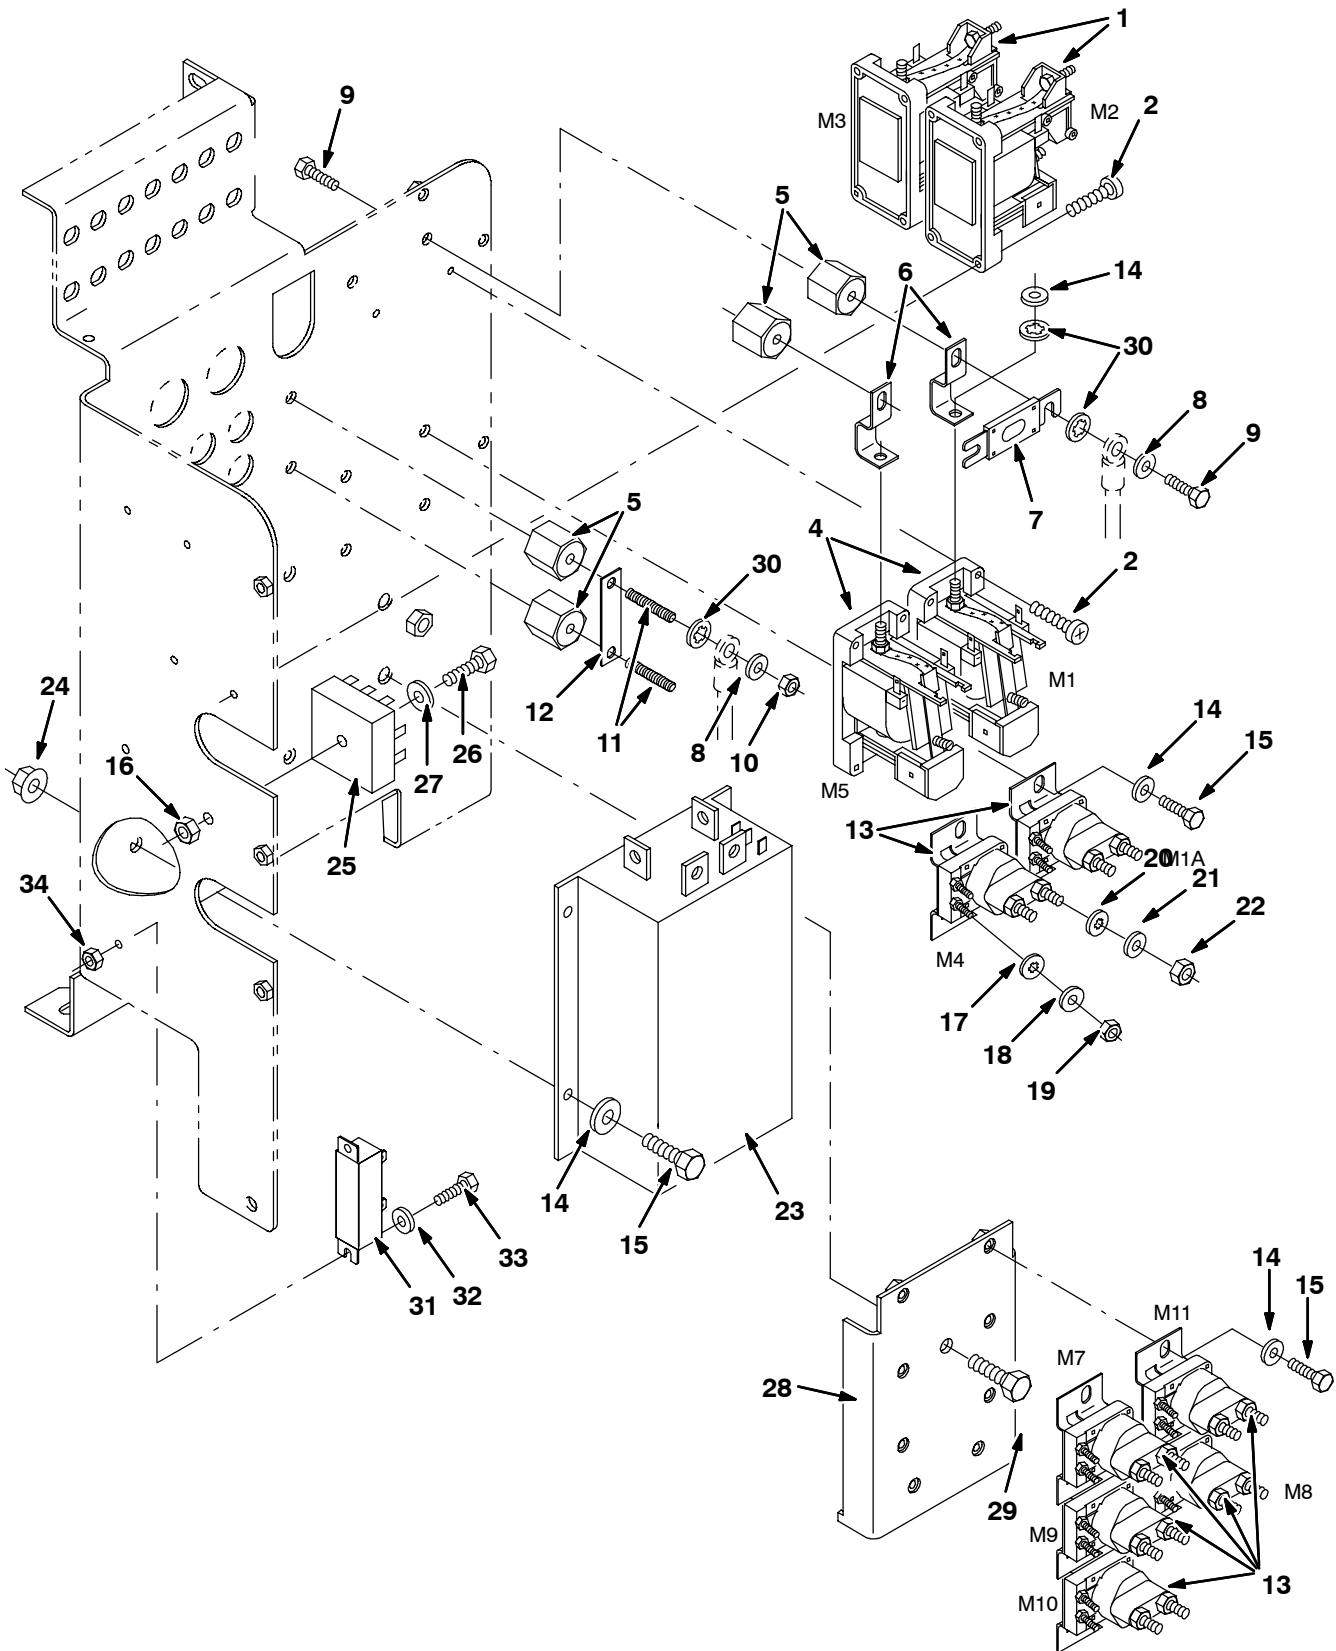


Fig. 49 - Electrical Control Box Contactor Group (000000-003545)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	87482	(000000-003545)	Contactactor, 36vdc, Spdt	2
2	71026	(000000-003545)	Screw, Hex, M04 X 0.7 X 20, Fmg	8
3	02850	(000000-003545)	Nut, Hex, Lock, M04 X 0.7, NI	8
4	86375	(000000-003545)	Contactactor, 36vdc, [Spno]	2
5	76062	(000000-003545)	Insulator, Panel	4
6	87507	(000000-003545)	Busbar, Fuse, .6 0.6w 0.8h 2.0l	2
7	386348	(000000-003545)	Fuse, 200amp	1
8	32490	(000000-003545)	Washer, Flt, .25 Std	4
9	19314	(000000-003545)	Screw, Hex, .25-20 X 0.38, 5	6
10	19312	(000000-003545)	Nut, Hex, Std, .25-20	2
11	41702	(000000-003545)	Rod, Thrd, Full, .25-20 01.5l	2
12	87483	(000000-003545)	Busbar, .06 0.6w 2.5l 2/.28h	1
13	386810	(000000-003545)	Contactactor, 36vdc	7
14	32483	(000000-003545)	Washer, Flt, .25 Sae	20
15	06942	(000000-003545)	Screw, Hex, M06 X 1.0 X 16, 8.8	14
16	08708	(000000-003545)	Nut, Hex, Lock, M06 X 1.0, NI	7
17	32980	(000000-003545)	Washer, Lock, Int, #10	14
18	19066	(000000-003545)	Washer, Flt, #10	14
19	01713	(000000-003545)	Nut, Hex, Std, #10-32, 2	14
20	32984	(000000-003545)	Washer, Lock, Int, .31	14
21	39349	(000000-003545)	Washer, Flt, .31 Sae	14
22	01715	(000000-003545)	Nut, Hex, Std, .31-24	14
23	386303	(000000-003545)	Controller, Motor, 36vdc, 1205	1
24	07790	(000000-003545)	Nut, Hex, Flng, M06 X 1.0	4
25	81922	(000000-003545)	Module	1
26	06946	(000000-003545)	Screw, Hex, M06 x 1.0 x 35, 8.8	1
27	32491	(000000-003545)	Washer, Flt, .31 Std	1
28	387452	(000000-003545)	Plate, Mtg, Contactactor	1
29	41342	(000000-003545)	Screw, Hex, M08 X 1.25 X 40, 8.8	2
30	32982	(000000-003545)	Washer, Lock, Int, .25	9
31	87349	(000000-003545)	Resistor, 040.00ohm, 40watt	1
32	01683	(000000-003545)	Washer, Flt, #10 Ss	2
33	12312	(000000-003545)	Screw, Hex, M05 X 0.8 X 12, 8.8	2
34	06549	(000000-003545)	Nut, Hex, Lock, M05 X 0.8, NI	2

Fig. 50 - Electrical Control Box Contactor Group (003546-)

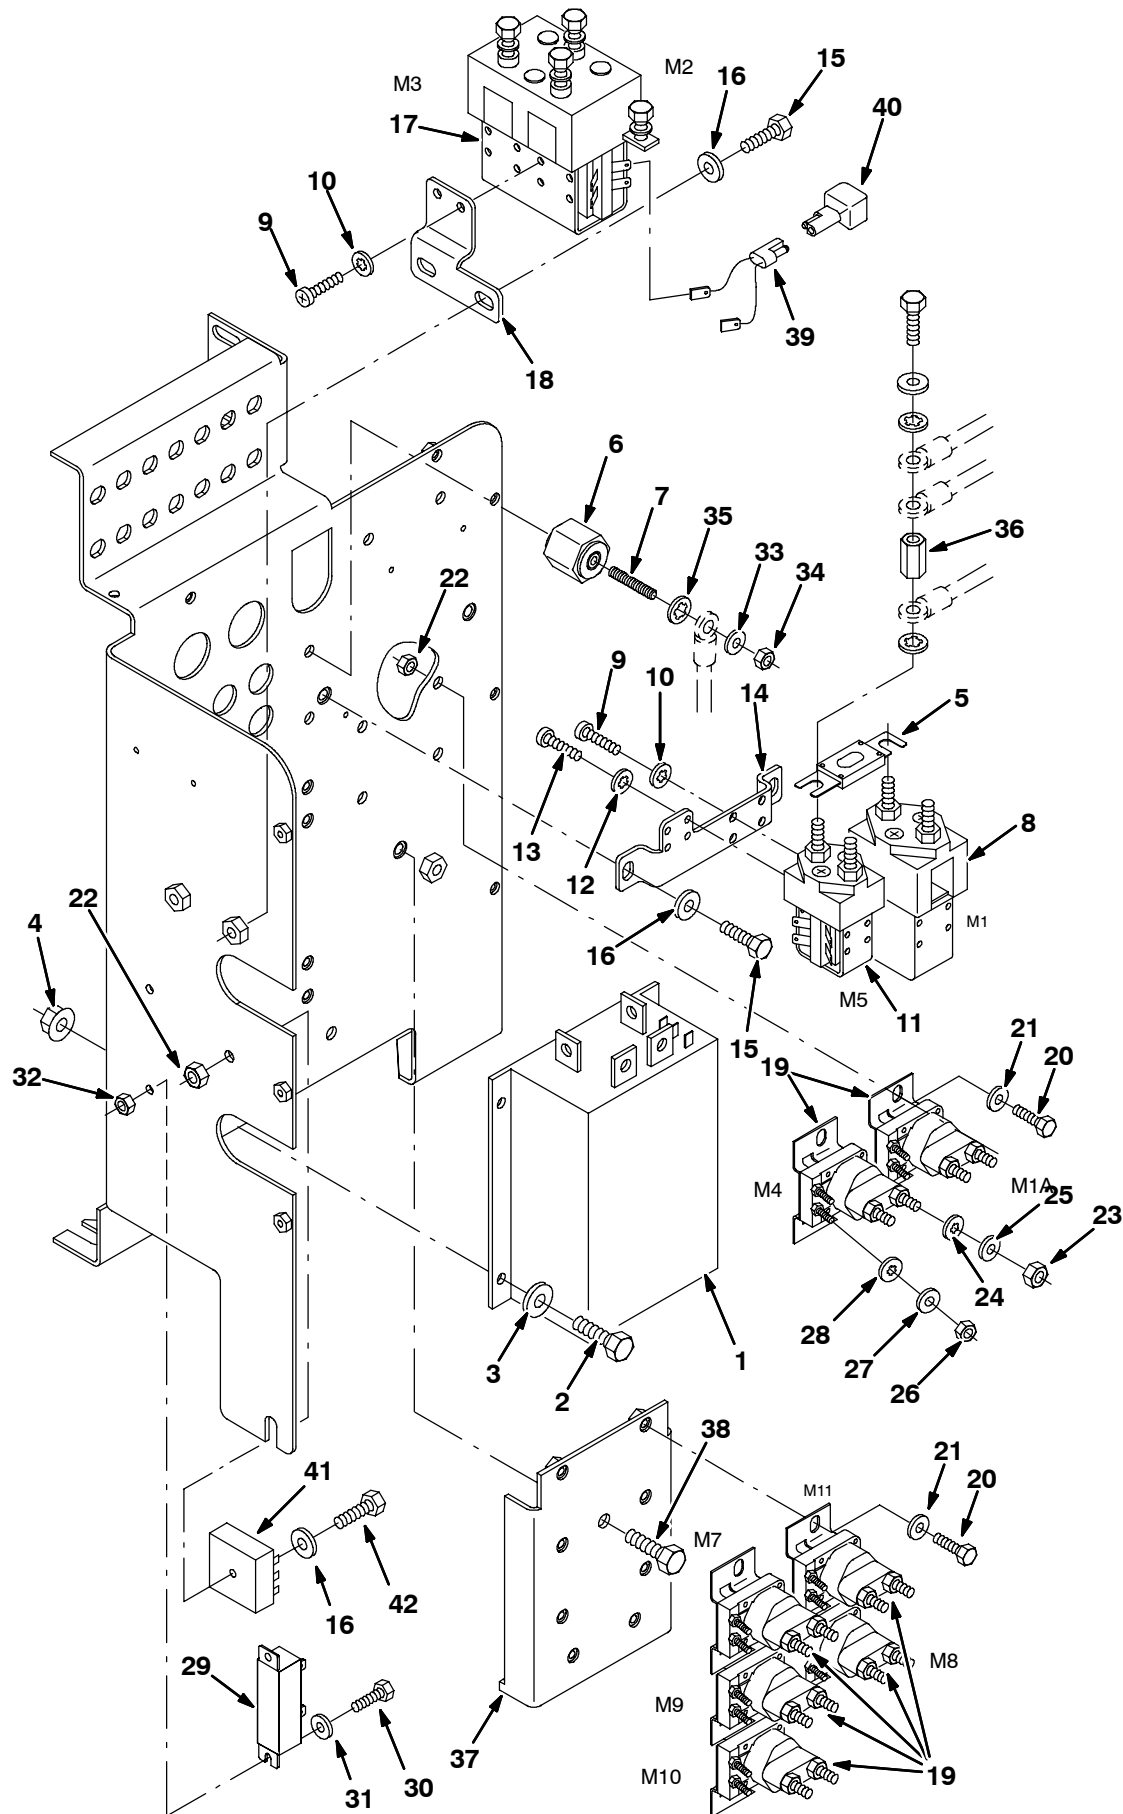


Fig. 50 - Electrical Control Box Contactor Group (003546-)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386303	(003446-	) Controller, Motor, 36vdc400A	1
2	06942	(003446-	) Screw, Hex, M 6 X 1.0 X 16, 8.8	4
3	32483	(003446-	) Washer, Flat, 0.25 Sae	4
4	07790	(003446-	) Nut, Hex, Flng, M06 X 1.0	4
5	386348	(003446-	) Fuse, 200amp	1
6	76062	(003446-	) Insulator, Panel & Switchboard	1
7	41702	(003446-	) Rod, Thrd, Full, .25-20 01.5l	1
8	1007337	(003446-	) Contactor, 36vdc, 200a, Spst	1
9	06931	(003446-	) Screw, Pan, M 5 X 0.8 X 6, 4.8	6
10	07514	(003446-	) Washer, Lock, Int, #10, Ss	6
11	387639	(003446-	) Contactor, 36vdc, 100a, Spst	1
12	02938	(003446-	) Washer, Lock, Int, #08, Ss	4
13	06925	(003446-	) Screw, Pan, M 4 X 0.7 X 6, 4.8	4
14	1007344	(003446-	) Bracket, Mtg, Controller, Sgl	1
15	12274	(003446-	) Screw, Hex, M 6 X 1.0 X 20, NI	4
16	32491	(003446-	) Washer, Flat, 0.31 Std	5
17	1007349	(003446-	) Contactor, 36vdc, 200a, Dpdt	1
18	1007353	(003446-	) Bracket, Mtg, Relay	1
19	386810	(003446-	) Relay, 36vdc, 100a, Sp N/O [White]	7
20	06942	(003446-	) Screw, Hex, M 6 X 1.0 X 16, 8.8	8
21	32483	(003446-	) Washer, Flat, 0.25 Sae	8
22	08708	(003446-	) Nut, Hex, Lock, M 6 X 1.0, NI	5
23	01715	(003446-	) Nut, Hex, Std, .31-24	4
24	32984	(003446-	) Washer, Lock, Int, .31	4
25	39349	(003446-	) Washer, Flat, 0.31 Sae	4
26	01713	(003446-	) Nut, Hex, Std, #10-32, 2	4
27	19066	(003446-	) Washer, Flt, #10	4
28	32980	(003446-	) Washer, Lock, Int, #10	4
29	87349	(003446-	) Resistor, 040.00 0hm, 40watt	1
30	12312	(003446-	) Screw, Hex, M 5 X 0.8 X 12, 8.8	2
31	01683	(003446-	) Washer, Flat, #10 Ss	2
32	06549	(003446-	) Nut, Hex, Lock, M 5 X 0.8, NI	2
33	32490	(003446-	) Washer, Flat, 0.25 Std	1
34	19312	(003446-	) Nut, Hex, Std, .25-20	1
35	32982	(003446-	) Washer, Lock, Int, .25	1
36	387648	(003446-	) Nut, Hex, Cplg, M08X1.25	1
37	387452	(003446-	) Plate, Mtg, Contactor	1
38	41342	(003446-	) Screw, Hex, M08 X 1.25 X 40, 8.8	2
39	370156	(003446-	) Harness. Switch, Key, Diode	2
40	222290	(003446-	) Diode, Ele, Plug	2
41	81922	(003446-	) Timer, 36vdc, 5a [25hz Pwm, 70%Duty]	1
42	06946	(003446-	) Screw, Hex, M6 X 1.00 X 35, 8.8	1

Fig. 51 - Electrical Control Box Wires Group (000000-003545)

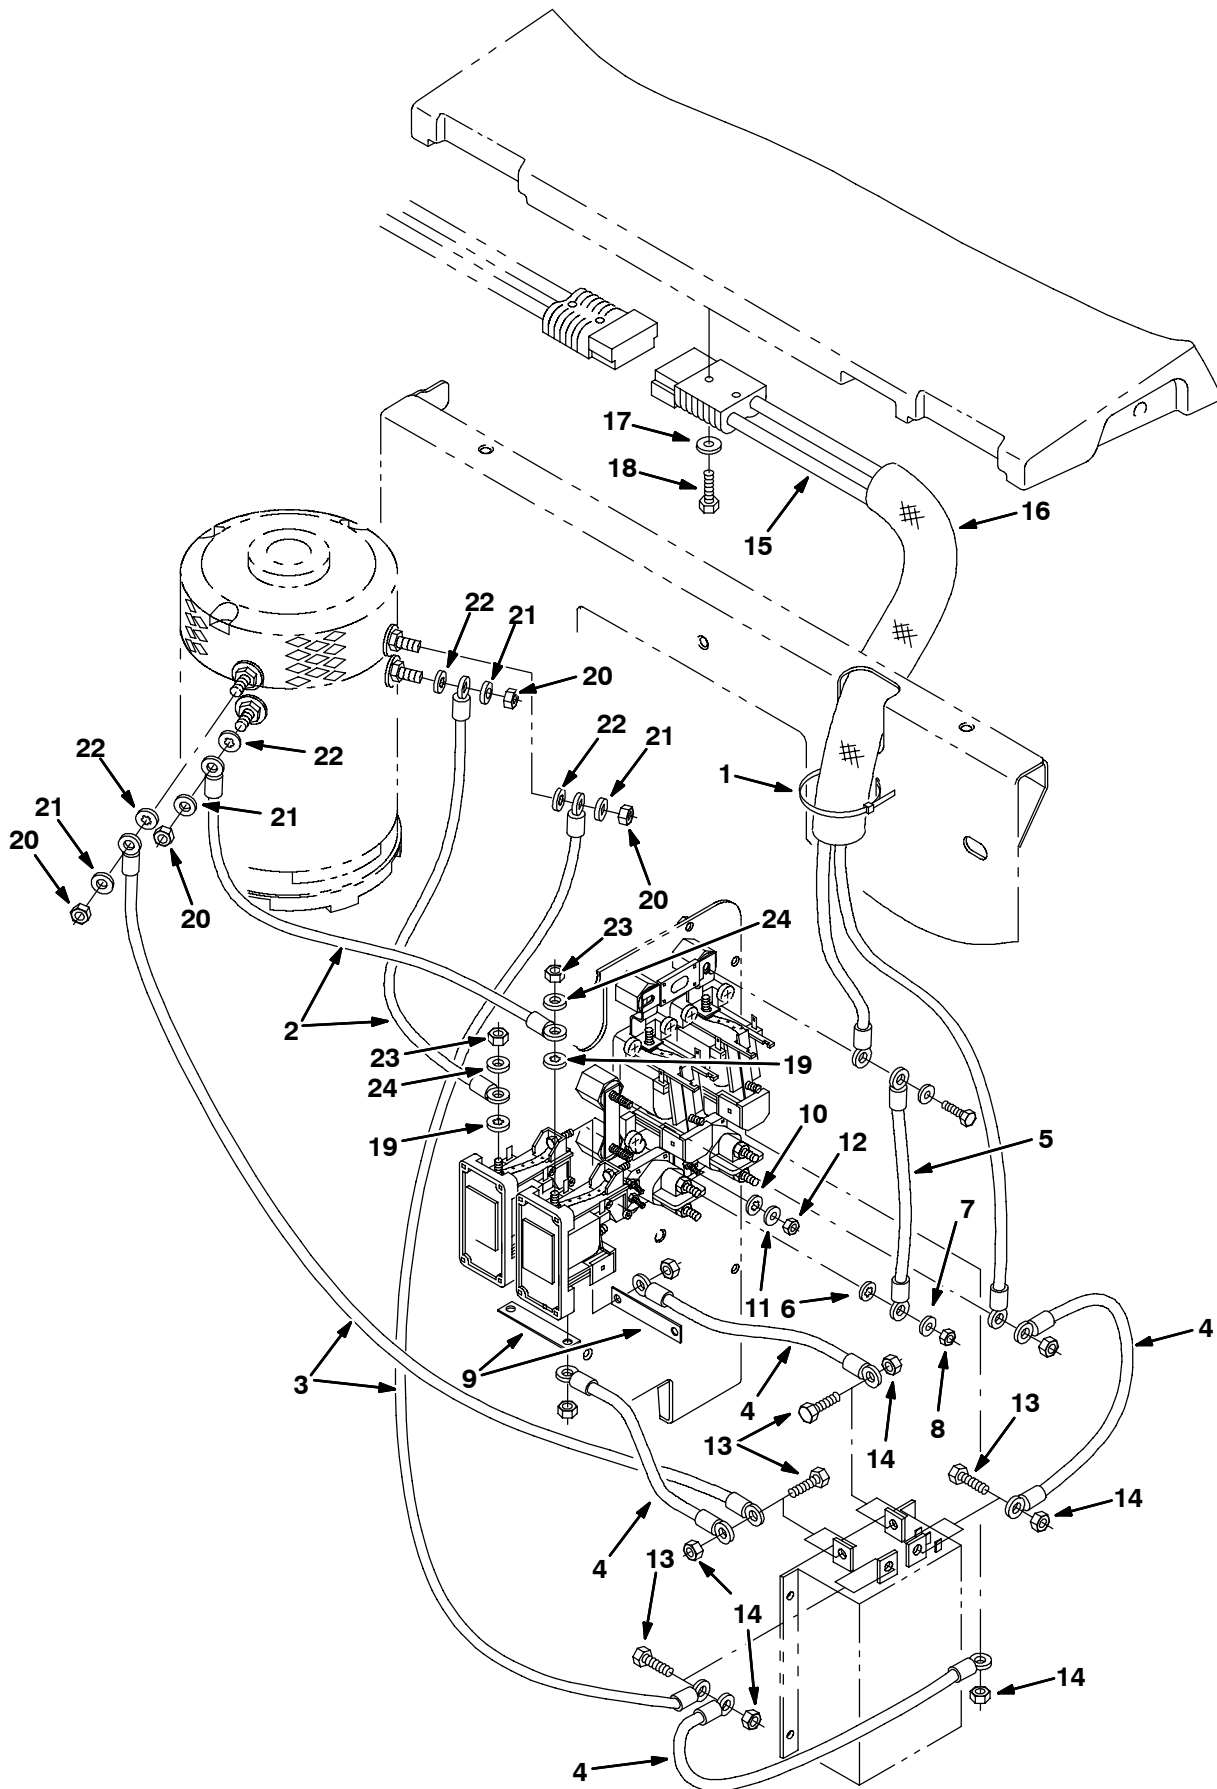


Fig. 51 - Electrical Control Box Wires Group (000000-003545)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	32815	(000000-003545)	Tie, Cable, Nyl, 28.5l .50w 8.0 Max D	4
2	71529	(000000-003545)	Wire, 04ga 32.0l Blk .31ring /.31ring	1
3	386804	(000000-003545)	Wire Assy, 02ga 27.0l Blk .34h /.34h	2
4	86393	(000000-003545)	Wire, 04ga 09.0l Blk .34ring /.28ring	4
5	15846	(000000-003545)	Wire, 06ga 11.0l Blk .34ring /.28ring	1
6	32984	(000000-003545)	Washer, Lock, Int, .31	4
7	39348	(000000-003545)	Washer, Flat, 1.50 Std Hard	4
8	01715	(000000-003545)	Nut, Hex, Std, .31-24	4
9	87483	(000000-003545)	Busbar, .06 0.6w 2.5l 2/.28h	2
10	07514	(000000-003545)	Washer, Lock, Int, #10, Ss	4
11	19066	(000000-003545)	Washer, Flt, #10	4
12	01713	(000000-003545)	Nut, Hex, Std, #10-32, 2	4
13	16931	(000000-003545)	Screw, Hex, M08 X 1.25 X 20, 8.8	4
14	08709	(000000-003545)	Nut, Hex, Lock, M08 X 1.25, NI	4
15	386610	(000000-003545)	Harness, Battery, Connecting	1
16	31647	(000000-003545)	Sleeve, Nyl, #15 14.0l	1
17	01684	(000000-003545)	Washer, Flt, .25 Ss	2
18	33930	(000000-003545)	Screw, Hex, M06 X 1.0 X 40, Ss	2
19	32982	(000000-003545)	Washer, Lock, Int, .25	2
20	39311	(000000-003545)	Nut, Hex, Std, M08 X 1.25	4
21	32490	(000000-003545)	Washer, Flt, .25 Std	4
22	32988	(000000-003545)	Washer, Lock, Int, .38	2
23	41359	(000000-003545)	Nut, Hex, Std, M06 X 1.0	2
24	32483	(000000-003545)	Washer, Flt, .25 Sae	4

Fig. 52 - Electrical Control Box Wires Group (003546-)


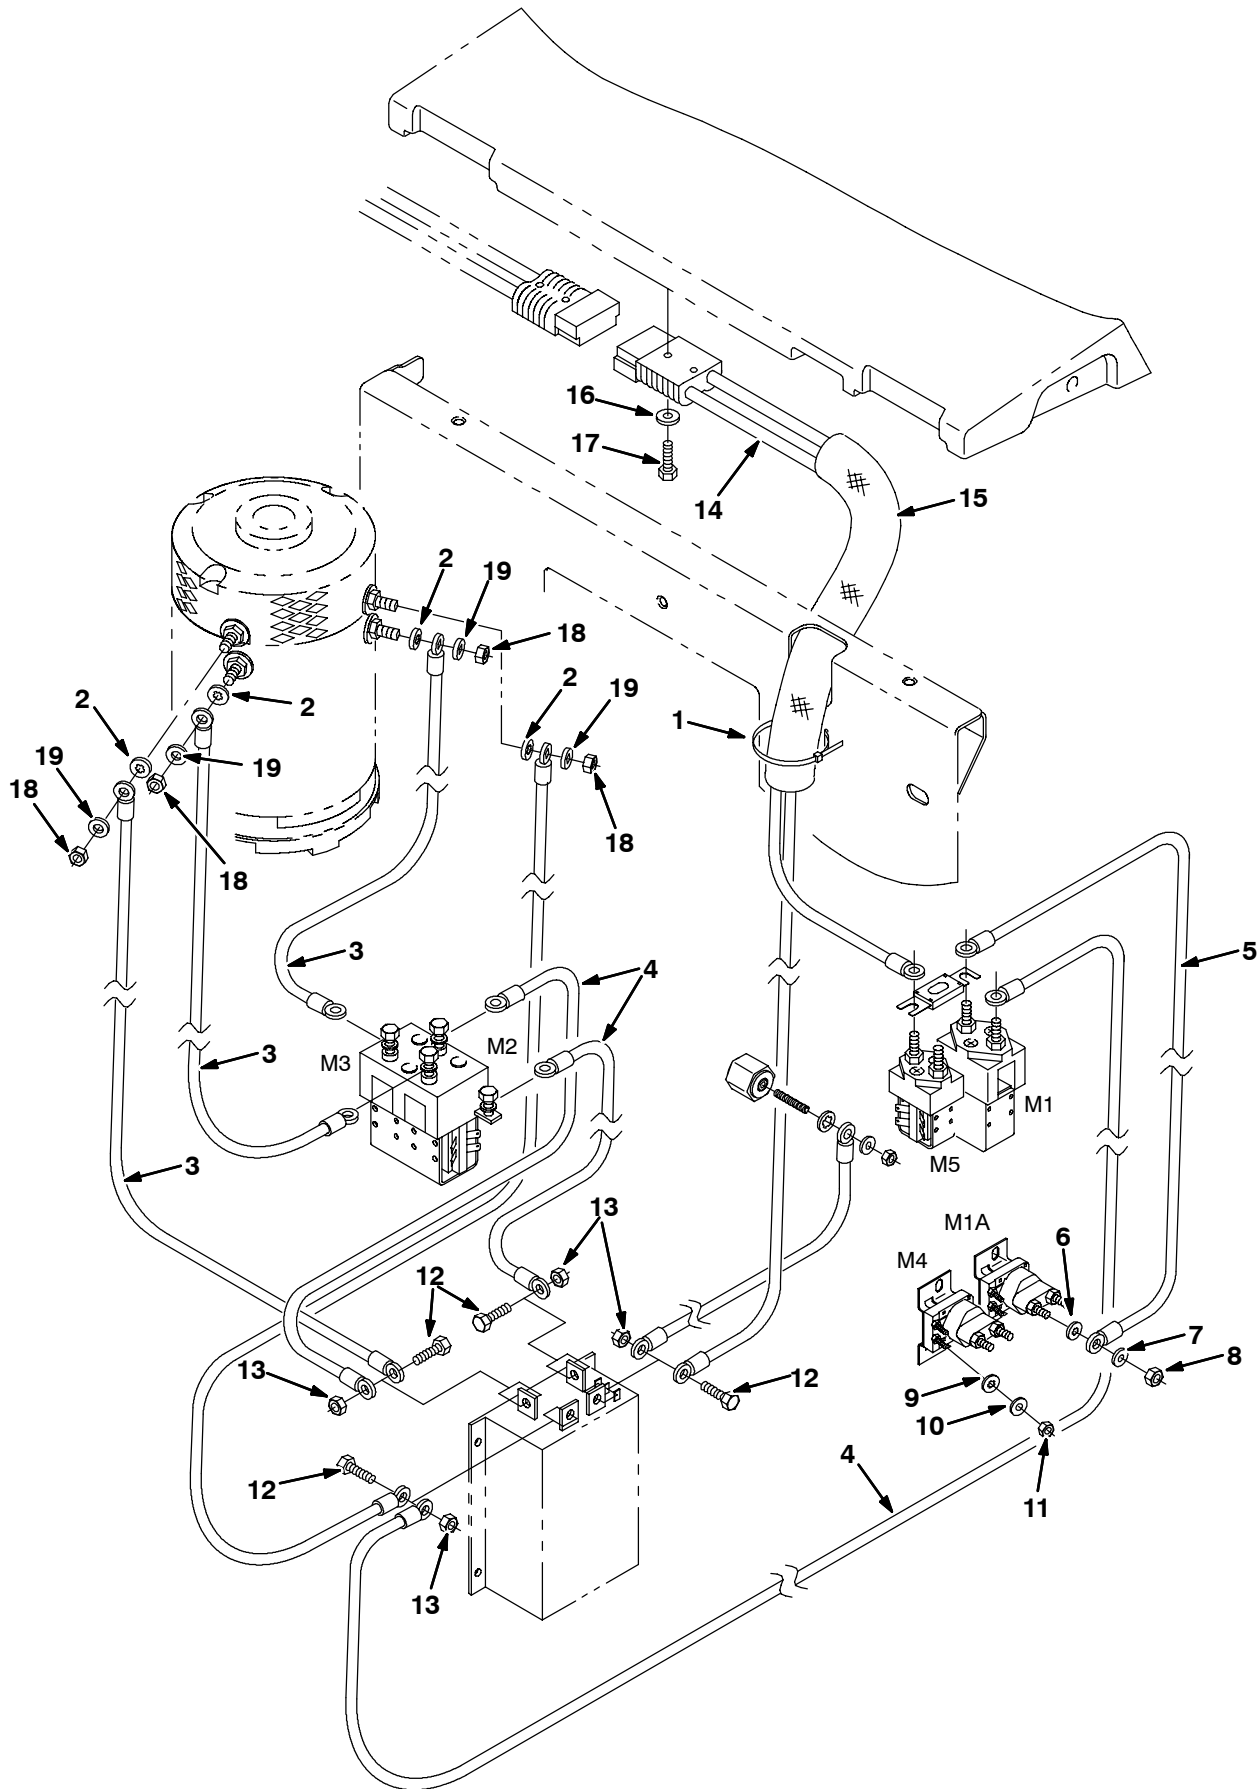


Fig. 52 - Electrical Control Box Wires Group (003546-)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	32815	(003546-	) Tie, Cable, Nyl, 28.5l .50w 8.0 Max D	4
2	32988	(003546-	) Washer, Lock, Int, .38	2
3	386804	(003546-	) Wire Assy, 02ga 27.0l Blk .34h /.34h	4
4	387641	(003546-	) Wire Assy, 02ga, 10.0l, Blk	4
5	63740	(003546-	) Wire, 06Ga 09.0L Blk .34 Ring/.34 Ring	1
6	32984	(003546-	) Washer, Lock, Int, .31	4
7	39348	(003546-	) Washer, Flat, 1.50 Std Hard	4
8	01715	(003546-	) Nut, Hex, Std, .31-24	4
9	07514	(003546-	) Washer, Lock, Int, #10, Ss	4
10	19066	(003546-	) Washer, Flt, #10	4
11	01713	(003546-	) Nut, Hex, Std, #10-32, 2	4
12	16931	(003546-	) Screw, Hex, M 8 X 1.25 X 20, 8.8	4
13	08709	(003546-	) Nut, Hex, Lock, M 8 X 1.25 NI	4
14	386610	(003546-	) Harness, Battery, Connecting	1
15	31647	(003546-	) Sleeve, Nyl, #15 14.0l	1
16	01684	(003546-	) Washer, Flat, 0.25 Ss	2
17	33930	(003546-	) Screw, Hex, M 6 X 1.0 X 40, Ss	2
18	39311	(003546-	) Nut, Hex, Std, M08 X 1.25	4
19	32490	(003546-	) Washer, Flat, 0.25 Std	4


Fig. 53 - Electrical Circuit Board Group

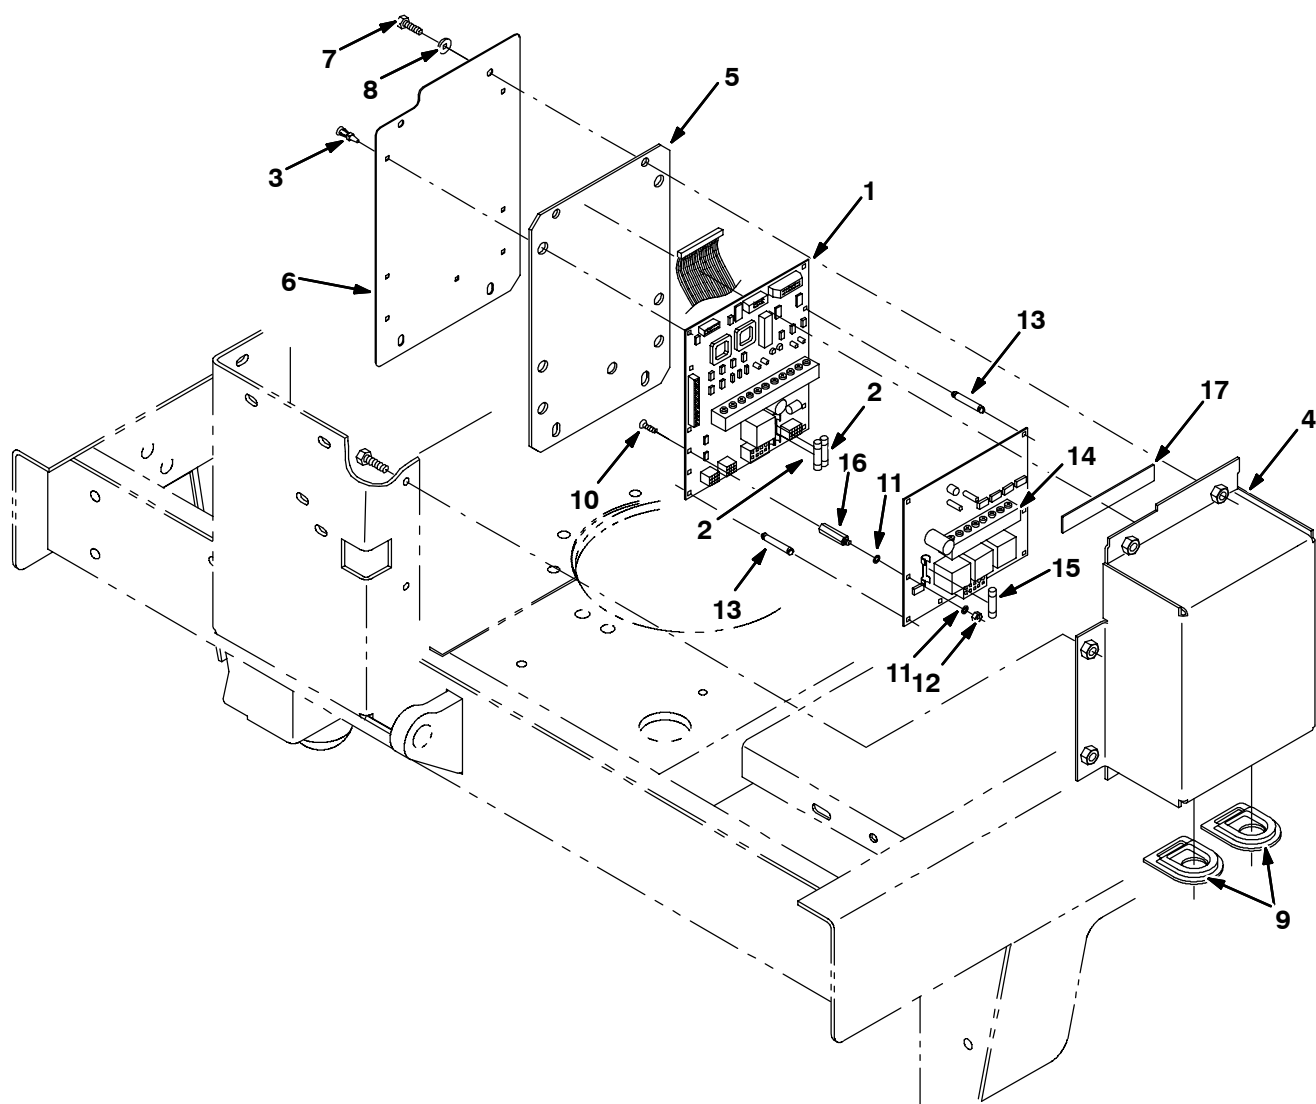

353395 - 8300

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽ 1	374204	(000000-)	Circuitboard, Assy, [7300/8300]	1
▲ 2	603103000	(000000-)	Fuse 20a,3ag,Slo-blo	2
3	15840	(000000-)	Pin, Prong	7
4	386922	(000000-)	Box, Circuitboard	1
5	386921	(000000-)	Gasket	1
6	386920	(000000-)	Cover	1
7	06942	(000000-)	Screw, Hex, M06 X 1.0 X 16, 8.8	6
8	32483	(000000-)	Washer, Flt, .25 Sae	4
9	386563	(000000-)	Grommet, Rbr, 1.0b	2
10	25538	(000000-)	Screw, Flat, #06-32 X 0.38, Al	2
11	41401	(000000-)	Washer, Lock, Int, #06, Ss	4
12	75939	(000000-)	Nut, Hex, Lock, #06-32, NI	2
13	386307	(000000-)	Stand-Off, 1.25, Plstc	5
▽ 14	386308	(000000-)	Circuitboard, Sweeper, [8300]	1
▲ 15	45595	(000000-)	Fuse, .25d 10a 32vdc	1
16	386806	(000000-)	Stand-Off, 1.25, Metal	2
17	387529	(000000-)	Tape, Foam	1


Fig. 54 - Electrical Group, FaST

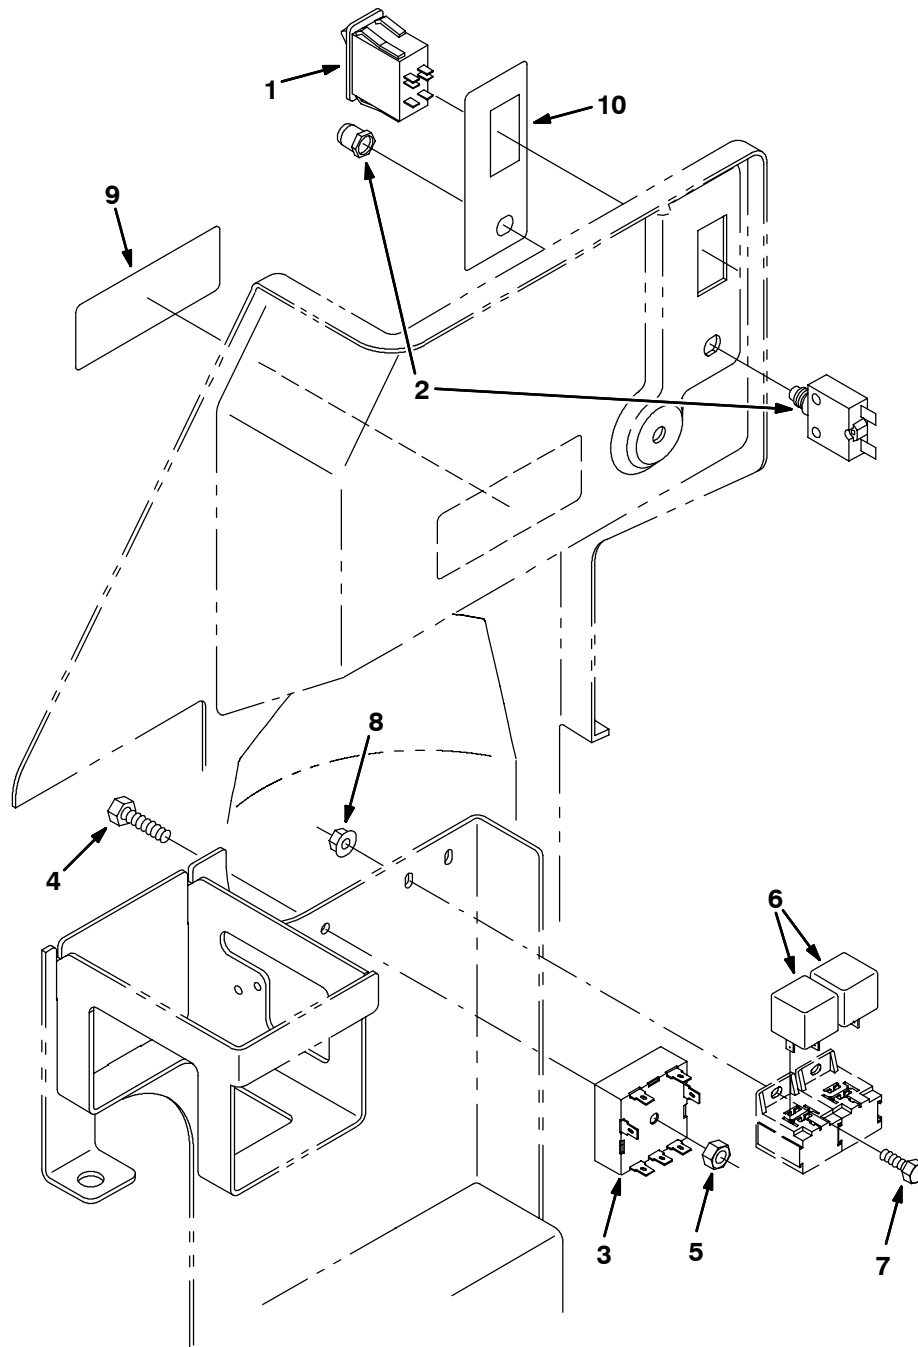

353307 - ALL

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	377084	(000000-)	Switch, Rocker, 36vdc 05a Progressive	1
2	383721	(000000-)	Circuitbreaker, 10.0a	1
3	1028580	(000000-)	Timer, 9-41vdc, Recycling	1
4	06945	(000000-)	Screw, Hex, M6 X 1.0 X 30, 8.8	1
5	08708	(000000-)	Nut, Hex, Lock, M 6 X 1.0, NI	1
6	398526	(000000-)	Relay, 36vdc, 05a, Spdt N/O [Greenwich]	2
7	09244	(000000-)	Screw, Hex, M5 X 0.8 X 16, 8.8	2
8	07789	(000000-)	Nut, Hex, Flng, M5 X 0.8	2
9	1005416	(000000-)	Label, Fast	1
10	1011276	(000000-)	Label, Switch, Fast	1


Fig. 55 - Electrical Schematic

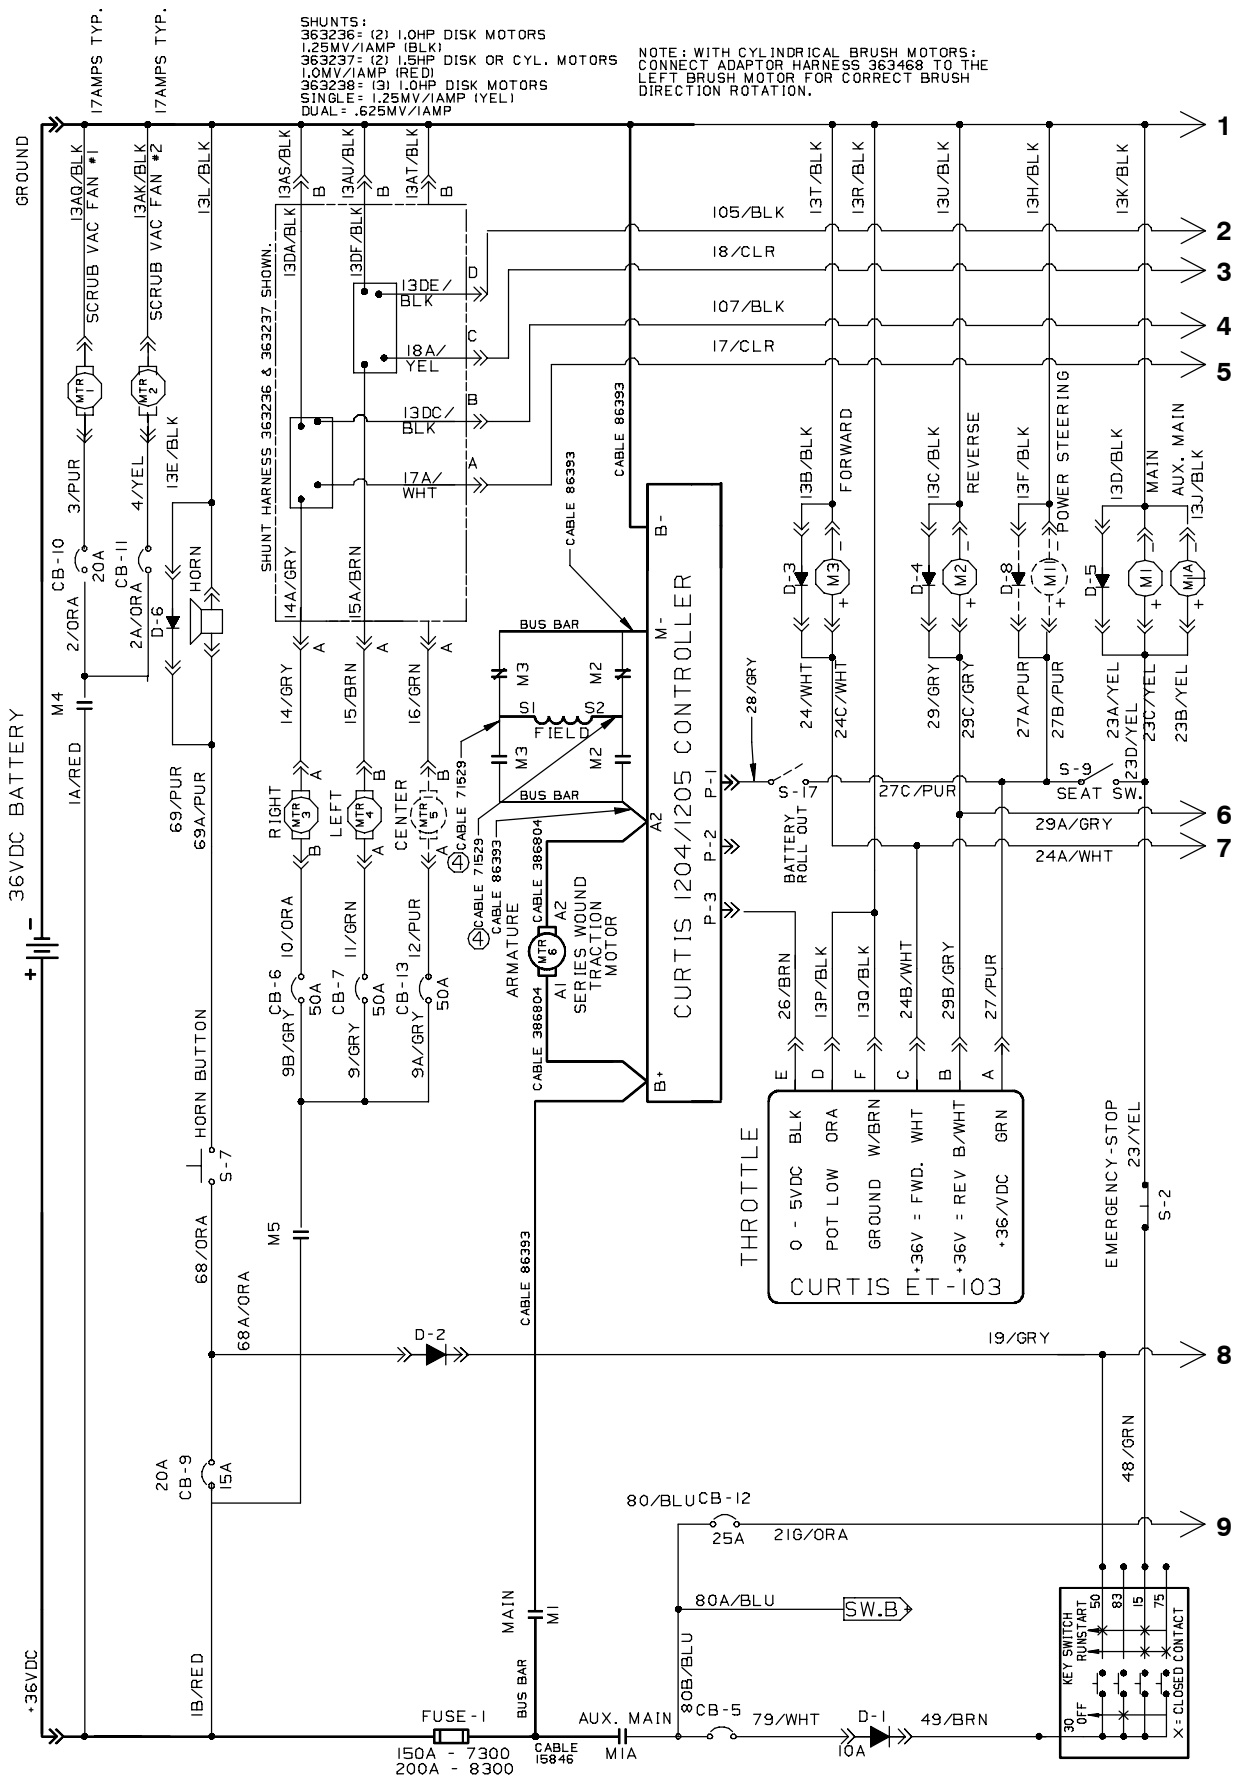

353346, 386300

8300 330630 (6-05)

Fig. 55 - Electrical Schematic

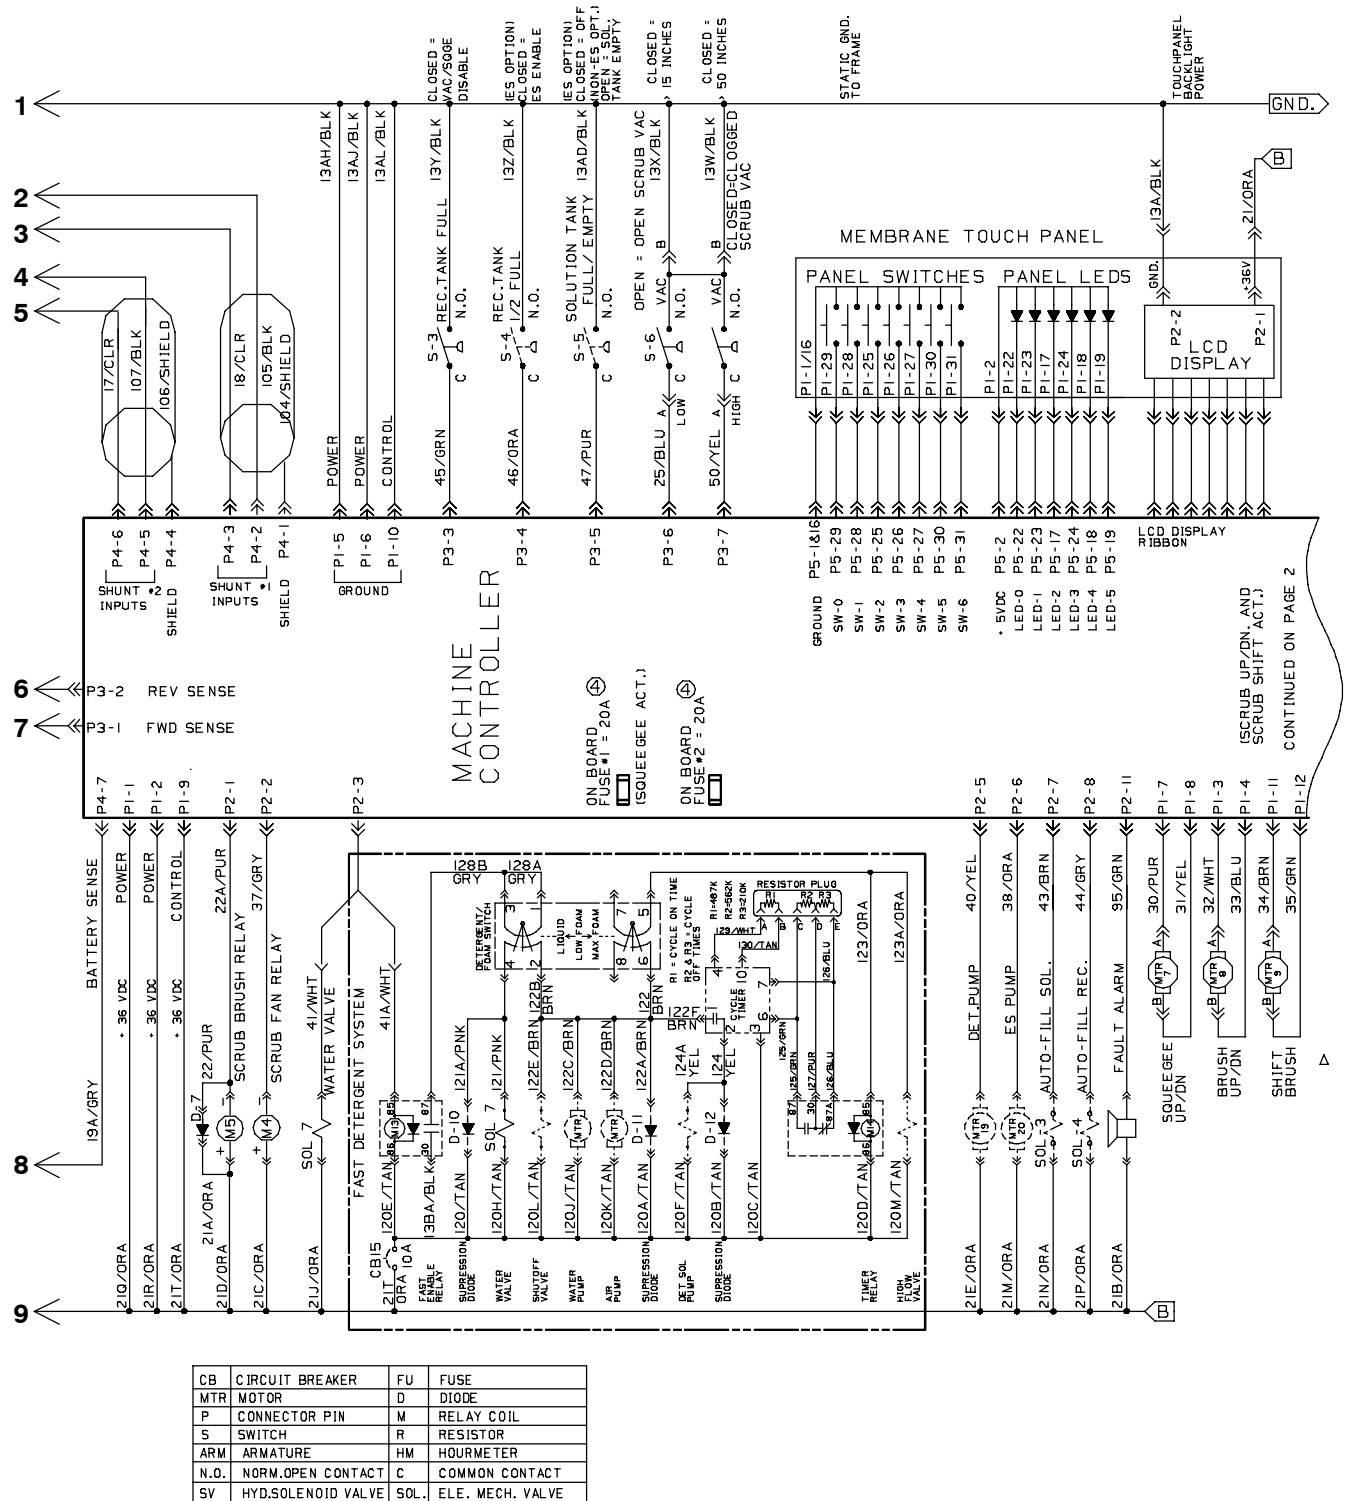

353346, 386300

Fig. 55 - Electrical Schematic



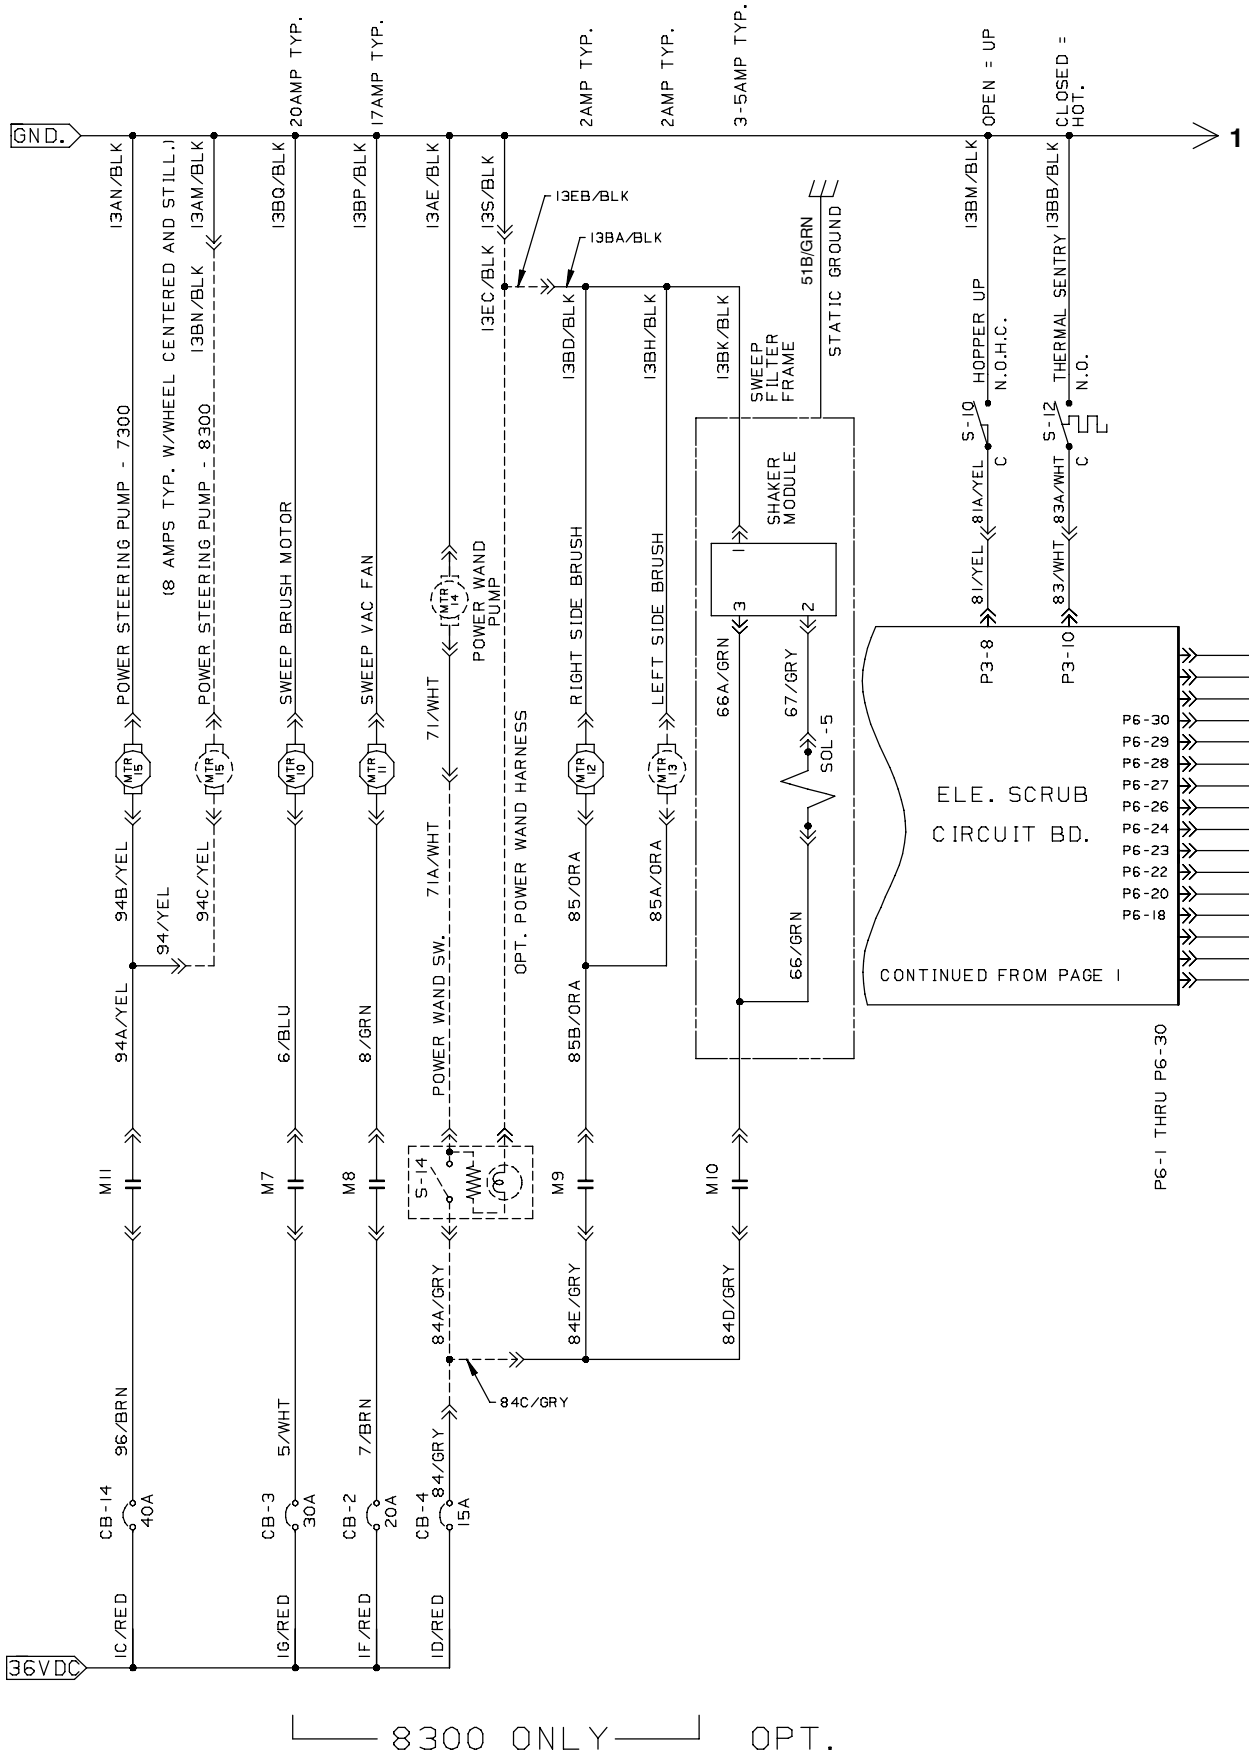


Fig. 55 - Electrical Schematic

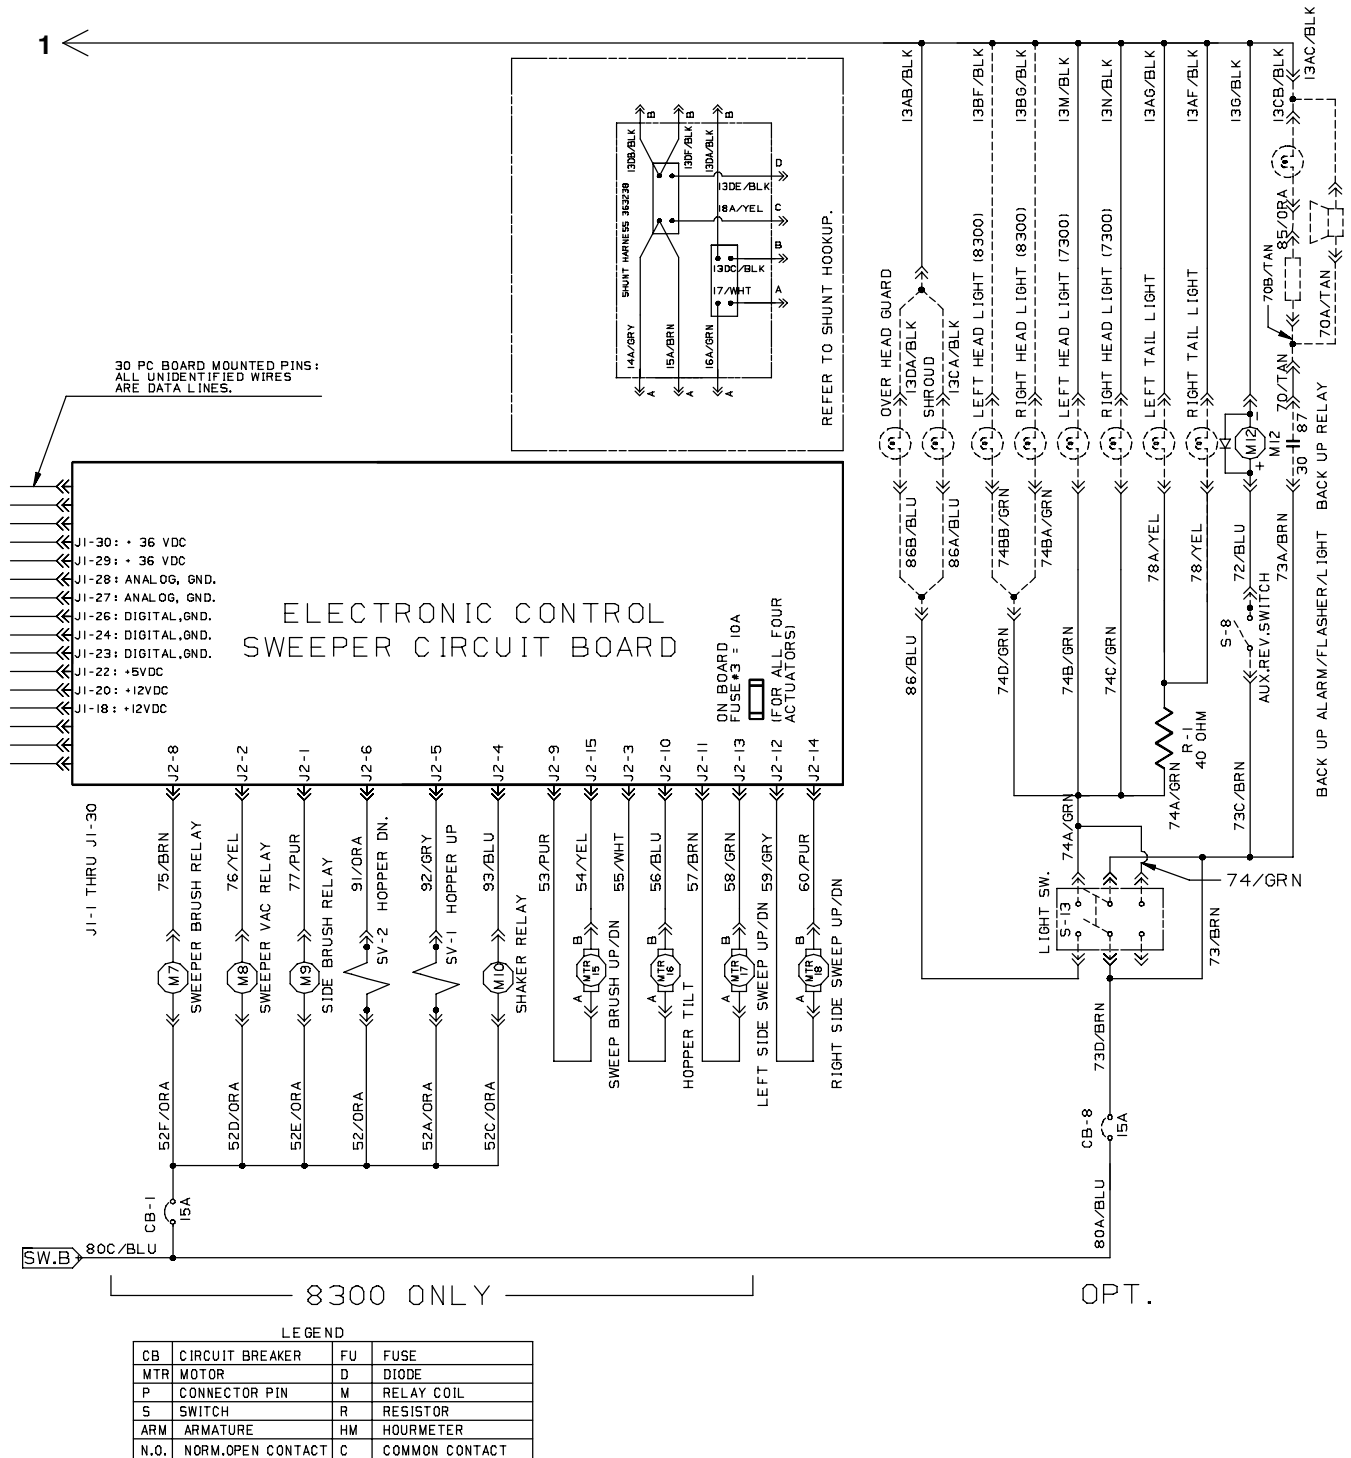

353346, 386300


Fig. 56 - Electrical Wire Harness Group

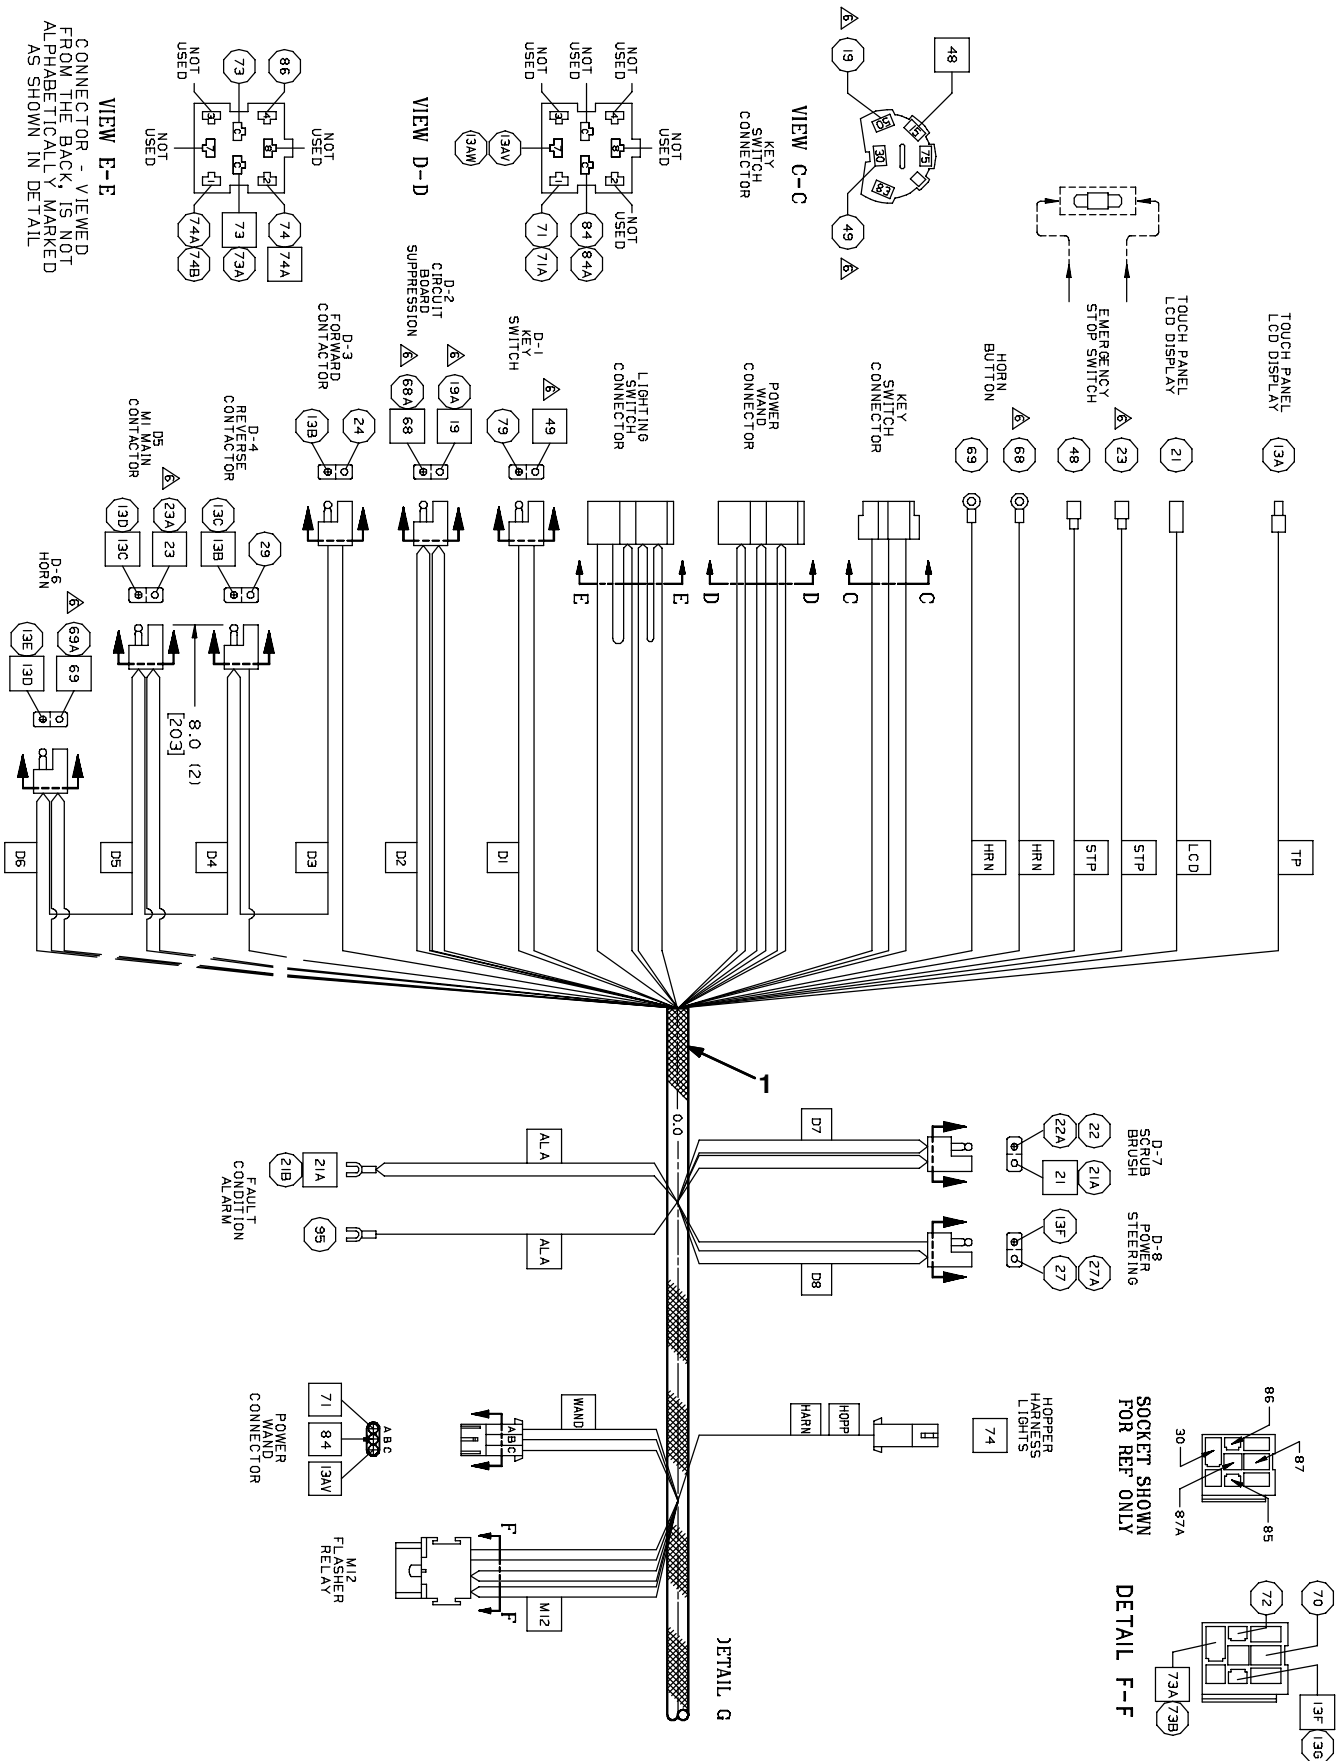


8300 330630 (9-02)



Fig. 56 - Electrical Wire Harness Group

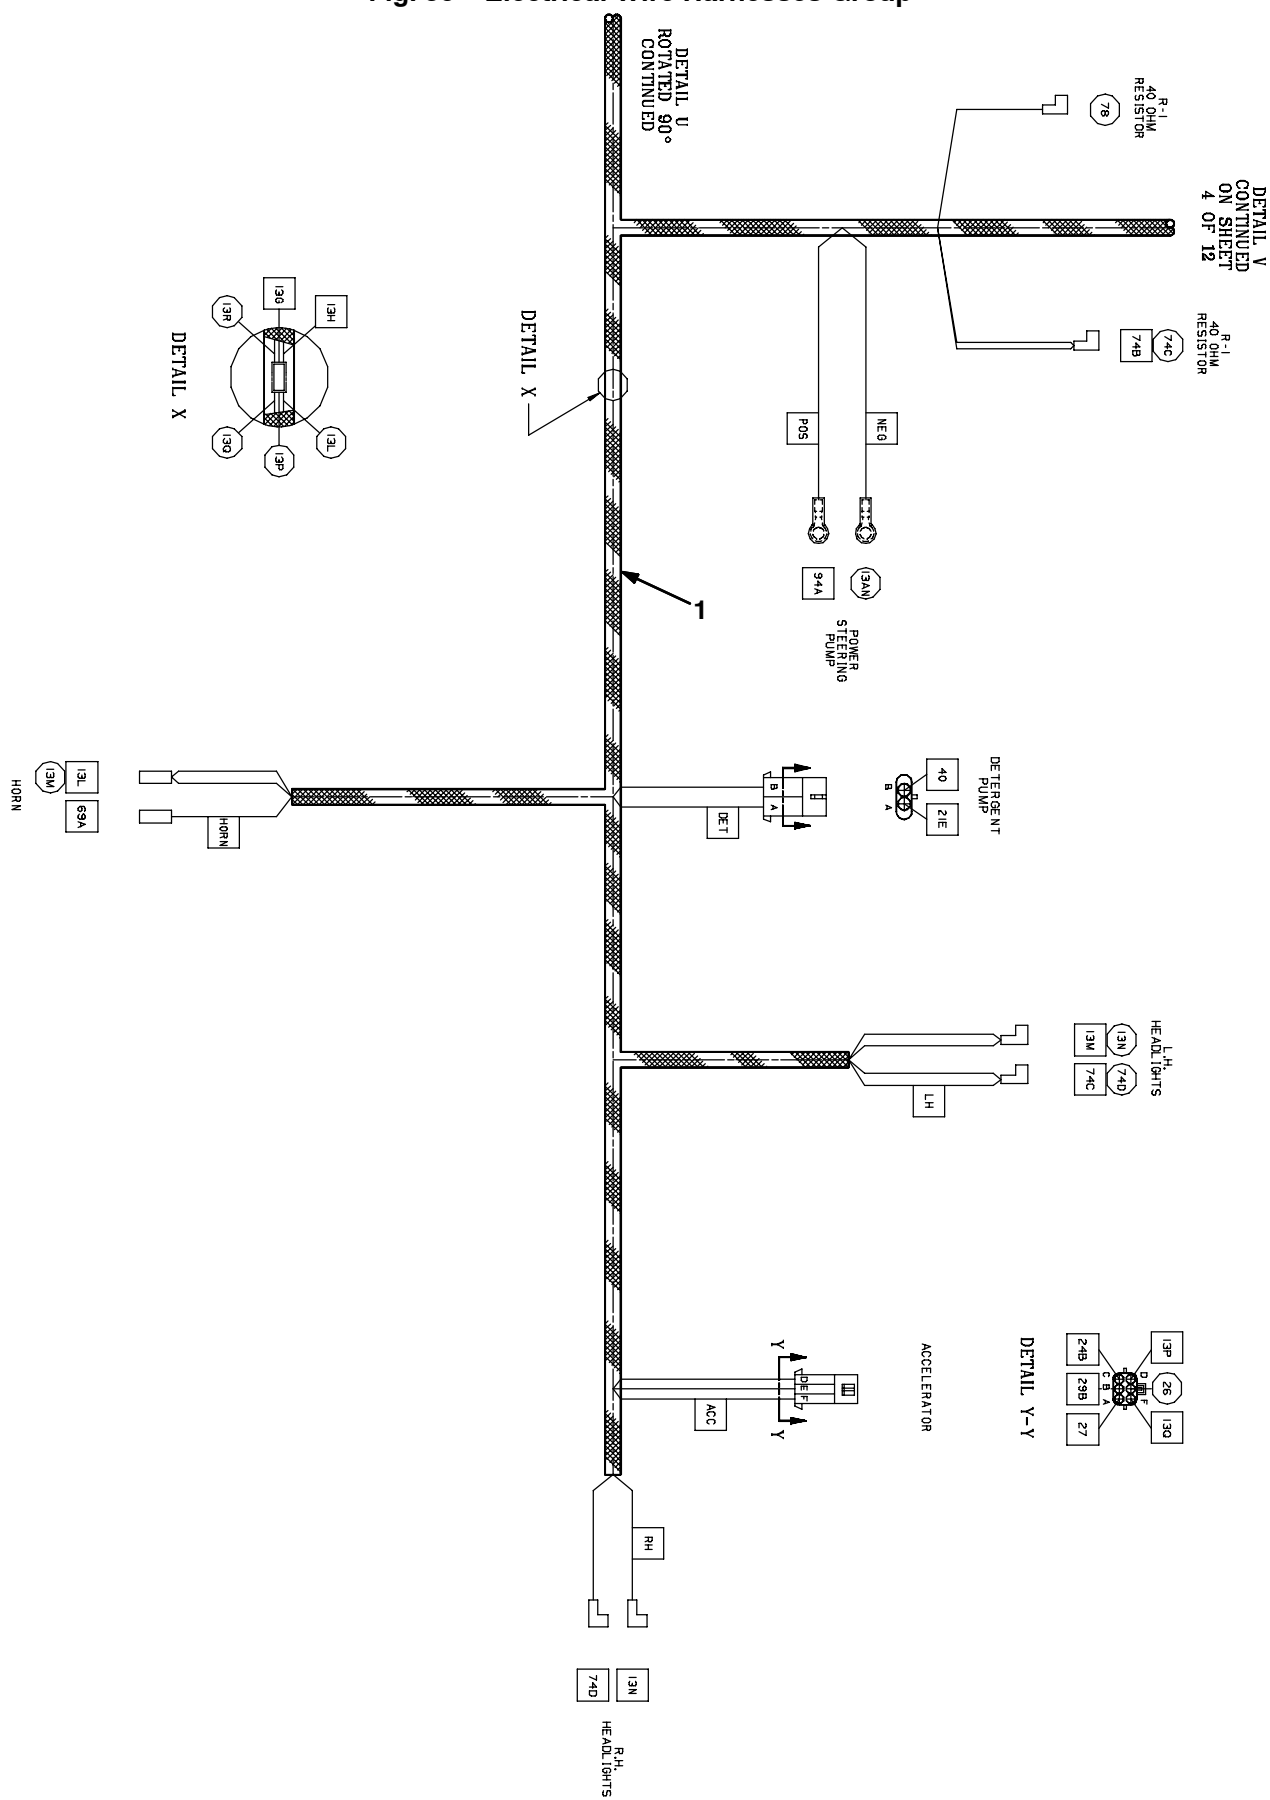

DETAIL V



8300 330630 (12-01)

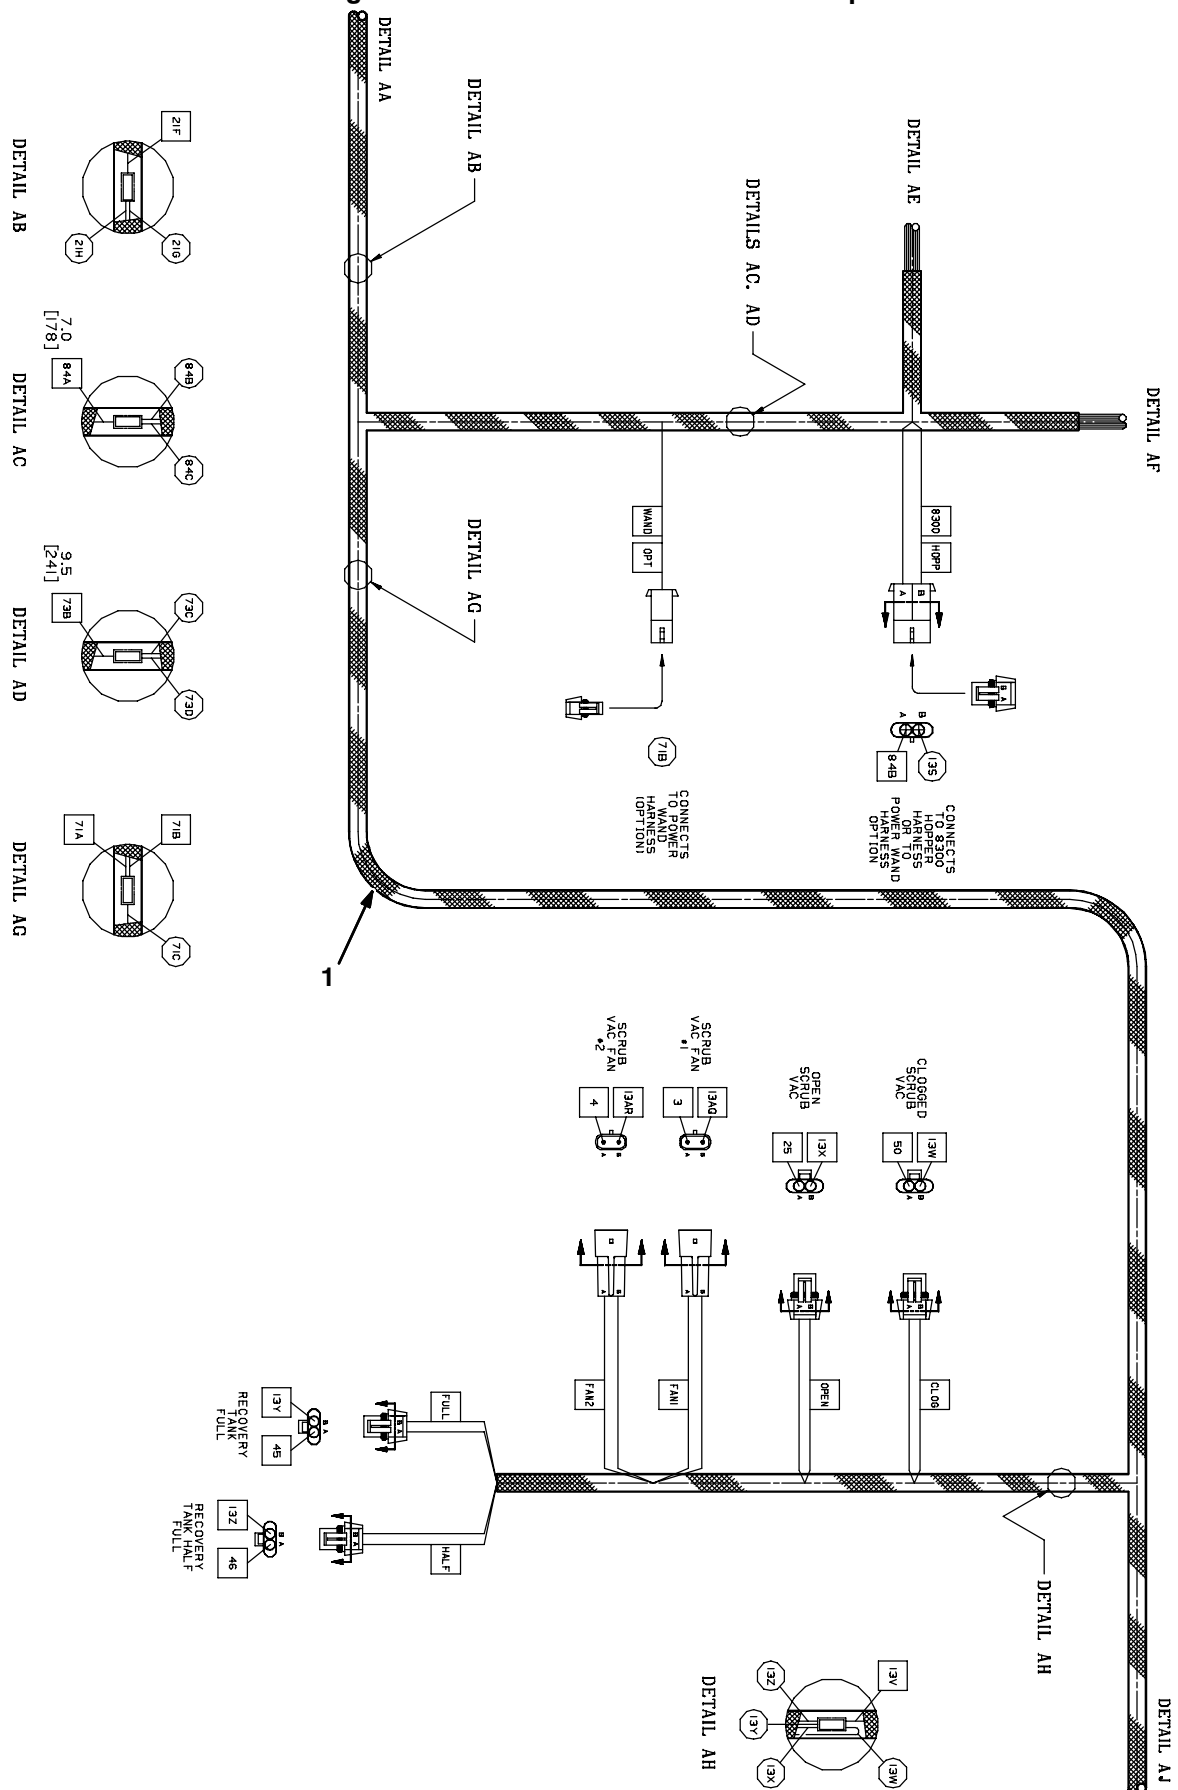


Fig. 56 - Electrical Wire Harness Group

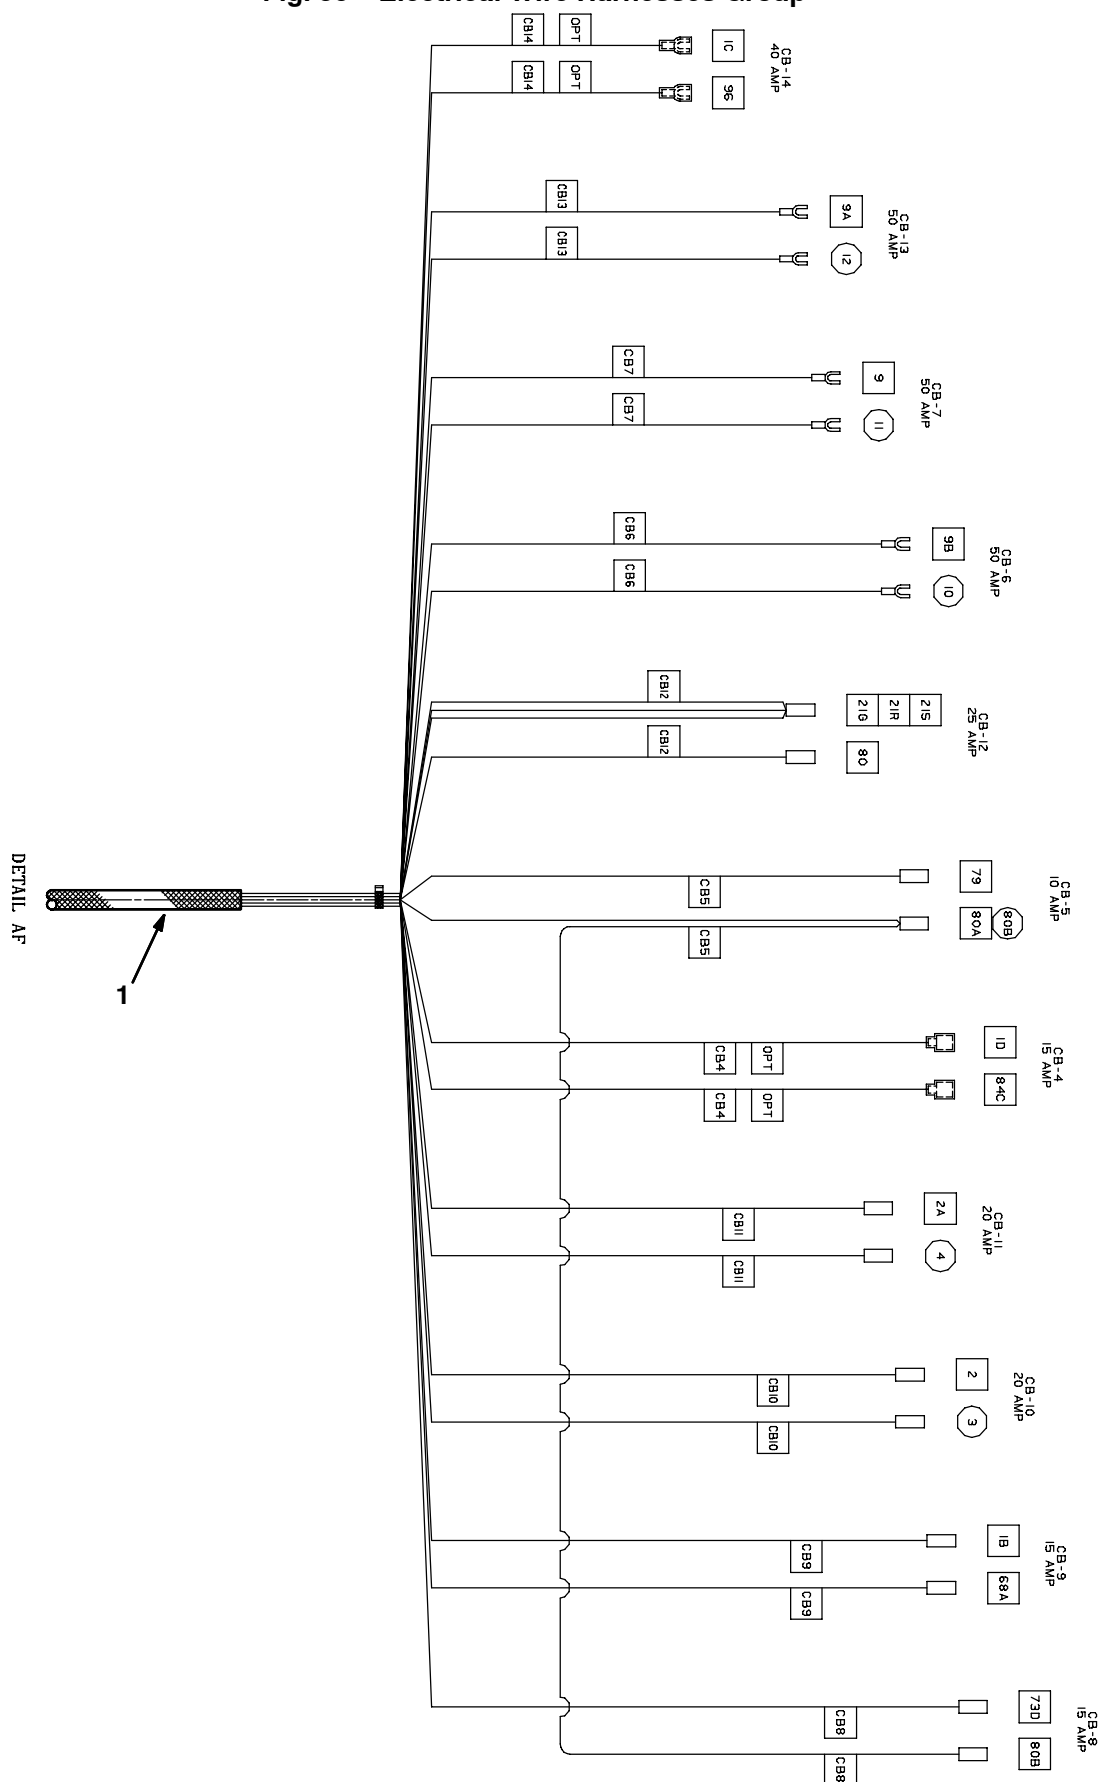


Fig. 56 - Electrical Wire Harness Group

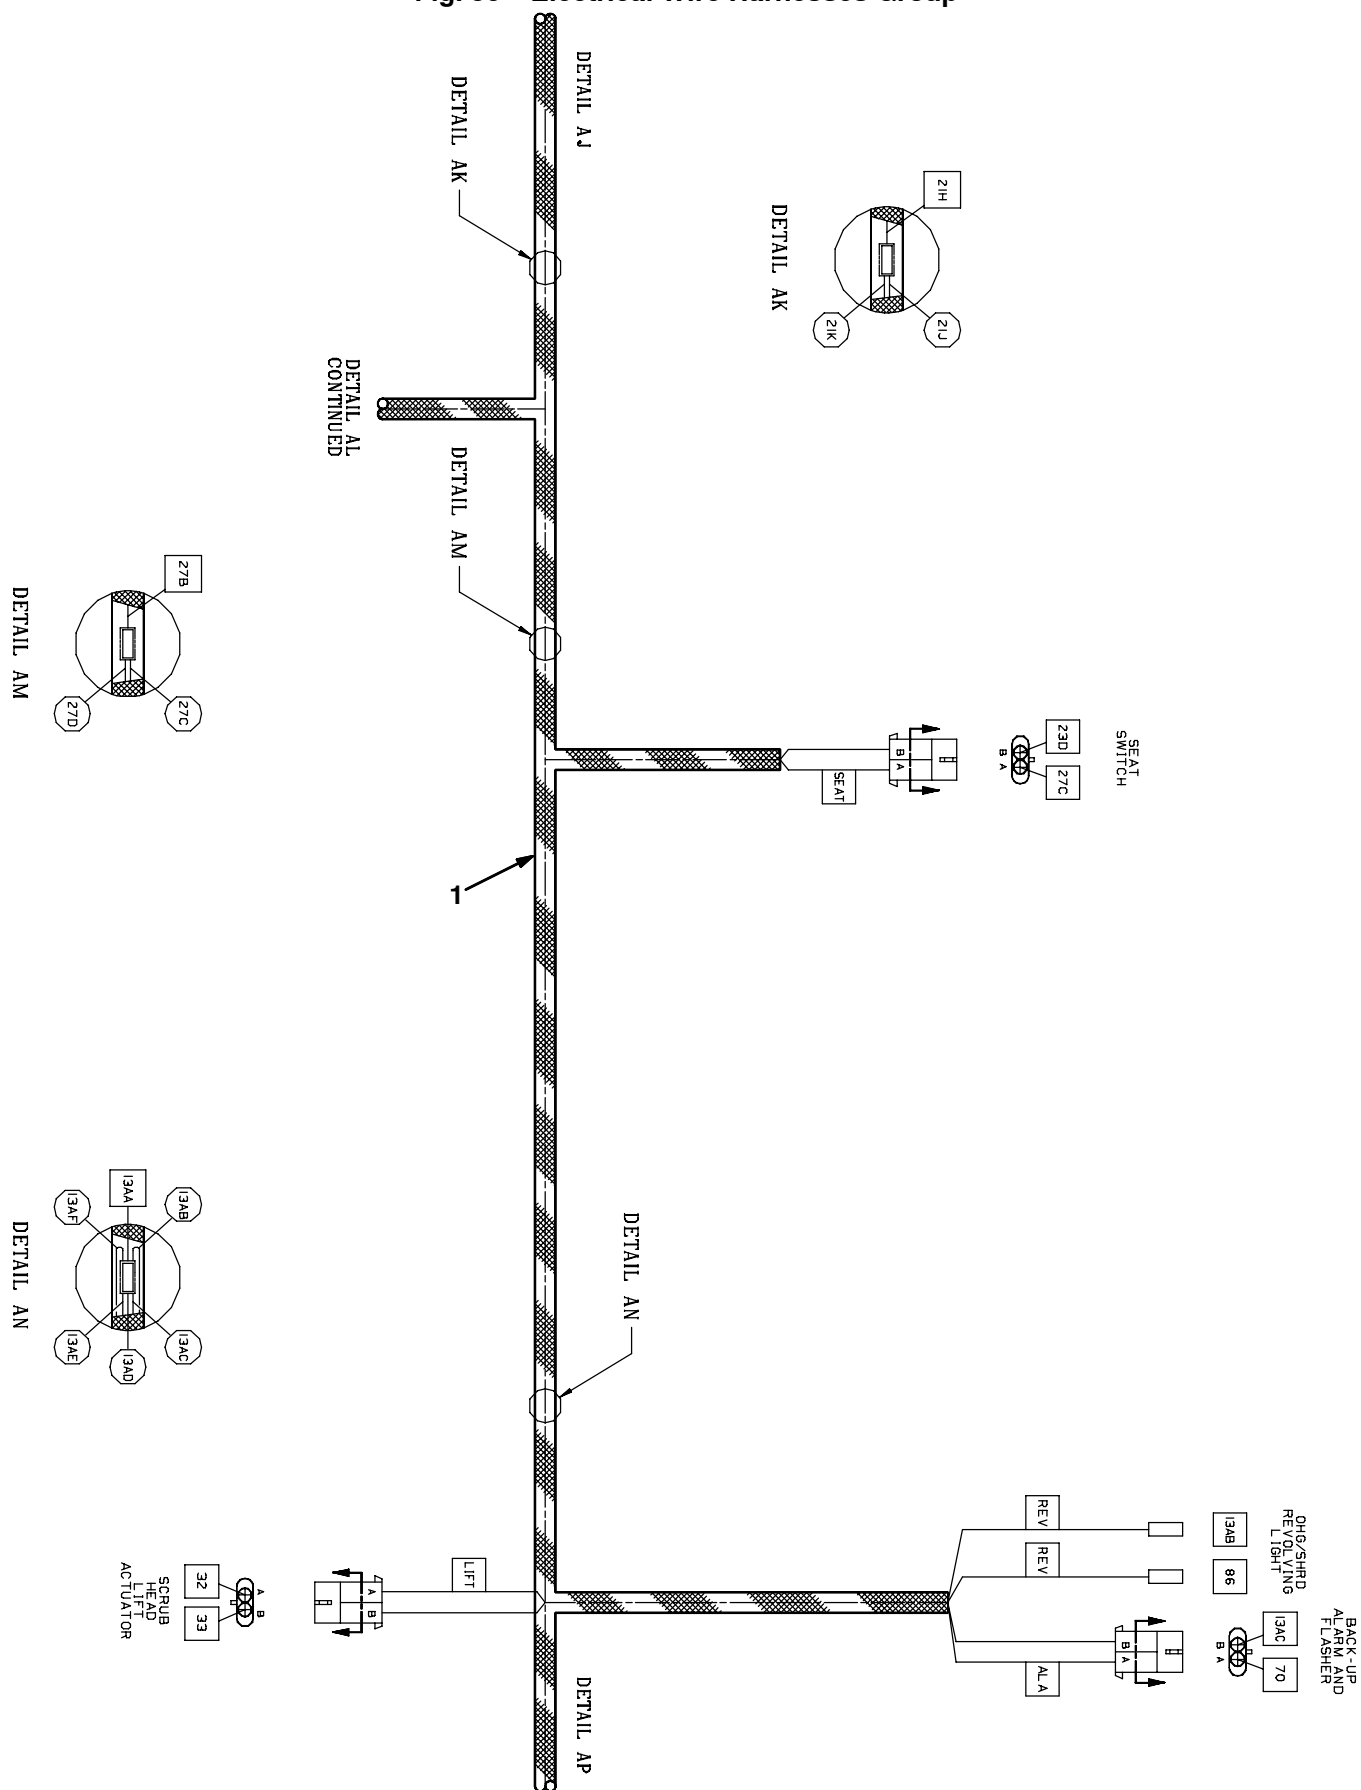


Fig. 56 - Electrical Wire Harness Group

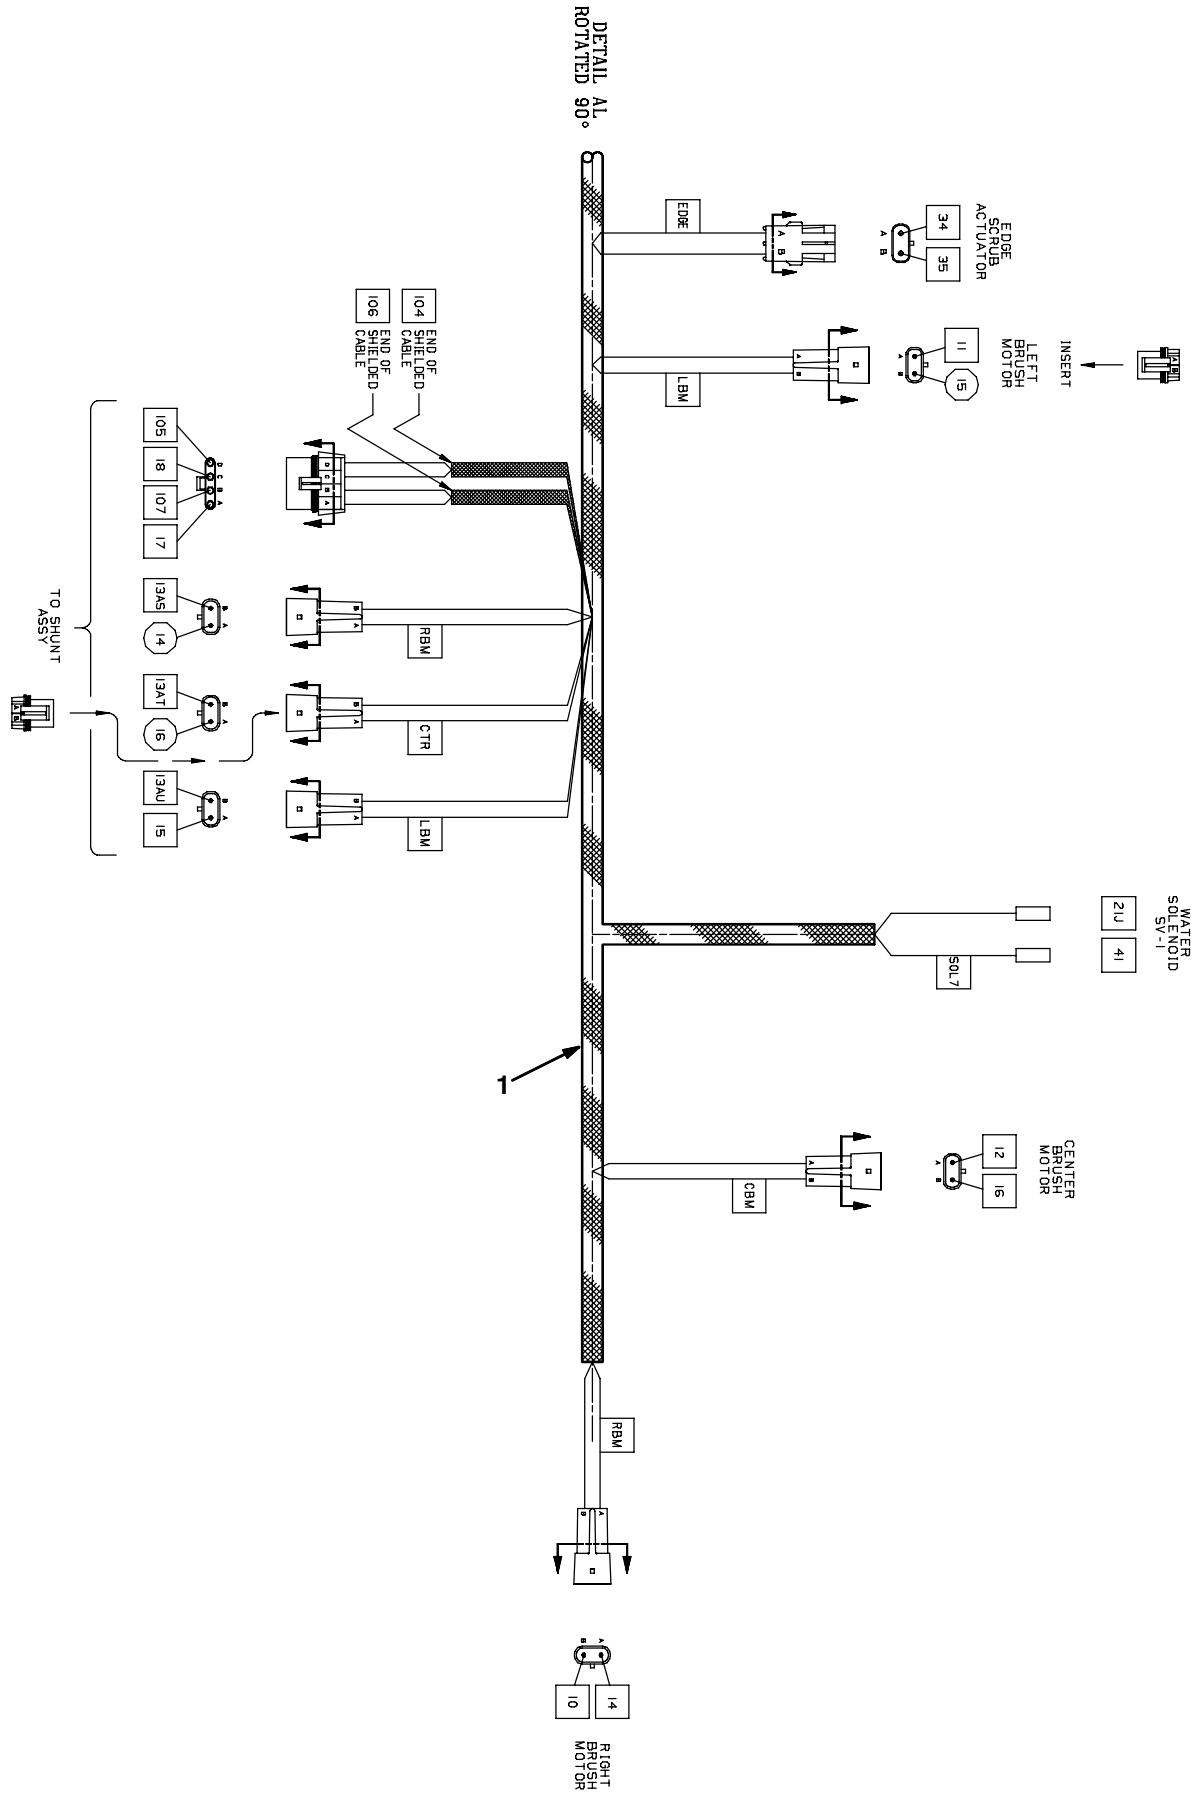


Fig. 56 - Electrical Wire Harness Group

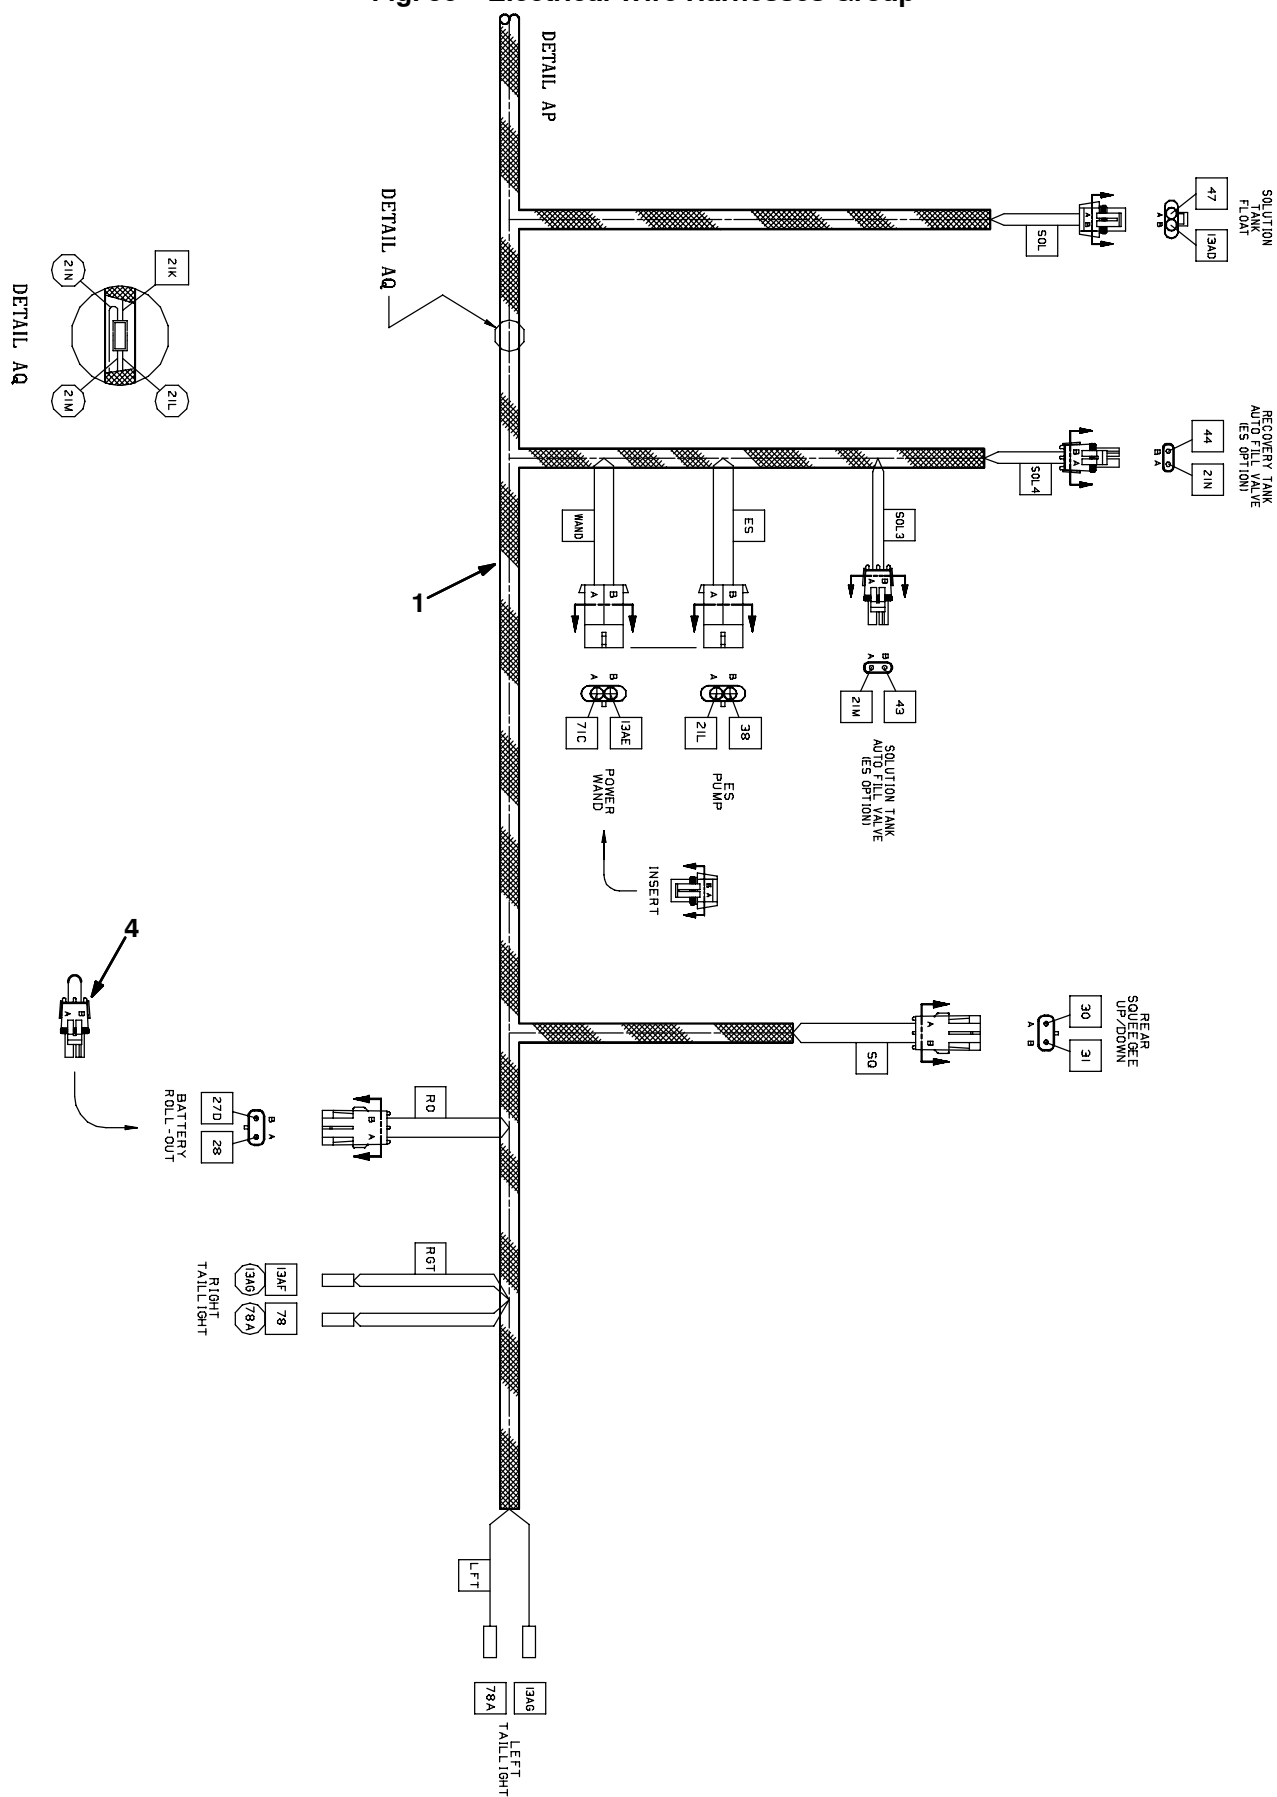


Fig. 56 - Electrical Wire Harness Group

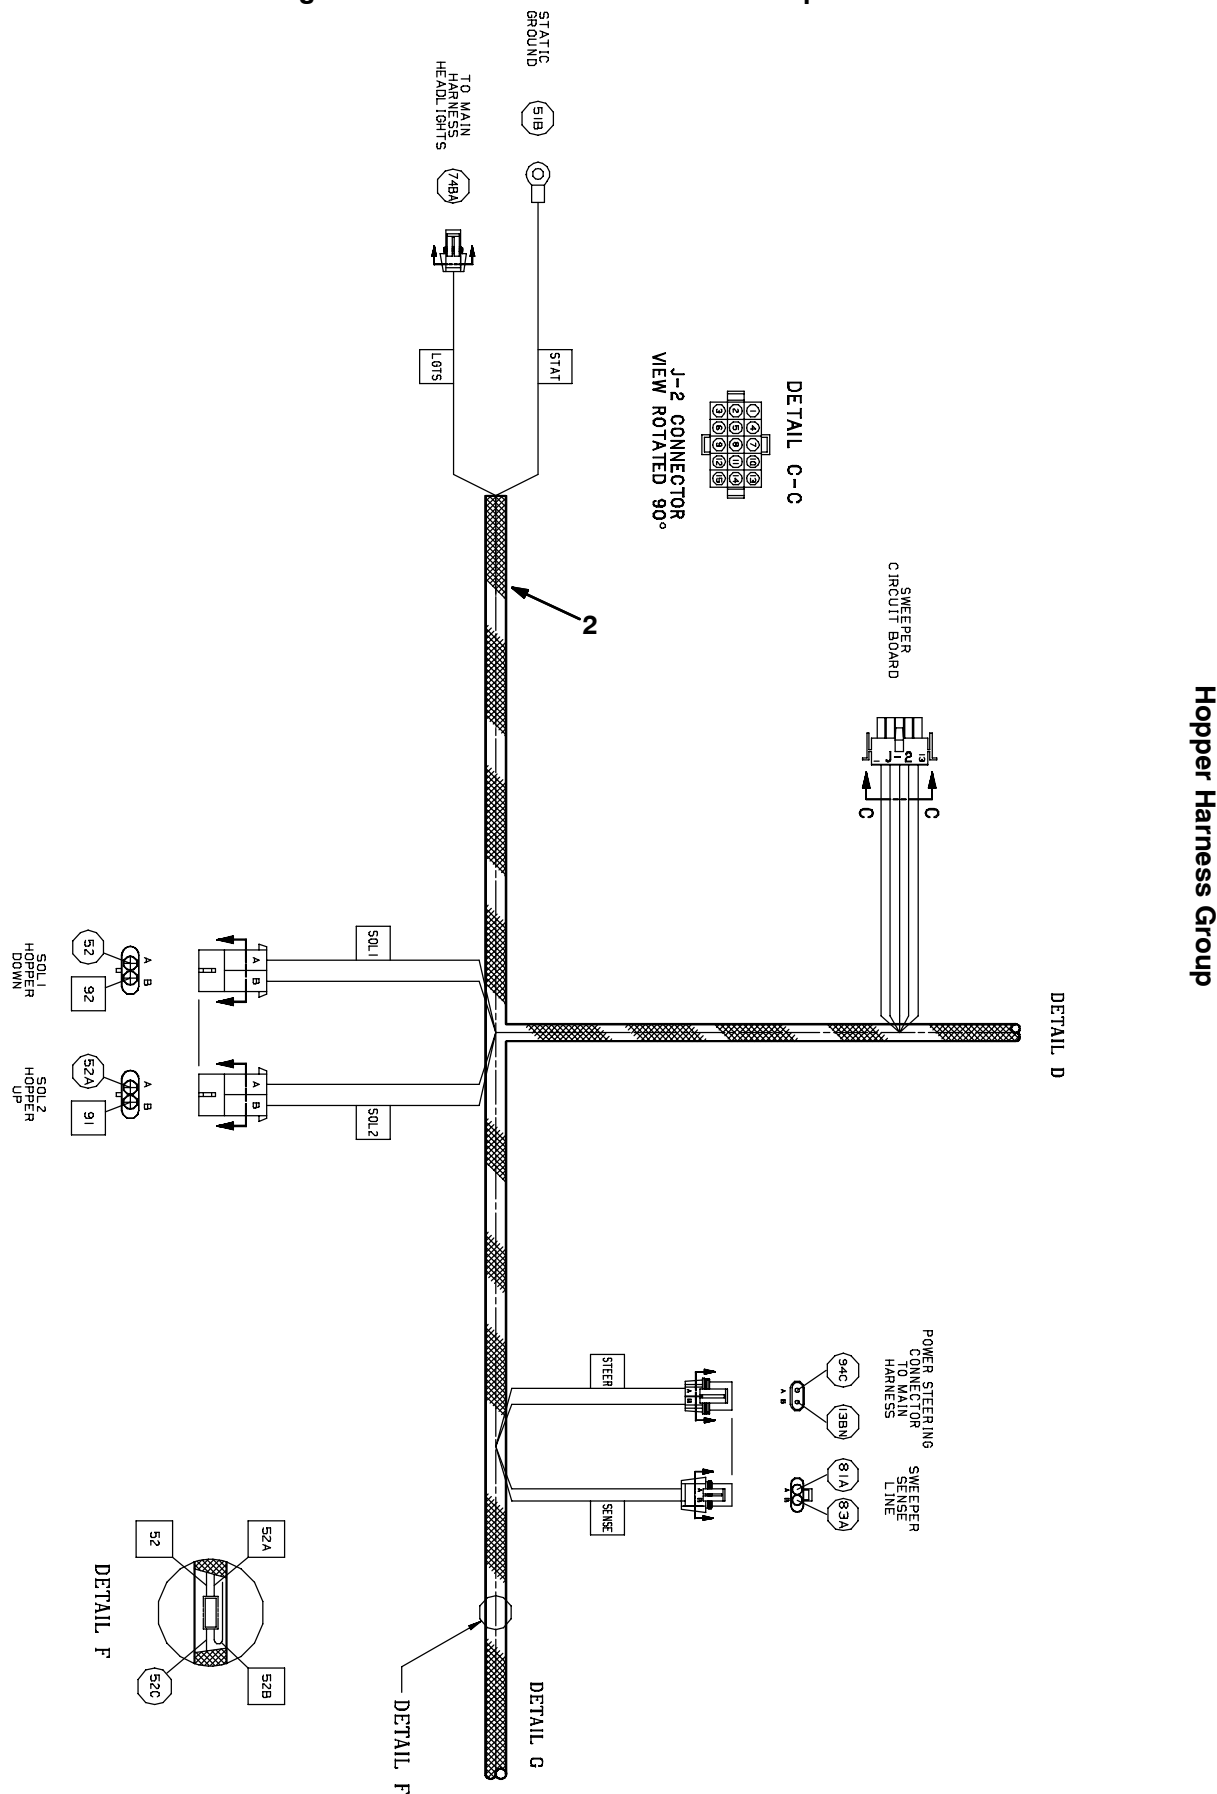


Fig. 56 - Electrical Wire Harnesses Group

Hopper Harness Group


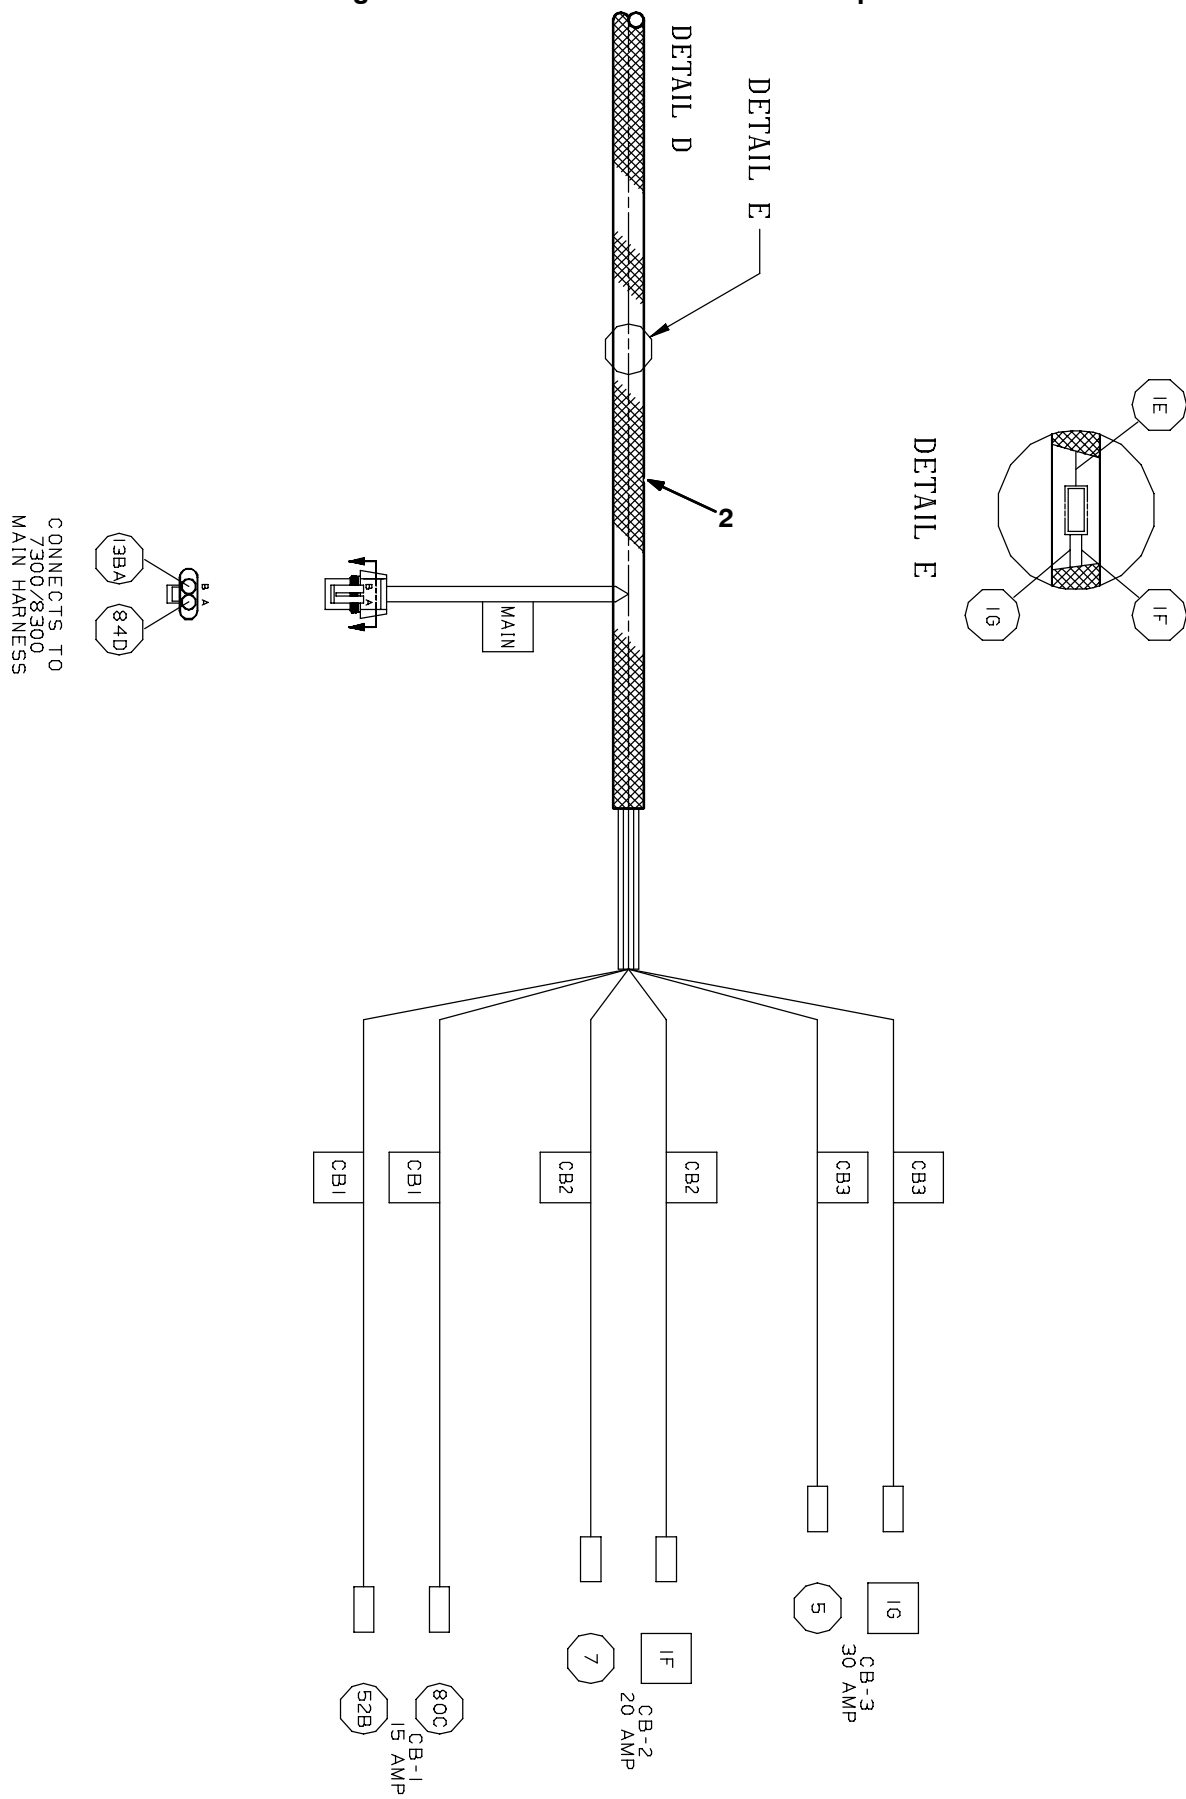


Fig. 56 - Electrical Wire Harnesses Group

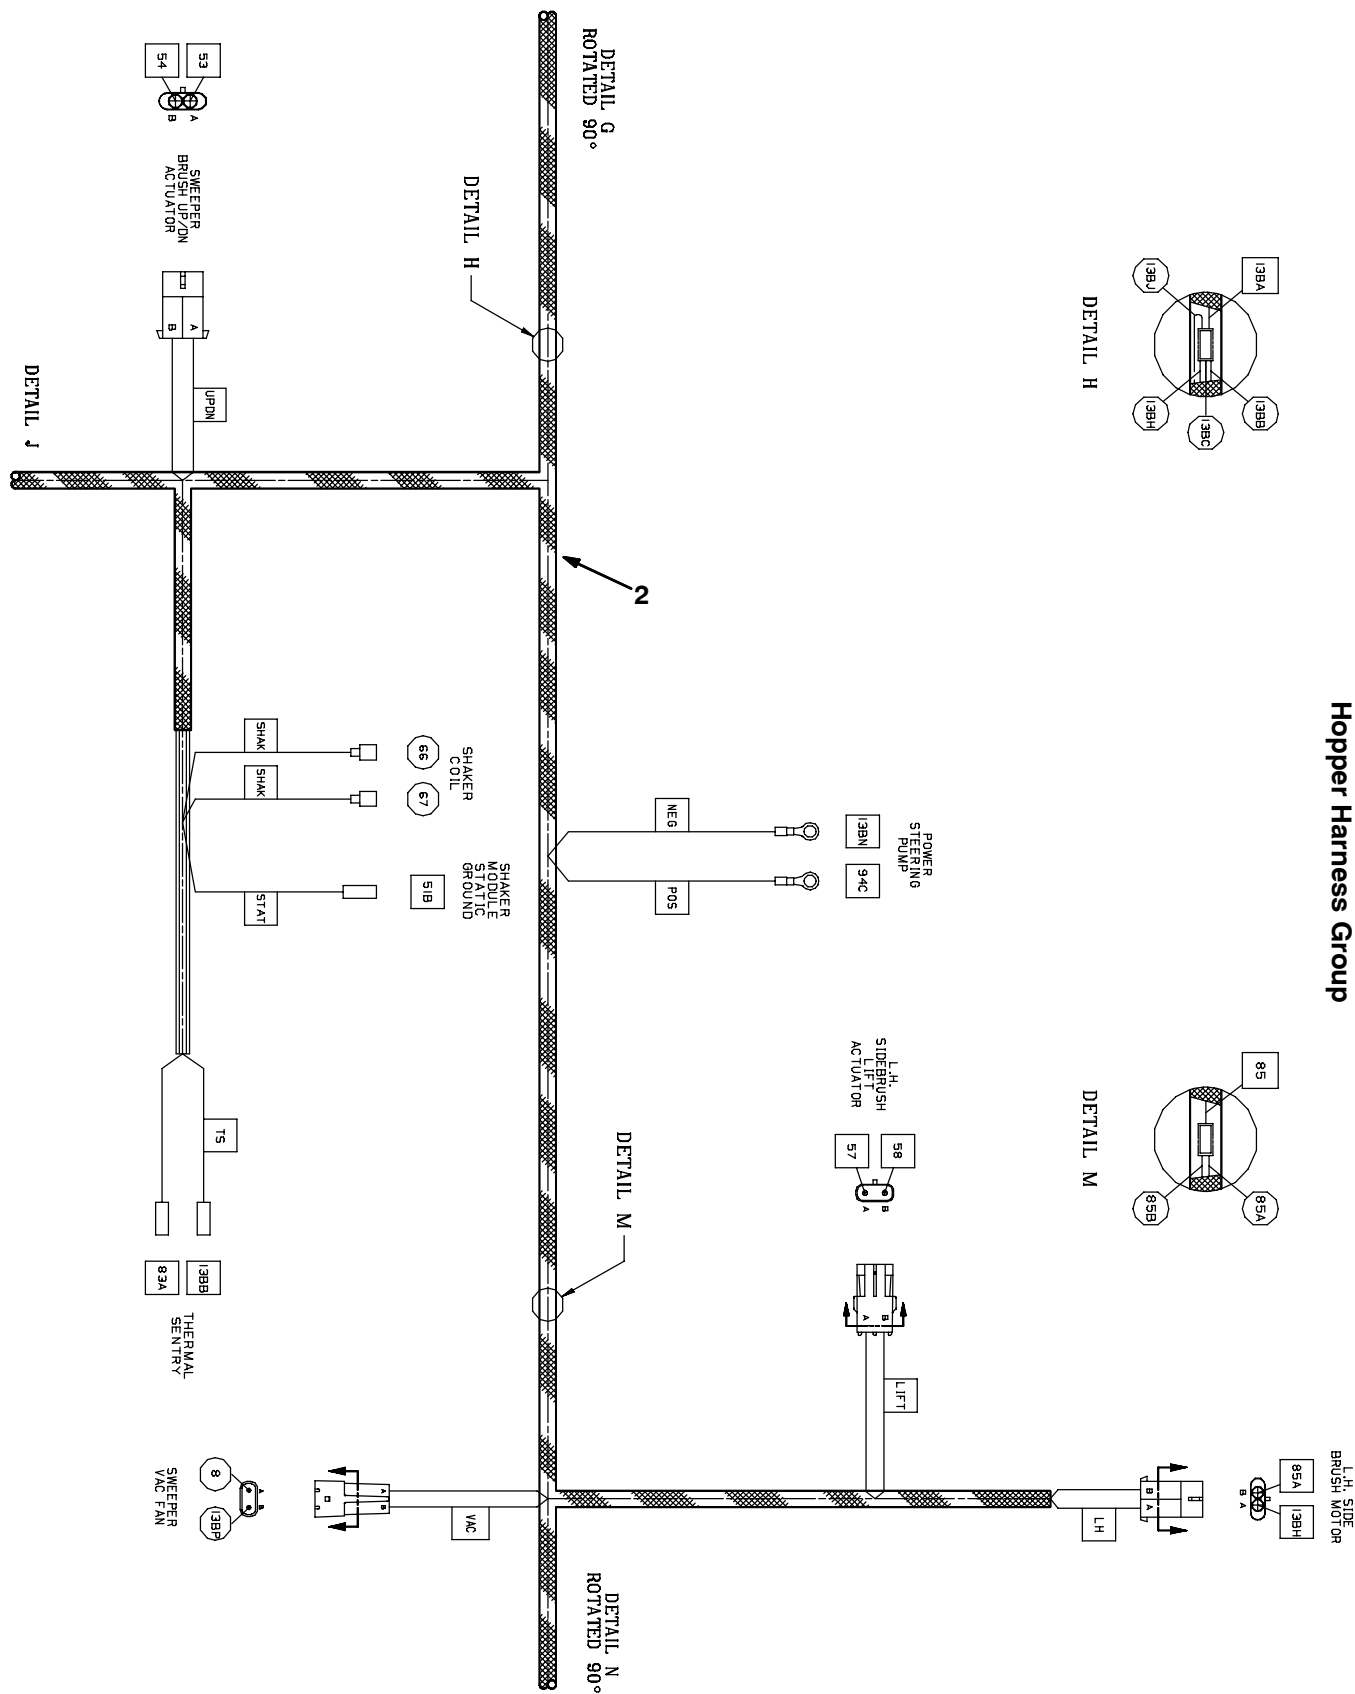

8300 330630 (9-02)

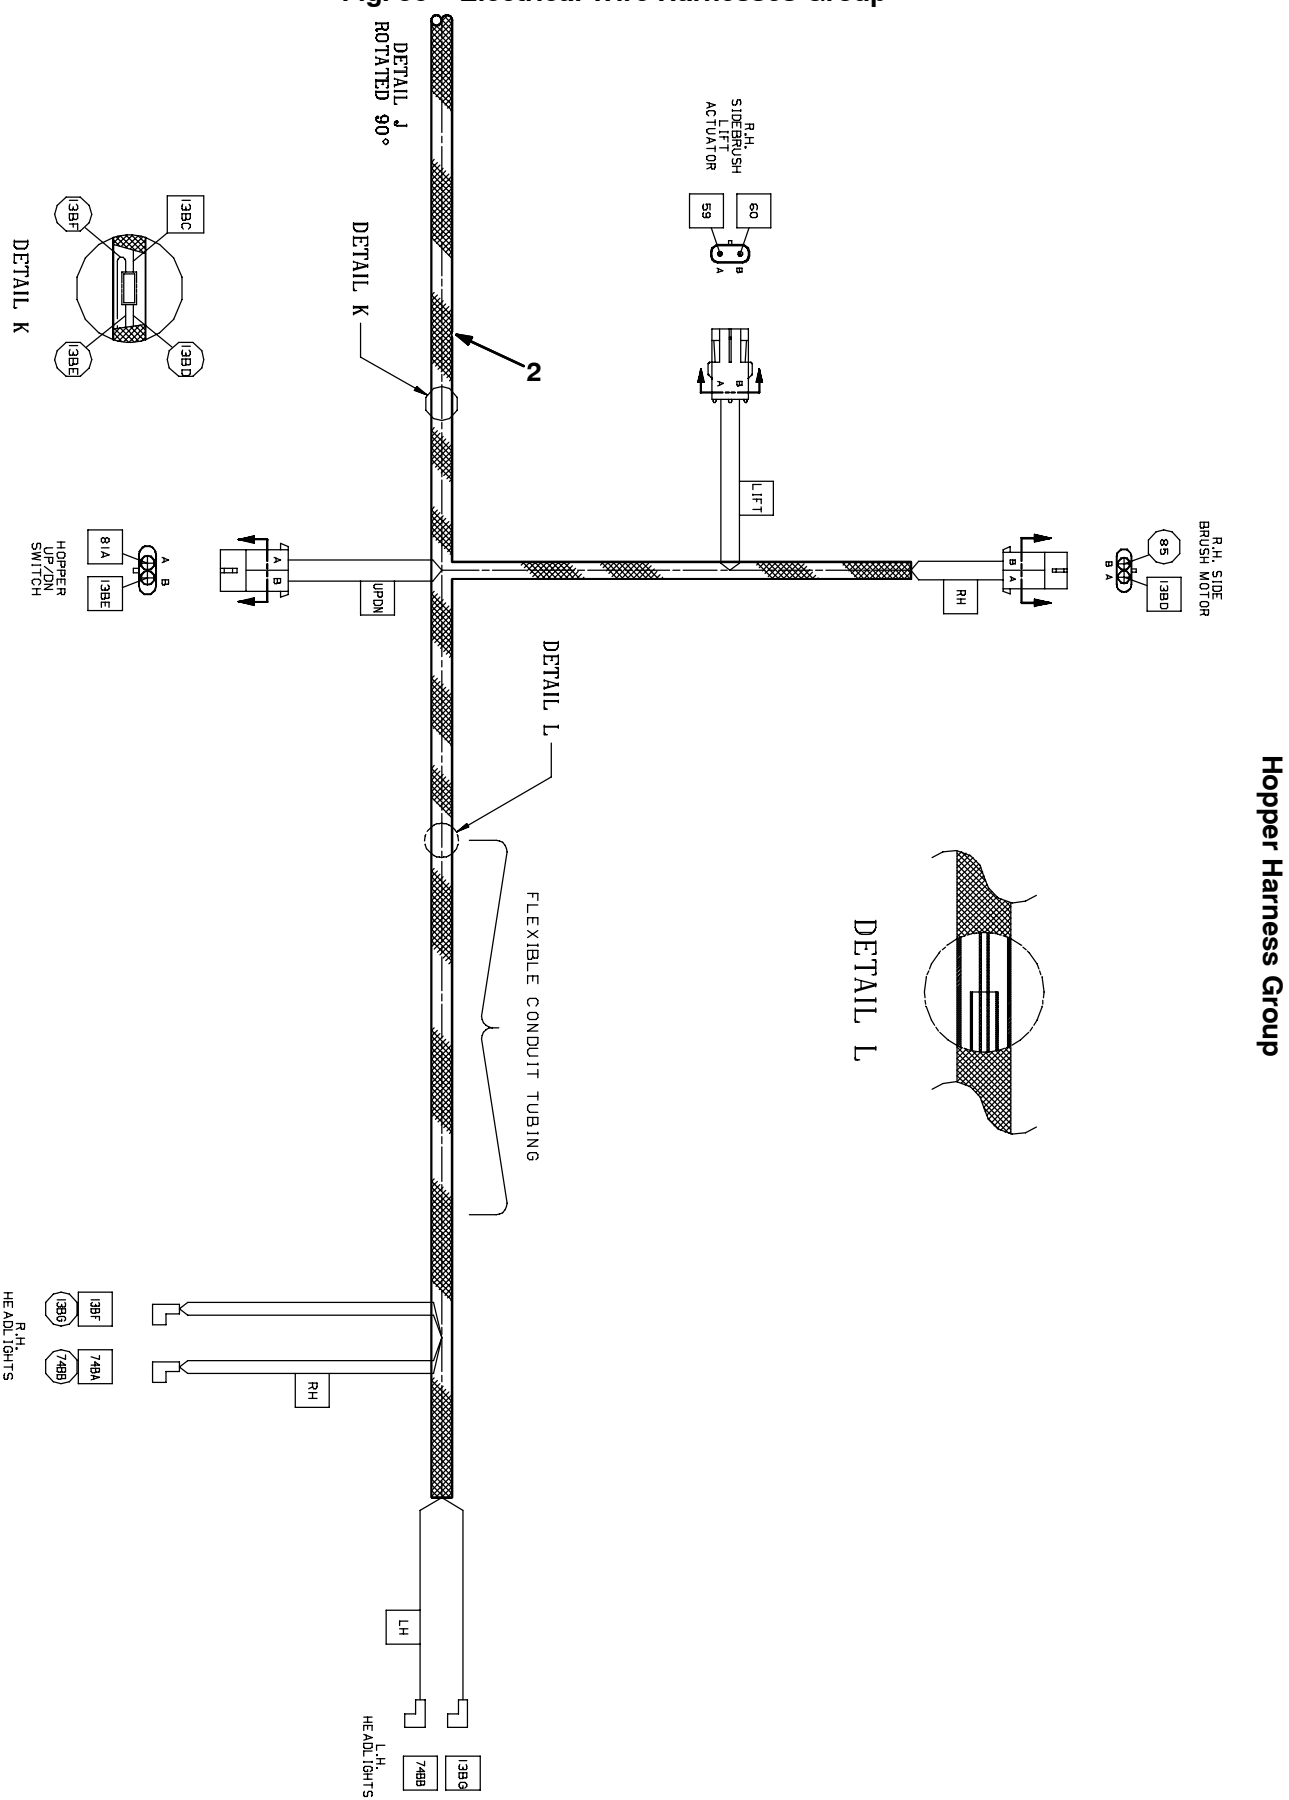


Fig. 56 - Electrical Wire Harnesses Group



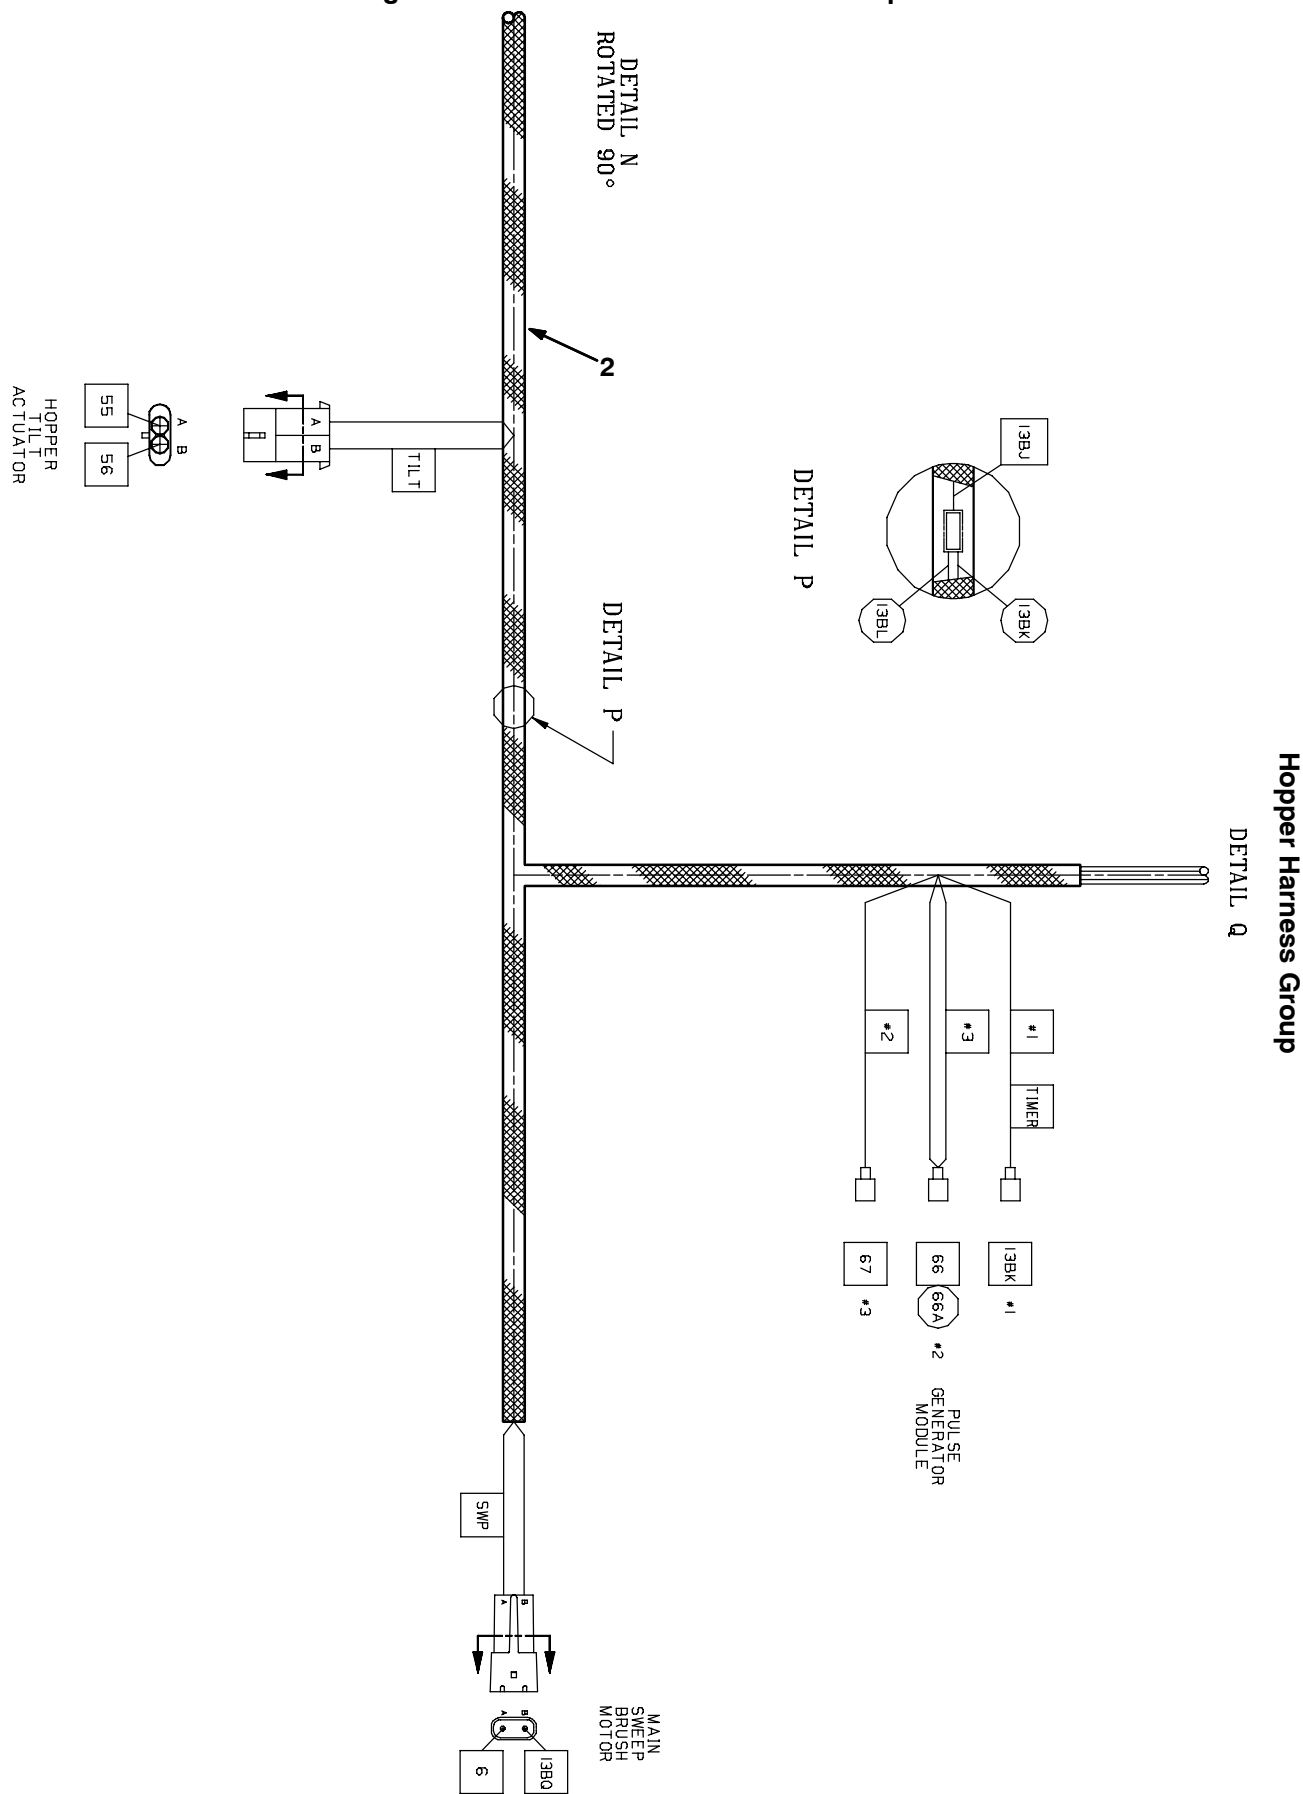


Fig. 56 - Electrical Wire Harnesses Group
Hopper Harness Group

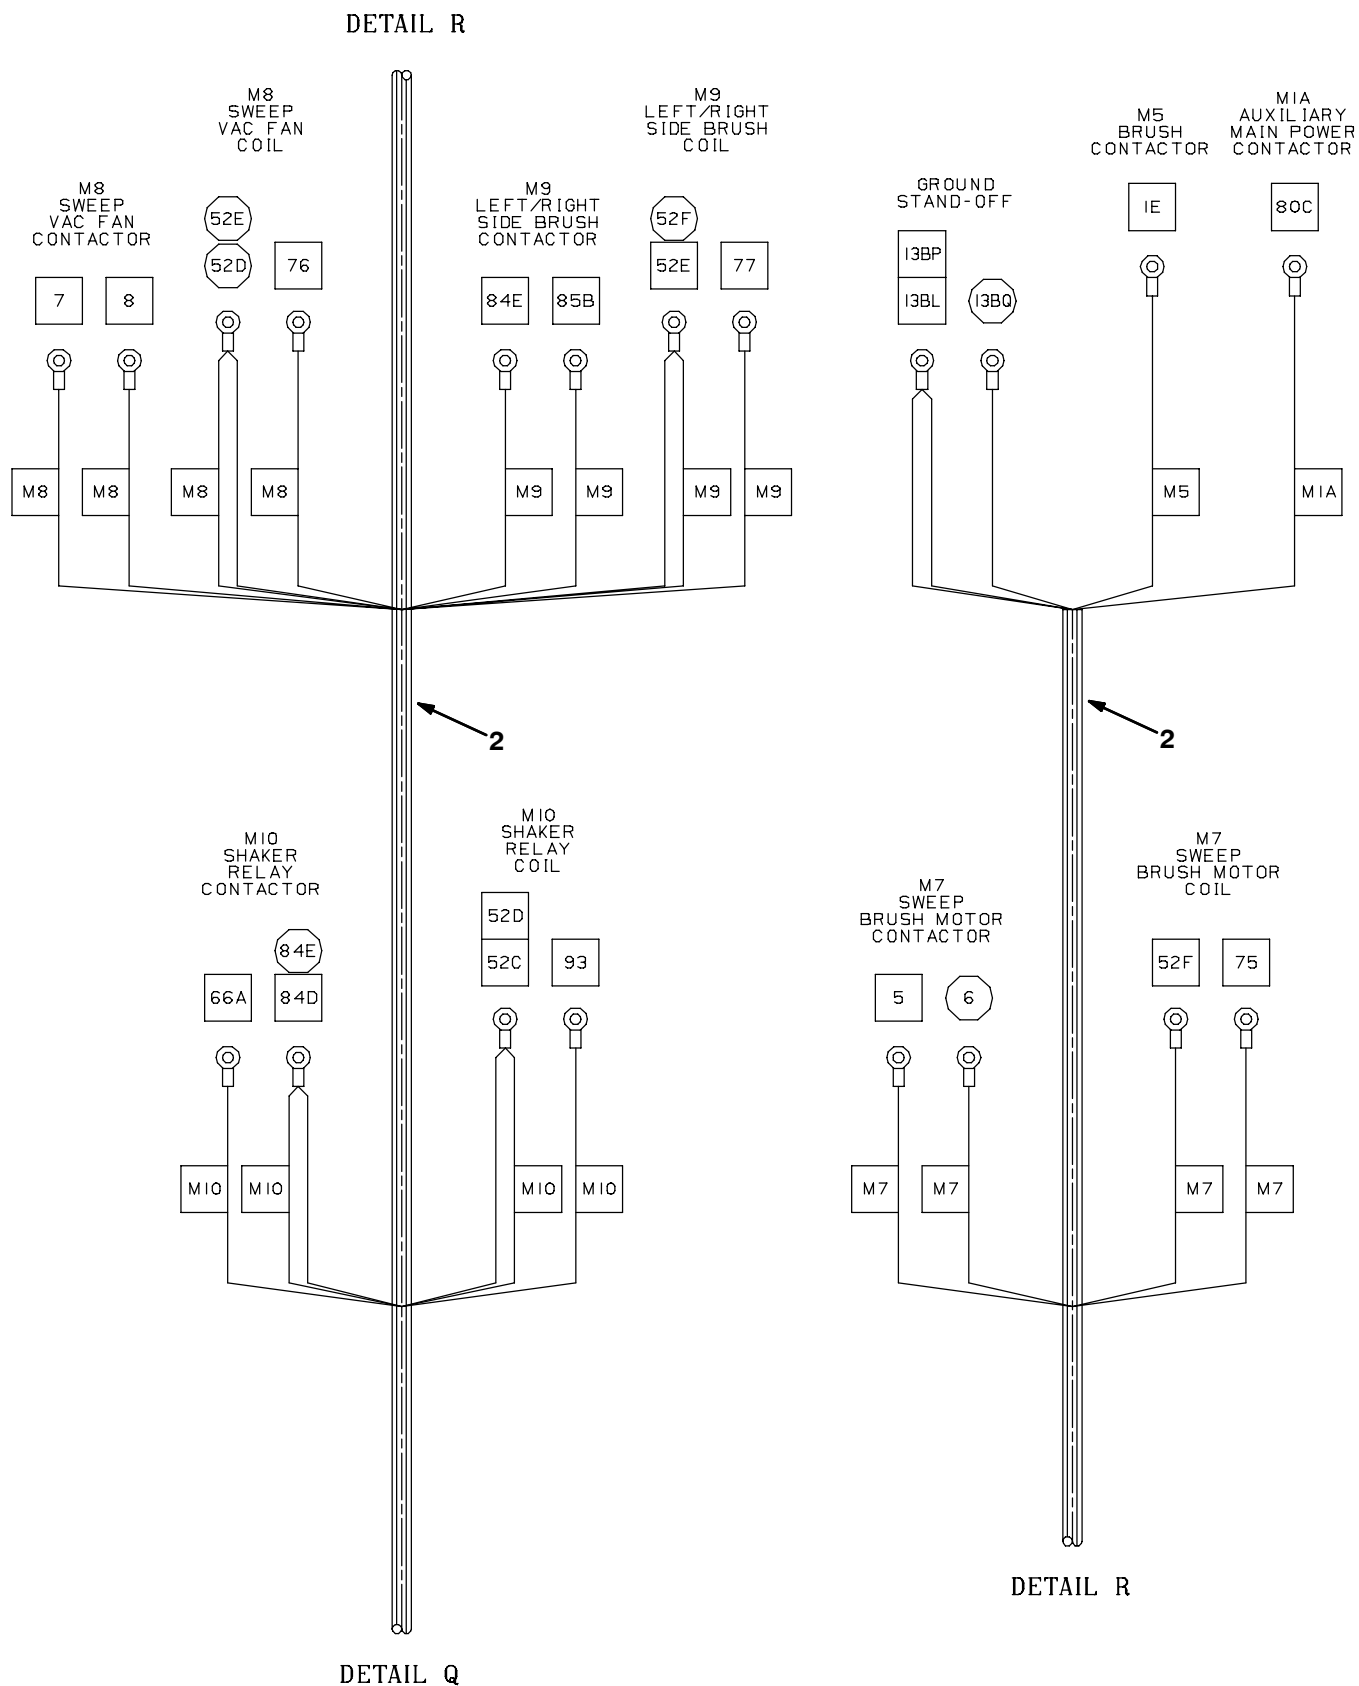


353347 - 353390 - 353835 - 8300

Fig. 56 - Electrical Wire Harnesses Group

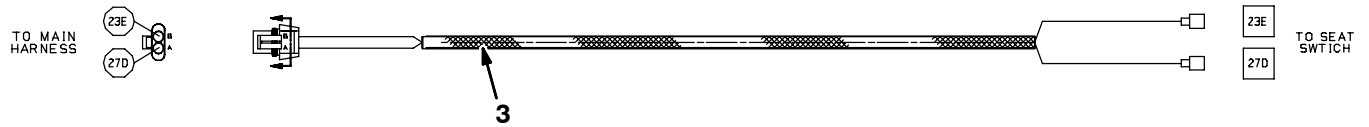

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386600	(000000-003233)	Harness, Main, 7300/8300	1
1	387424	(003234-)	Harness, Main, 7300/8300	1
2	386601	(000000-003233)	Harness, Hppr	1
2	387423	(003234-)	Harness, Hppr	1
3	387302	(000000-)	Harness, Wire, Jumper, Seat Switch	1
4	60278	(000000-)	Harness, Jumper, Arm	2


Fig. 57 - Electrical Wire Harness Group, FaST

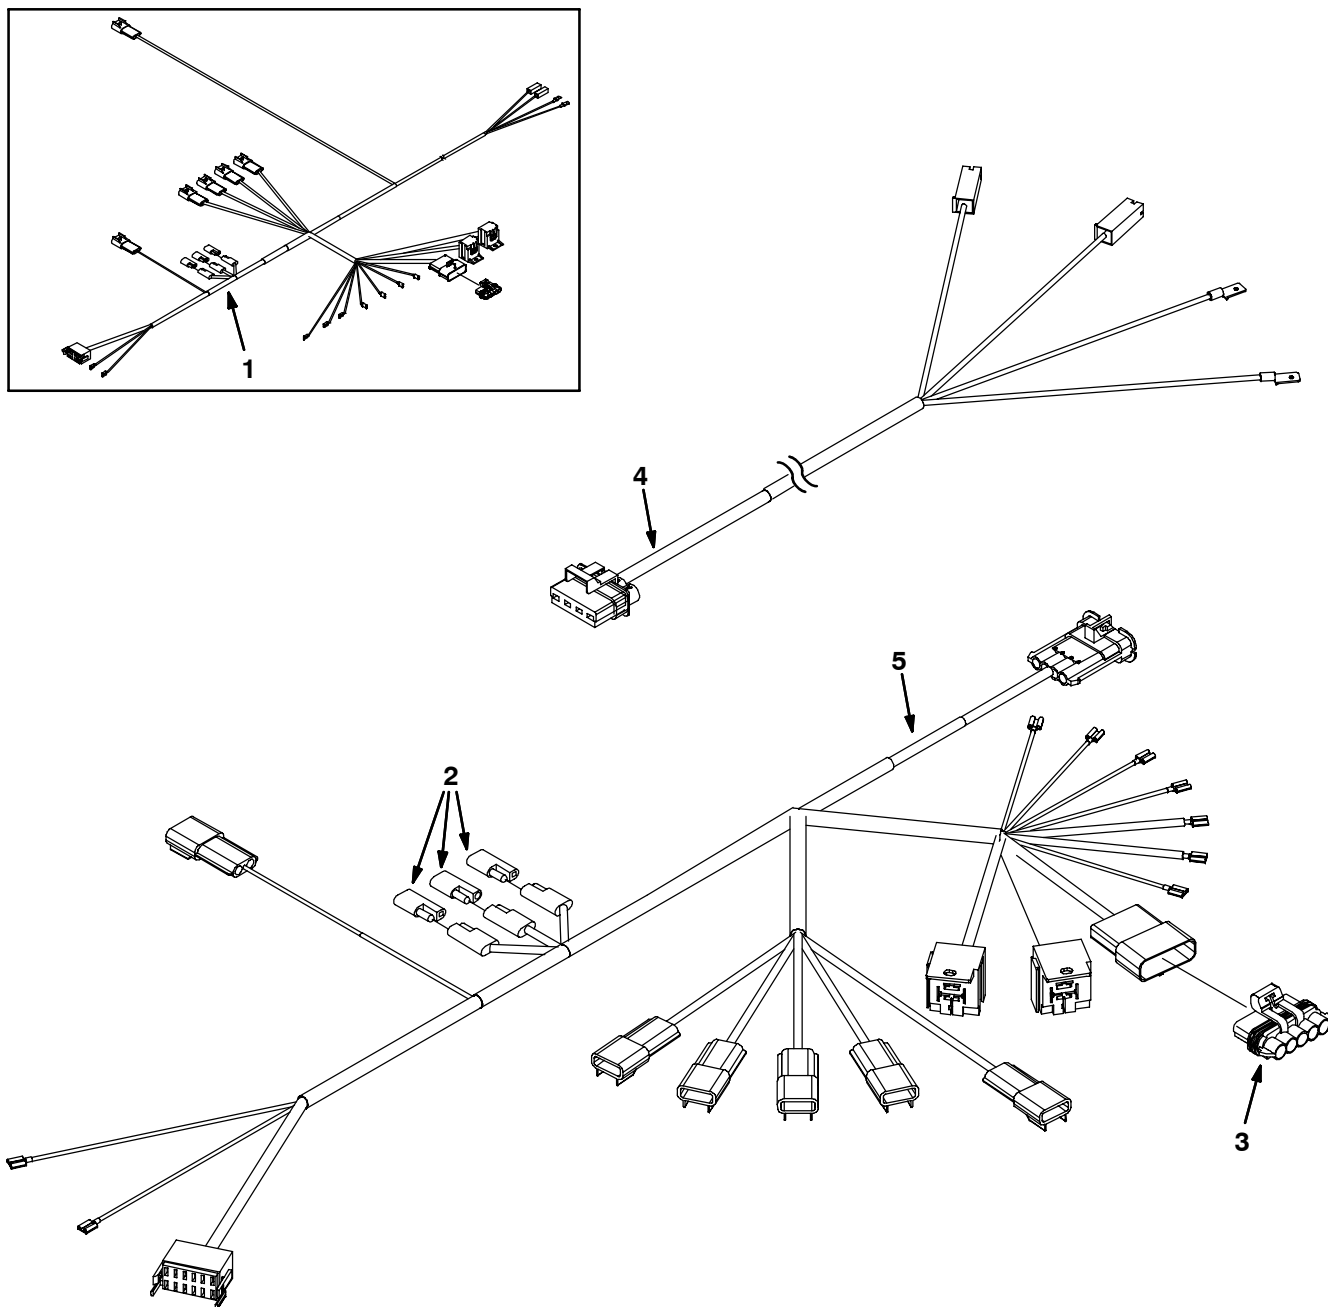

354203 - 7300

Ref.	Tenant Part No.	Machine Serial Number	Description	Qty.
1	1010325	(000000-004014)	Harness, Fast, 7300/8300	1
2	222290	(000000-	Diode, Ele, Plug	3
3	1015096	(000000-	Plug, Resistor	1
4	1017288	(004015-	Harness, Rear, [Fast 7300/8300]	1
5	1017289	(004015-	Harness [Fast 7300/8300]	1

Fig. 58 - Label Group

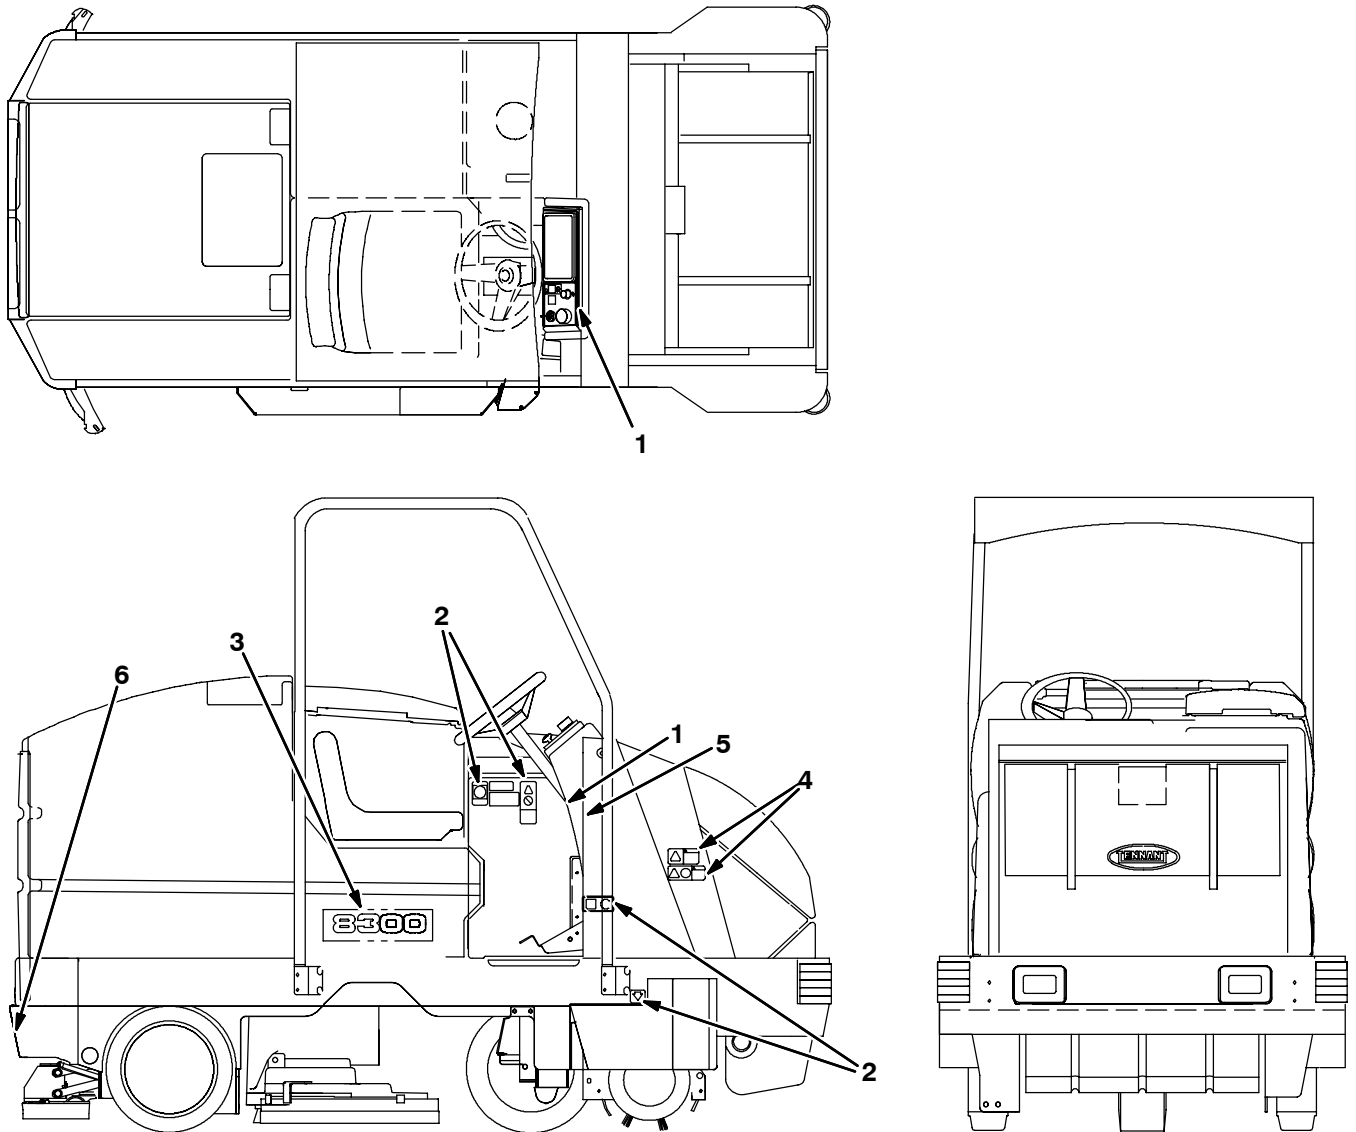

353382

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386130	(000000-)	Label Set, Operational, 7300/8300	1
2	387032	(000000-)	Label Set, Info & Hzd	1
3	386333	(000000-)	Label	2
4	387068	(000000-)	Label Set, Info & Hzd	1
5	387520	(000000-)	Tag, Operator, [8300]	1
6	387525	(000000-)	Label, Sqge	1

SECTION 3

Contents	Page
Fig. 1 - Revolving Light Kit	3-4
Fig. 2 - Revolving Light Kit, Overhead Guard	3-6
Fig. 3 - Backup Alarm Kit	3-8
Fig. 4 - Rear Bumper Kit	3-10
Fig. 5 - Overhead Guard Kit	3-12
Fig. 6 - Seat Belt Kit	3-14
Fig. 7 - Suspension Seat Kit	3-16
Fig. 8 - Left Side Brush Motor and Pivot Group	3-18
Fig. 9 - Left Side Brush Lift Group	3-20
Fig. 10 - Max Pro 1200 (Disc-Brush) Scrub Head Frame Group	3-22
Fig. 11 - Max Pro 1200 (Disc-Brush) Scrub Head Linkage Group	3-24
Fig. 12 - Max Pro 1200 (Disc-Brush) Solution Valve Group (Non FaST)	3-26
Fig. 13 - Max Pro 1200 (Disc-Brush) Solution Valve Group (FaST)	3-28
Fig. 14 - Max Pro 1200 (Disc-Brush) Edge Scrub Group	3-30
Fig. 15 - Max Pro 1200 (Disc-Brush) Right Side Squeegee Group	3-32
Fig. 16 - Max Pro 1200 (Disc-Brush) Right Side Vacuumized Squeegee Group	3-34
Fig. 17 - Max Pro 1200 (Disc-Brush) Left Side Squeegee Group	3-36
Fig. 18 - Max Pro 1000 (Cylindrical Brush) Scrub Head Frame and Linkage Group	3-38
Fig. 19 - Max Pro 1000 (Cylindrical Brush) Scrub Head Drive Group	3-40
Fig. 20 - Max Pro 1000 (Cylindrical Brush) Solution Valve Group (Non FaST)	3-42
Fig. 21 - Max Pro 1000 (Cylindrical Brush) Solution Valve Group (FaST)	3-44
Fig. 22 - Max Pro 1000 (Cylindrical Brush) Edge Scrub Group	3-46
Fig. 23 - Max Pro 1000 (Cylindrical Brush) Right Side Squeegee Group	3-48
Fig. 24 - Max Pro 1000 (Cylindrical Brush) Left Side Squeegee Group	3-50
Fig. 25 - Max Pro 1000 (Cylindrical Brush) Debris Tray Group	3-52
Fig. 26 - Max Pro 1000 (Cylindrical Brush) Vacuumized Debris Tray Group .	3-54
Fig. 27 - Max Pro 1200 (Cylindrical Brush) Scrub Head Frame and Linkage Group	3-56
Fig. 28 - Max Pro 1200 (Cylindrical Brush) Scrub Head Drive Group	3-58
Fig. 29 - Max Pro 1200 (Cylindrical Brush) Solution Valve Group (Non FaST)	3-60
Fig. 30 - Max Pro 1200 (Cylindrical Brush) Solution Valve Group (FaST)	3-62

Contents	Page
Fig. 31 - Max Pro 1200 (Cylindrical Brush) Edge Scrub Group	3-64
Fig. 32 - Max Pro 1200 (Cylindrical Brush) Right Side Squeegee Group	3-66
Fig. 33 - Max Pro 1200 (Cylindrical Brush) Left Side Squeegee Group	3-68
Fig. 34 - Max Pro 1200 (Cylindrical Brush) Debris Tray Group	3-70
Fig. 35 - Max Pro 1200 (Cylindrical Brush) Vacuumized Debris Tray Group .	3-72
Fig. 36 - ES Pump Group	3-74
Fig. 37 - ES Tank Goup	3-76
Fig. 38 - ES Drain Assembly	3-78
Fig. 39 - Positive Solution Control Drain Kit, Recovery Tank	3-80
Fig. 40 - Positive Solution Control Drain Kit, Solution Tank	3-82
Fig. 41 - Low Water Level Kit	3-84
Fig. 42 - Detergent Metering Kit	3-86
Fig. 43 - Power Wand Hose Assembly	3-88
Fig. 44 - Power Wand Assembly	3-90
Fig. 45 - Power Wand Pump and Fittings Group	3-92
Fig. 46 - Power Wand Mount Group	3-94
Fig. 47 - Vacuum Wand Kit	3-96
Fig. 48 - Max Pro 1200 Rear Squeegee Group	3-98
Fig. 49 - Max Pro 1200 Rear Squeegee Group (For Vacuumized Side Squeegee)	3-100
Fig. 50 - Max Pro 1000 Urethane Squeegee Kit	3-102
Fig. 51 - Max Pro 1200 Urethane Squeegee Kit	3-103
Fig. 52 - Battery Rollout Kit	3-104
Fig. 53 - Battery Forklift Kit	3-106
Fig. 54 - Battery Kit, 500AH Wet	3-108
Fig. 55 - Battery Kit, 600AH	3-110
Fig. 56 - Battery Kit, 750AH Wet	3-112
Fig. 57 - Battery Kit, 1000AH Wet	3-114
Fig. 58 - Battery Charger Group, 120A, 36V, 60Hz 1Ph (500Ah Batteries)	3-116
Fig. 59 - Battery Charger Group, 120A, 36V, 60Hz 3Ph (500Ah Batteries)	3-117
Fig. 60 - Battery Charger Group, 150A, 36V, 60Hz (750Ah Batteries)	3-118
Fig. 61 - Battery Charger Group, 93A, 36V, 60Hz 1Ph (600Ah Batteries)	3-119
Fig. 62 - Battery Charger Group, 93A, 36V, 60Hz 3Ph (600Ah Batteries)	3-120

OPTIONS

Contents	Page
Fig. 63 - Battery Charger Group, 210A, 36V, 60Hz, 3Ph (1000 Ah Batteries)	3-121
Fig. 64 - Tire, Non-Mark, Non-Skid, Front Drive	3-122
Fig. 65 - Non-Mark, Non-Skid Tire, Rear	3-123
Fig. 66 - Fire Extinguisher Kit	3-124
Fig. 67 - Documentation Group	3-125

Fig. 1 - Revolving Light Kit

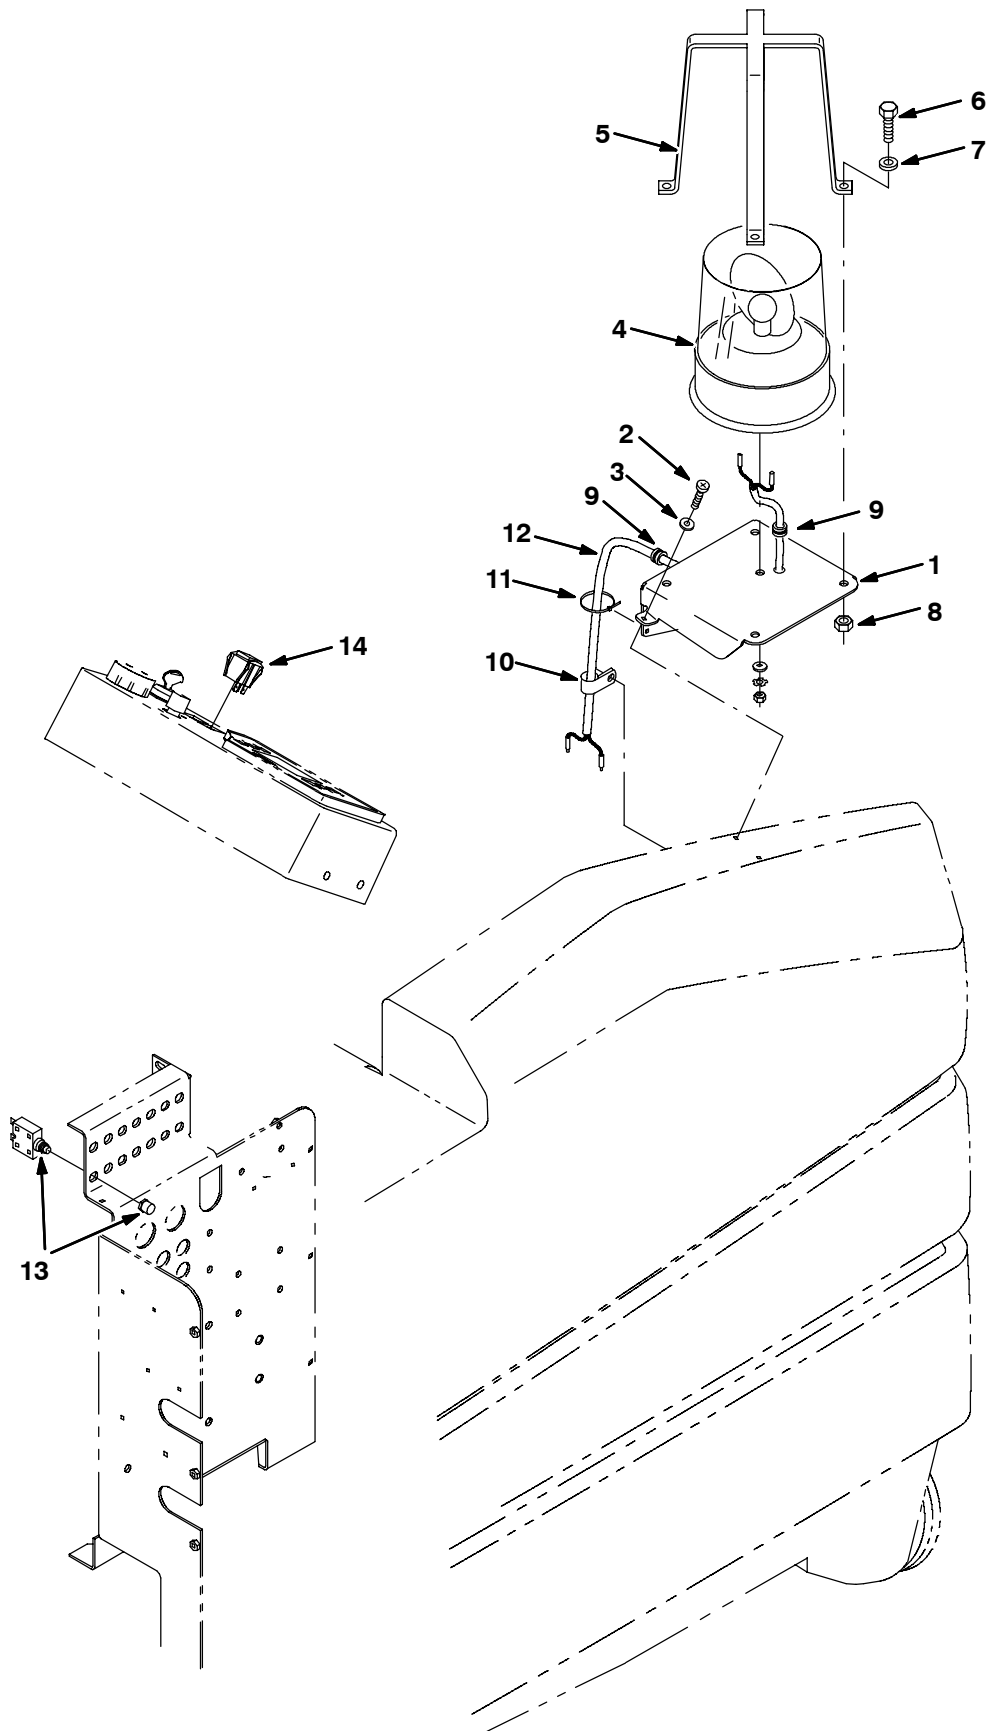


Fig. 1 - Revolving Light Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387301	(000000-	) Kit, Cl, Light, Revl W/O OHG	1
▲	1	387157	(000000-	) Bracket, Mtg	1
▲	2	360943	(000000-	) Screw, Pan, #10-14 X 0.75, F/Plstc	5
▲	3	19066	(000000-	) Washer, Flt, #10	4
▲▽	4	87709	(000000-	) Light, Revl, 36vdc, Amb, Rework 44684	1
▲▲		44681-1	(000000-	) Lens, Amber, Light, Revl	1
▲▲		45283	(000000-	) Lamp, 40vdc, 0.9a, [50cp#1062]	1
▲	5	45272	(000000-	) Guard Wldt, Light, Revl/Flsh	1
▲	6	39277	(000000-	) Screw, Hex, M08 X 1.25 X 25, 8.8	4
▲	7	39349	(000000-	) Washer, Flt, .31 Sae	4
▲	8	07791	(000000-	) Nut, Hex, Flng, M08 X 1.25	4
▲	9	10632-12	(000000-	) Grommet, Rbr, 0.38id, F/ 0.5h, .12matl	2
▲	10	26395-2	(000000-	) Clamp, Cable, Stl, 0.38d X 0.38w, 1h	1
▲	11	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	1
▲	12	386609	(000000-	) Harness, Light, Revl, Shrd	1
▲	13	383722	(000000-	) Circuitbreaker, 15.0 A	1
▲	14	360520	(000000-	) Switch, Rocker	1
		44681	(000000-	) Lens, Rev. Light, Red	1
		44681-2	(000000-	) Lens, Rev. Light, Blue	1

Fig. 2 - Revolving Light Kit, Overhead Guard

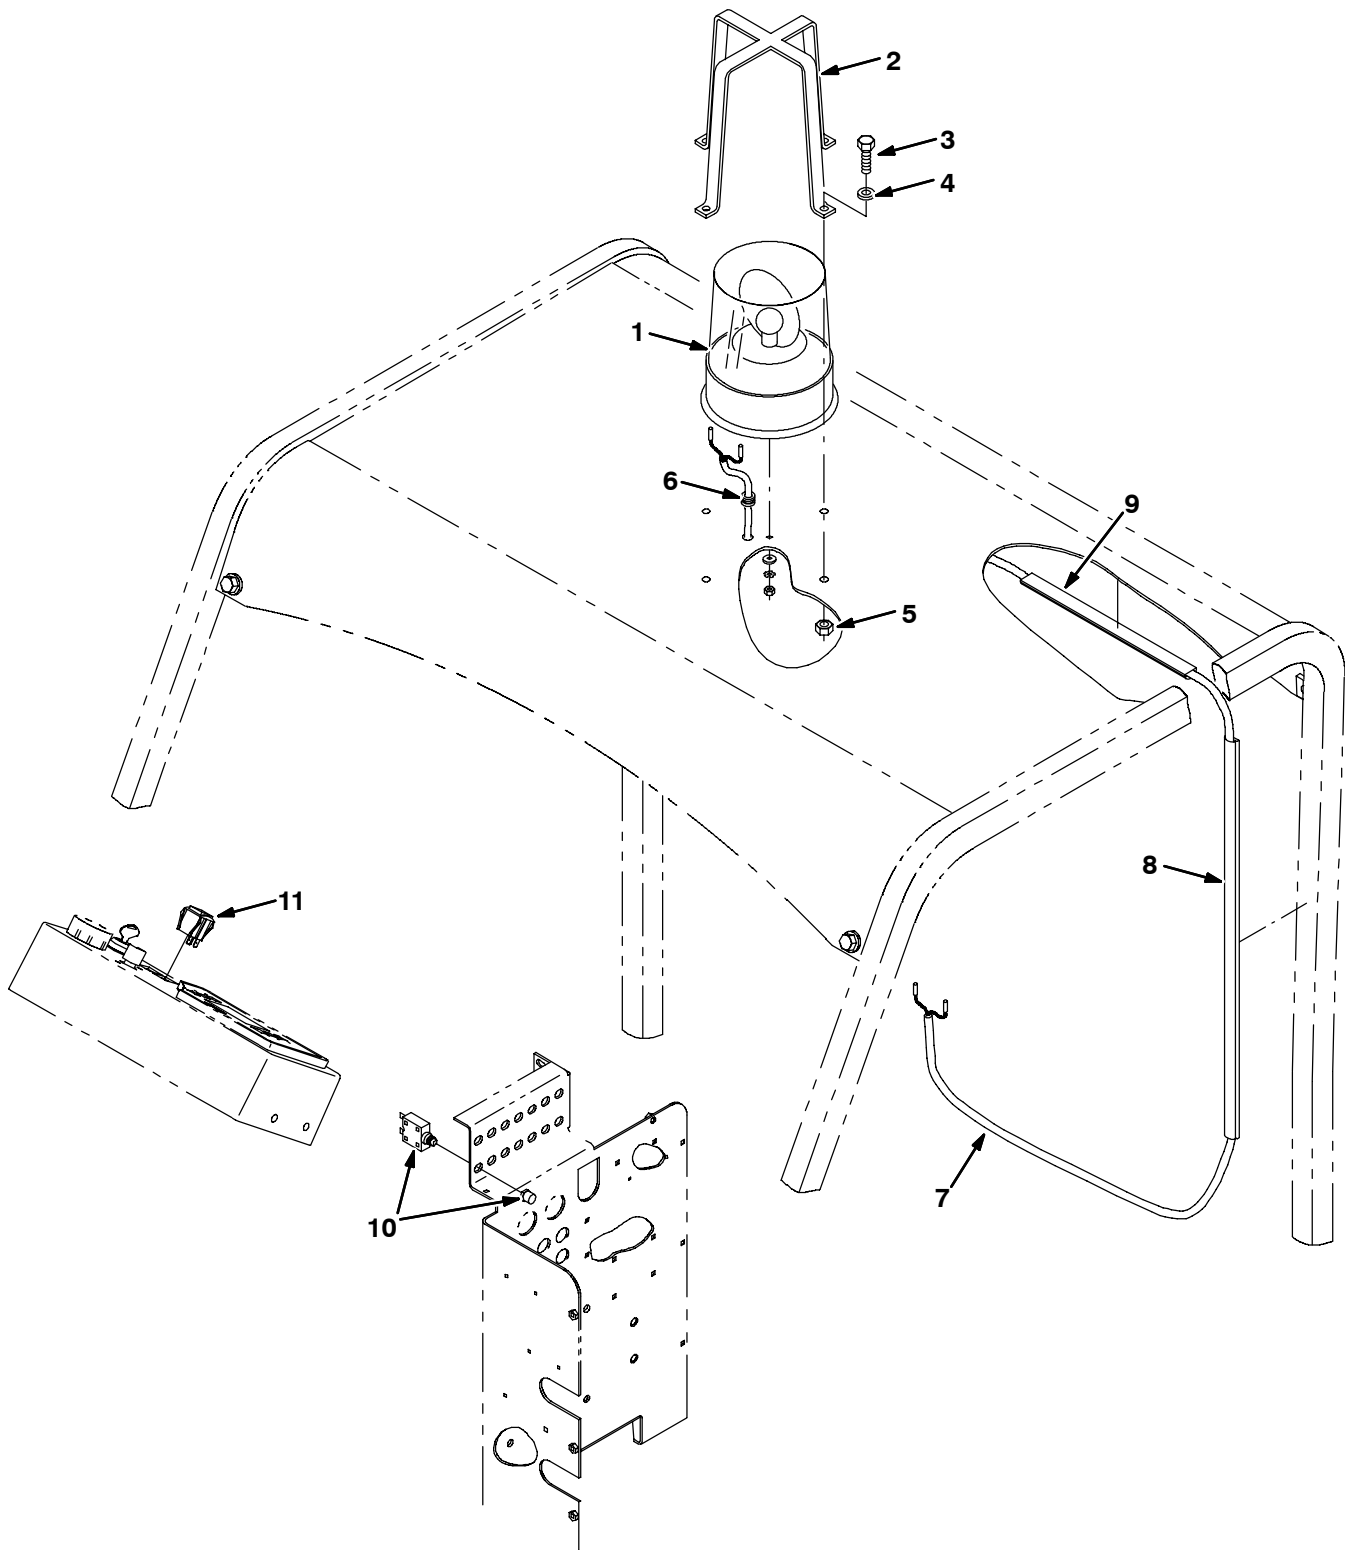


Fig. 2 - Revolving Light Kit, Overhead Guard

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387300	(000000-	) Kit, Cl, Light, Revl W/ Ohg	1
▲▽	1	87709	(000000-	) Light, Revl, 36vdc, Amb, Rework 44684	1
▲▲		44681-1	(000000-	) Lens, Amber, Light, Revl	1
▲▲		45283	(000000-	) Lamp, 40vdc, 0.9a, [50cp#1062]	1
▲	2	45272	(000000-	) Guard Wldt, Light, Revl/Flsh	1
▲	3	39277	(000000-	) Screw, Hex, M08 X 1.25 X 25, 8.8	4
▲	4	39349	(000000-	) Washer, Flt, .31 Sae	4
▲	5	07791	(000000-	) Nut, Hex, Flng, M08 X 1.25	4
▲	6	10632-12	(000000-	) Grommet, Rbr, 0.38id, F/ 0.5h, .12matl	1
▲	7	386605	(000000-	) Harness, Warning Light, Alarm	1
▲	8	365032	(000000-	) Duct, Vyl, 0.40 X 0.75 .25d 48.0l	1
▲	9	365033	(000000-	) Duct, Vyl, 0.40 X 0.75 .25d 23.0l	1
▲	10	383722	(000000-	) Circuitbreaker, 15.0 A	1
▲	11	360520	(000000-	) Switch, Rocker	1
		44681	(000000-	) Lens, Rev. Light, Red	1
		44681-2	(000000-	) Lens, Rev. Light, Blue	1

Fig. 3 - Backup Alarm Kit

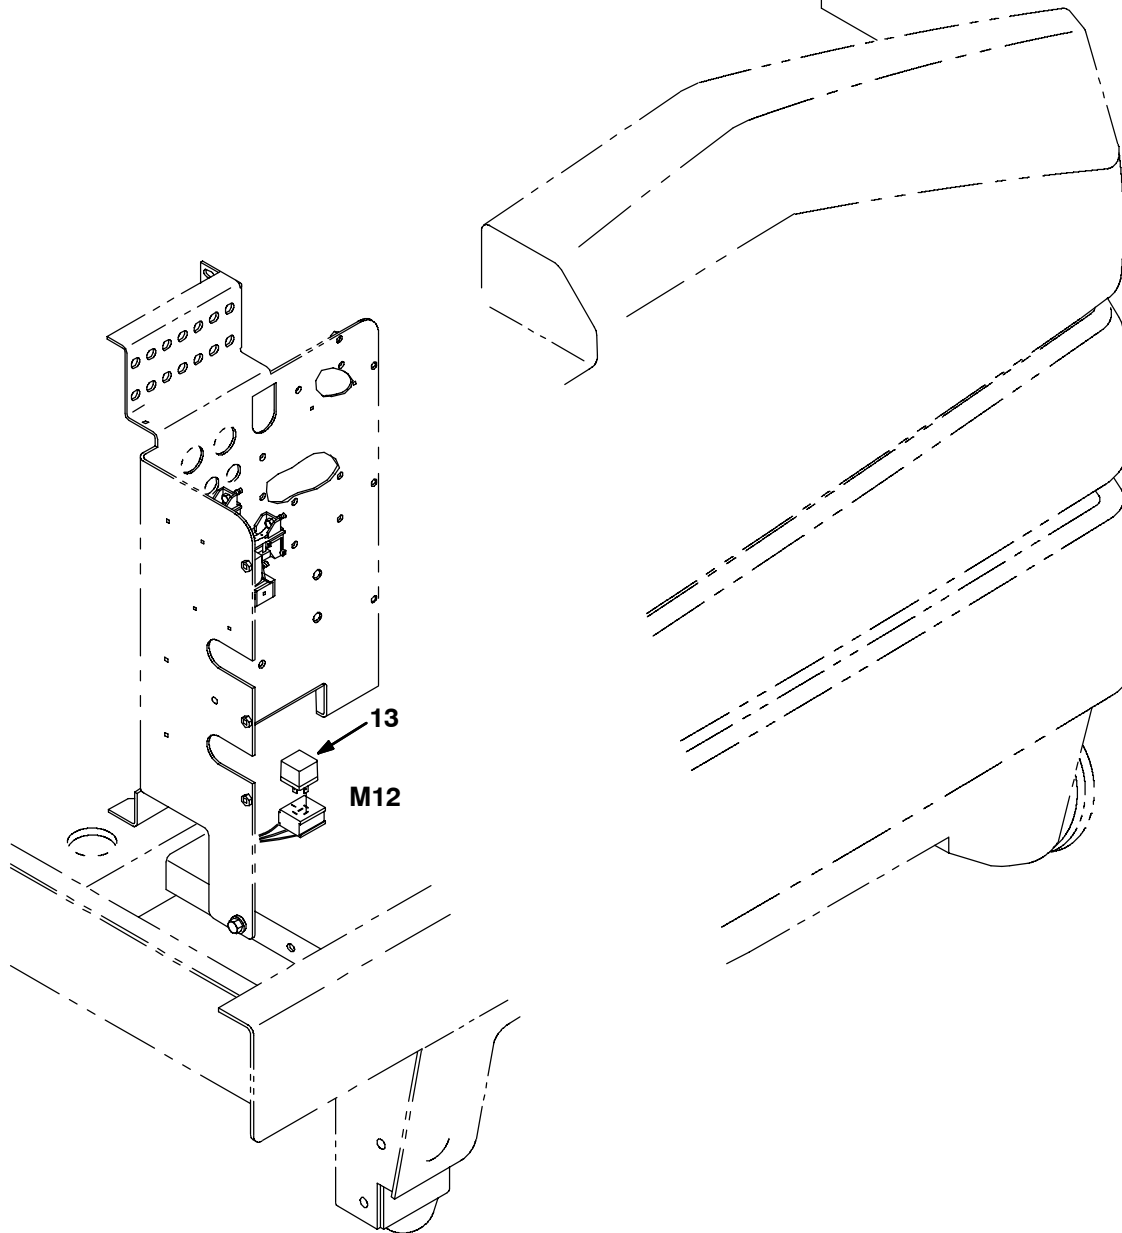
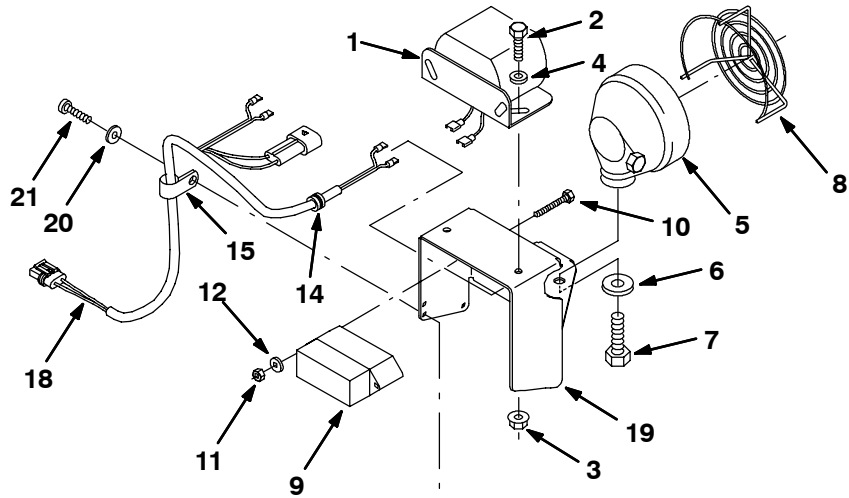
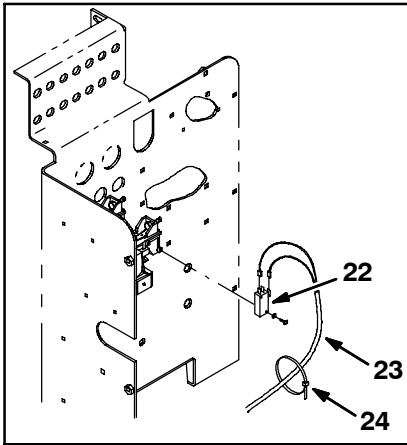


Fig. 3 - Backup Alarm Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387208	(000000-	) Kit, Cl, Alarm, Backup, 36Vdc	1
▲	1	72171	(000000-	) Alarm Assy, Backup, 12-48vdc 82-102dba	1
▲	2	06943	(000000-	) Screw, Hex, M06 X 1.0 X 20, 8.8	2
▲	3	07790	(000000-	) Nut, Hex, Flng, M06 X 1.0	2
▲	4	19066	(000000-	) Washer, Flt, #10	2
▲▽	5	72172	(000000-	) Light, Spot, 36vdc, 60w Rework 72173	1
▲▲		45391	(000000-	) Headlight, 36Vdc, 60 Watt 1.7A	1
▲	6	32486	(000000-	) Washer, Flt, .50 Sae	1
▲	7	39807	(000000-	) Screw, Hex, .50-13 X 0.75, 5	1
▲	8	72174	(000000-	) Guard, Light	1
▲	9	72164	(000000-	) Flasher, 12/48vdc 5a #6309/12-48vdc	1
▲	10	06949	(000000-	) Screw, Hex, M06 X 1.0 X 50, 8.8	2
▲	11	08708	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI	2
▲	12	32483	(000000-	) Washer, Flt, .25 Sae	2
▲	13	398526	(000000-	) Relay, 36vdc, 5a, Spdt, [Greenwich]	1
▲	14	10632-12	(000000-	) Grommet, Rbr, 0.38id, F/ 0.5h, .12matl	1
▲	15	26395-2	(000000-	) Clamp, Cable, Stl, 0.38d X 0.38w, 1h	1
▲	16	32980	(000000-	) Washer, Lock, Int, #10	2
▲	17	38622	(000000-	) Spring	1
▲	18	386606	(000000-	) Harness, Backup Alarm, Shrd	1
▲	19	387158	(000000-	) Bracket, Mtg	1
▲	20	19066	(000000-	) Washer, Flt, #10	5
▲	21	360943	(000000-	) Screw, Pan, #10-14 X 0.75, F/Plstc	6
▲	22	28622	(000000-003545	) Kit, Switch, Micro	1
▲	23	387344	(000000-003545	) Harness, Wire, Jumper, Reverse Switch	1
▲	24	49266	(000000-003545	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	4

Fig. 4 - Rear Bumper Kit

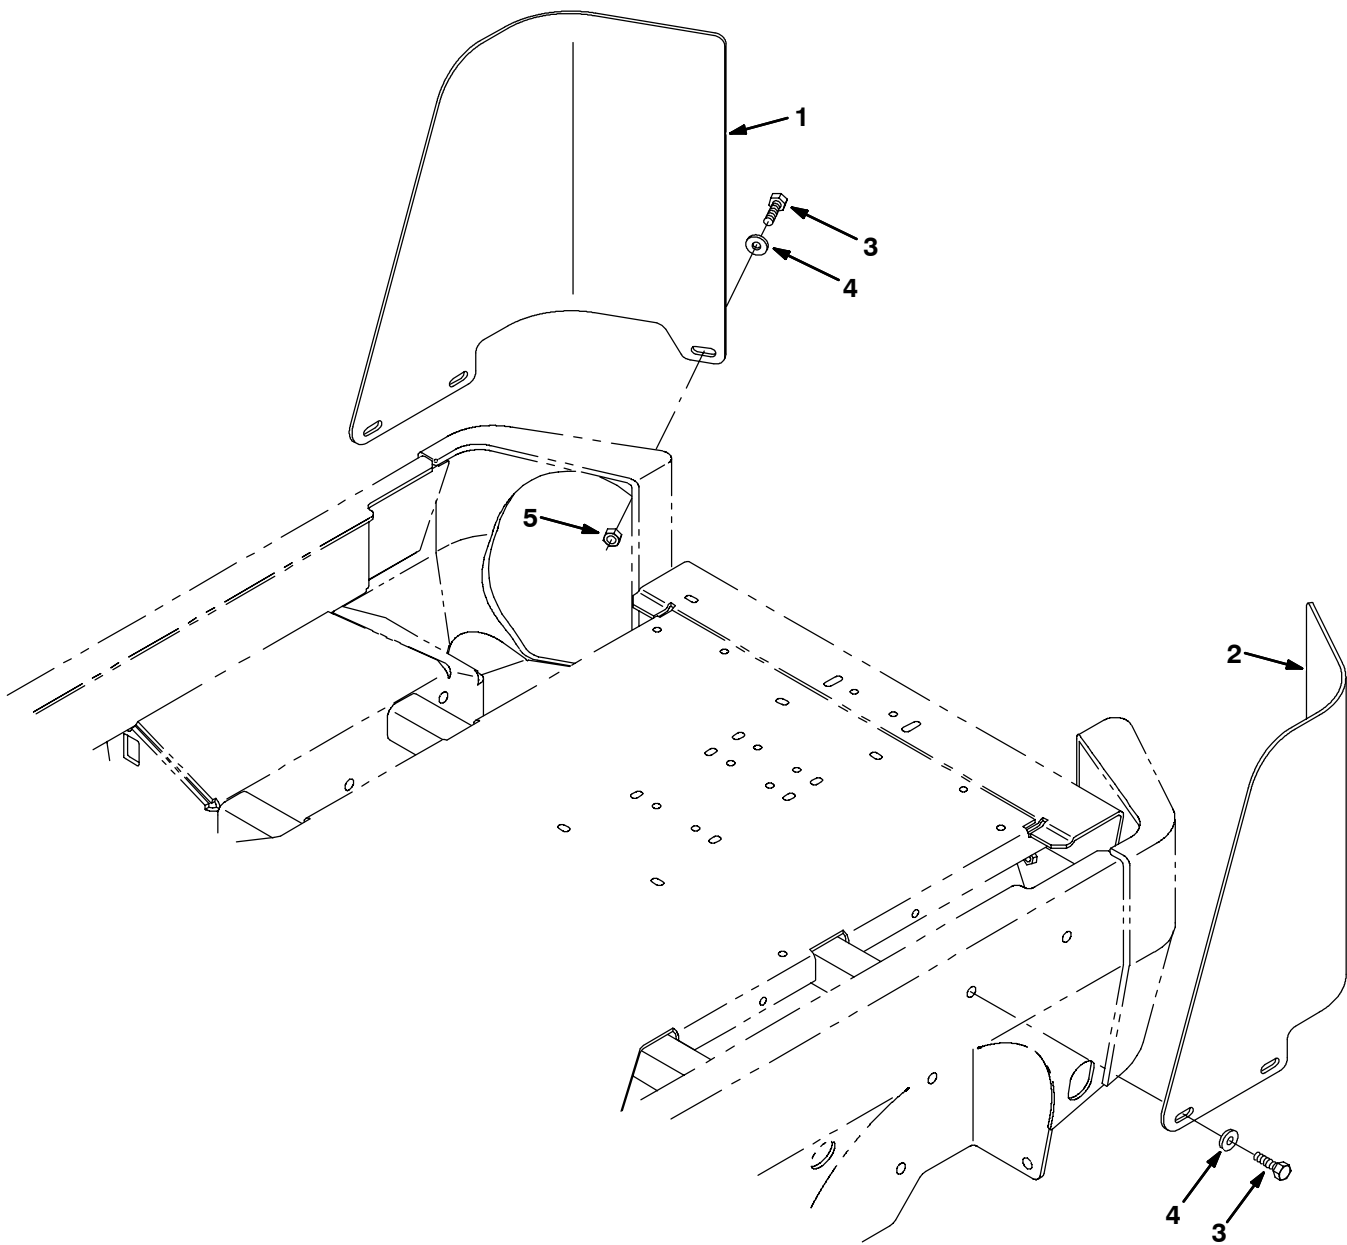


Fig. 4 - Rear Bumper Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386417	(000000-	) Kit, Ci, Bumper, Rear	1
▲	1	386415	(000000-	) Bumper, Rear, Rh	1
▲	2	386416	(000000-	) Bumper, Rear, Lh	1
▲	3	09028	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss	6
▲	4	01686	(000000-	) Washer, Flt, .38 Ss	6
▲	5	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	2

Fig. 5 - Overhead Guard Kit

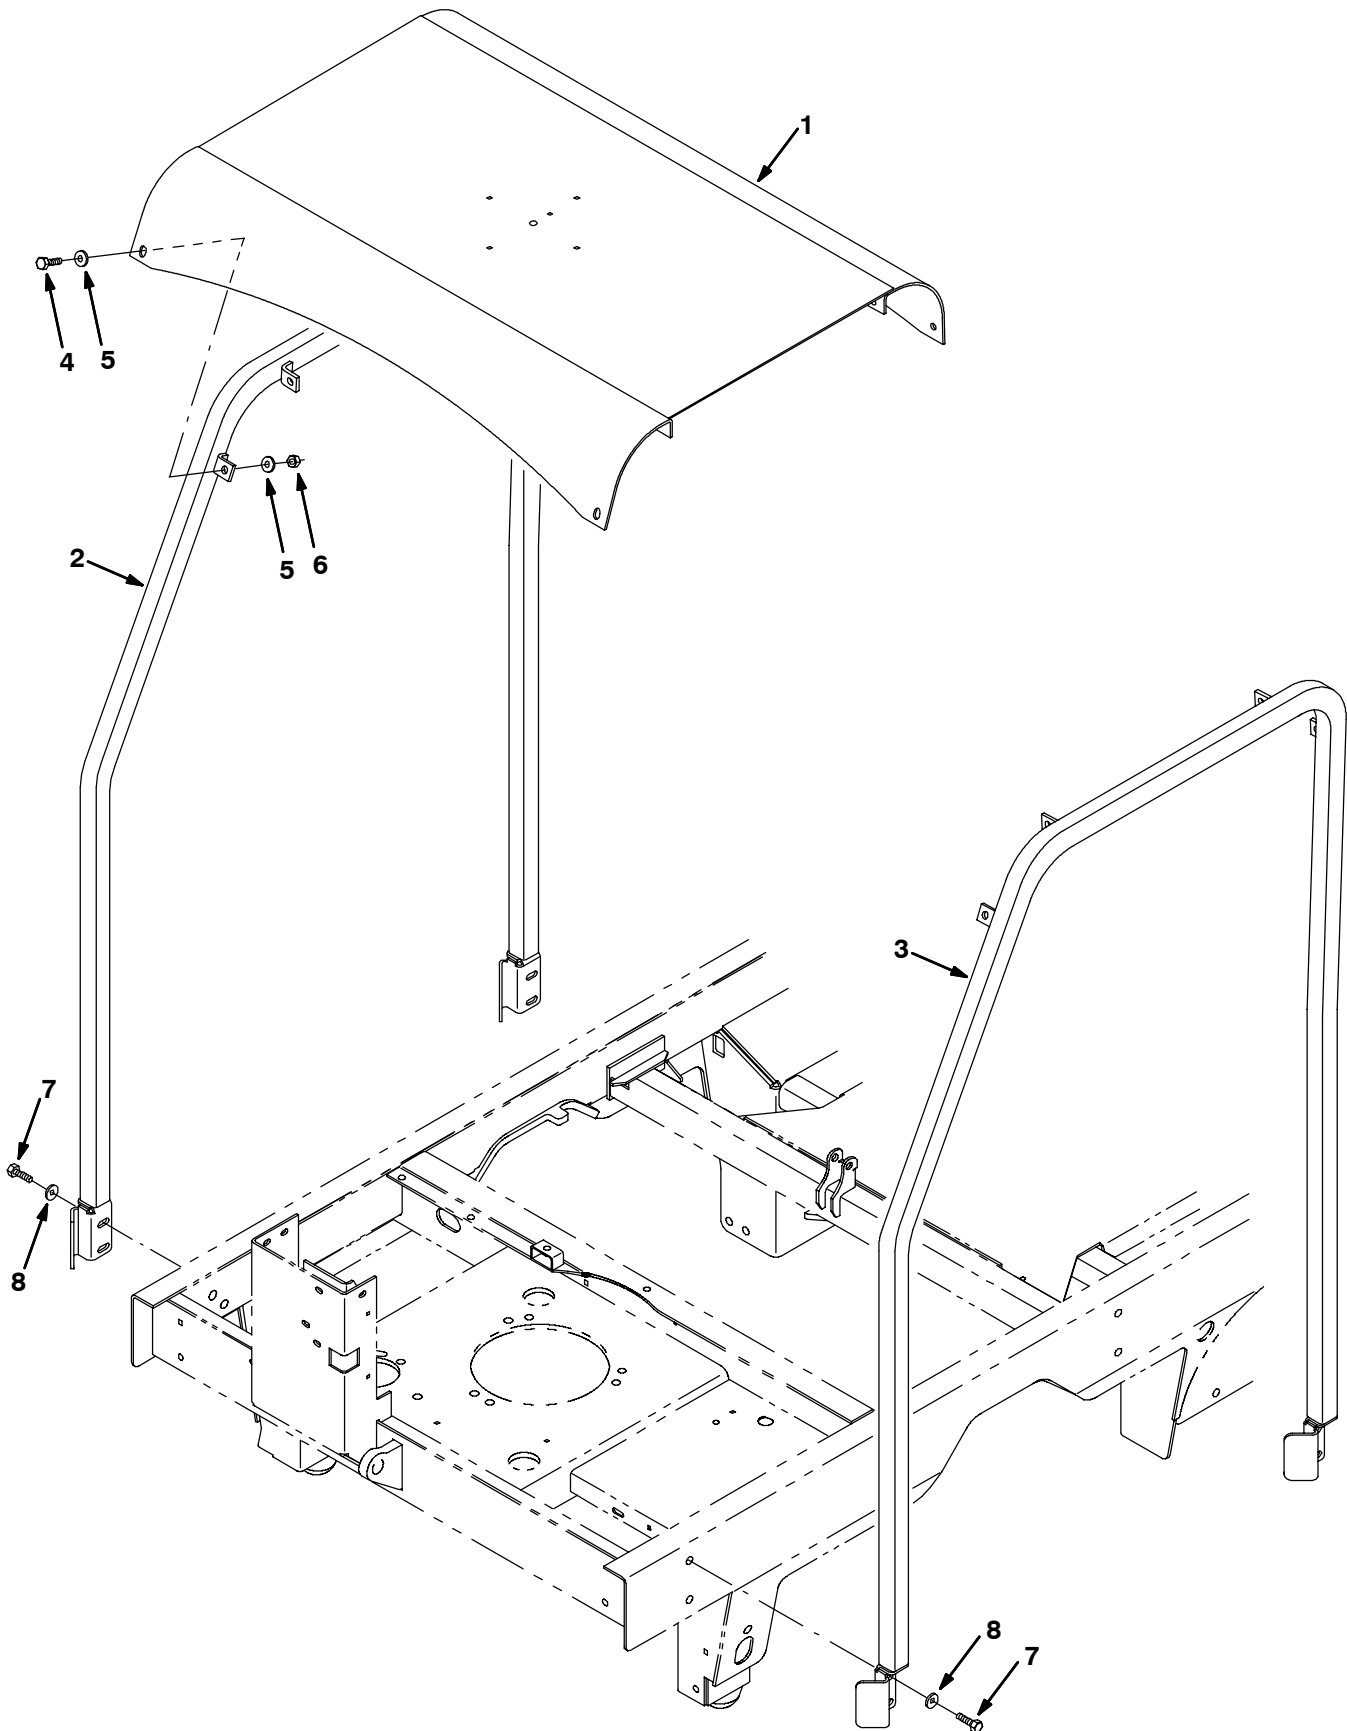


Fig. 5 - Overhead Guard Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386875	(000000-	) Kit, Ci, Ohg, [7300/8300]	1
▲	1	386642	(000000-	) Guard Wldt, Oprtr, Top	1
▲	2	386983	(000000-	) Tube, Guard, Oprtr, Pnt, Rh	1
▲	3	386984	(000000-	) Tube, Guard, Oprtr, Pnt, Lh	1
▲	4	06961	(000000-	) Screw, Hex, M10 X 1.5 X 20, 8.8	8
▲	5	32492	(000000-	) Washer, Flt, .38 Std	16
▲	6	41430	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI	8
▲	7	09028	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss	8
▲	8	01686	(000000-	) Washer, Flt, .38 Ss	8

Fig. 6 - Seat Belt Kit

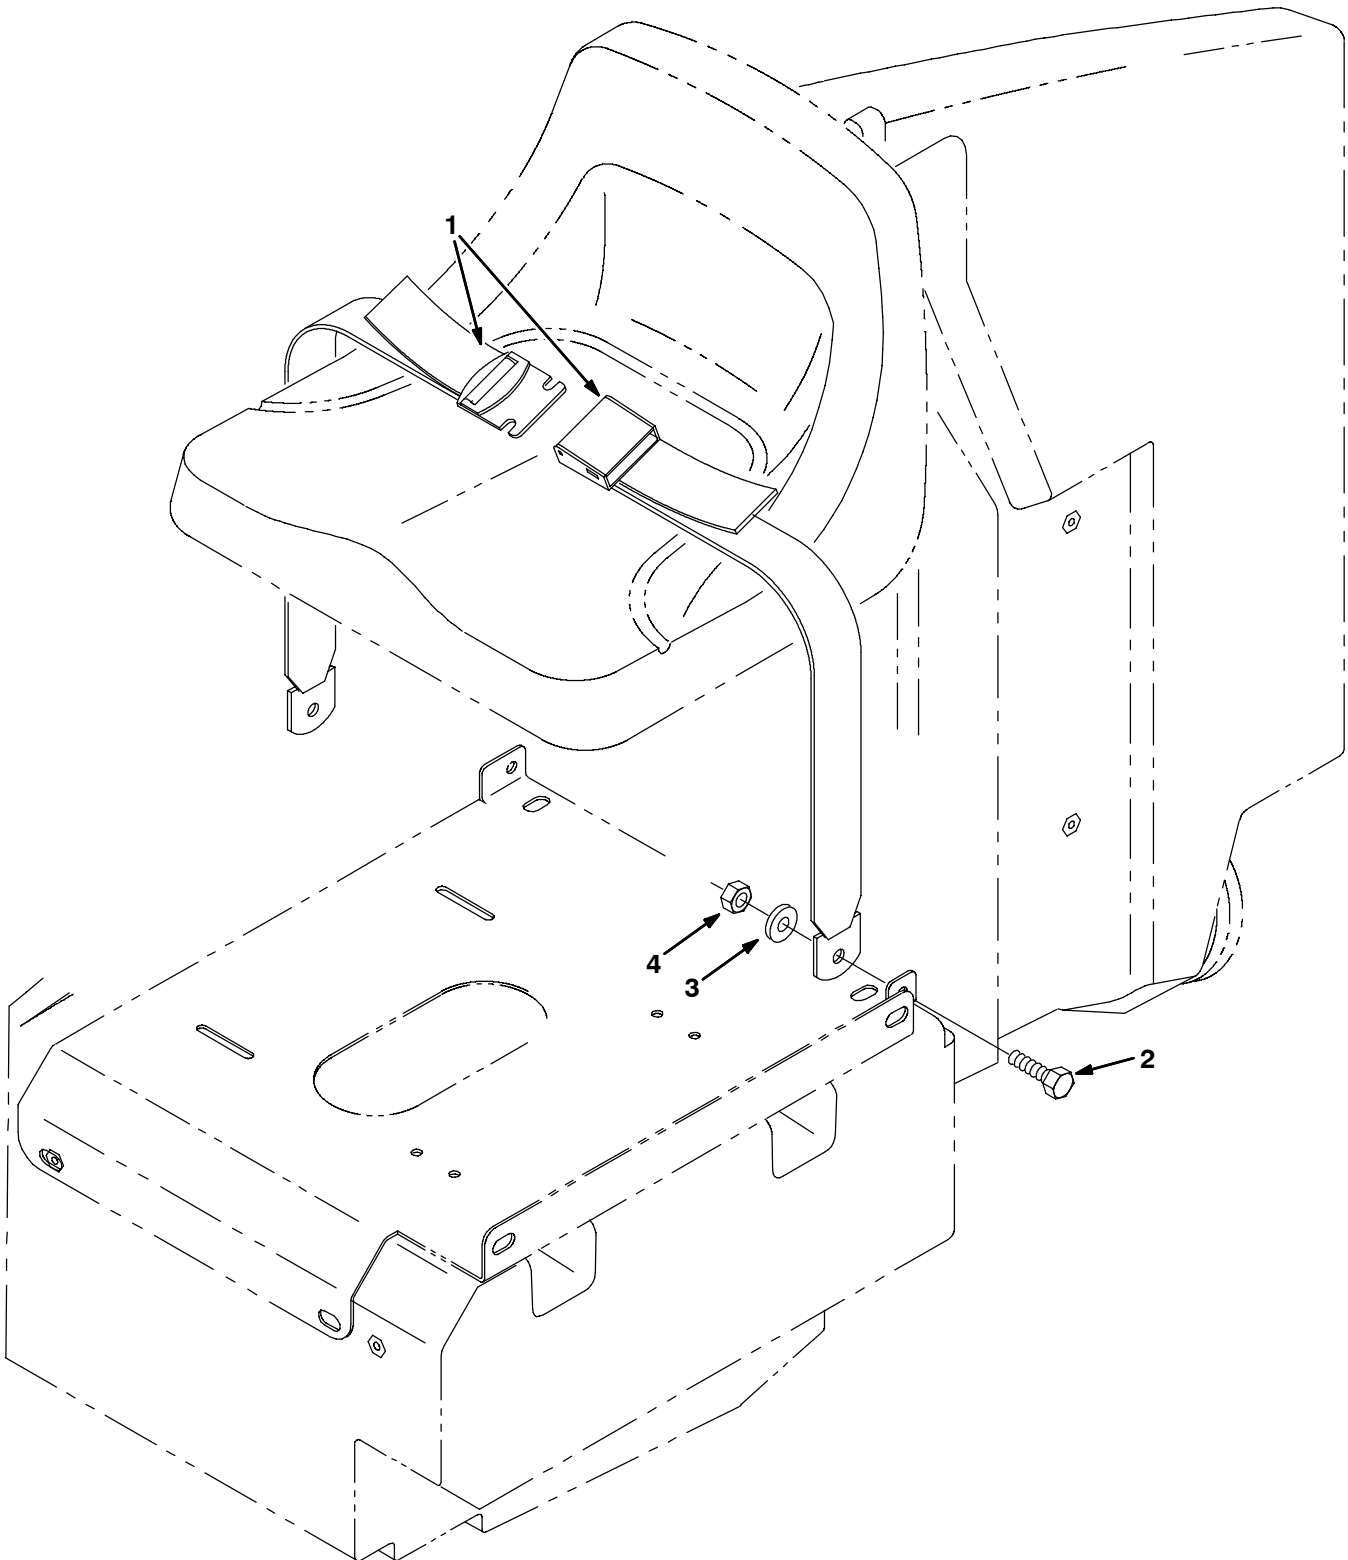


Fig. 6 - Seat Belt Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386958	(000000-	) Kit, Ci, Seatbelt	1
▲	1	30533	(000000-	) Seatbelt	1
▲	2	06961	(000000-	) Screw, Hex, M10 X 1.5 X 20, 8.8	2
▲	3	32493	(000000-	) Washer, Flt, .50 Std	2
▲	4	41430	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI	2

Fig. 7 - Suspension Seat Kit

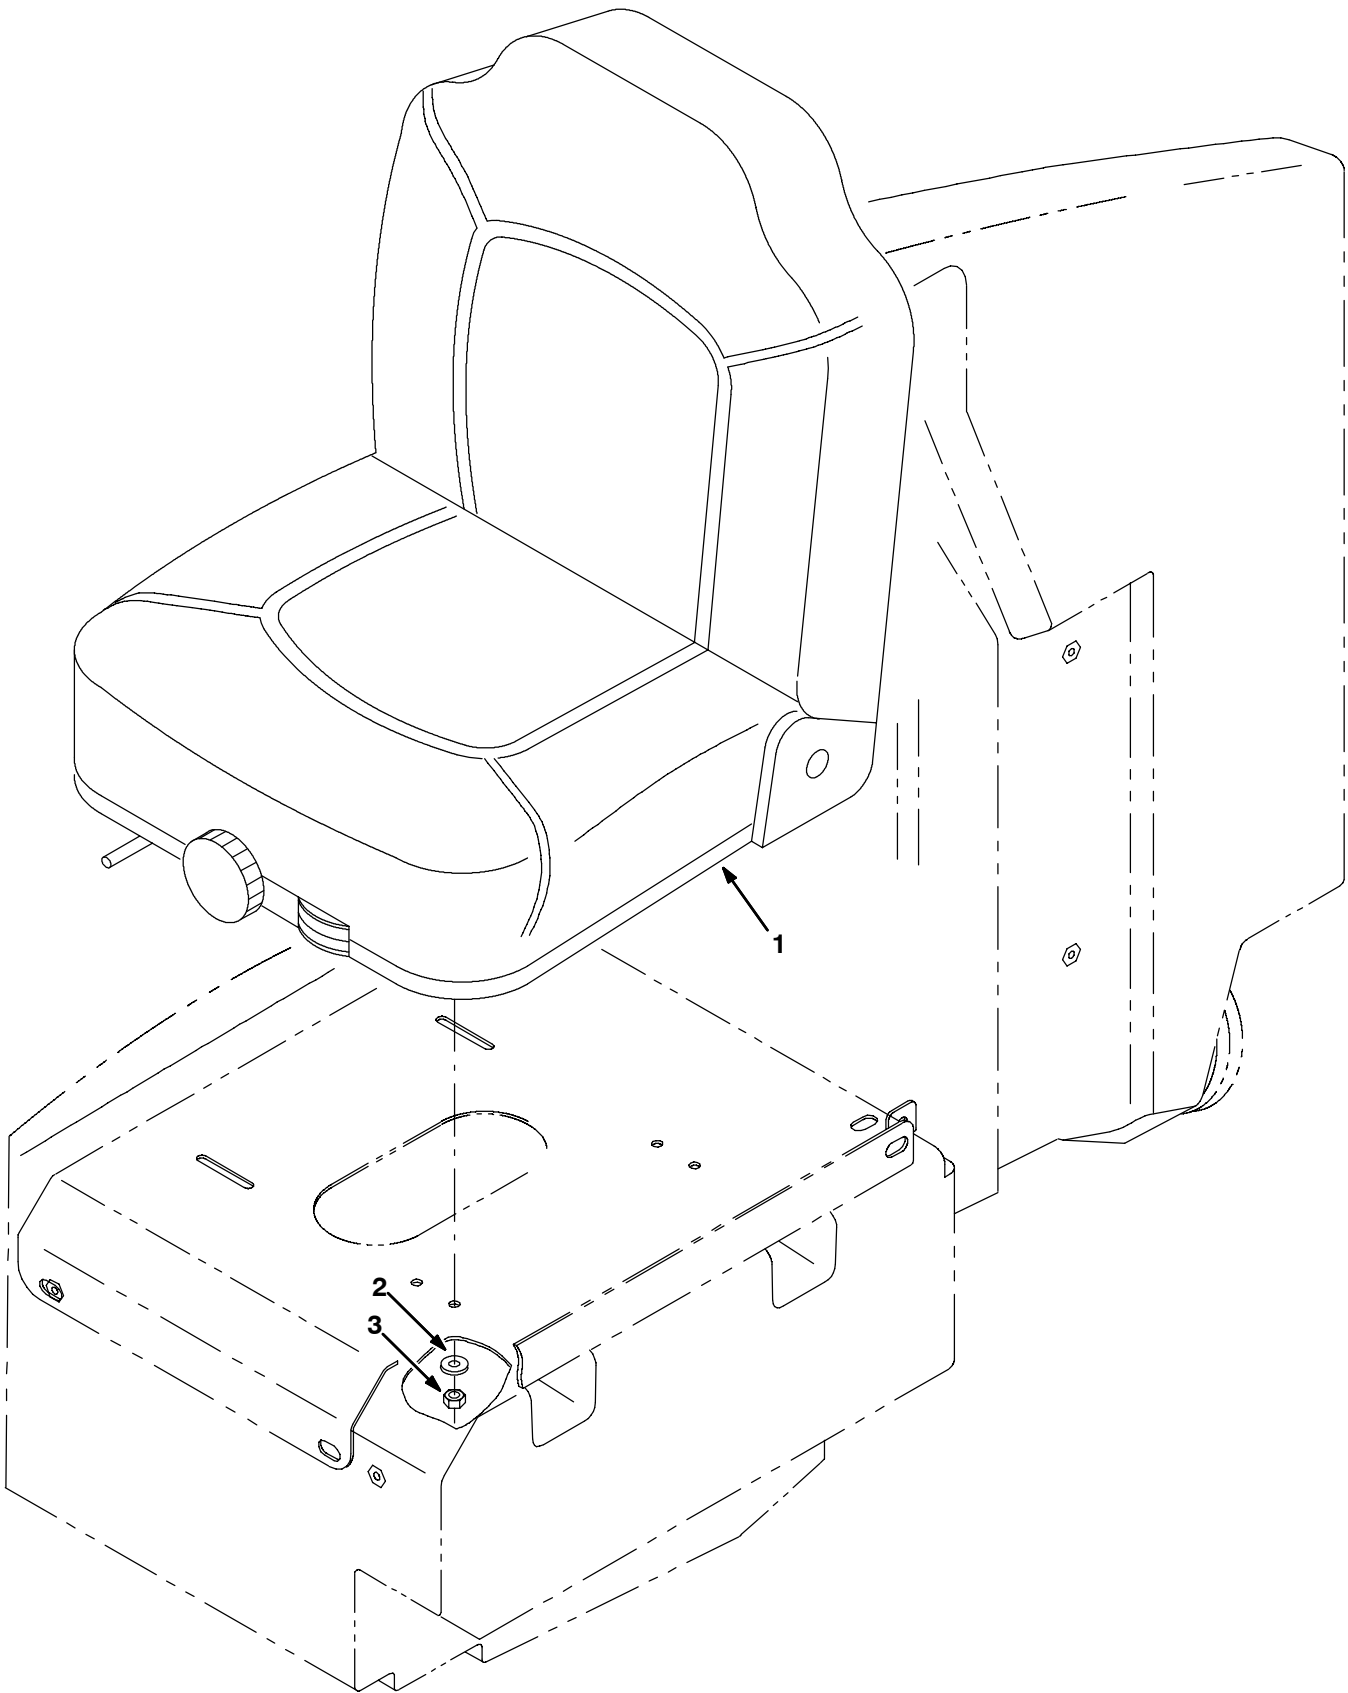


Fig. 7 - Suspension Seat Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386963	(000000-	) Kit, Ci, Seat, Suspension	1
▲	1	223595	(000000-	) Seat, Suspension	1
▲	2	32491	(000000-	) Washer, Flt, .31 Std	4
▲	3	32983	(000000-	) Nut, Hex, Lock, .31-18, NI	4

Fig. 8 - Left Side Brush Motor and Pivot Group

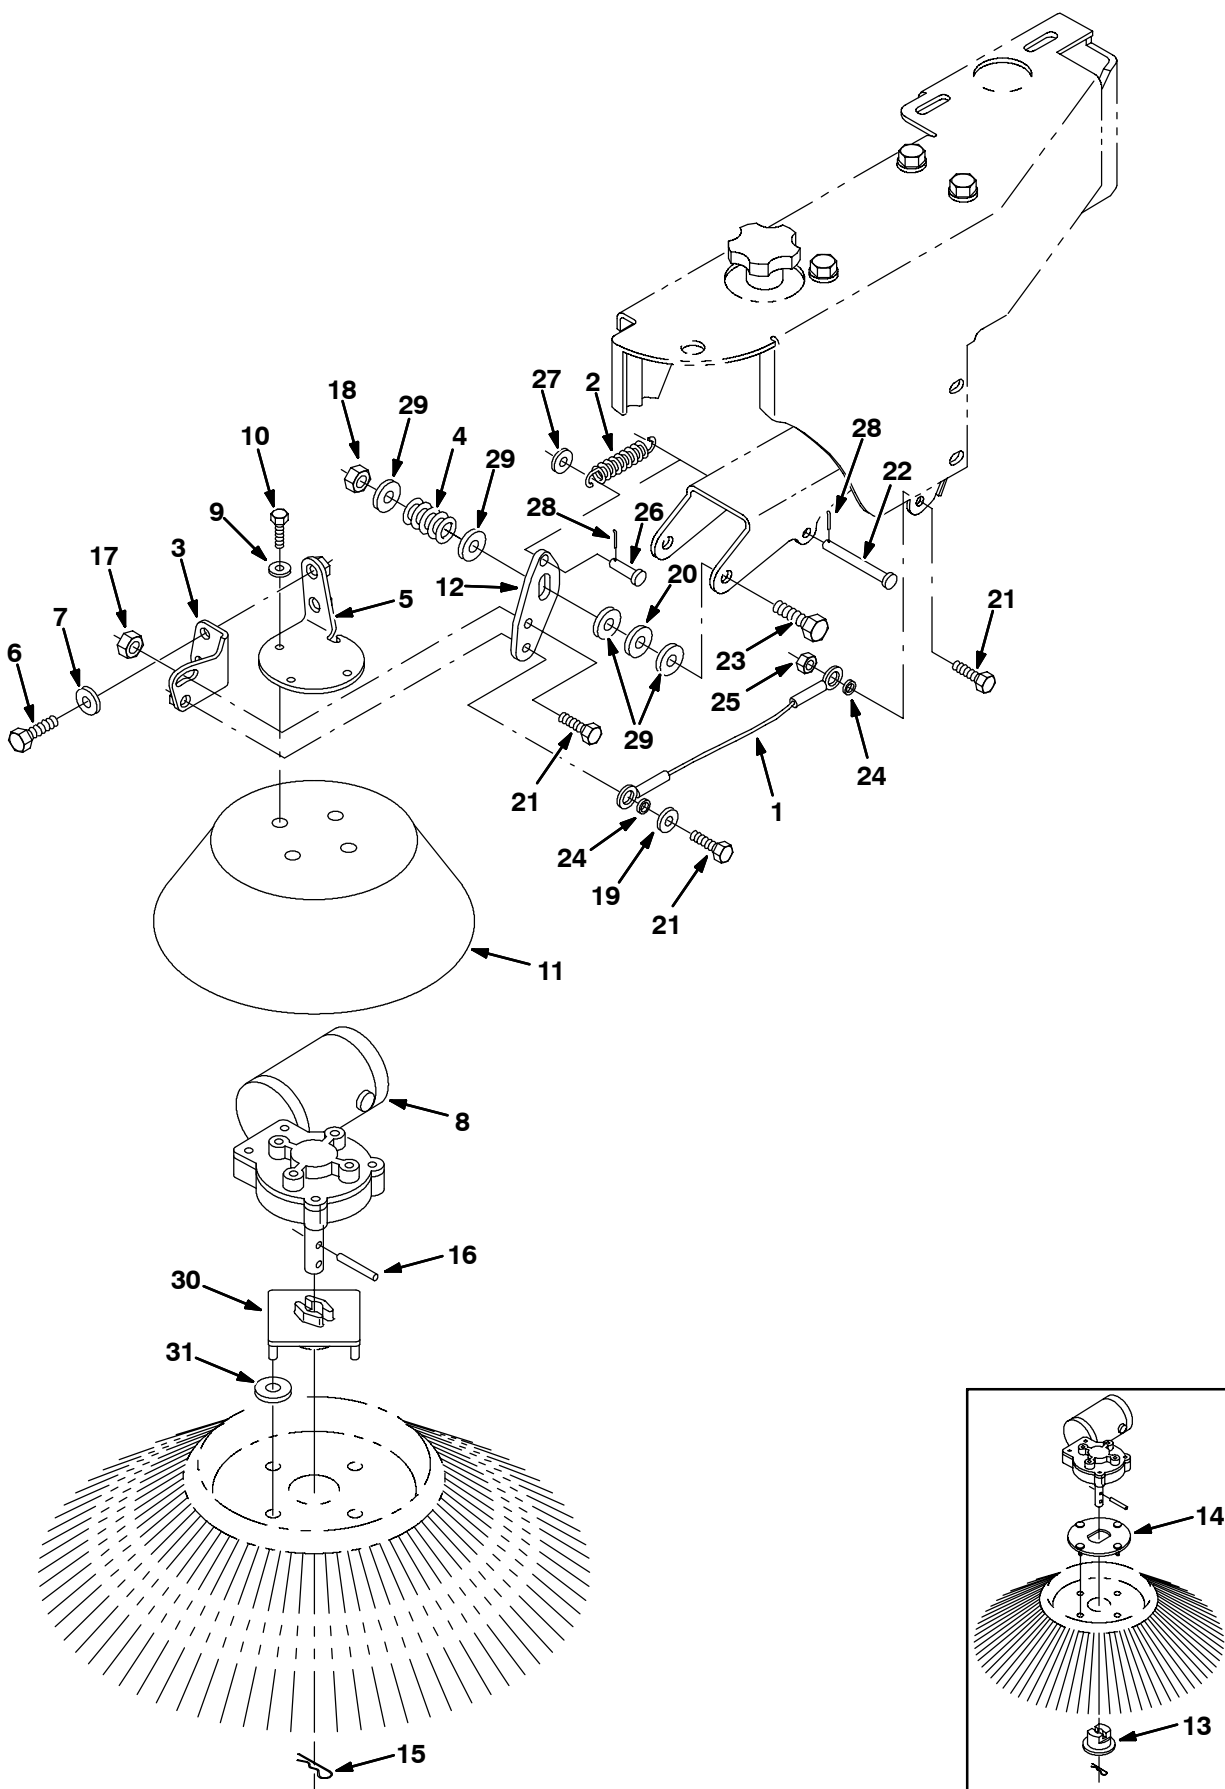


Fig. 8 - Left Side Brush Motor and Pivot Group

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
	1	87172	(000000-	) Cable, .13d, 10.0l, .51eye /.51eye	1
	2	09480	(000000-	) Spring, Extn, 1.10od X 0.15wir, 3.2l	1
	3	386668	(000000-	) Bracket, Motor, Mtg	2
	4	360357	(000000-	) Spring, Die, 1.00od 0.50id 1.25l	2
	5	386662	(000000-	) Bracket, Motor, Mtg	1
	6	09770	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss, NI	2
	7	01686	(000000-	) Washer, Flat, .38 Ss	2
▽	8	81767	(000000-003699	) Motor, Ele, 36Vdc, Hp, 0080Rpm, Lh (Rep By 1008275)	1
▲		81919	(000000-003699	) Kit, Brush, Motor	2
▲		80127	(000000-003699	) Cap, Brush	2
▲		369795	(000000-003699	) Brushholder, Motor, Ele	2
▲		369796	(000000-003699	) Clip, Motor, Ele	2
▽	8	1008275	(003700-	) Motor, Ele, 36Vdc 0.08Hp 0068Rpm 04.5A	1
▲		81919	(003700-	) Kit, Brush, Motor, Ele	1
▲		80127	(003700-	) Cap, Brush, Motor, Ele	2
▲		369795	(003700-	) Brushholder, Motor, Ele	2
▲		369796	(003700-	) Clip, Motor, Ele	2
	9	01684	(000000-	) Washer, Flt, .25 Ss	4
	9	01684	(000000-	) Washer, Flt, .25 Ss	4
	10	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	4
	11	386666	(000000-	) Guard, Brush, Side	1
	12	386905	(000000-	) Plate	1
	13	386664	(000000-004071	) Adapter, Brush	1
	14	386663	(000000-004071	) Plate, Adapter, Brush	1
	15	44906	(000000-	) Pin, Hair Cotter, 0.69 D .092 Wir	1
	16	11398	(000000-	) Pin, Roll, .250 D X 2.00l, .250/.256	1
	17	07791	(000000-	) Nut, Hex, Flng, M08 X 1.25	1
	18	08711	(000000-	) Nut, Hex, Lock, M12 X 1.75,NI	1
	19	32491	(000000-	) Washer, Flt, .31 Std	1
	20	86860	(000000-	) Bearing, Thrust	1
	21	39277	(000000-	) Screw, Hex, M08 X 1.25 X 25, 8.8	3
	22	57598	(000000-	) Pin, Clevis, 0.37 D X 3.25l	1
	23	06974	(000000-	) Screw, Hex, M12 X 1.75 X 80, 8.8	1
	24	360801	(000000-	) Sleeve	2
	25	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI	1
	26	04733-2	(000000-	) Pin, Clevis, 0.37 D X 0.62l	1
	27	01685	(000000-	) Washer, Flt, .31 Ss	1
	28	39005	(000000-	) Pin, Cotter, .094 X 0.75	2
	29	32486	(000000-	) Washer, Flt, .50 Sae	4
	30	1017441	(004072-	) Plate, Adapter, Brush	1
	31	1017802	(004072-	) Washer, .625 B, 2.50 Od, .211 T, Ss	4

Fig. 9 - Left Side Brush Lift Group

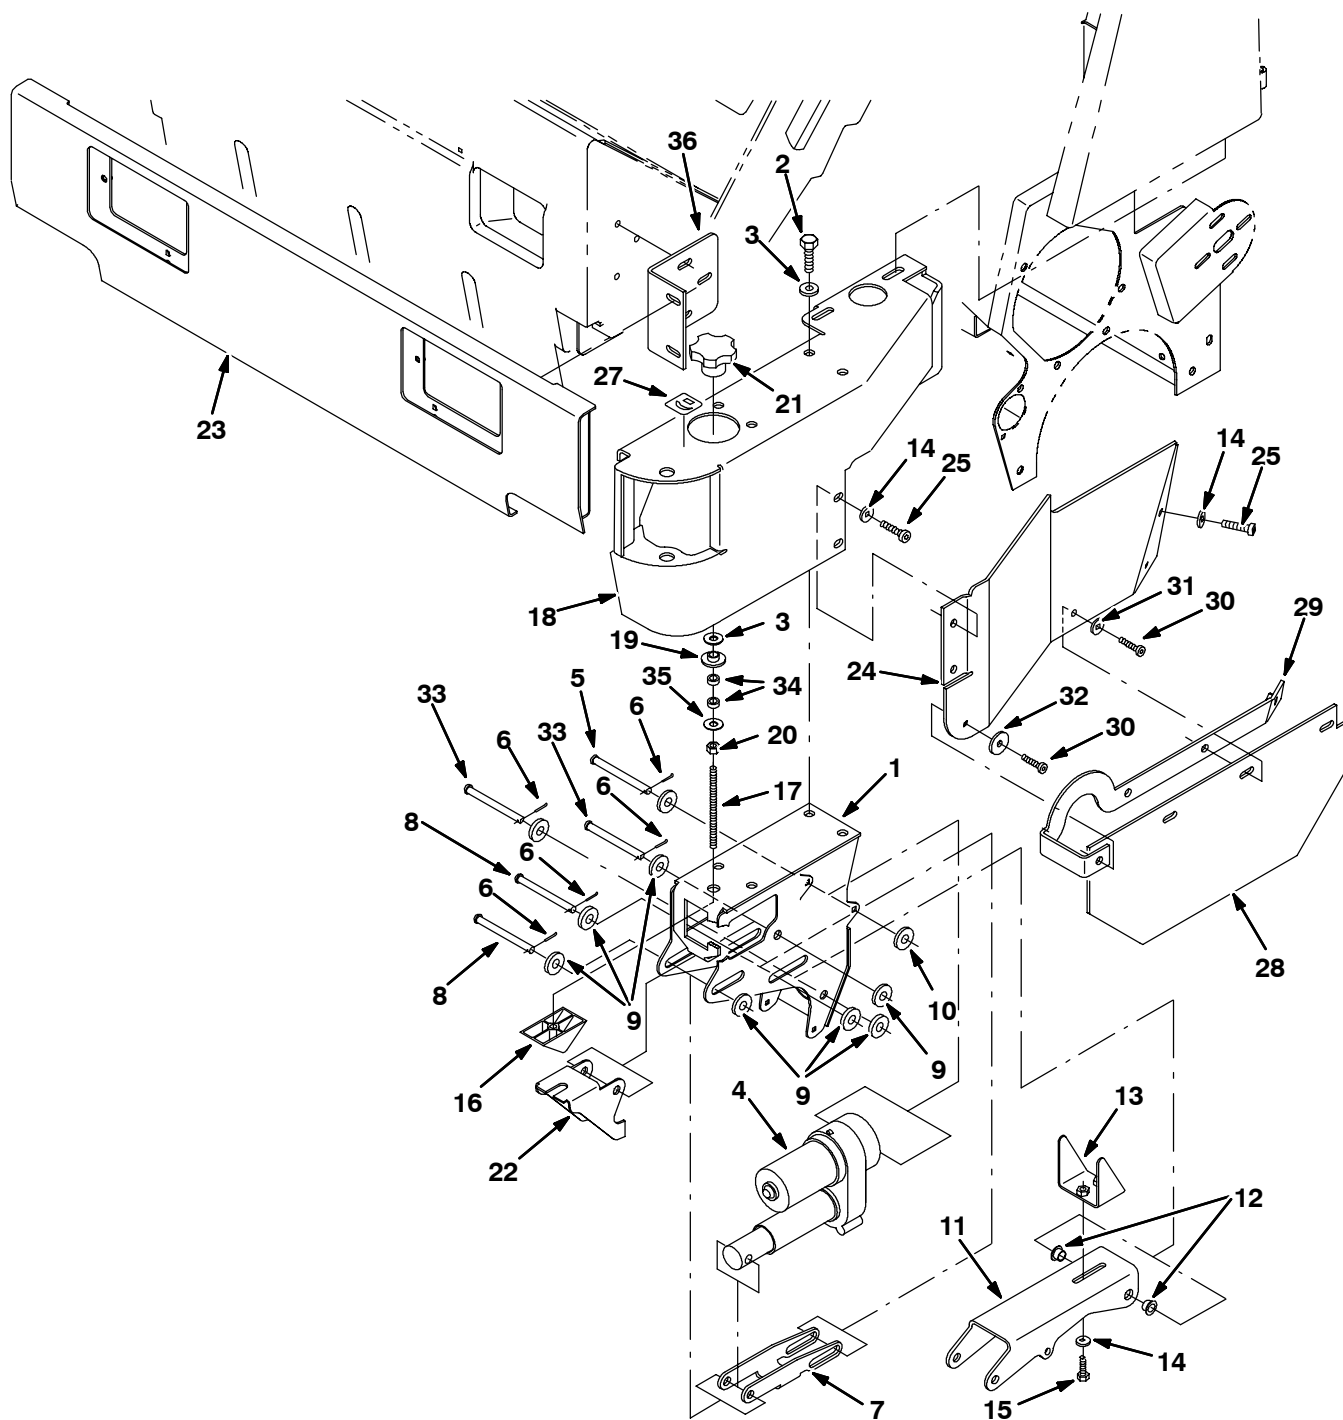


Fig. 9 - Left Side Brush Lift Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386656	(000000-	) Housing Wldt, Brush, Side	1
2	09291	(000000-	) Screw, Hex, M10 X 1.5 X 20, Ss	4
3	32492	(000000-	) Washer, Flt, .38 Std	4
4	222539	(000000-	) Actuator, 36Vdc, 01.8 Stroke 300Lb	1
5	49914	(000000-	) Pin, Clevis, 0.37D X 4.00L	1
6	39005	(000000-	) Pin, Cotter, .094 X 0.75	5
7	386657	(000000-	) Bracket	1
8	51528	(000000-	) Pin, Clevis, 0.50D X 4.00L	2
9	32486	(000000-	) Washer, Flat, .50 Sae	8
10	32485	(000000-	) Washer, Flt, .38 Sae	2
11	386659	(000000-	) Channel	1
12	15648	(000000-	) Bushing, Flng, 1.50B 0.59D 0.38L	2
13	386660	(000000-	) Bracket	1
14	32491	(000000-	) Washer, Flt, .31 Std	5
15	16931	(000000-	) Screw, Hex, M08 X 1.25 X 20, 8.8	2
16	386658	(000000-	) Block, Adj	1
17	387151	(000000-	) Shaft, Thrd	1
18	386753	(000000-	) Bumper Wldt, Lh	1
19	363087	(000000-	) Spacer, Flanged	1
20	25014	(000000-	) Nut, Hex, Std, .38-16	1
21	41341	(000000-	) Knob, Plastic	1
22	386909	(000000-	) Bracket, Pivot	1
23	386646	(000000-	) Bumper Wldt	1
24	387085	(000000-	) Door, Brush, Lh	1
25	76570	(000000-	) Screw, Hex, M08 X 1.25 X 30, 8.8	3
26	64489	(000000-	) Washer, 0.81b 1.24d .03, Stl, Pl	1
27	387405	(000000-	) Label, Brush, Side, Adj	1
28	387468	(000000-	) Skirt	1
29	387478	(000000-	) Strip	1
30	223470	(000000-	) Screw, Btn, M08 X 1.25 X 25, Ss	4
31	39349	(000000-	) Washer, Flt, .31 Sae	3
32	30013	(000000-	) Washer, Flat, .31 Fender	1
33	222196	(000000-	) Pin, Clevis, 0.50 D X 4.00l	2
34	390879	(000000-	) Sleeve, P/M, 0.625D 0.406B 0.38L 430Ss	2
35	32492	(000000-	) Washer, Flat, 0.38 Std	1
36	387317	(000000-	) Angle, Bumper, Mtg, Lh	1

Fig. 10 - Max Pro 1200 (Disc-Brush) Scrub Head Frame Group

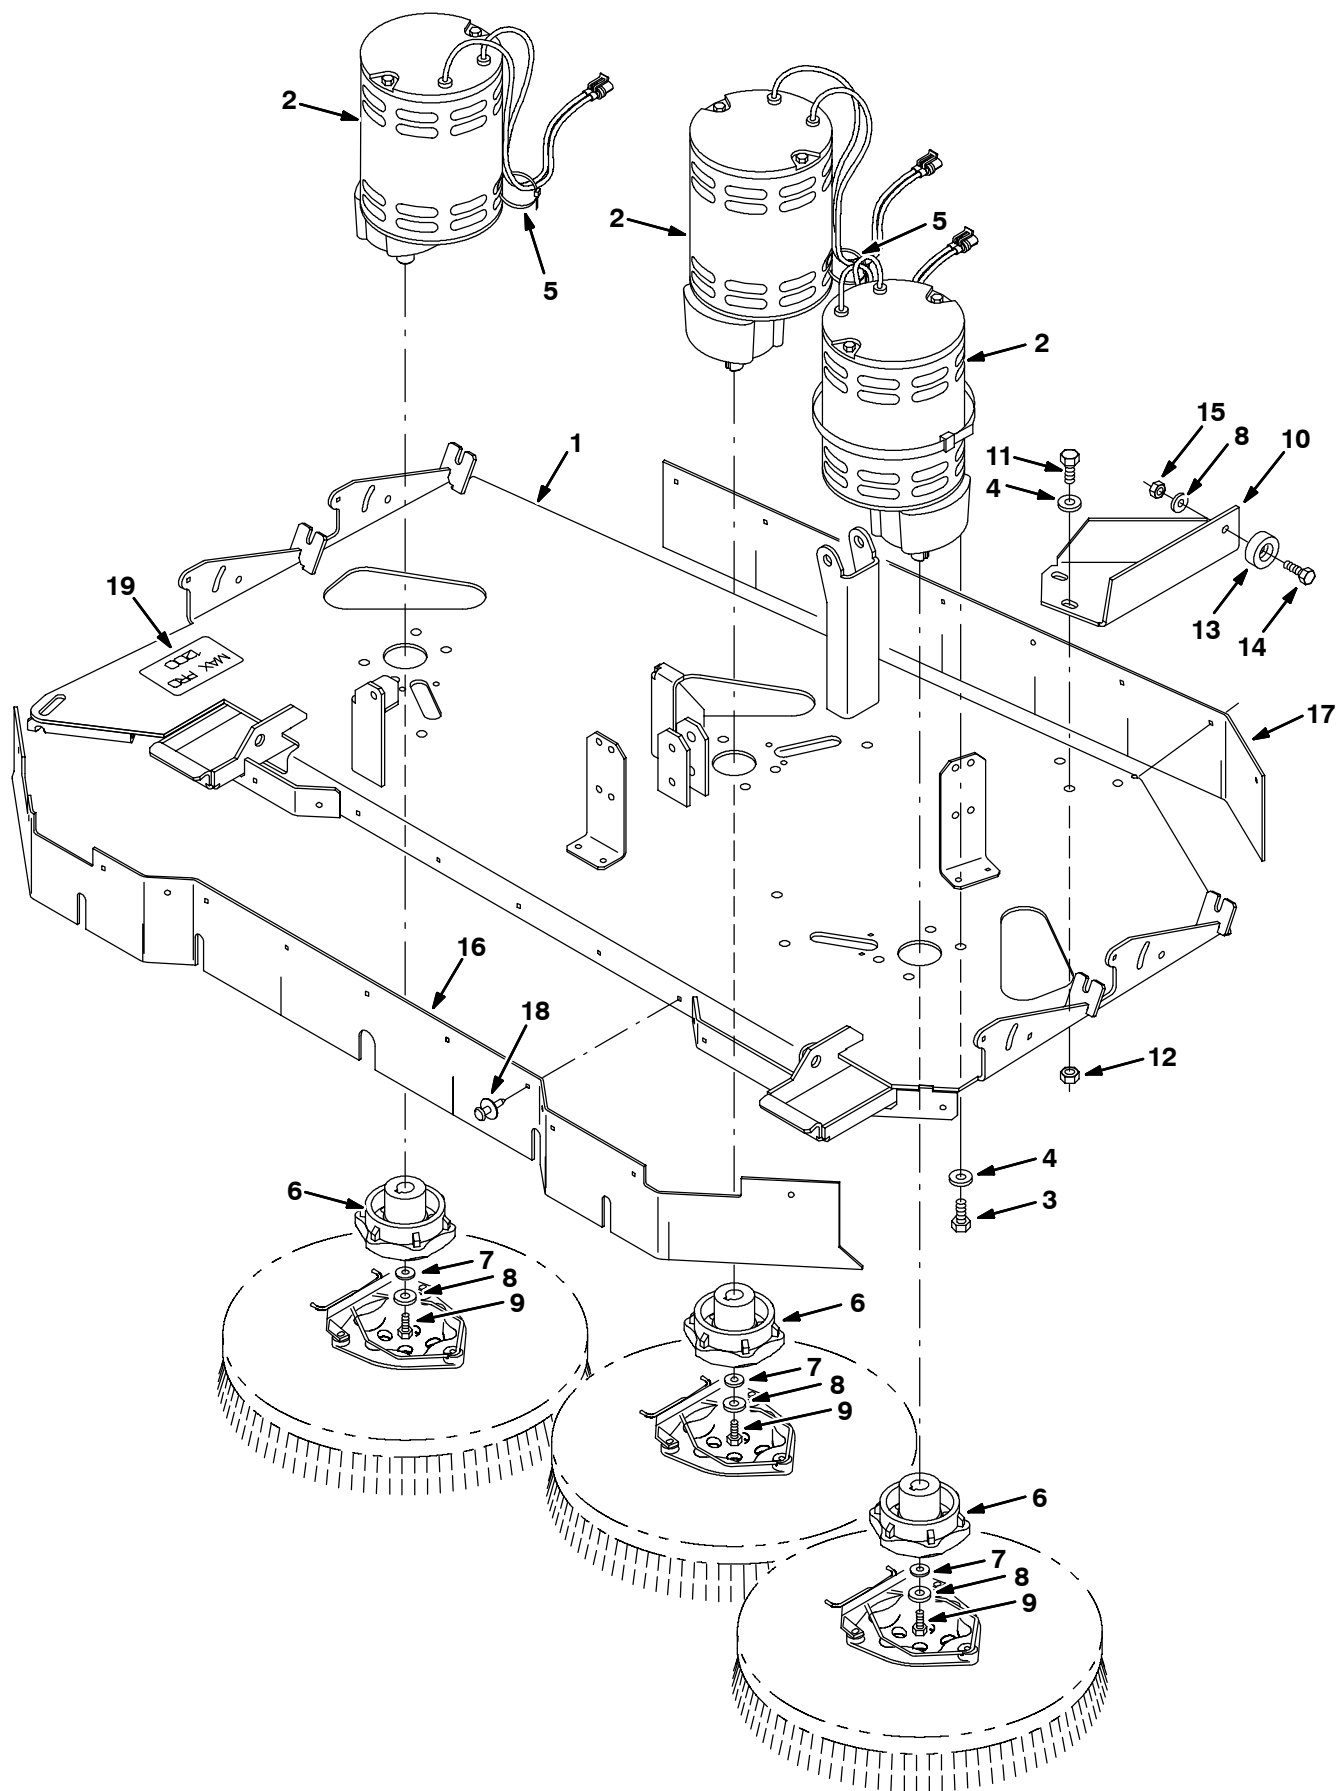


Fig. 10 - Max Pro 1200 (Disc-Brush) Scrub Head Frame Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386816	(000000-	) Frame Wldt, Scb Head, 3-Brush, Ele	1
2	386687AM	(000000-	) Motor, Gear, Ele, 1.0hp, 36vdc, 300rpm (See Breakdown)	3
3	34195	(000000-	) Screw, Hex, .38-16 X 1.00, NI	12
4	01686	(000000-	) Washer, Flt, .38 Ss	15
5	49263	(000000-	) Tie, Cable, Nyl, 11.4l .19w 3.0 Max D	3
6	377364	(000000-	) Hub, Drive, Brush	3
7	41186	(000000-	) Washer, Belleville, .31	3
8	01685	(000000-	) Washer, Flt, .31 Ss	4
9	32124	(000000-	) Screw, Hex, .31-18 X 1.00, Ss, NI	3
10	378976	(000000-	) Bracket, Stop, Frame	1
11	09028	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss	3
12	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	3
13	15023	(000000-	) Bumper, Pye	1
14	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	1
15	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	1
16	386825	(000000-	) Skirt, Front, Scrub Head, 3-Brush, Ele	1
17	386826	(000000-	) Skirt, Rear, Scrub Head, 3-Brush, Ele	1
18	72968	(000000-	) Rivet, Plstc, .250 X 0.898	21
19	365156	(000000-	) Label Set, Info/Hzrd, [Maxpro]	1

Fig. 11 - Max Pro 1200 (Disc-Brush) Scrub Head Linkage Group

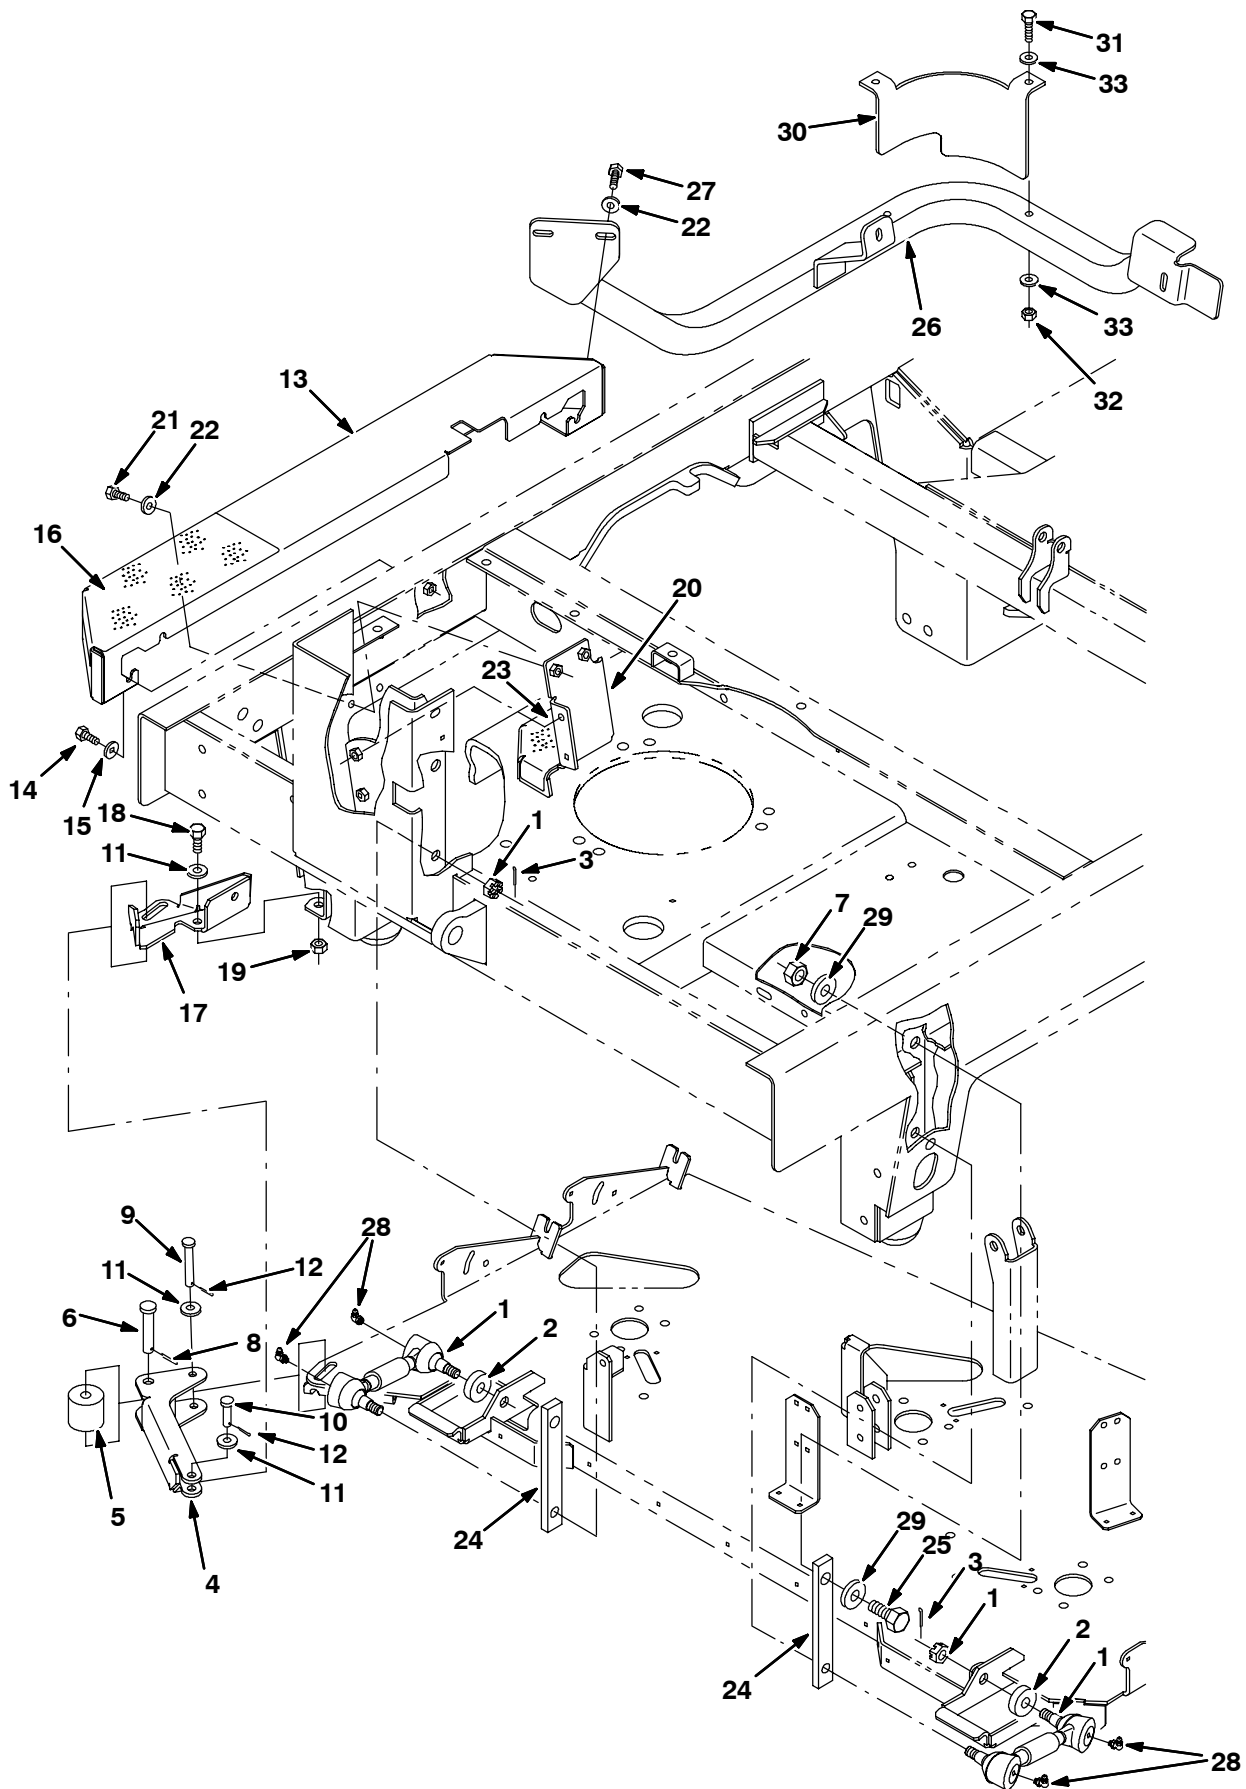


Fig. 11 - Max Pro 1200 (Disc-Brush) Scrub Head Linkage Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	363113	(000000-	) Link Wldt, Head, Drag	2
2	14524	(000000-	) Spacer, Washer	2
3	08346	(000000-	) Pin, Cotter, .125 X 0.75	4
4	1001099	(000000-	) Guard, Kick In, Scb Head	1
5	72946	(000000-	) Roller	1
6	06279	(000000-	) Pin, Clevis, 0.50 D X 2.50l	1
7	08711	(000000-	) Nut, Hex, Std, M12 X 2.0	2
8	08182	(000000-	) Pin, Cotter, .125 X 1.00	1
9	365180	(000000-	) Pin, Clevis, 0.38 D X 2.50l	1
10	29557	(000000-	) Pin, Clevis, 0.37 D X 1.31l	1
11	01686	(000000-	) Washer, Flt, .38 Ss	4
12	39005	(000000-	) Pin, Cotter, .094 X 0.75	2
13	386827	(000000-	) Bumper, Side, Scb Head, Wide	1
14	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	4
15	32491	(000000-	) Washer, Flt, .31 Std	6
16	387080	(000000-	) Tread, Floor, 12.5 X 5.75	1
17	386876	(000000-	) Bracket, Adaptor, Mtg, Kick In, Frame	1
18	09028	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss	2
19	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	1
20	387162	(000000-	) Bracket	1
21	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	4
22	01685	(000000-	) Washer, Flt, .31 Ss	8
23	387230	(000000-	) Tread, Step	1
24	24254	(000000-	) Spacer, Plate	2
25	06969	(000000-	) Screw, Hex, M12 X 1.75 X 40, 8.8	2
26	387245	(000000-	) Guard Wldt, Sqge (MP 20)	1
27	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	4
28	09718	(000000-	) Fitting, Grease, E90 Pm04 .75L	4
29	32486	(000000-	) Washer, Flt, .50 Sae	4
30	1007486	(000000-	) Guard, Bumper	1
31	49694	(000000-	) Screw, Hex, M 8 X 1.25 X 50, Ss	2
32	08713	(000000-	) Nut, Hex, Lock, M 8 X 1.25, NI, Ss	2
33	01685	(000000-	) Washer, Flat, 0.31 Ss	2

Fig. 12 - Max Pro 1200 (Disc-Brush) Solution Valve Group (Non FaST)

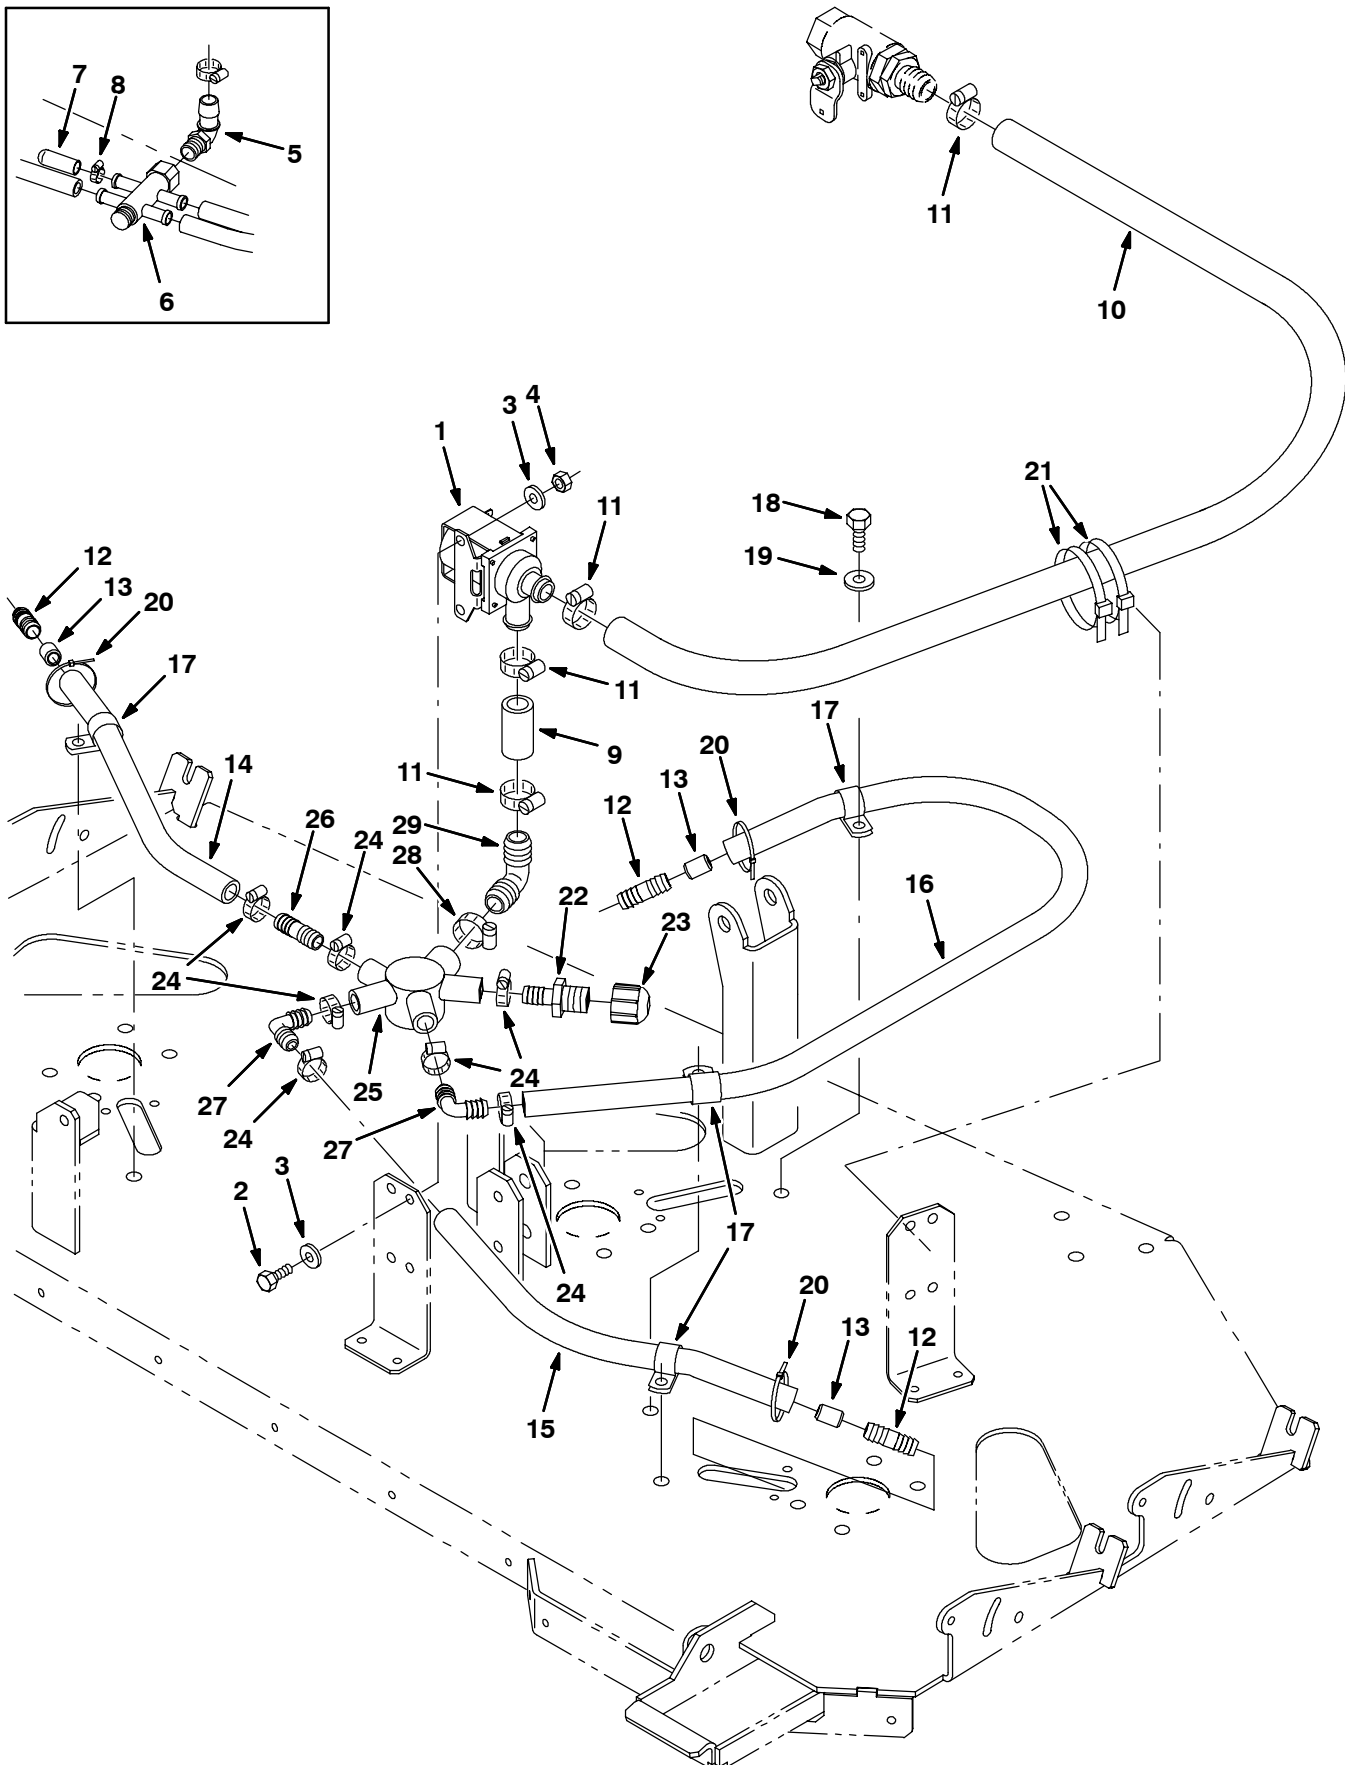


Fig. 12 - Max Pro 1200 (Disc-Brush) Solution Valve Group (Non FaST)

Ref.	Tenant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	32490	(000000-	) Washer, Flt, .25 Std	4
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	63244-2	(000000-003817	) Fitting, Plstc, E90, Bm12/Pm08	1
6	72950	(000000-003817	) Manifold, Plastic	1
7	20807	(000000-003817	) Cap, Neoprene Black	1
8	54333	(000000-003817	) Clamp, Hose, Wormdrive, 0.31-0.88d	1
9	16914	(000000-	) Hose, Pvc, Brd, 0.75id 1.00od 02.00l	1
10	73474	(000000-	) Hose, Pvc, Brd, 0.75id 1.00od 44.50l	1
11	63810	(000000-	) Clamp, Hose, Wormdrive, 0.56-1.06d, .56w	4
12	364631	(000000-	) Fitting, Plstc, Str, Bm08/Bm08	3
13	77334	(000000-	) Fitting, Plstc, Rst, .50od/.31id	3
14	49142	(000000-	) Hose, Pvc, Brd, 0.50id 0.80od 18.00l	1
15	223515	(000000-	) Hose, Pvc, Brd, 0.50id 0.75od 14.00l	1
16	385682	(000000-	) Hose, Pvc, Brd, 0.50id 0.73od 33.00l	1
17	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	4
18	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	4
19	01685	(000000-	) Washer, Flt, .31 Ss	4
20	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	3
21	44961	(000000-	) Tie, Cable, Nyl, 14.5l .30w 4.0 Max D	2
22	79273-4	(003818-	) Fitting, Plstc, Str, Bm08/Pm08	1
23	1015558	(003818-	) Fitting, Plstc, Cap, Pf08	1
24	54333	(003818-	) Clamp, Hose, Wormdrive, 0.31-0.88d	7
25	1012528	(003818-	) Manifold, Soltn, Cntrl	1
26	364631	(003818-	) Fitting, Plstc, Str, Bm08/Bm08	1
27	63987-1	(003818-	) Fitting, Plstc, E90, Bm08/Bm08	2
28	86824	(003818-	) Clamp, Hose, Wormdrive, 0.50-1.06d	1
29	40566	(003818-	) Fitting, Plstc, E90, Bm12/Bm12	1

Fig. 13 - Max Pro 1200 (Disc-Brush) Solution Valve Group (FaST)

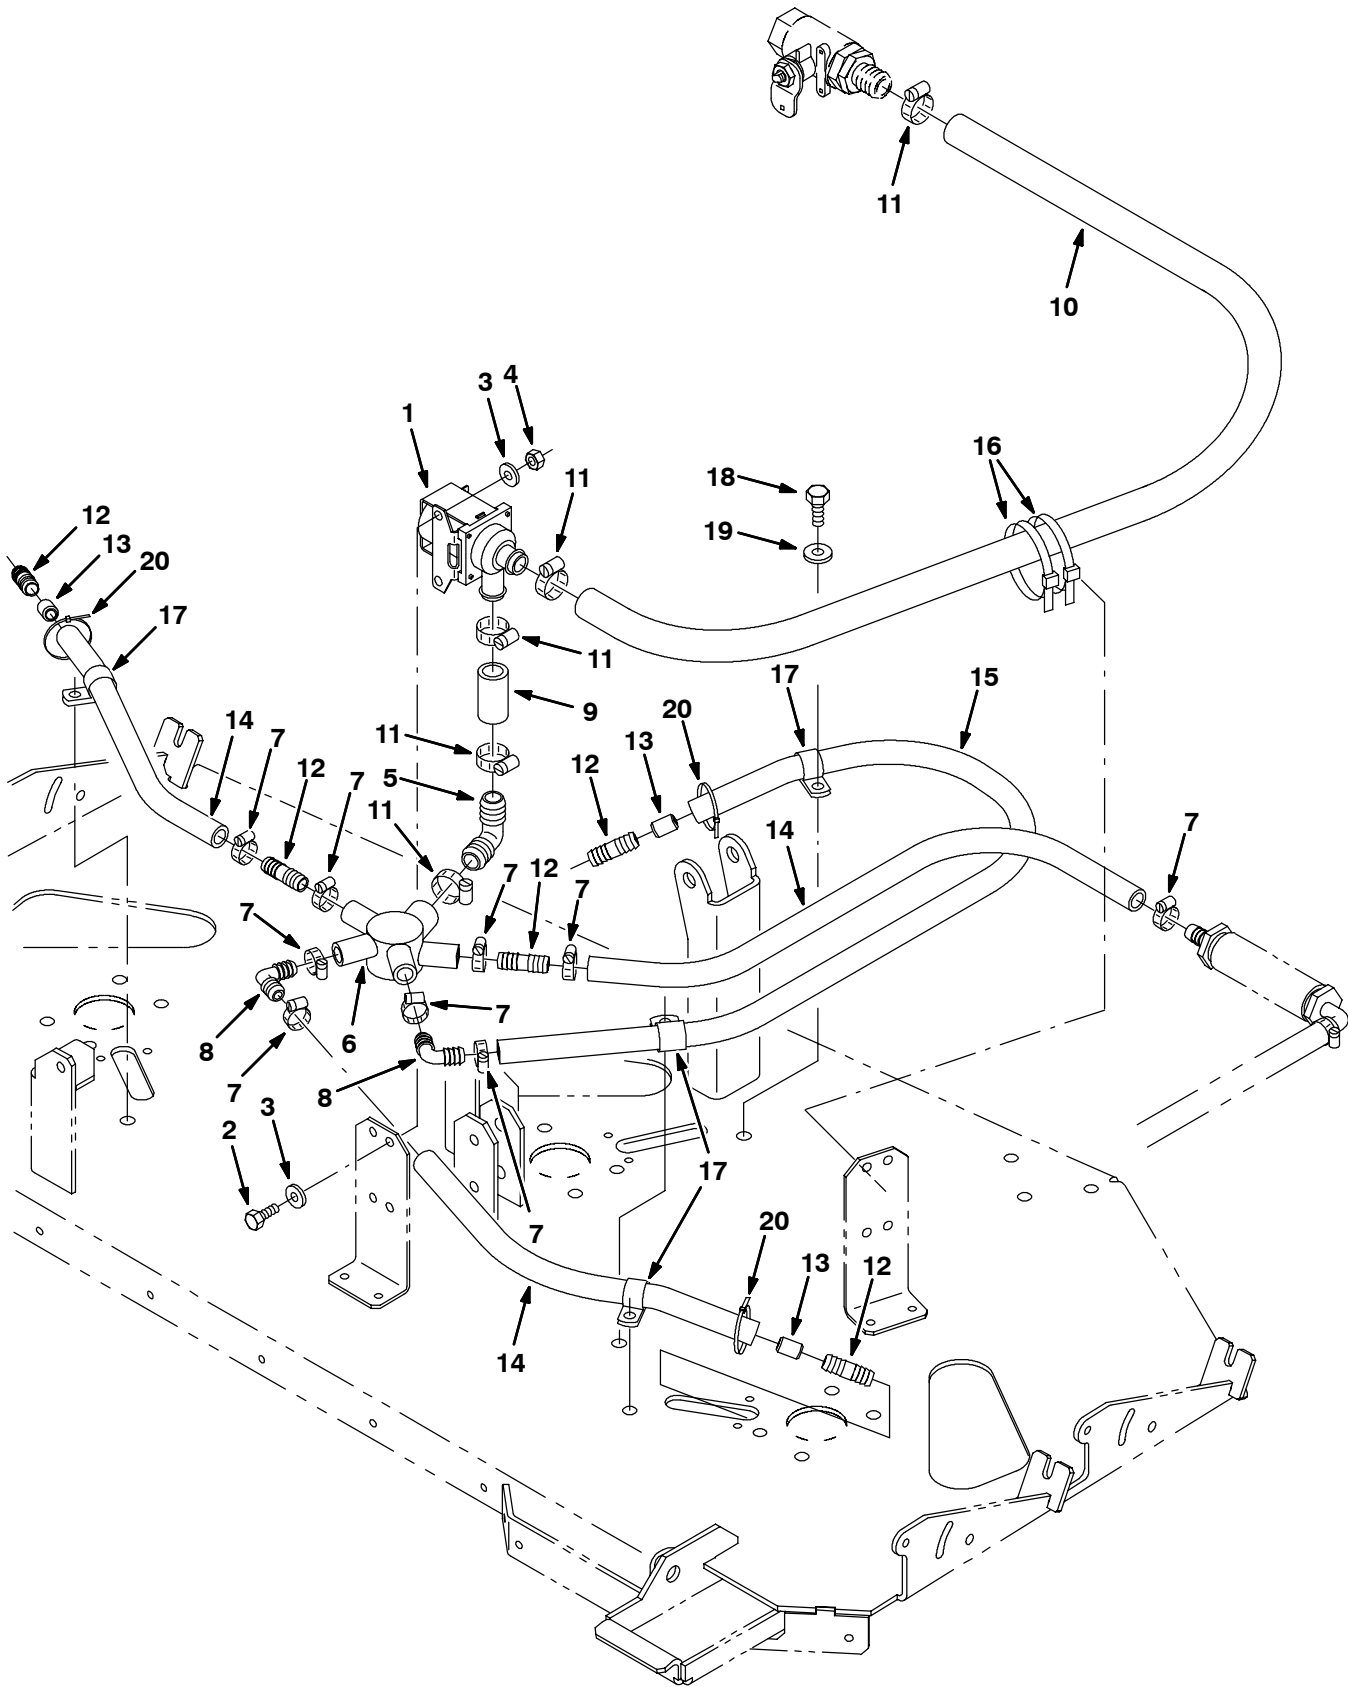


Fig. 13 - Max Pro 1200 (Disc-Brush) Solution Valve Group (FaST)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	32490	(000000-	) Washer, Flt, .25 Std	4
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	40566	(000000-	) Fitting, Plstc, E90, Bm12/Bm12	1
6	1012528	(000000-	) Manifold, Soltn, Cntrl	1
7	54333	(000000-	) Clamp, Hose, Wormdrive, 0.31-0.88d	9
8	63987-1	(000000-	) Fitting, Plstc, E90, Bm08/Bm08	2
9	1015048	(000000-	) Hose, Afmkt, Pvc, Brd 0.75id 1 Ft	1
10	1015045	(000000-	) Hose, Afmkt, Pvc, Brd 0.75id 8 Ft	1
11	63810	(000000-	) Clamp, Hose, Wormdrive, 0.56-1.06d, .56w	5
12	364631	(000000-	) Fitting, Plstc, Str, Bm08/Bm08	5
13	77334	(000000-	) Fitting, Plstc, Rst, .50od/.31id	3
14	1011521	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 2 Ft	3
15	1006401	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 3 Ft	1
16	44961	(000000-	) Tie, Cable, Nyl, 14.5l .30w 4.0 Max D	2
17	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	4
18	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	4
19	01685	(000000-	) Washer, Flt, .31 Ss	4
20	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	3

Fig. 14 - Max Pro 1200 (Disc-Brush) Edge Scrub Group

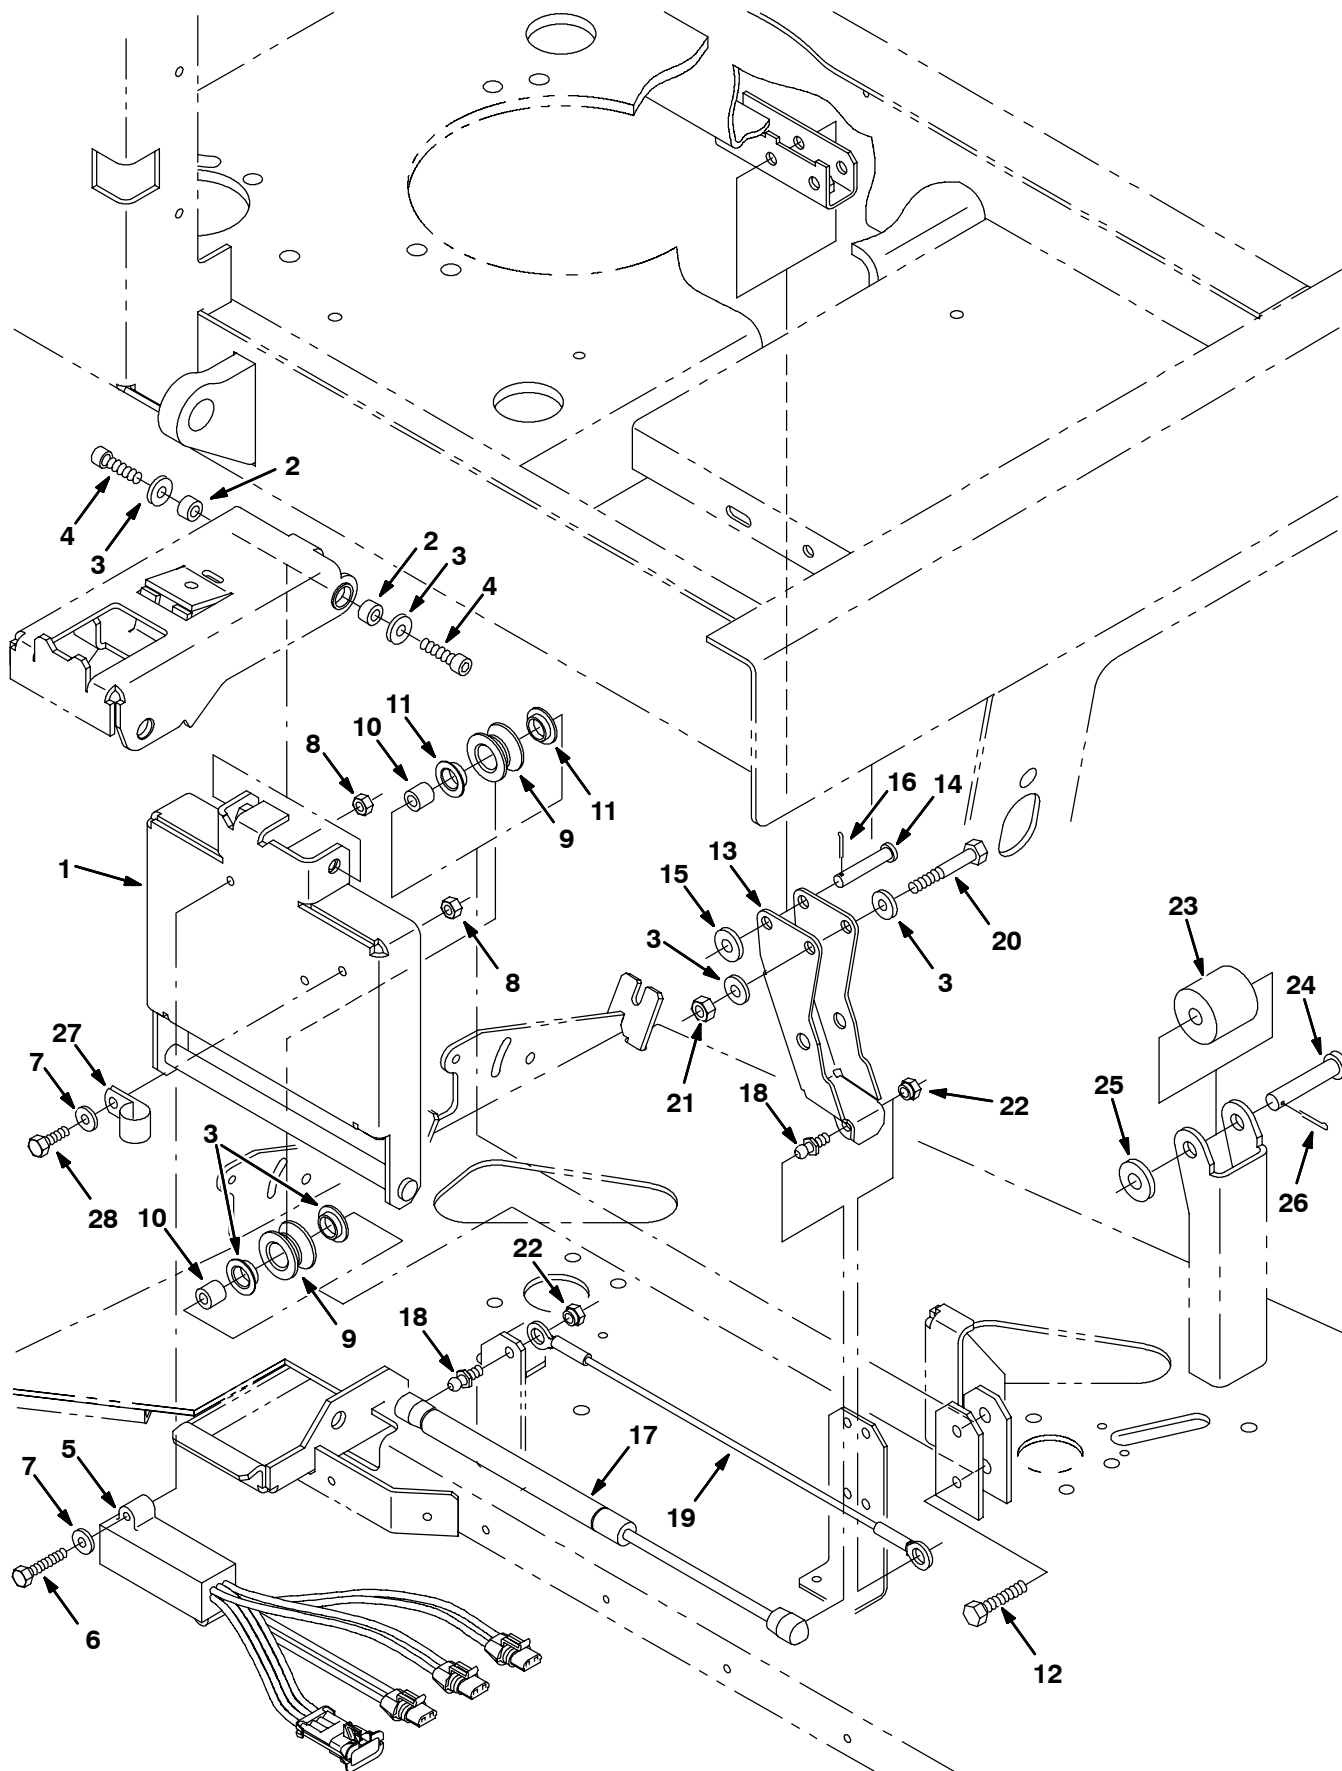


Fig. 14 - Max Pro 1200 (Disc-Brush) Edge Scrub Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386043	(000000-	) Rail Wldt, Lift, Disk Head	1
2	222556	(000000-	) Sleeve	2
3	01685	(000000-	) Washer, Flt, .31 Ss	4
4	39308	(000000-	) Screw, Soc, M08 X 1.25 X 25, 12.9	2
5	363238	(000000-	) Shunt, 3 Std Mtrs, Scrub 515, Yellow	1
6	33930	(000000-	) Screw, Hex, M06 X 1.0 X 40, Ss	2
7	01684	(000000-	) Washer, Flt, .25 Ss	3
8	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	3
9	363120	(000000-	) Roller	2
10	222277	(000000-	) Sleeve	2
11	04843	(000000-	) Bushing, Flng, 0.63b 0.72d 0.25l	4
12	222505	(000000-	) Screw, Hex, M08 X 1.25 X 45, Ss	2
13	386048	(000000-	) Arm Wldt, Pivot, Side, [7300/8300]	1
14	29584	(000000-	) Pin, Clevis, 0.37 D X 2.00l	1
15	01686	(000000-	) Washer, Flt, .38 Ss	1
16	39005	(000000-	) Pin, Cotter, .094 X 0.75	1
17	364858	(000000-	) Gasspring, 56lb, 6.3strk	1
18	58494	(000000-	) Stud, Ball, .39d .31-16, Gasspring	2
19	364404	(000000-	) Cable, .13d, 15.5l, .50eye /.50eye	1
20	77270	(000000-	) Screw, Hex, M08 X 1.25 X 60, Ss	1
21	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	1
22	14725	(000000-	) Nut, Retainer, .31-18	2
23	72946	(000000-	) Roller	1
24	06279	(000000-	) Pin, Clevis, 0.50 D X 2.50l	1
25	32493	(000000-	) Washer, Flt, .50 Std	1
26	08182	(000000-	) Pin, Cotter, .125 X 1.00	1
27	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	1
28	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	1

Fig. 15 - Max Pro 1200 (Disc-Brush) Right Side Squeegee Group

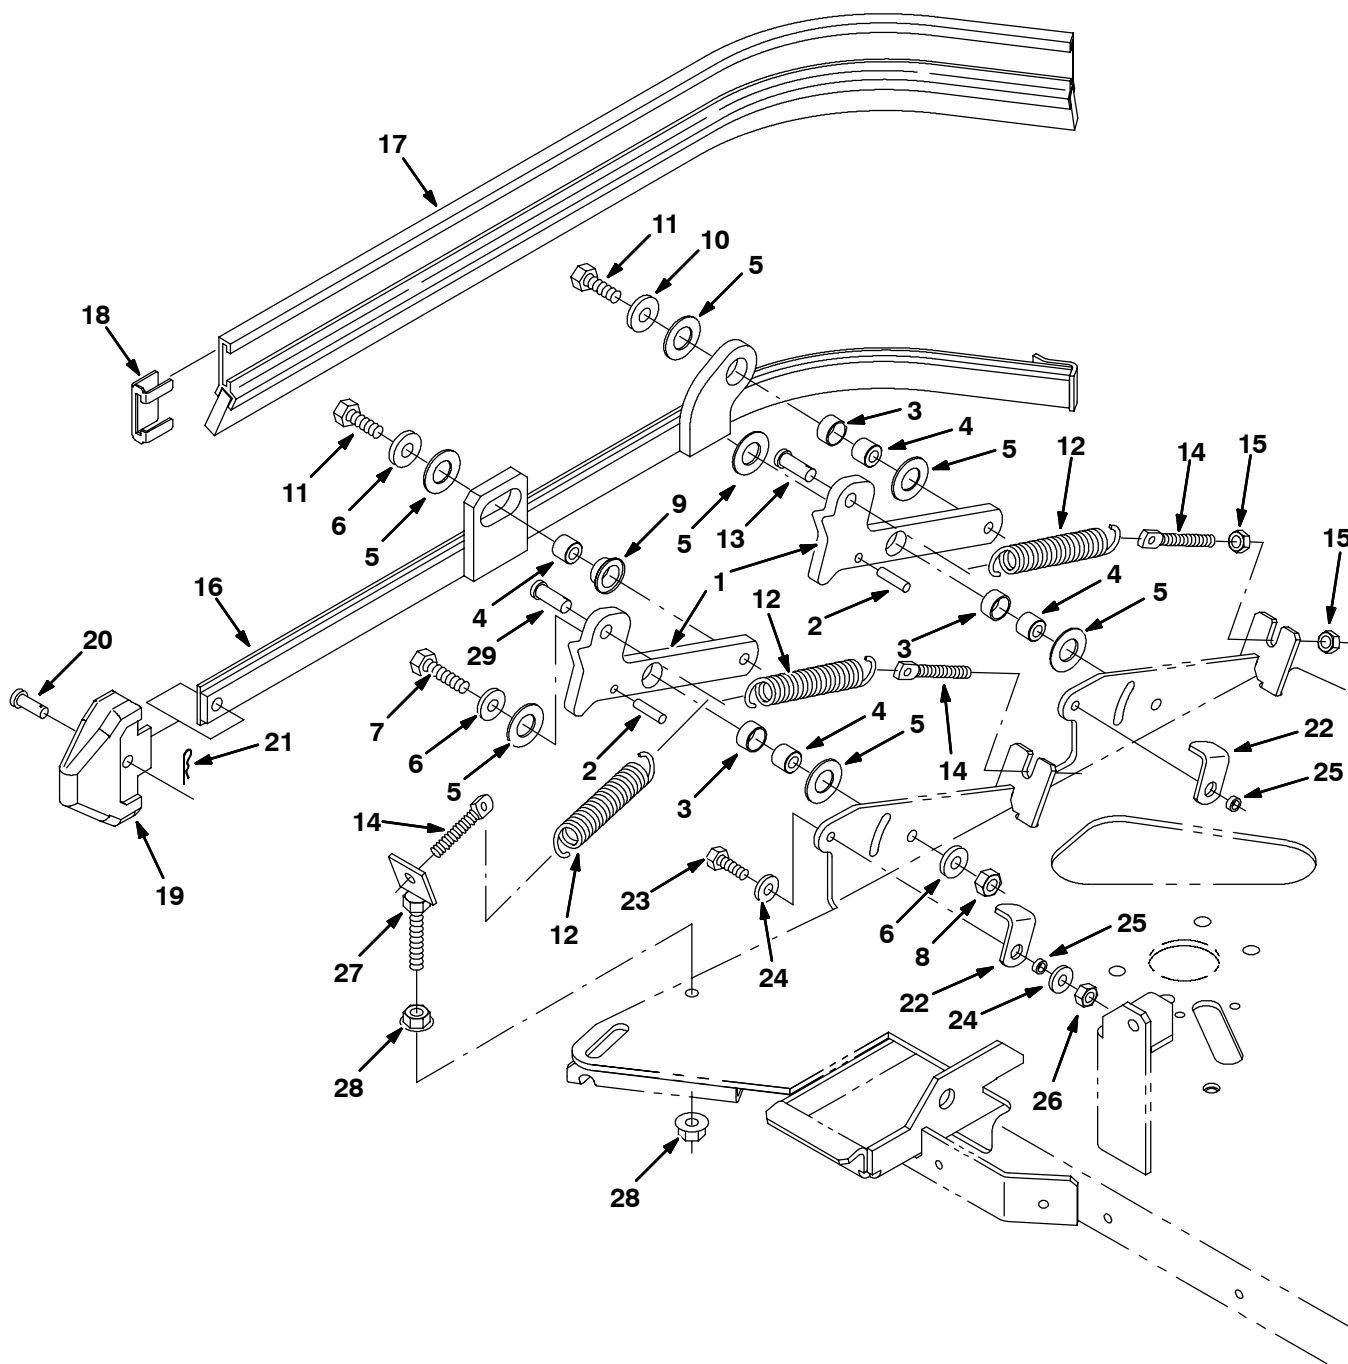


Fig. 15 - Max Pro 1200 (Disc-Brush) Right Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386390	(000000-	) Arm, Mtg, Side Sqge Frame, Ele	2
2	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
3	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
4	386356	(000000-	) Sleeve, .335b X .62d X .52l, Sst	4
5	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
6	01685	(000000-	) Washer, Flt, .31 Ss	5
7	09023	(000000-	) Screw, Hex, M08 X 1.25 X 35, Ss	2
8	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	2
9	25735	(000000-	) Bushing, Flng, 0.63b 0.75d 0.38l	1
10	01686	(000000-	) Washer, Flt, .38 Ss	2
11	12333	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss, NI	2
12	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
13	76653	(000000-	) Pin, Clevis, 0.37 D X 1.00l	2
14	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
15	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
16	386263	(000000-	) Frame Wldt, Sqge, Side, Rh	1
17	386260	(000000-	) Squeegee, Side	1
18	86759	(000000-	) Retainer, Sqge	1
19	386986	(000000-	) Guide, Point, Side Sqge	1
20	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
21	86866	(000000-	) Pin, Hair Cotter, 0.38 D .072 Wir	1
22	386391	(000000-	) Latch, Double Scrub, Side Sqge	2
23	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	4
25	80491	(000000-	) Sleeve	2
26	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
27	1007632	(000000-	) Bracket Wldt, Mtg, Spring	1
28	27980	(000000-	) Nut, Hex, Flng, .38-16	2
29	29568	(000000-	) Angle, 1.00 0.75 .12t 00.8l Hr	1

Fig. 16 - Max Pro 1200 (Disc-Brush) Right Side Vacuumized Squeegee Group

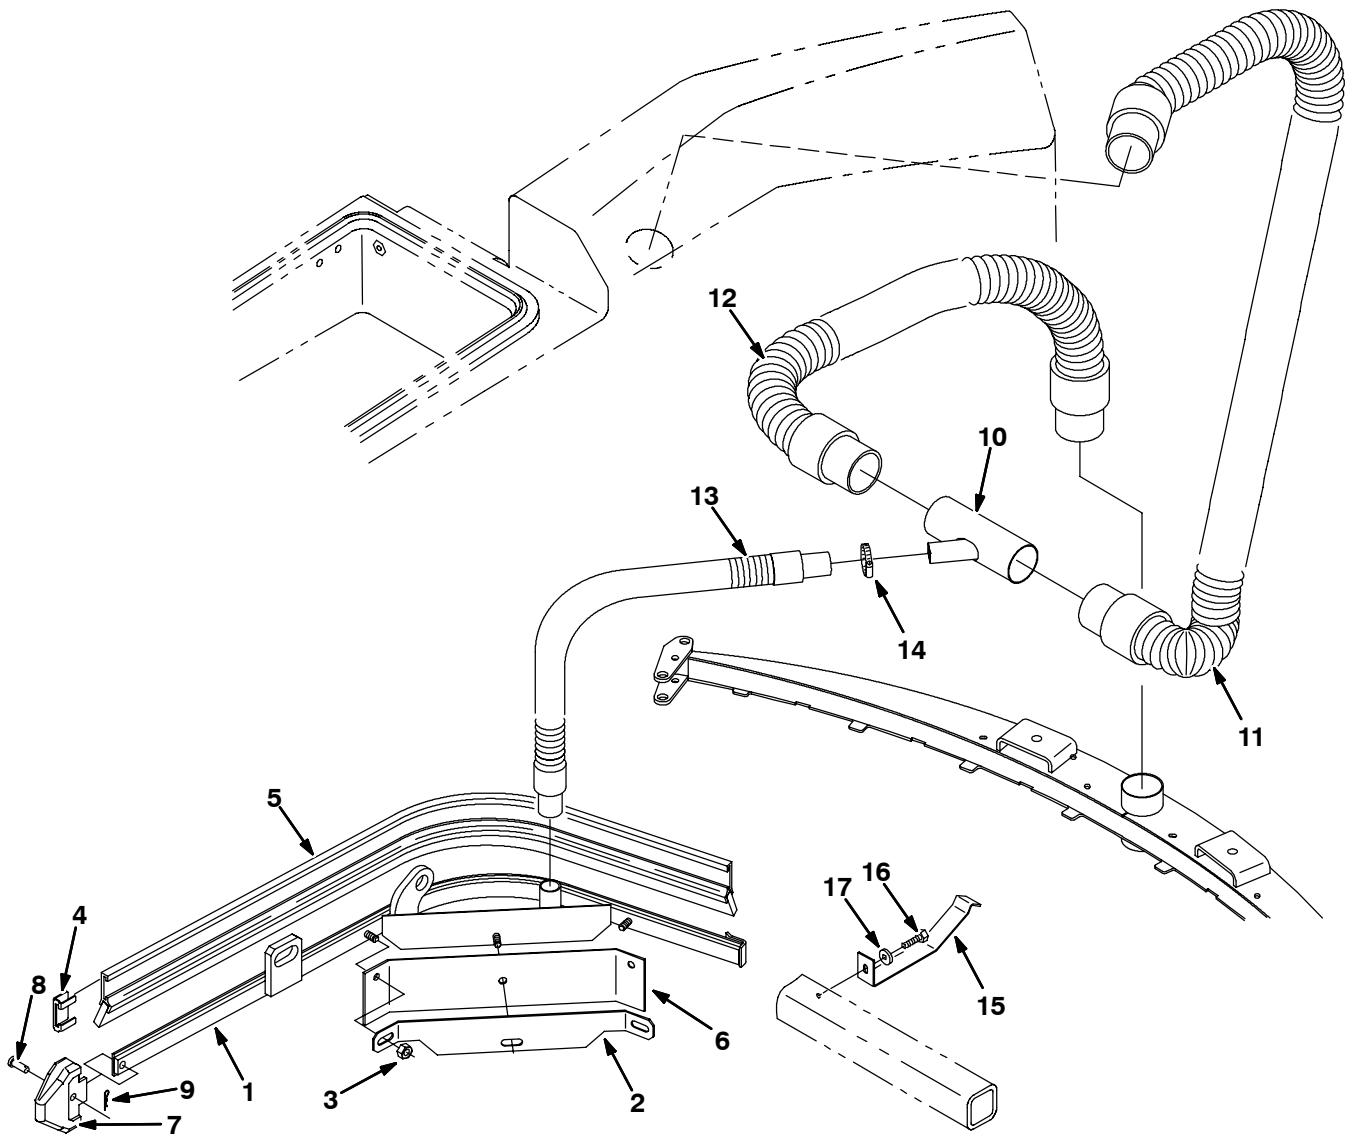


Fig. 16 - Max Pro 1200 (Disc-Brush) Right Side Vacuumized Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387509	(000000-	) Frame Assy, Sqge, Side, Vacuum, Rh	1
2	387516	(000000-	) Retainer, Blade, Front	1
3	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl, Ss	3
4	86759	(000000-	) Retainer, Sqge	1
5	387545	(000000-	) Blade Assy, Sqge, Side	1
6	387546	(000000-	) Blade, Squeegee	1
7	386986	(000000-	) Guide, Point, Side Sqge	1
8	386987	(000000-	) Pin, Clevis, 0.31 D X 0.88l	1
9	86866	(000000-	) Pin, Hair Cotter, 0.38 D .072 Wir	1
10	386518	(000000-	) Tube Wldt	1
11	386514	(000000-003545	) Hose, Vacuum, 58.5l	1
11	1005133	(003546-	) Hose Assy, W/2cuff, 2.0d 75l	1
12	387256	(000000-003545	) Hose, Vacuum, 35.0l	1
12	1005135	(003546-	) Hose Assy, W/2cuff, 2.0d 26l	1
13	387517	(000000-003545	) Hose Assy, W/2 Cuff, 1.0d 41.0l	1
13	398802	(003546-	) Hose Assy, W/2 Cuff, 1.0D 44L 1.0/1.0	1
14	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	1
15	1002464	(003546-	) Bracket, Tube , Tee	1
16	361339	(003546-	) Screw, Hex, M 6 X 1.0 X 16, Fmg	1
17	32483	(003546-	) Washer, Flat, 0.25 Sae	1

Fig. 17 - Max Pro 1200 (Disc-Brush) Left Side Squeegee Group

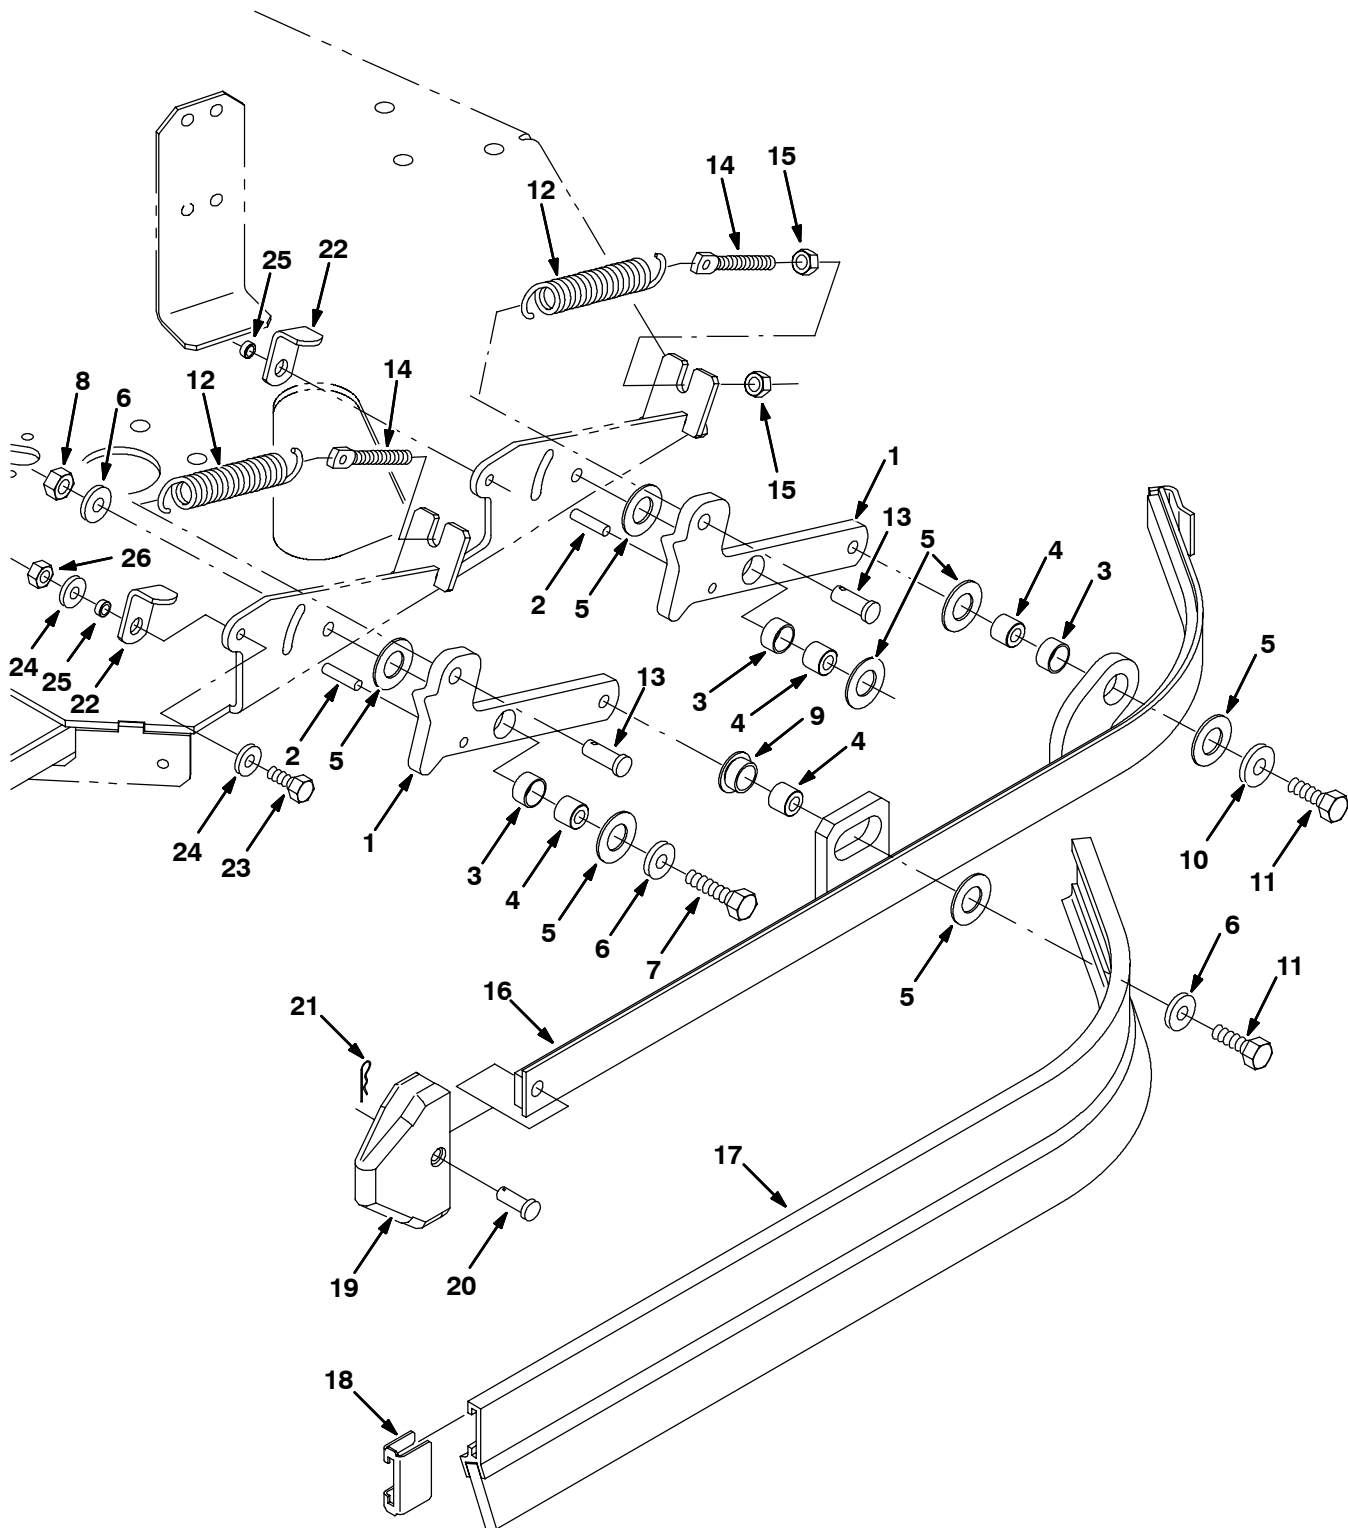


Fig. 17 - Max Pro 1200 (Disc-Brush) Left Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386390	(000000-	) Arm, Mtg, Side Sqge Frame, Ele	2
2	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
3	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
4	386356	(000000-	) Sleeve, .335b X .62d X .52l, Sst	4
5	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
6	01685	(000000-	) Washer, Flt, .31 Ss	5
7	09023	(000000-	) Screw, Hex, M08 X 1.25 X 35, Ss	2
8	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	2
9	25735	(000000-	) Bushing, Flng, 0.63b 0.75d 0.38l	1
10	01686	(000000-	) Washer, Flt, .38 Ss	2
11	12333	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss, NI	2
12	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
13	76653	(000000-	) Pin, Clevis, 0.37 D X 1.00l	2
14	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
15	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
16	386262	(000000-	) Frame Wldt, Sqge, Side, Lh	1
17	386260	(000000-	) Squeegee, Side	1
18	86759	(000000-	) Retainer, Sqge	1
19	386986	(000000-	) Guide, Point, Side Sqge	1
20	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
21	86866	(000000-	) Pin, Hair Cotter, 0.38 D .072 Wir	1
22	386391	(000000-	) Latch, Double Scrub, Side Sqge	2
23	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	4
25	80491	(000000-	) Sleeve	2
26	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2

Fig. 18 - Max Pro 1000 (Cylindrical Brush) Scrub Head Frame and Linkage Group

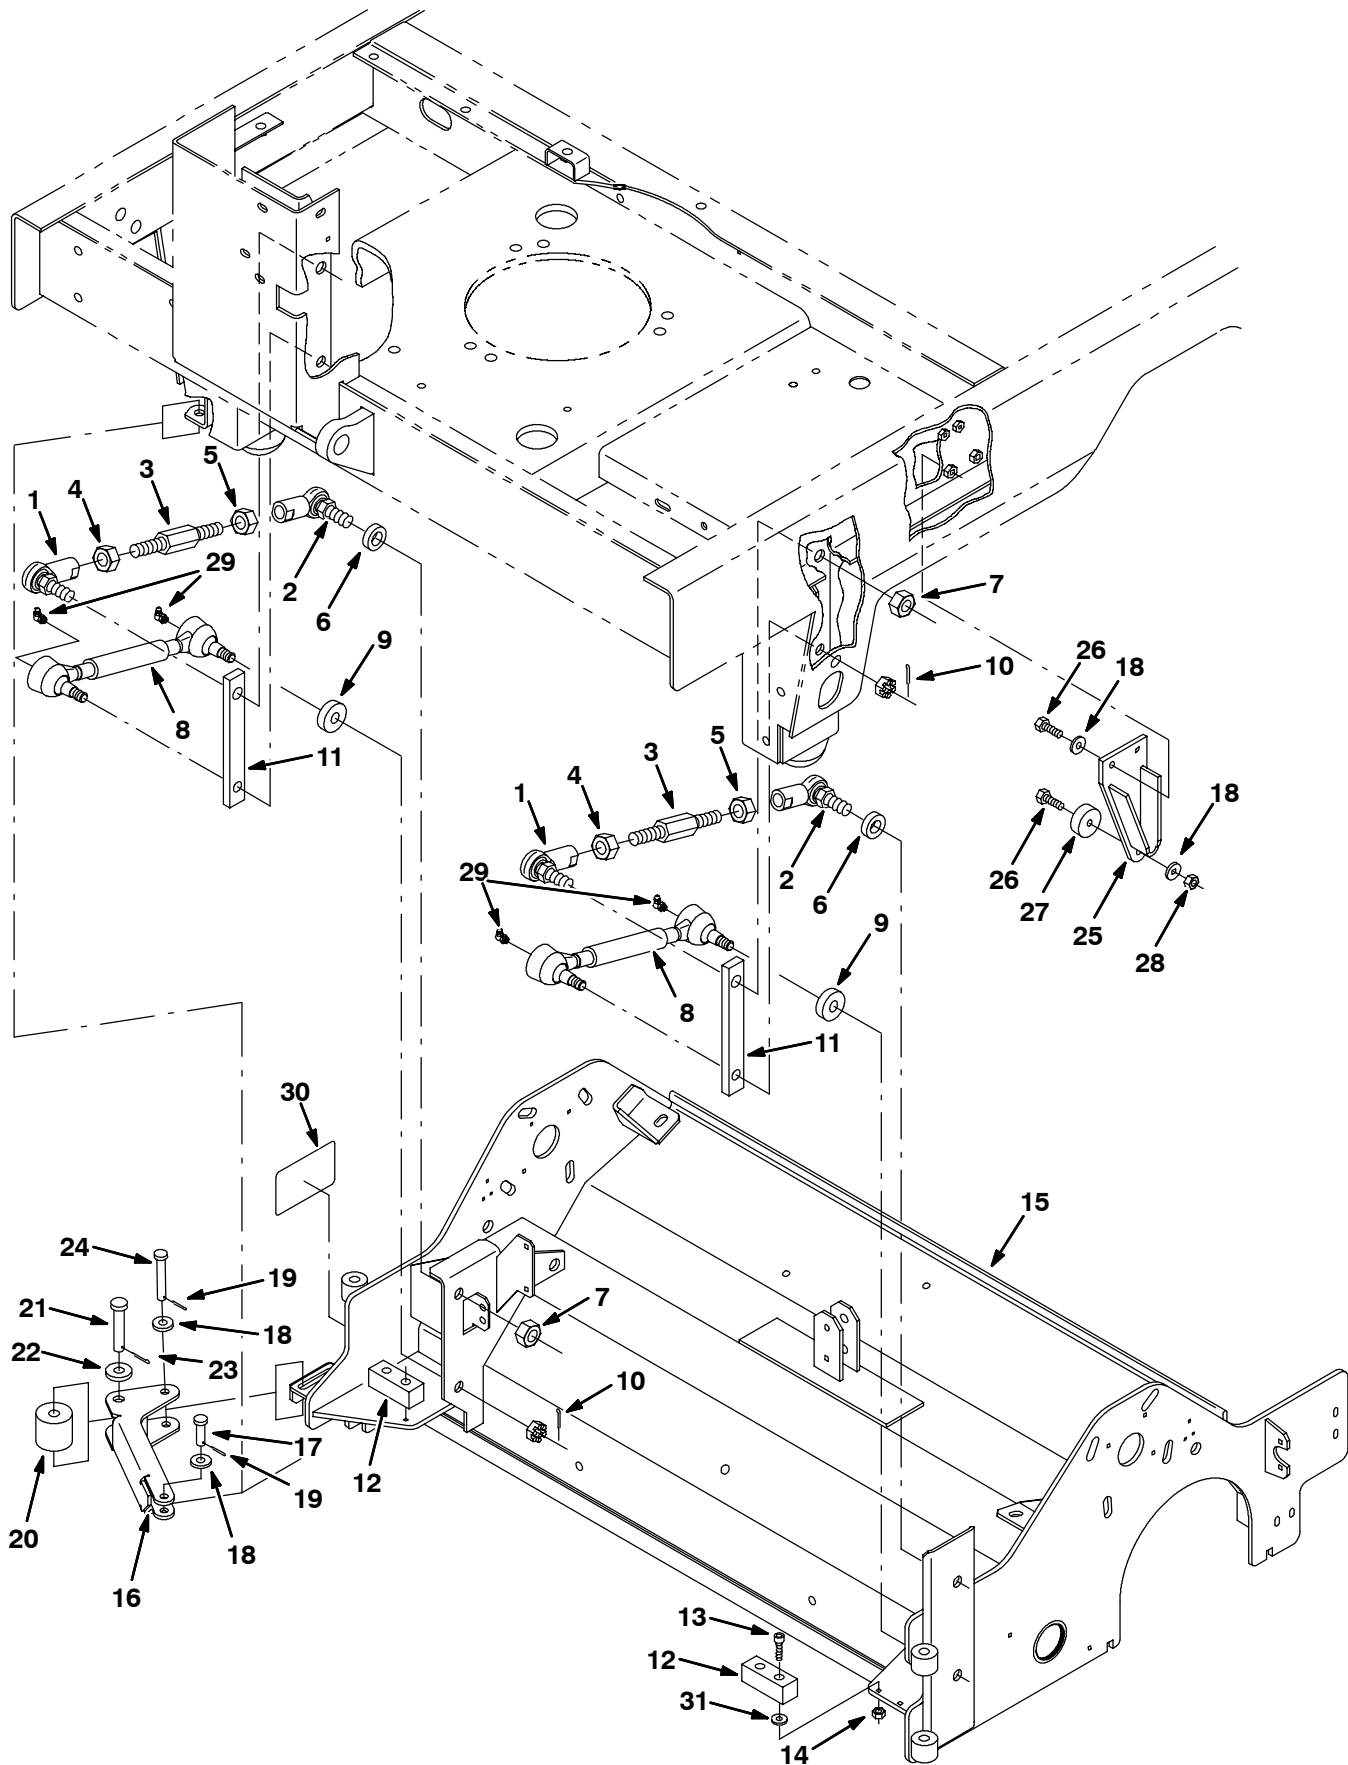


Fig. 18 - Max Pro 1000 (Cylindrical Brush) Scrub Head Frame and Linkage Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	77275	(000000-	) Rod-End, .62-18rh Fem 0.50-18stud	2
2	386070	(000000-	) Rod-End, .625-18, Lh	2
3	386071	(000000-	) Rod, Link	2
4	77276	(000000-	) Nut, Hex, Jam, .62-18, Ss	2
5	77277	(000000-	) Nut, Hex, Jam, .62-18, Ss, Lh	2
6	386081	(000000-	) Spacer, Rod-End	2
7	40814	(000000-	) Nut, Hex, Lock, .62-18, NI, Thin	4
8	363113	(000000-	) Link Wldt, Head, Drag	2
9	14524	(000000-	) Spacer, Washer	2
10	08346	(000000-	) Pin, Cotter, .125 X 0.75	4
11	386844	(000000-	) Spacer, Plate	2
12	386865	(000000-	) Bumper	2
13	24198	(000000-	) Screw, Pan, M05 X 0.8 X 25, Ss	4
14	09739	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI, Ss	4
15	386099	(000000-	) Housing Wldt, Brush	1
16	1001099	(000000-	) Guard, Kick In, Scb Head	1
17	29557	(000000-	) Pin, Clevis, 0.37 D X 1.31l	1
18	01686	(000000-	) Washer, Flt, .38 Ss	5
19	39005	(000000-	) Pin, Cotter, .094 X 0.75	2
20	72946	(000000-	) Roller	1
21	06279	(000000-	) Pin, Clevis, 0.50 D X 2.50l	1
22	32493	(000000-	) Washer, Flt, .50 Std	1
23	08182	(000000-	) Pin, Cotter, .125 X 1.00	1
24	365180	(000000-	) Pin, Clevis, 0.38 D X 2.50l	1
25	386493	(000000-	) Plate Wldt, Stop	1
26	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	3
27	15023	(000000-	) Bumper, Pye	1
28	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	1
29	09718	(000000-	) Fitting, Grease, E90 Pm04 .75L	4
30	365156	(000000-	) Label Set, Info/Hzrd, [Max Pro]	1
31	13248	(000000-	) Washer, 0.40B 1.12D .12, Stl, PI	4

Fig. 19 - Max Pro 1000 (Cylindrical Brush) Scrub Head Drive Group

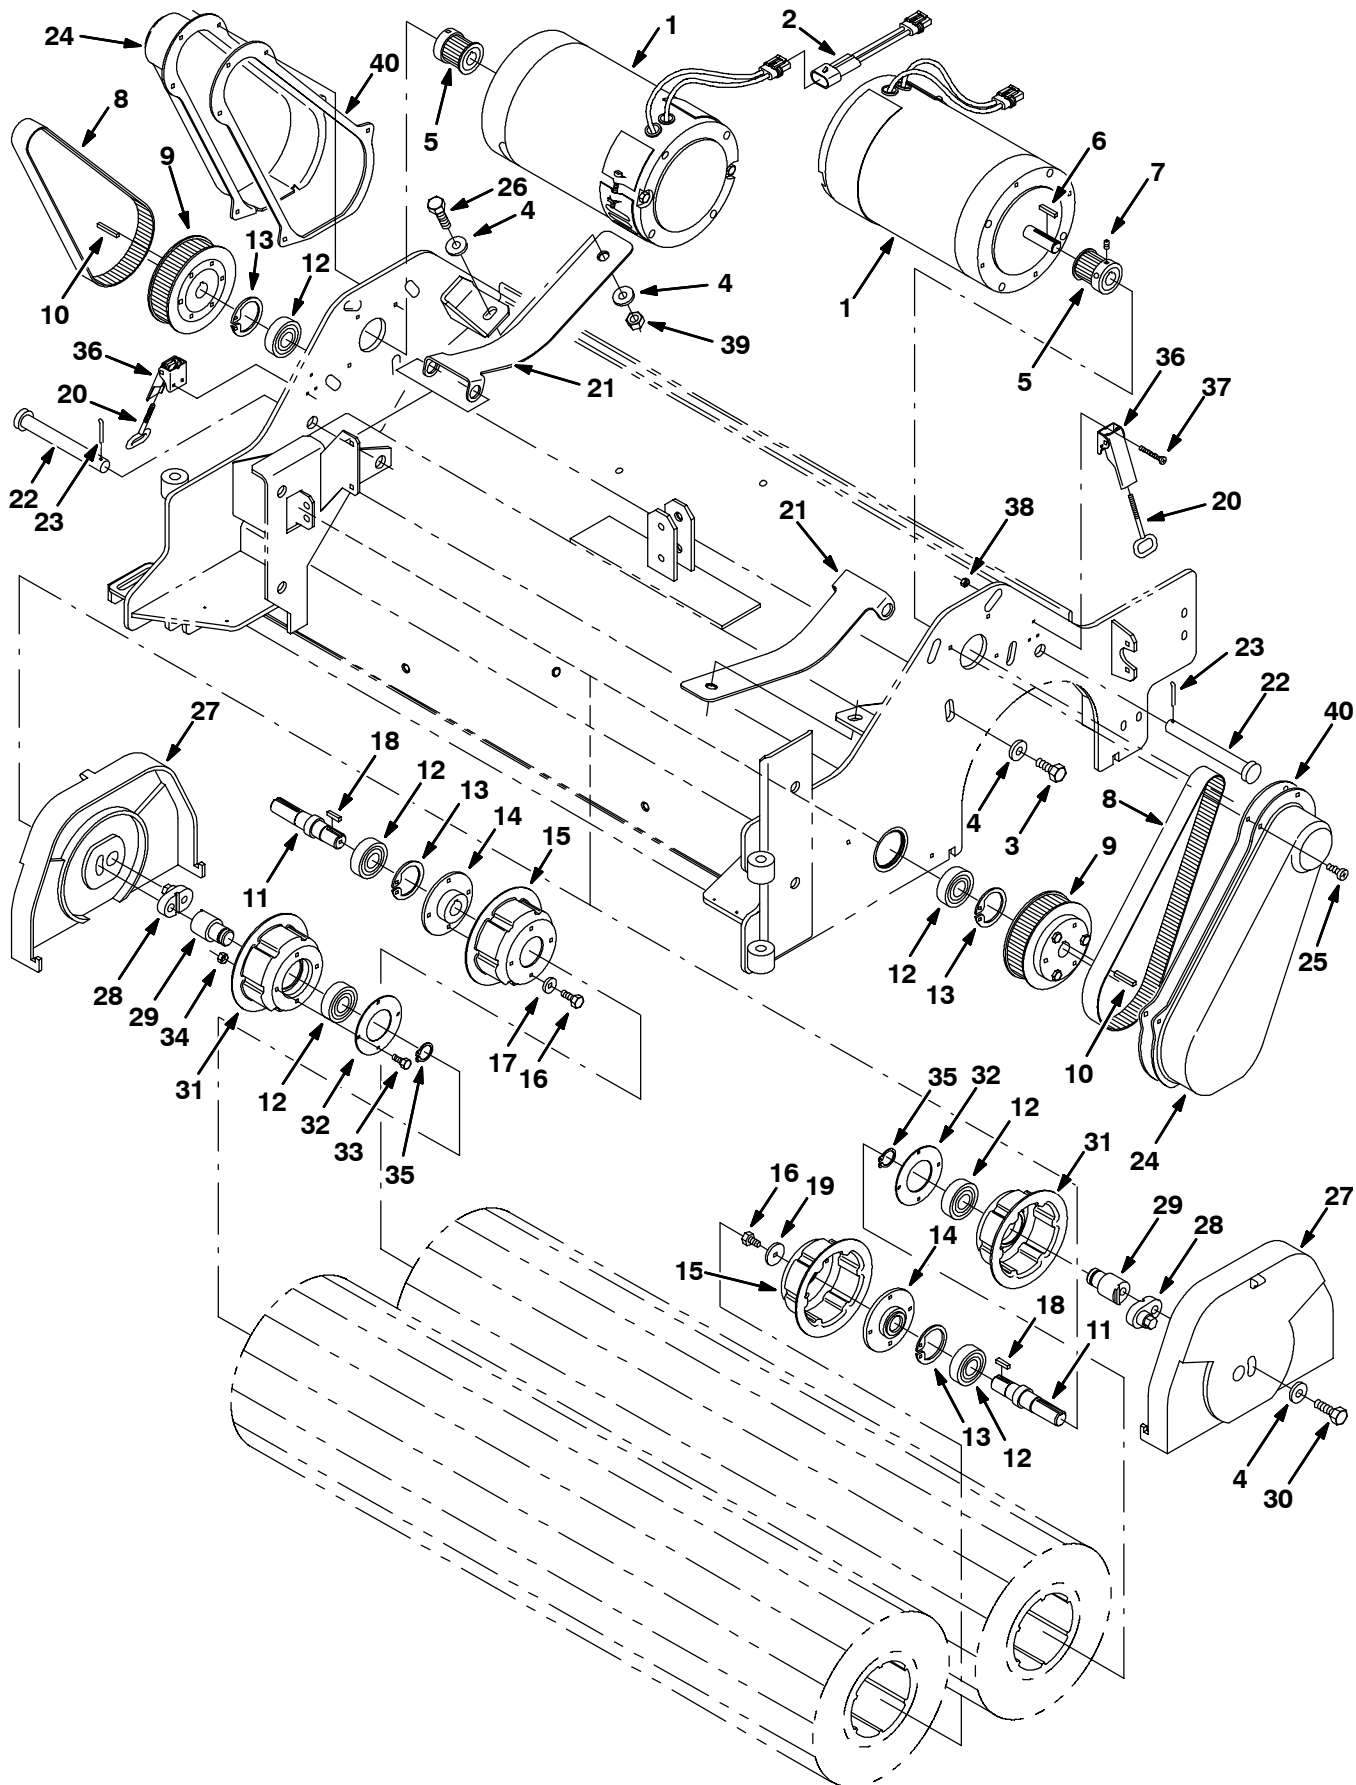


Fig. 19 - Max Pro 1000 (Cylindrical Brush) Scrub Head Drive Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386050	(000000-003887)	Motor, Ele, 36vdc 1500rpm 1.5hp (See Breakdown) (Repl By 377398AM)	2
1	377398	(003888-	Motor, Ele, 36Vdc 1.50Hp 1500Rpm 43.0A	2
2	363468	(000000-	Wire Assy, Jumper Reverse, [515]	1
3	09291	(000000-	Screw, Hex, M10 X 1.5 X 20, Ss	8
4	01686	(000000-	Washer, Flt, .38 Ss	14
5	83052	(000000-	Sprocket, Timing, 23tooth, 0.625b	2
6	00912	(000000-	Key, Sq, 0.19 X 0.19, 01.00l	2
7	39323	(000000-	Screw, Set, #10-32 X 0.38, Al	4
8	386053	(000000-	Belt, Drive (Cylindrical Brush)	2
9	375301	(000000-	Sprocker, Timing, 4.26Pd, 68 Grv, Pl	2
10	00918	(000000-	Key, Sq, 0.19 X 0.19, 01.25l	2
11	386058	(000000-	Shaft, Drive, Brush	2
12	46390	(000000-	Bearing, Ball, 0.79b 1.85d 0.55w	6
13	10464	(000000-	Ring, Retaining, Int, 1.85d, Basic	4
14	386062	(000000-	Collar Wldt	2
15	386067	(000000-	Plug, Drive, Brush, Splined	2
16	15678	(000000-	Screw, Hex, M06 X 1.0 X 16, Ss	10
17	01684	(000000-	Washer, Flt, .25 Ss	8
18	00911	(000000-	Key, Sq, 0.19 X 0.19, 00.75l	2
19	386063	(000000-	Washer, 0.25b 1.12d .12, Ss	2
20	386274	(000000-	Hook Wldt, Latch	2
21	1011713	(000000-	Spring, Motor	2
22	386072	(000000-	Pin, Clevis, .625 Dia X 5.25l	2
23	02942	(000000-	Pin, Hair Cotter, 0.62 D .120 Wir	2
24	386066	(000000-	Cover, Drive	2
25	48732	(000000-	Screw, Pan, M06 X 1.0 X 10, Ss	10
26	12317	(000000-	Screw, Hex, M10 X 1.5 X 30, Ss	2
27	386080	(000000-	Cover, Idler	2
28	386841	(000000-	Cam, Front	2
29	386842	(000000-	Cam, Rear	2
30	12317	(000000-	Screw, Hex, M10 X 1.5 X 30, Ss	2
31	81818	(000000-	Plug, Drive, Brush, Splined	2
32	35836	(000000-	Retainer, Bearing	2
33	09738	(000000-	Screw, Hex, M05 X 0.8 X 12, Ss	8
34	06549	(000000-	Nut, Hex, Lock, M05 X 0.8, NI	8
35	26428	(000000-	Ring, Retaining, Ext, 0.75d, Hd	2
36	386257	(000000-	Latch	2
37	09198	(000000-	Screw, Pan, M04 X 0.7 X 35, Ss	6
38	33932	(000000-	Nut, Hex, Lock, M04 X 0.7, NI, Ss	6
39	08714	(000000-	Nut, Hex, Lock, M10 X 1.5, NI, SS	2
40	1001062	(000000-	Gasket, Cover	2

Fig. 20 - Max Pro 1000 (Cylindrical Brush) Solution Valve Group (Non FaST)

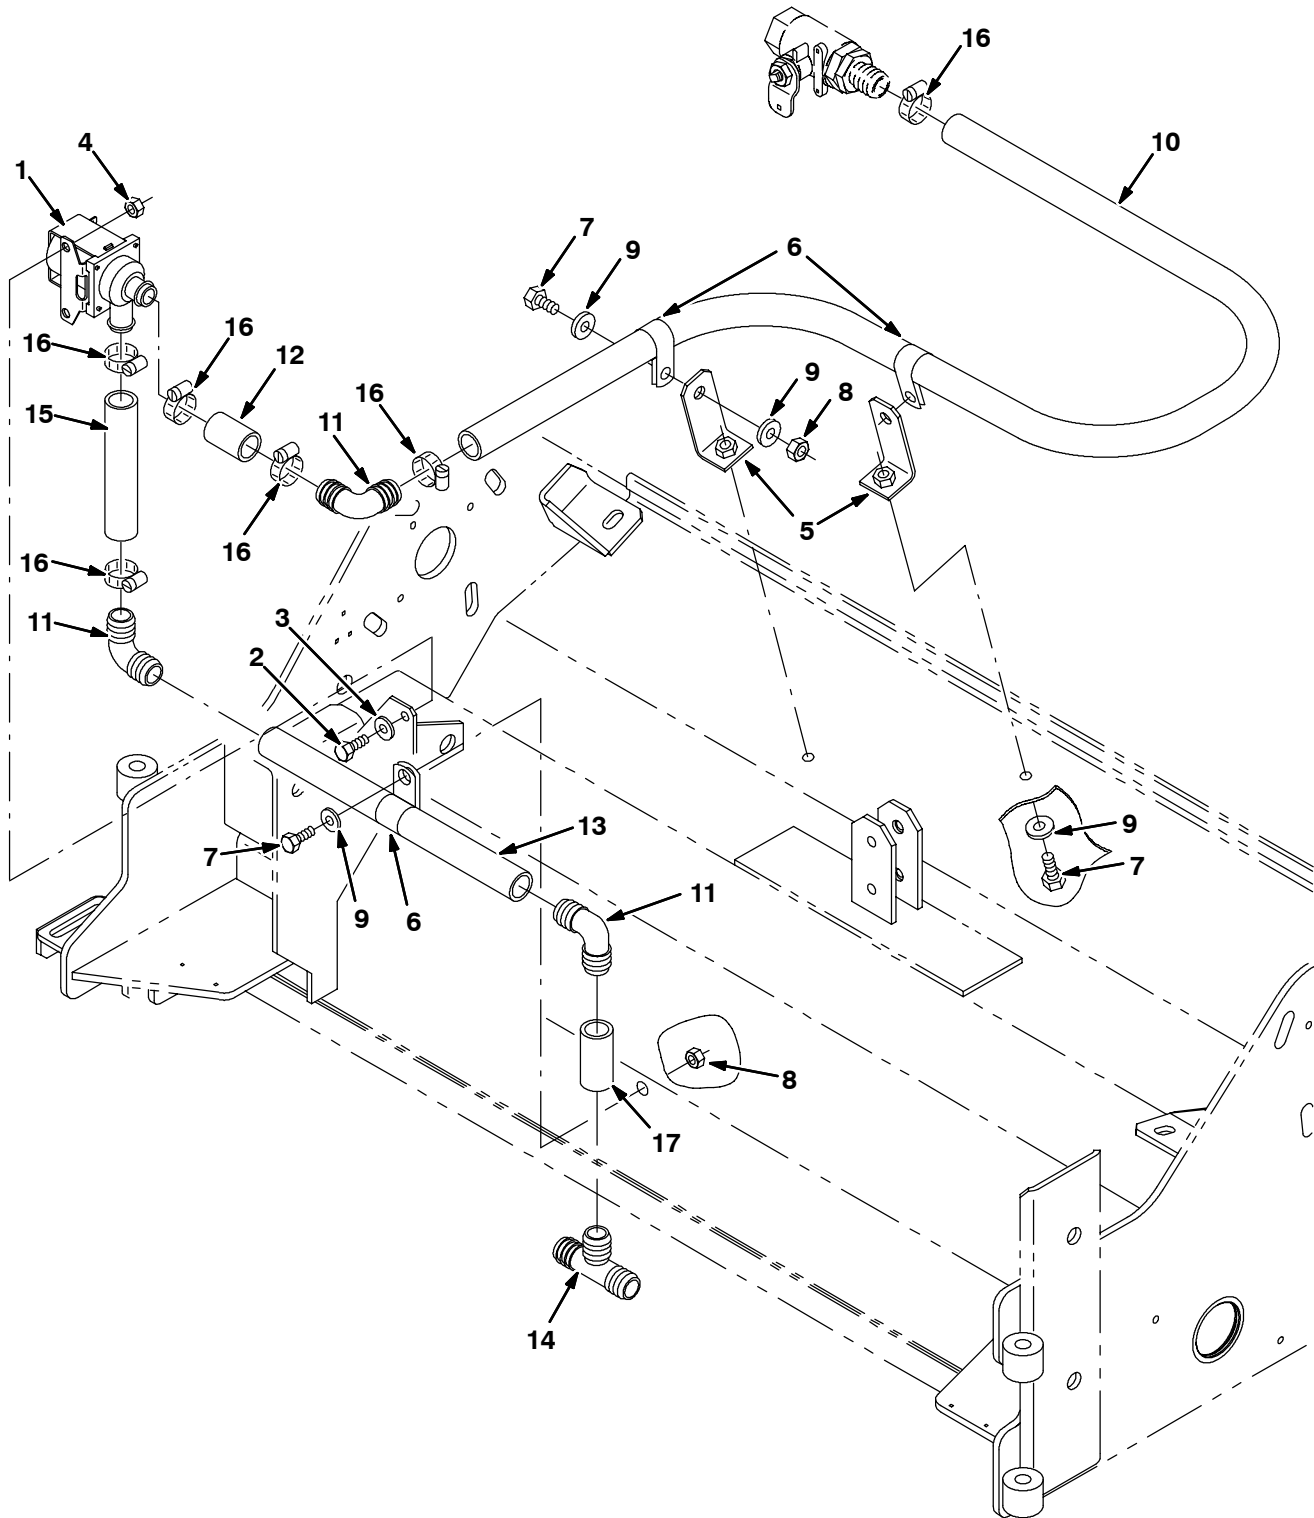


Fig. 20 - Max Pro 1000 (Cylindrical Brush) Solution Valve Group (Non FaST)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	01684	(000000-	) Washer, Flt, .25 Ss	2
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	386490	(000000-	) Angle	2
6	69234	(000000-	) Clamp, Cable, Stl, 1.00d X 0.62w, 1h	3
7	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	7
8	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	5
9	01685	(000000-	) Washer, Flt, .31 Ss	9
10	73474	(000000-	) Hose, Pvc, Brd, 0.75id 1.00od 44.50l	1
11	40566	(000000-	) Fitting, Plstc, E90, Bm12/Bm12	3
12	364899	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 01.50l	1
13	364896	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 11.00l	1
14	41315	(000000-	) Fitting, Plstc, Tee, Bm12/Bm12/Bm12	1
15	364895	(000000-	) Hose, Pvc, Brd, 0.75ID 1.03OD 05.00L	1
16	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	6
17	16914	(000000-	) Hose, Pvc, Brd, 0.75ID 1.00OD 02.00L	1

Fig. 21 - Max Pro 1000 (Cylindrical Brush) Solution Valve Group (FaST)

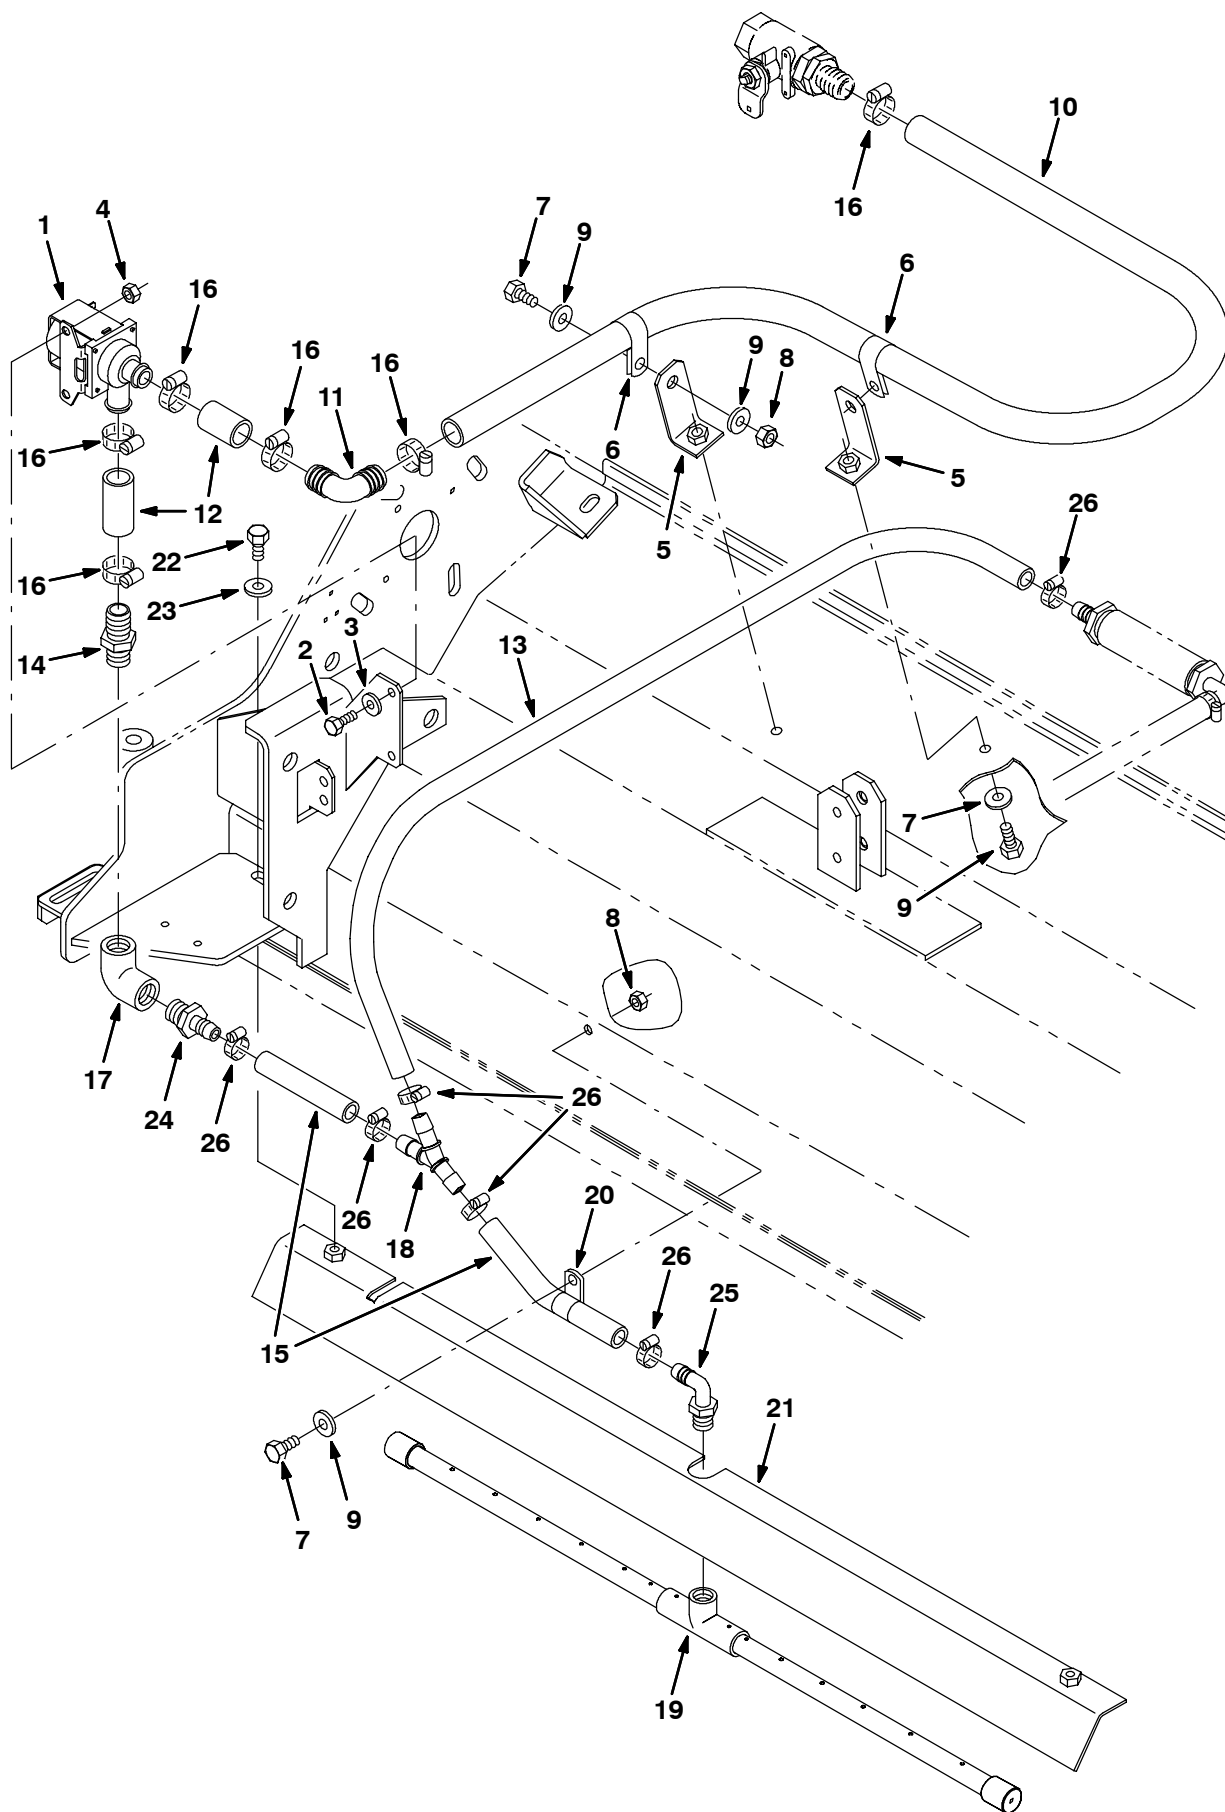


Fig. 21 - Max Pro 1000 (Cylindrical Brush) Solution Valve Group (FaST)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	01684	(000000-	) Washer, Flt, .25 Ss	2
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	386490	(000000-	) Angle	2
6	69234	(000000-	) Clamp, Cable, Stl, 1.00d X 0.62w, 1h	2
7	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	5
8	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	3
9	01685	(000000-	) Washer, Flt, .31 Ss	7
10	1015045	(000000-	) Hose, Afmkt, Pvc, Brd 0.75id 8 Ft	1
11	40566	(000000-	) Fitting, Plstc, E90, Bm12/Bm12	3
12	1015048	(000000-	) Hose, Afmkt, Pvc, Brd 0.75id 1 Ft	1
13	1011521	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 2 Ft	1
14	78398	(000000-	) Fitting, Plstc, Str, Bm12/Pm08, Nyl	1
15	1011403	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 1 Ft	1
16	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	6
17	79572	(000000-	) Fitting, Plstc, E90, Pf08/Pf08	1
18	1010668	(000000-	) Fitting, Plstc, Y, Bm08/Bm08/Bm08 Nyl	1
19	1015097	(000000-	) Tube Assy, Spray Bar 40" [7300/8300]	1
20	07471	(000000-	) Clamp, Cable, Stl, 0.75d X 0.75w, 1h	1
21	1015090	(000000-	) Bracket, Spray Bar, 40" [7300/8300]	1
22	49826	(000000-	) Screw, Hex, M8 X 1.25 X 16, Ss, NI	2
23	32492	(000000-	) Washer, Flat, 0.38 Std	2
24	79273-4	(000000-	) Fitting, Plstc, Str, Bm08/Pm08	1
25	64778	(000000-	) Fitting, Plstc, E90, Bm08/Pm06	1
26	54333	(000000-	) Clamp, Hose, Wormdrive, 0.31-0.88d	6

Fig. 22 - Max Pro 1000 (Cylindrical Brush) Edge Scrub Group

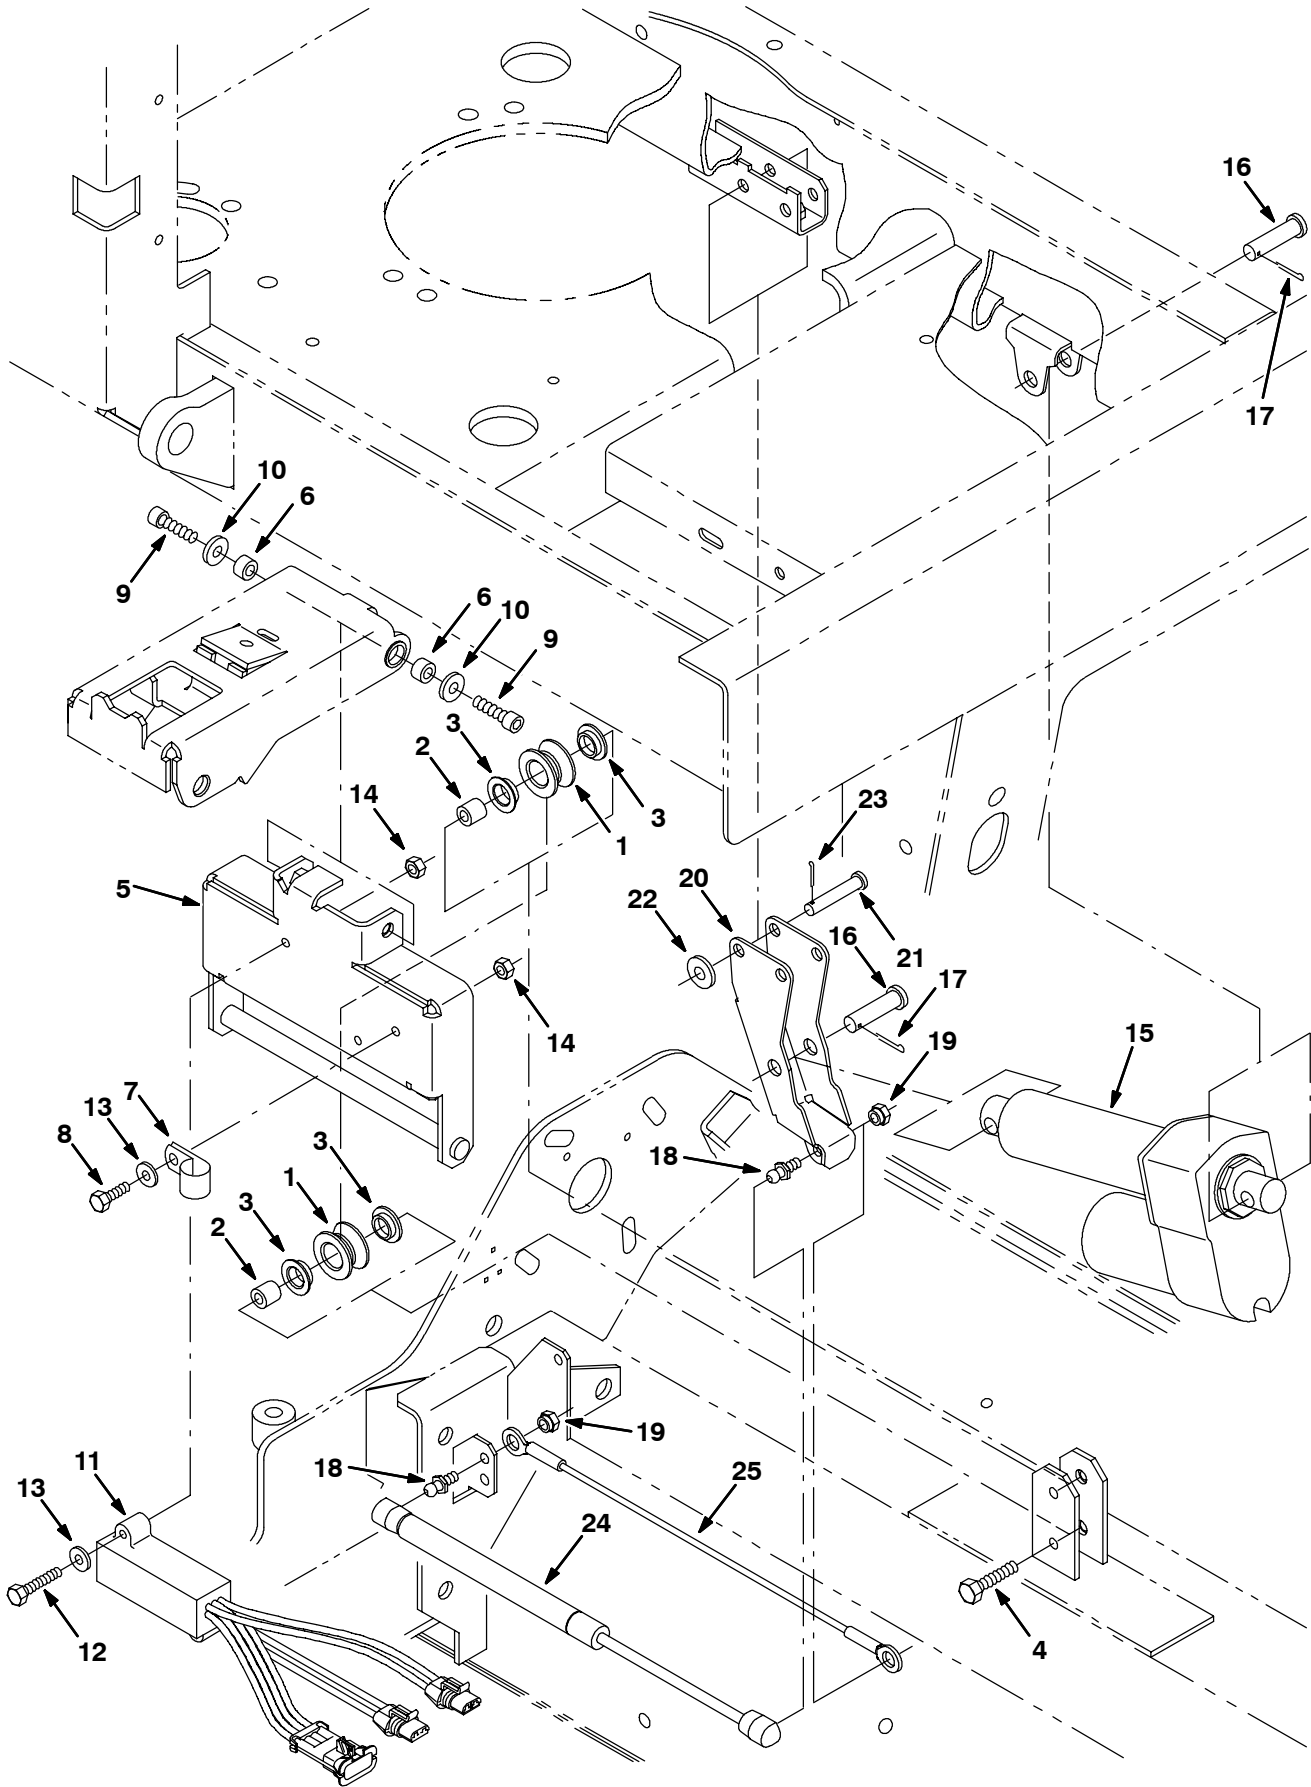


Fig. 22 - Max Pro 1000 (Cylindrical Brush) Edge Scrub Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	363120	(000000-	) Roller	2
2	222277	(000000-	) Sleeve	2
3	04843	(000000-	) Bushing, Flng, 0.63b 0.72d 0.25l	4
4	222505	(000000-	) Screw, Hex, M08 X 1.25 X 45, Ss	2
5	386040	(000000-	) Rail Wldt, Lift, Cyl Head	1
6	222556	(000000-	) Sleeve	2
7	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	1
8	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	1
9	39308	(000000-	) Screw, Soc, M08 X 1.25 X 25, 12.9	2
10	01685	(000000-	) Washer, Flt, .31 Ss	2
11	363237	(000000-	) Shunt, 2Hd Mtrs, Scrub 515, Red	1
12	33930	(000000-	) Screw, Hex, M06 X 1.0 X 40, Ss	2
13	01684	(000000-	) Washer, Flt, .25 Ss	3
14	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	3
15	363152	(000000-	) Actuator, 36vdc, 02.7stroke 500lb	1
16	63147	(000000-	) Pin, Clevis, 0.50 D X 1.87l	2
17	08182	(000000-	) Pin, Cotter, .125 X 1.00	2
18	58494	(000000-	) Stud, Ball, .39d .31-16, Gasspring	2
19	14725	(000000-	) Nut, Retainer, .31-18	2
20	386048	(000000-	) Arm Wldt, Pivot, Side, [7300/8300]	1
21	29584	(000000-	) Pin, Clevis, 0.37 D X 2.00l	1
22	01686	(000000-	) Washer, Flt, .38 Ss	1
23	39005	(000000-	) Pin, Cotter, .094 X 0.75	1
24	364858	(000000-	) Gasspring, 56lb, 6.3strk	1
25	364404	(000000-	) Cable, .13d, 15.5l, .50eye /.50eye	1

Fig. 23 - Max Pro 1000 (Cylindrical Brush) Right Side Squeegee Group

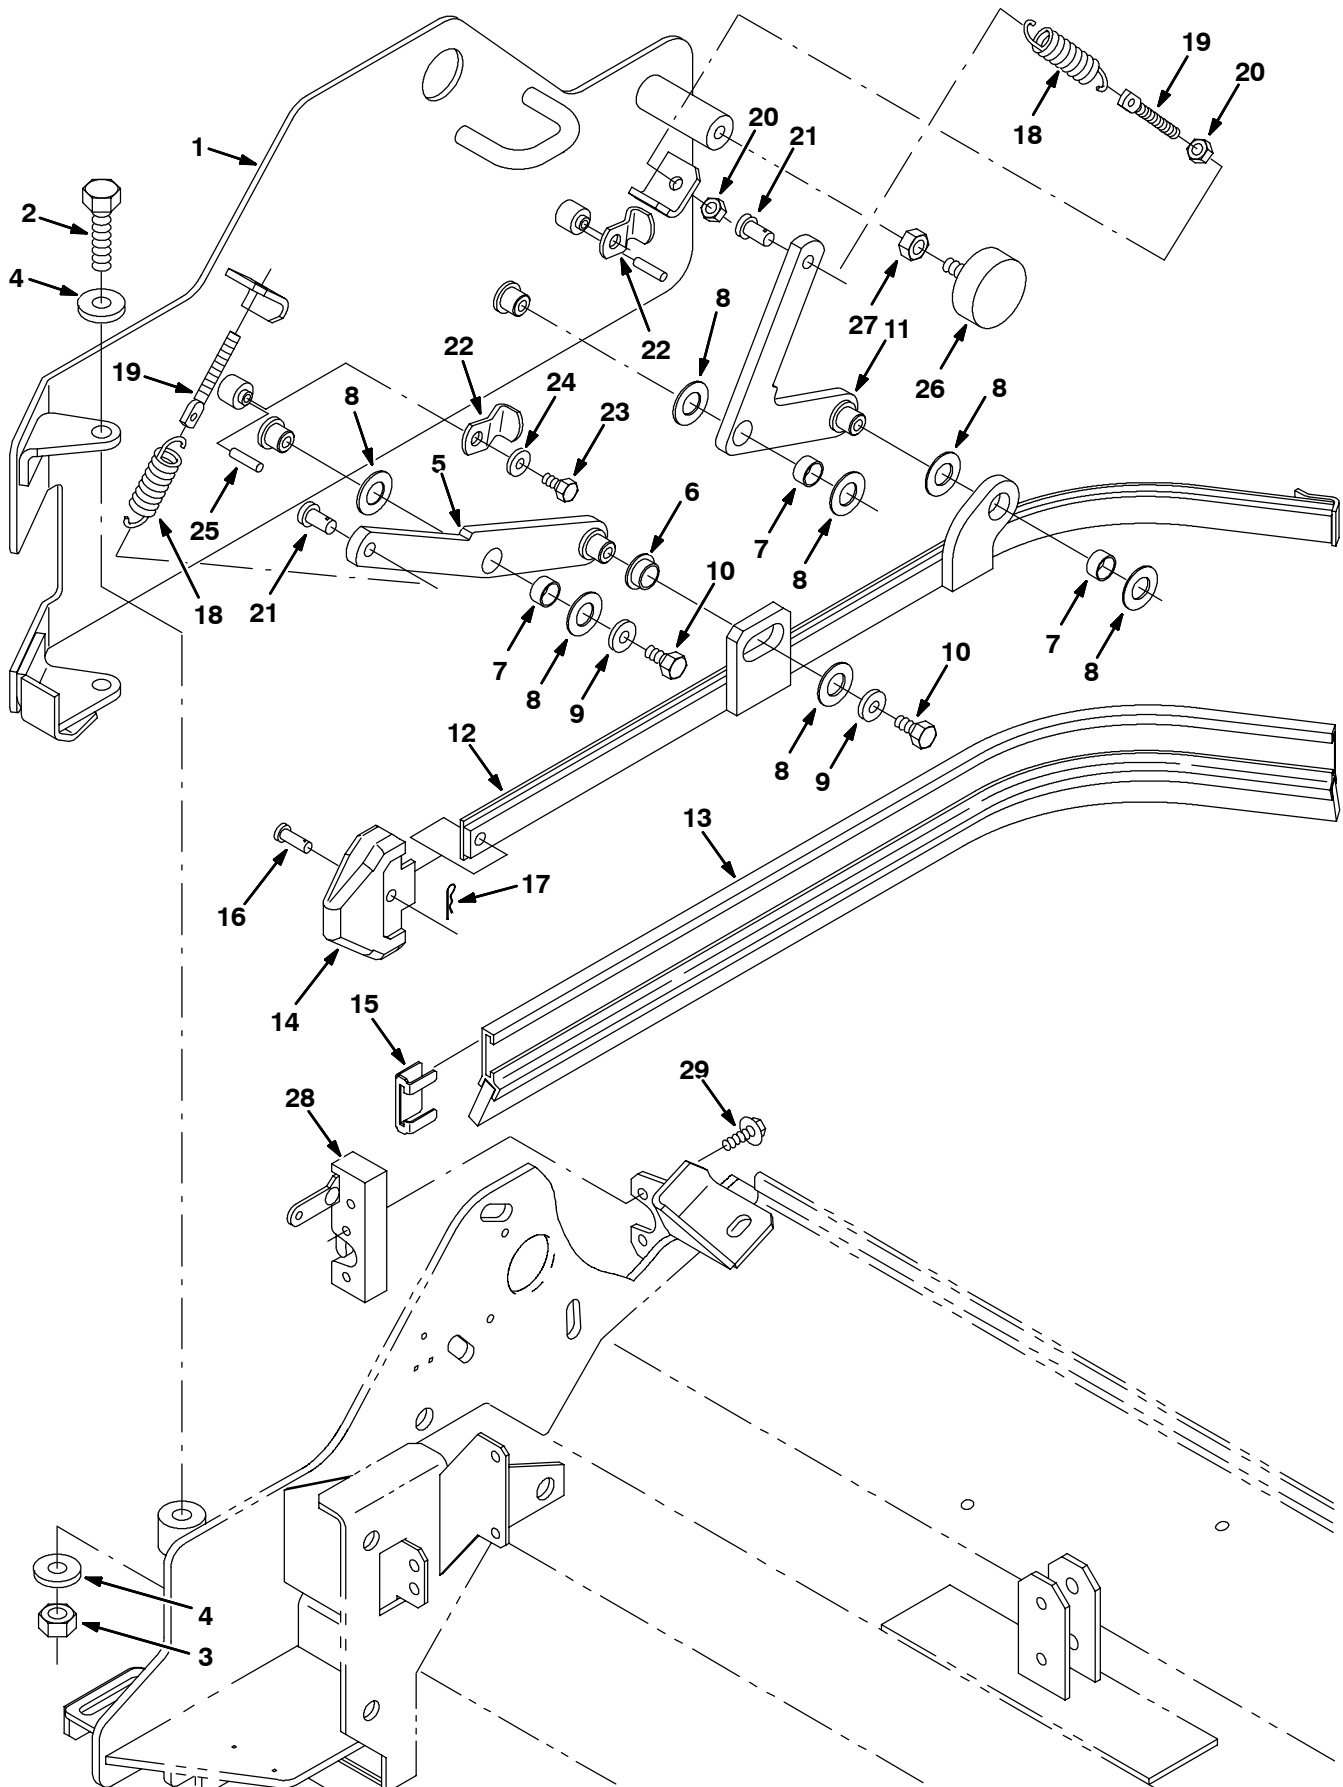


Fig. 23 - Max Pro 1000 (Cylindrical Brush) Right Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386495	(000000-	) Guard Wldt, Rh	1
2	09774	(000000-	) Screw, Hex, M12 X 1.75 X 50, Ss	2
3	09741	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI, Ss	2
4	33925	(000000-	) Washer, Flat, M12, 13x24x2.5ss	4
5	386269	(000000-	) Arm Wldt, Front, Rh	1
6	25735	(000000-	) Bushing, Fling, 0.63b 0.75d 0.38l	1
7	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
8	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
9	01686	(000000-	) Washer, Flt, .38 Ss	4
10	386868	(000000-	) Screw, Hex, M08x1.25 X12, Ss	4
11	386268	(000000-	) Arm Wldt, Rear, Rh	1
12	386263	(000000-	) Frame Wldt, Sqge, Side, Rh	1
13	386260	(000000-	) Squeegee, Side	1
14	386986	(000000-	) Guide, Point, Side Sqge	1
15	86759	(000000-	) Clip, Sqge	1
16	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
17	08085	(000000-	) Pin, Hair Cotter, 0.31 D .058 Wir	1
18	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
19	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
20	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
21	41305	(000000-	) Pin, Clevis, 0.37 D X 0.75l	2
22	386507	(000000-	) Arm, Latch	2
23	09744	(000000-	) Screw, Hex, M06 X 1.0 X 12, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	2
25	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
26	70756	(000000-	) Bumper, Rbr, 2.0d 0.75t .38-16	1
27	01692	(000000-	) Nut, Hex, Std, .38-16, Ss	1
28	72439	(000000-	) Latch	1
29	16949	(000000-	) Screw, Hex, .25-20 X 0.75, Sems	4

Fig. 24 - Max Pro 1000 (Cylindrical Brush) Left Side Squeegee Group

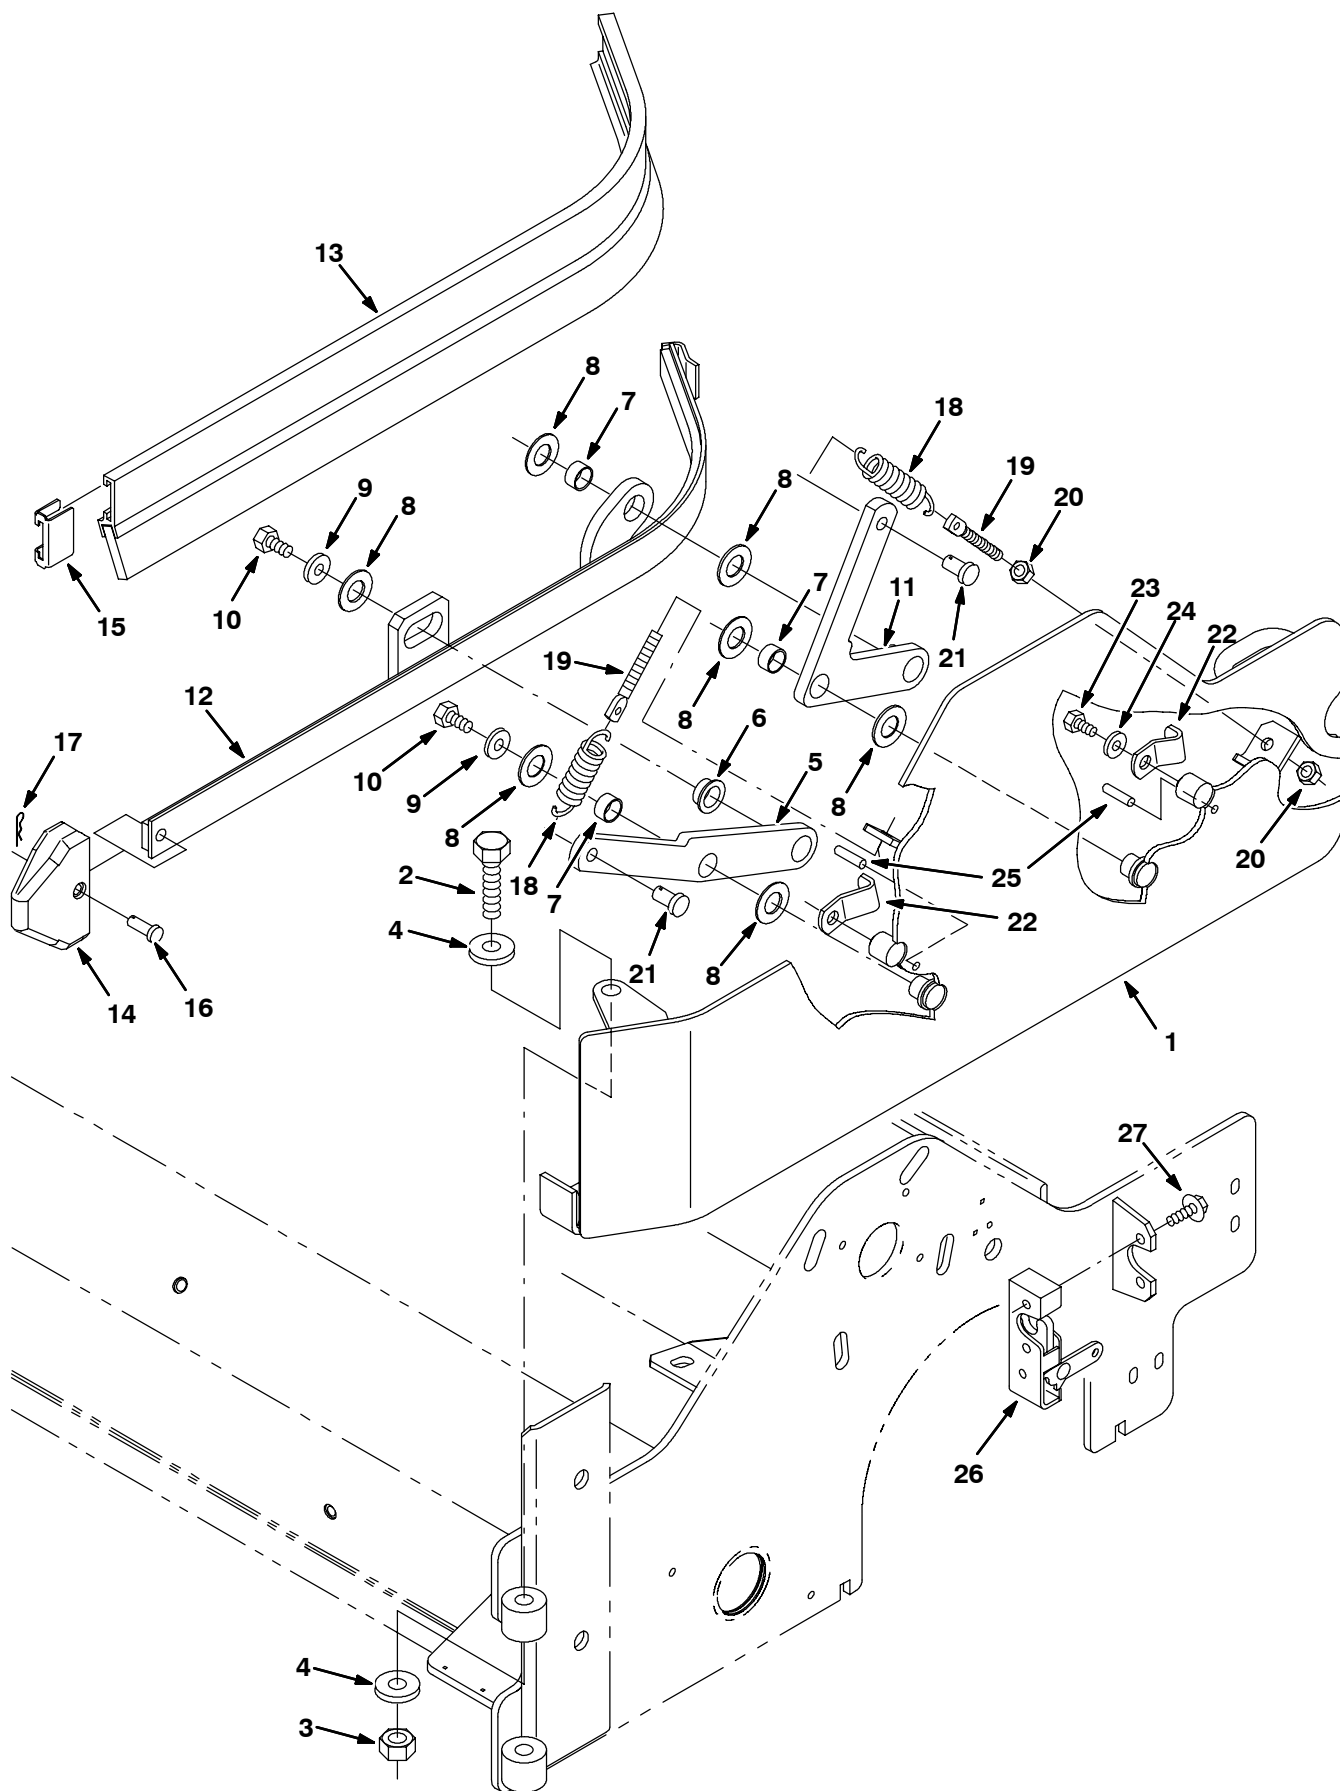


Fig. 24 - Max Pro 1000 (Cylindrical Brush) Left Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386496	(000000-	) Guard Wldt, Lh	1
2	09774	(000000-	) Screw, Hex, M12 X 1.75 X 50, Ss	2
3	09741	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI, Ss	2
4	33925	(000000-	) Washer, Flat, M12, 13x24x2.5ss	4
5	386276	(000000-	) Arm Wldt, Front, Lh	1
6	25735	(000000-	) Bushing, Fling, 0.63b 0.75d 0.38l	1
7	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
8	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
9	01686	(000000-	) Washer, Flt, .38 Ss	4
10	386868	(000000-	) Screw, Hex, M08x1.25 X12, Ss	4
11	386275	(000000-	) Arm Wldt, Rear, Lh	1
12	386262	(000000-	) Frame Wldt, Sqge, Side, Lh	1
13	386260	(000000-	) Squeegee, Side	1
14	386986	(000000-	) Guide, Point, Side Sqge	1
15	86759	(000000-	) Clip, Sqge	1
16	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
17	08085	(000000-	) Pin, Hair Cotter, 0.31 D .058 Wir	1
18	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
19	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
20	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
21	41305	(000000-	) Pin, Clevis, 0.37 D X 0.75l	2
22	386507	(000000-	) Arm, Latch	2
23	09744	(000000-	) Screw, Hex, M06 X 1.0 X 12, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	2
25	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
26	59661	(000000-	) Latch	1
27	16949	(000000-	) Screw, Hex, .25-20 X 0.75, Sems	4

Fig. 25 - Max Pro 1000 (Cylindrical Brush) Debris Tray Group

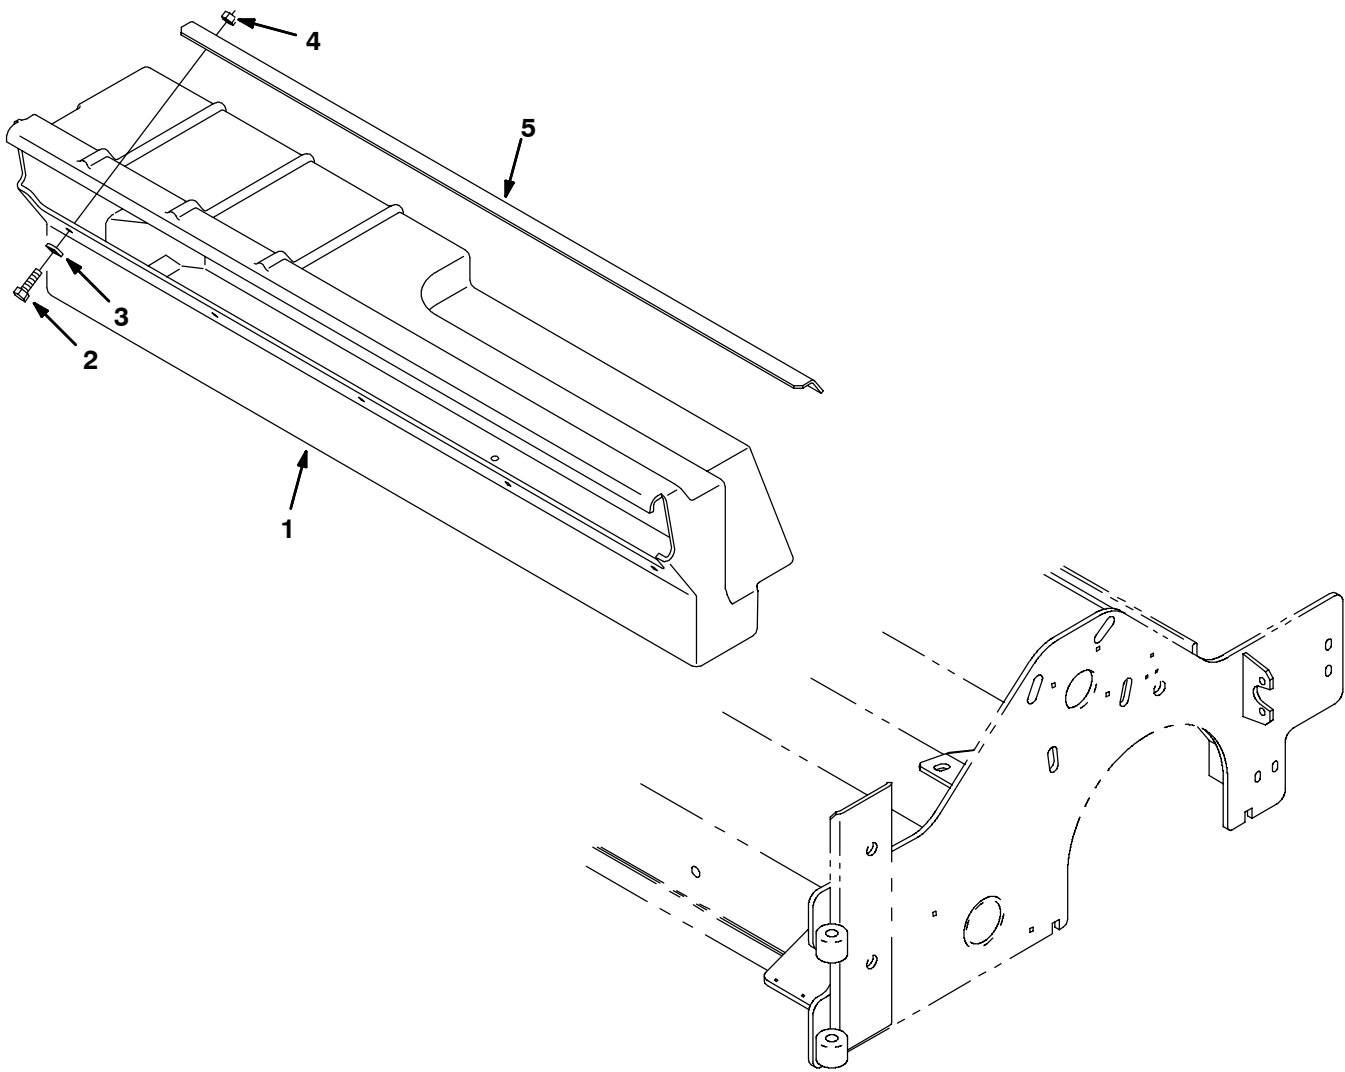


Fig. 25 - Max Pro 1000 (Cylindrical Brush) Debris Tray Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387671	(000000-	) Tray, Debris, 40L, W/Holes	1
2	08716	(000000-	) Screw, Hex, M6X1.0X20, Ss	5
3	01684	(000000-	) Washer, Flat, 0.25 Ss	5
4	08712	(000000-	) Nut, Hex, Lock, M6X1.0, Ss, NI	5
5	387253	(000000-	) Angle	1

Fig. 26 - Max Pro 1000 (Cylindrical Brush) Vacuumized Debris Tray Group

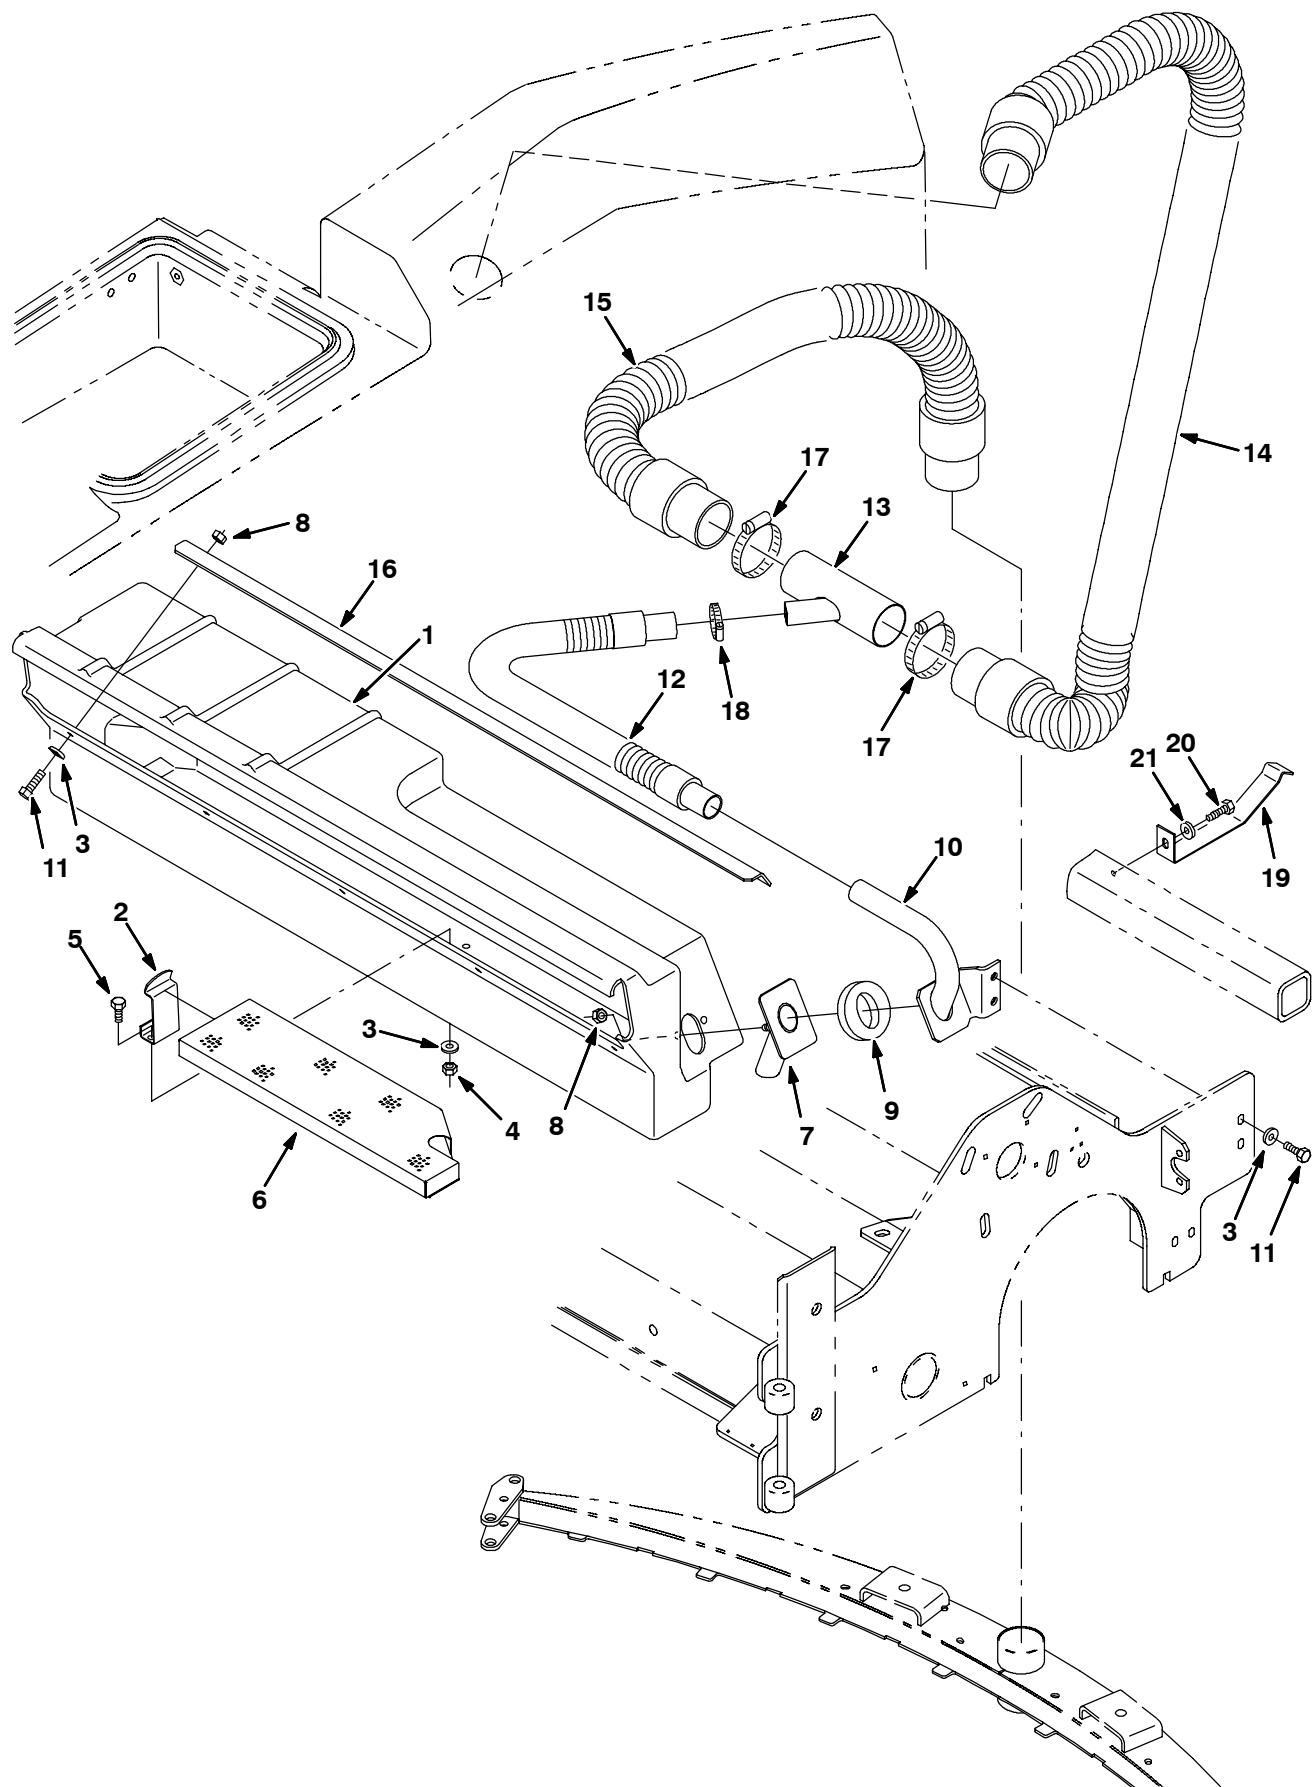


Fig. 26 - Max Pro 1000 (Cylindrical Brush) Vacuumized Debris Tray Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386282	(000000-	) Tray, Debris, 40.0l	1
2	87244	(000000-	) Clip, Spring, Prop Arm	1
3	01684	(000000-	) Washer, Flt, .25 Ss	14
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	09744	(000000-	) Screw, Hex, M06 X 1.0 X 12, Ss	2
6	386500	(000000-	) Screen Wldt	1
7	386503	(000000-	) Tube Wldt	1
8	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	7
9	386504	(000000-	) Gasket, Foam	1
10	386510	(000000-	) Tube Wldt, Upper	1
11	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	7
12	222788	(000000-003545	) Hose Assy, W/2cuff, 1.0d, 23l	1
12	387517	(003546-	) Hose Assy, W/2cuff, 1.0d, 41l	1
13	386518	(000000-	) Tube Wldt	1
14	386514	(000000-003545	) Hose, Vacuum, 58.5l	1
14	1005133	(003546-	) Hose Assy, W/2cuff, 2.0d 75l	1
15	387256	(000000-003545	) Hose, Vacuum, 35.0l	1
15	1005135	(003546-	) Hose Assy, W/2cuff, 2.0d 26l	1
16	387253	(000000-	) Angle	1
17	14432	(000000-	) Clamp, Hose, Wormdrive, 1.81-2.75d	2
18	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	1
19	1002464	(003546-	) Bracket, Tube , Tee	1
20	361339	(003546-	) Screw, Hex, M 6 X 1.0 X 16, Fmg	1
21	32483	(003546-	) Washer, Flat, 0.25 Sae	1

Fig. 27 - Max Pro 1200 (Cylindrical Brush) Scrub Head Frame and Linkage Group

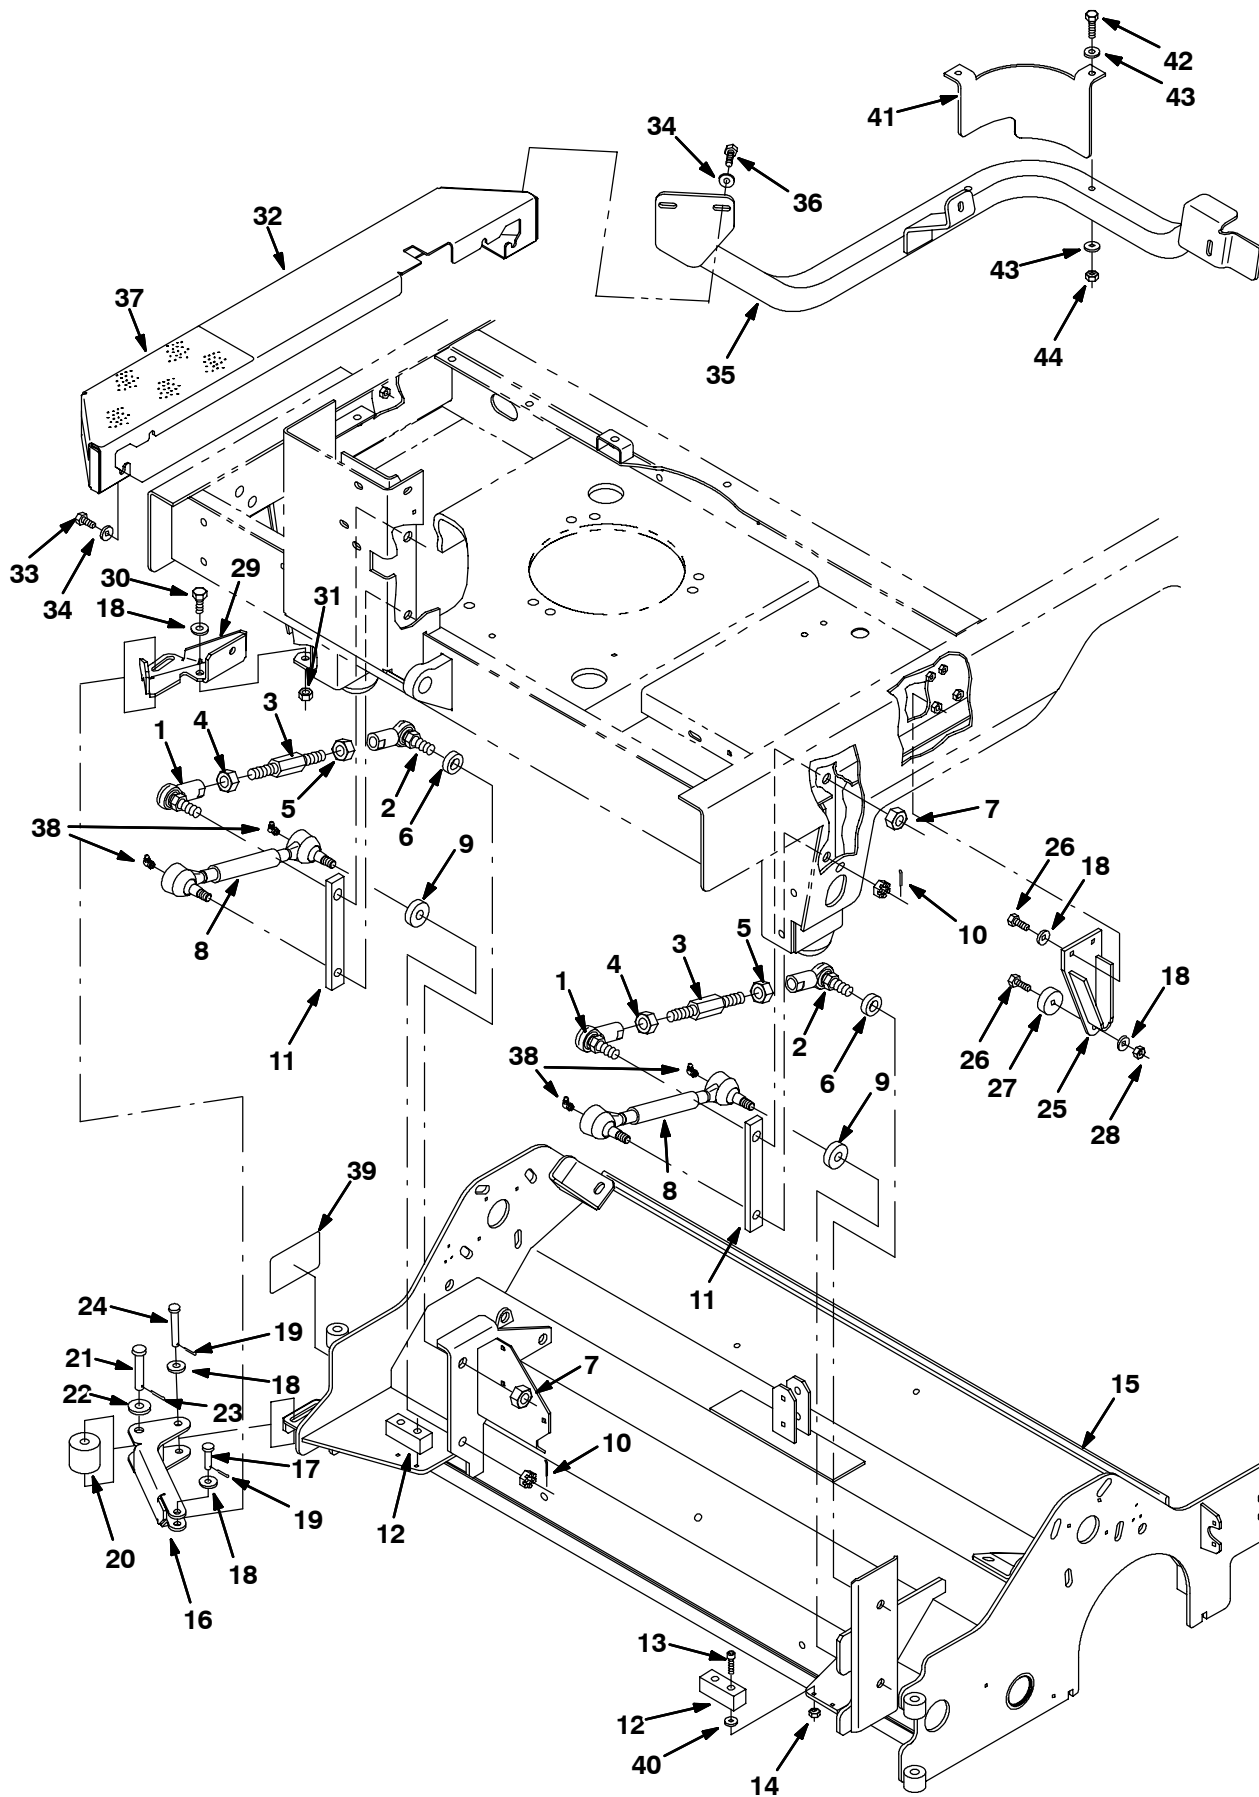


Fig. 27 - Max Pro 1200 (Cylindrical Brush) Scrub Head Frame and Linkage Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	77275	(000000-	) Rod-End, .62-18rh Fem 0.50-18stud	2
2	386070	(000000-	) Rod-End, .625-18, Lh	2
3	386071	(000000-	) Rod, Link	2
4	77276	(000000-	) Nut, Hex, Jam, .62-18, Ss	2
5	77277	(000000-	) Nut, Hex, Jam, .62-18, Ss, Lh	2
6	386081	(000000-	) Spacer, Rod-End	2
7	40814	(000000-	) Nut, Hex, Lock, .62-18, NI, Thin	4
8	363113	(000000-	) Link Wldt, Head, Drag	2
9	14524	(000000-	) Spacer, Washer	2
10	08346	(000000-	) Pin, Cotter, .125 X 0.75	4
11	386844	(000000-	) Spacer, Plate	2
12	386865	(000000-	) Bumper	2
13	24198	(000000-	) Screw, Pan, M05 X 0.8 X 25, Ss	4
14	09739	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI, Ss	4
15	386874	(000000-	) Housing Wldt, Brush [Mp1200]	1
16	1001099	(000000-	) Guard, Kick In, Scb Head	1
17	29557	(000000-	) Pin, Clevis, 0.37 D X 1.31l	1
18	01686	(000000-	) Washer, Flt, .38 Ss	7
19	39005	(000000-	) Pin, Cotter, .094 X 0.75	2
20	72946	(000000-	) Roller	1
21	06279	(000000-	) Pin, Clevis, 0.50 D X 2.50l	1
22	32493	(000000-	) Washer, Flt, .50 Std	1
23	08182	(000000-	) Pin, Cotter, .125 X 1.00	1
24	365180	(000000-	) Pin, Clevis, 0.38 D X 2.50l	1
25	386493	(000000-	) Plate Wldt, Stop	2
26	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	3
27	15023	(000000-	) Bumper, Pye	1
28	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	1
29	386876	(000000-	) Bracket, Adaptor, Mtg, Kick In, Frame	1
30	09028	(000000-	) Screw, Hex, M10 X 1.5 X 25, Ss	1
31	08714	(000000-	) Nut, Hex, Lock, M10 X 1.5, NI, Ss	1
32	386827	(000000-	) Bumper, Side, Scb Head, Wide	1
33	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	4
34	01685	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	8
35	387245	(000000-	) Guard Wldt, Sqge (MP 20)	1
36	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	4
37	387080	(000000-	) Tread, Floor, 12.5 X 5.75	1
38	09718	(000000-	) Fitting, Grease, E90 Pm04 .75L	4
39	365156	(000000-	) Label Set, Info/Hzrd, [Max Pro]	1
40	13248	(000000-	) Washer, 0.40B 1.12D .12, Stl, Pl	4
41	1007486	(000000-	) Guard, Bumper	1
42	49694	(000000-	) Screw, Hex, M 8 X 1.25 X 50, Ss	2
43	01685	(000000-	) Washer, Flat, 0.31 Ss	4
44	08713	(000000-	) Nut, Hex, Lock, M 8 X 1.25, NI, Ss	2

Fig. 28 - Max Pro 1200 (Cylindrical Brush) Scrub Head Drive Group

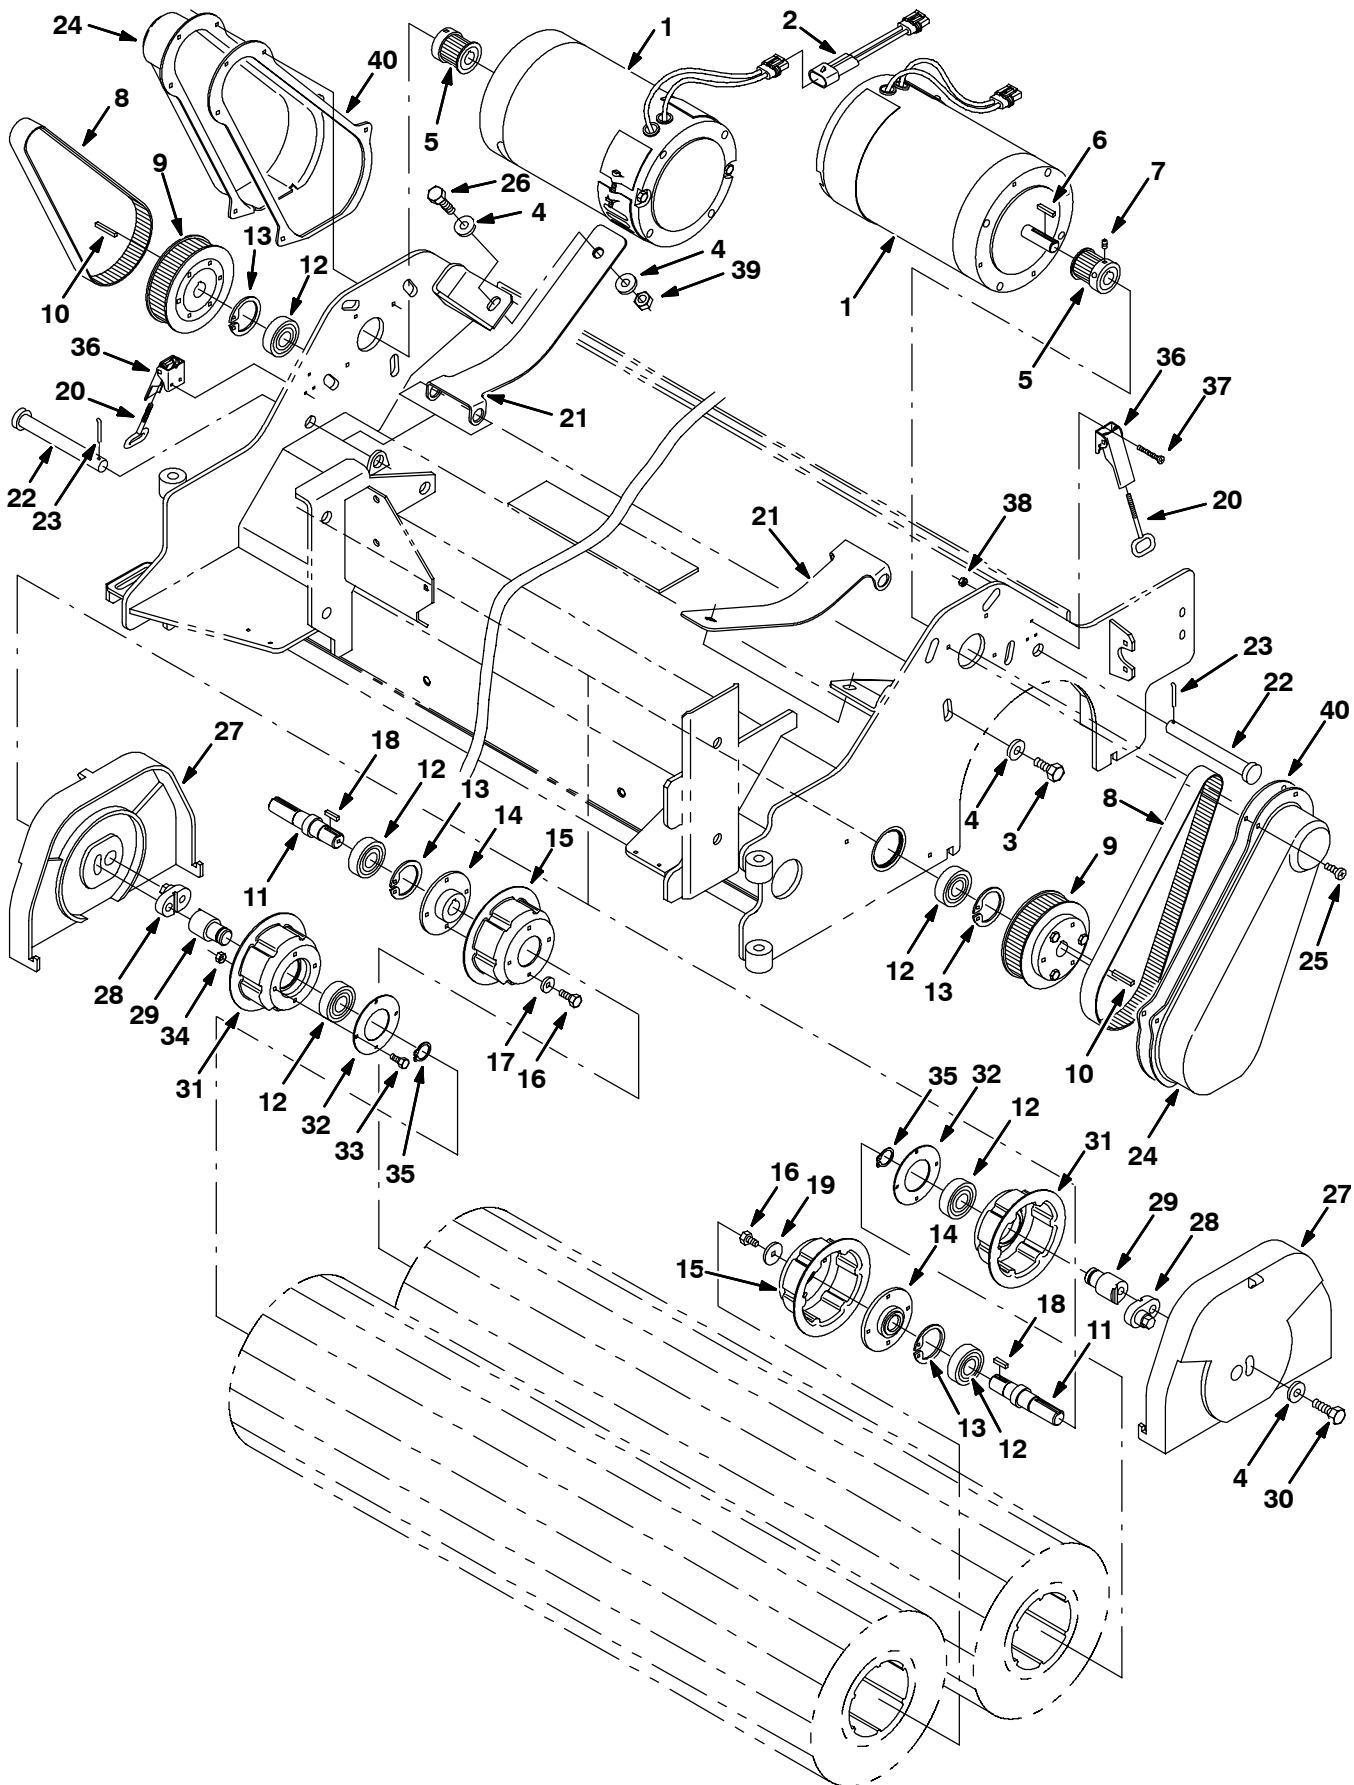


Fig. 28 - Max Pro 1200 (Cylindrical Brush) Scrub Head Drive Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386050	(000000-003887)	Motor, Ele, 36vdc 1500rpm 1.5hp (See Breakdown) (Repl By 377398AM)	2
1	377398	(003888-	Motor, Ele, 36Vdc 1.50Hp 1500Rpm 43.0A	2
2	363468	(000000-	Wire Assy, Jumper Reverse, [515]	1
3	09291	(000000-	Screw, Hex, M10 X 1.5 X 20, Ss	8
4	01686	(000000-	Washer, Flt, .38 Ss	14
5	83052	(000000-	Sprocket, Timing, 23tooth, 0.625b	2
6	00912	(000000-	Key, Sq, 0.19 X 0.19, 01.00l	2
7	39323	(000000-	Screw, Set, #10-32 X 0.38, Al	4
8	386053	(000000-	Belt, Drive (Cylindrical Brush)	2
9	375301	(000000-	Sprocket, Timing, 4.261Pd, 68Grv, Pl	2
10	00918	(000000-	Key, Sq, 0.19 X 0.19, 01.25l	2
11	386058	(000000-	Shaft, Drive, Brush	2
12	46390	(000000-	Bearing, Ball, 0.79b 1.85d 0.55w	6
13	10464	(000000-	Ring, Retaining, Int, 1.85d, Basic	4
14	386062	(000000-	Collar Wldt	2
15	386067	(000000-	Plug, Drive, Brush, Splined	2
16	15678	(000000-	Screw, Hex, M06 X 1.0 X 16, Ss	10
17	01684	(000000-	Washer, Flt, .25 Ss	8
18	00911	(000000-	Key, Sq, 0.19 X 0.19, 00.75l	2
19	386063	(000000-	Washer, 0.25b 1.12d .12, Ss	2
20	386274	(000000-	Hook Wldt, Latch	2
21	1011713	(000000-	Spring, Motor	2
22	386072	(000000-	Pin, Clevis, .625 Dia X 5.25l	2
23	02942	(000000-	Pin, Hair Cotter, 0.62 D .120 Wir	2
24	386066	(000000-	Cover, Drive	2
25	48732	(000000-	Screw, Pan, M06 X 1.0 X 10, Ss	10
26	12317	(000000-	Screw, Hex, M10 X 1.5 X 30, Ss	2
27	386080	(000000-	Cover, Idler	2
28	386841	(000000-	Cam, Front	2
29	386842	(000000-	Cam, Rear	2
30	12317	(000000-	Screw, Hex, M10 X 1.5 X 30, Ss	2
31	81771	(000000-	Plug, Drive, Brush, Splined	2
32	35836	(000000-	Retainer, Bearing	2
33	09738	(000000-	Screw, Hex, M05 X 0.8 X 12, Ss	8
34	06549	(000000-	Nut, Hex, Lock, M05 X 0.8, NI	8
35	26428	(000000-	Ring, Retaining, Ext, 0.75d, Hd	2
36	386257	(000000-	Latch	2
37	09198	(000000-	Screw, Pan, M04 X 0.7 X 35, Ss	6
38	33932	(000000-	Nut, Hex, Lock, M04 X 0.7, NI, Ss	6
39	08714	(000000-	Nut, Hex, Lock, M10 X 1.5, NI, SS	2
40	1001062	(000000-	Gasket, Cover	2

Fig. 29 - Max Pro 1200 (Cylindrical Brush) Solution Valve Group (Non FaST)

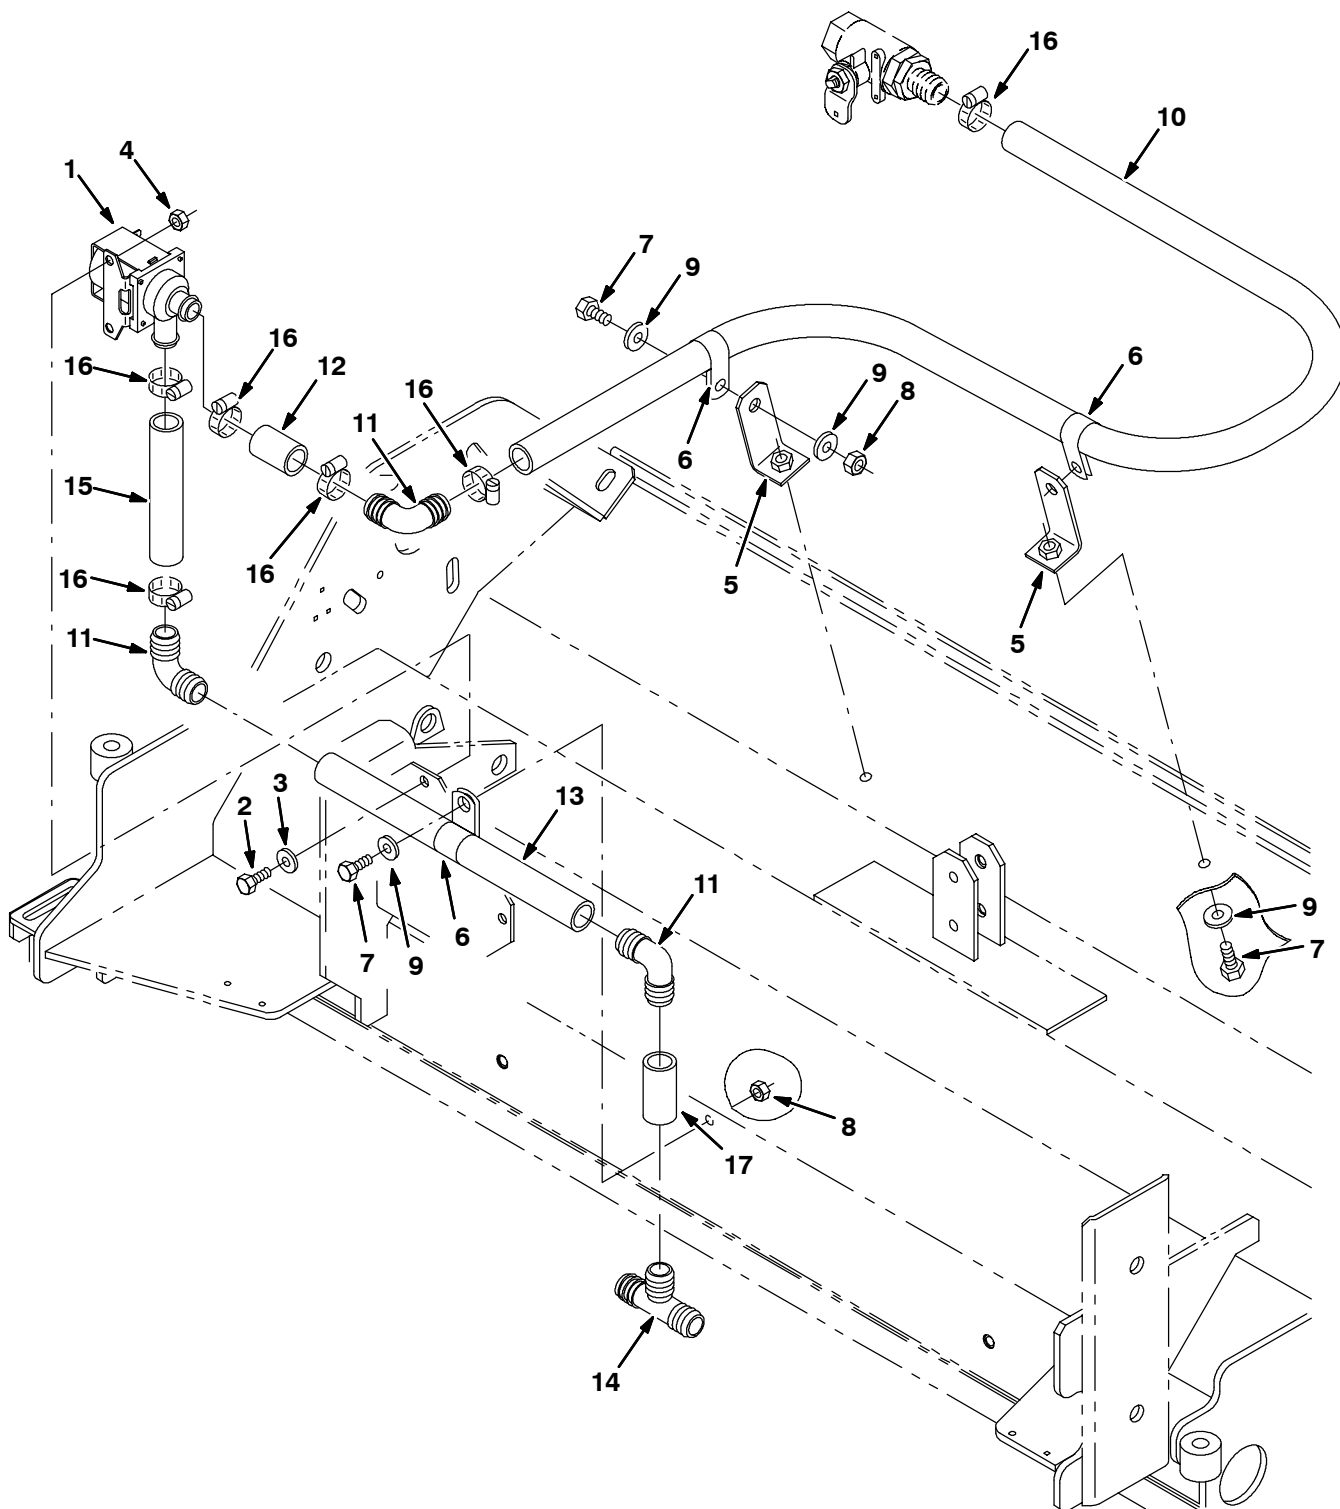


Fig. 29 - Max Pro 1200 (Cylindrical Brush) Solution Valve Group (Non FaST)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	01684	(000000-	) Washer, Flt, .25 Ss	2
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	386490	(000000-	) Angle	2
6	69234	(000000-	) Clamp, Cable, Stl, 1.00d X 0.62w, 1h	3
7	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	7
8	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	5
9	01685	(000000-	) Washer, Flt, .31 Ss	9
10	73474	(000000-	) Hose, Pvc, Brd, 0.75id 1.00od 44.50l	1
11	40566	(000000-	) Fitting, Plstc, E90, Bm12/Bm12	3
12	364899	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 01.50l	1
13	364896	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 11.00l	1
14	41315	(000000-	) Fitting, Plstc, Tee, Bm12/Bm12/Bm12	1
15	364895	(000000-	) Hose, Pvc, Brd, 0.75id 1.03od 05.00l	1
16	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	6
17	16914	(000000-	) Hose, Pvc, Brd, 0.75id 1.00od 2.00l	1

Fig. 30 - Max Pro 1200 (Cylindrical Brush) Solution Valve Group (FaST)

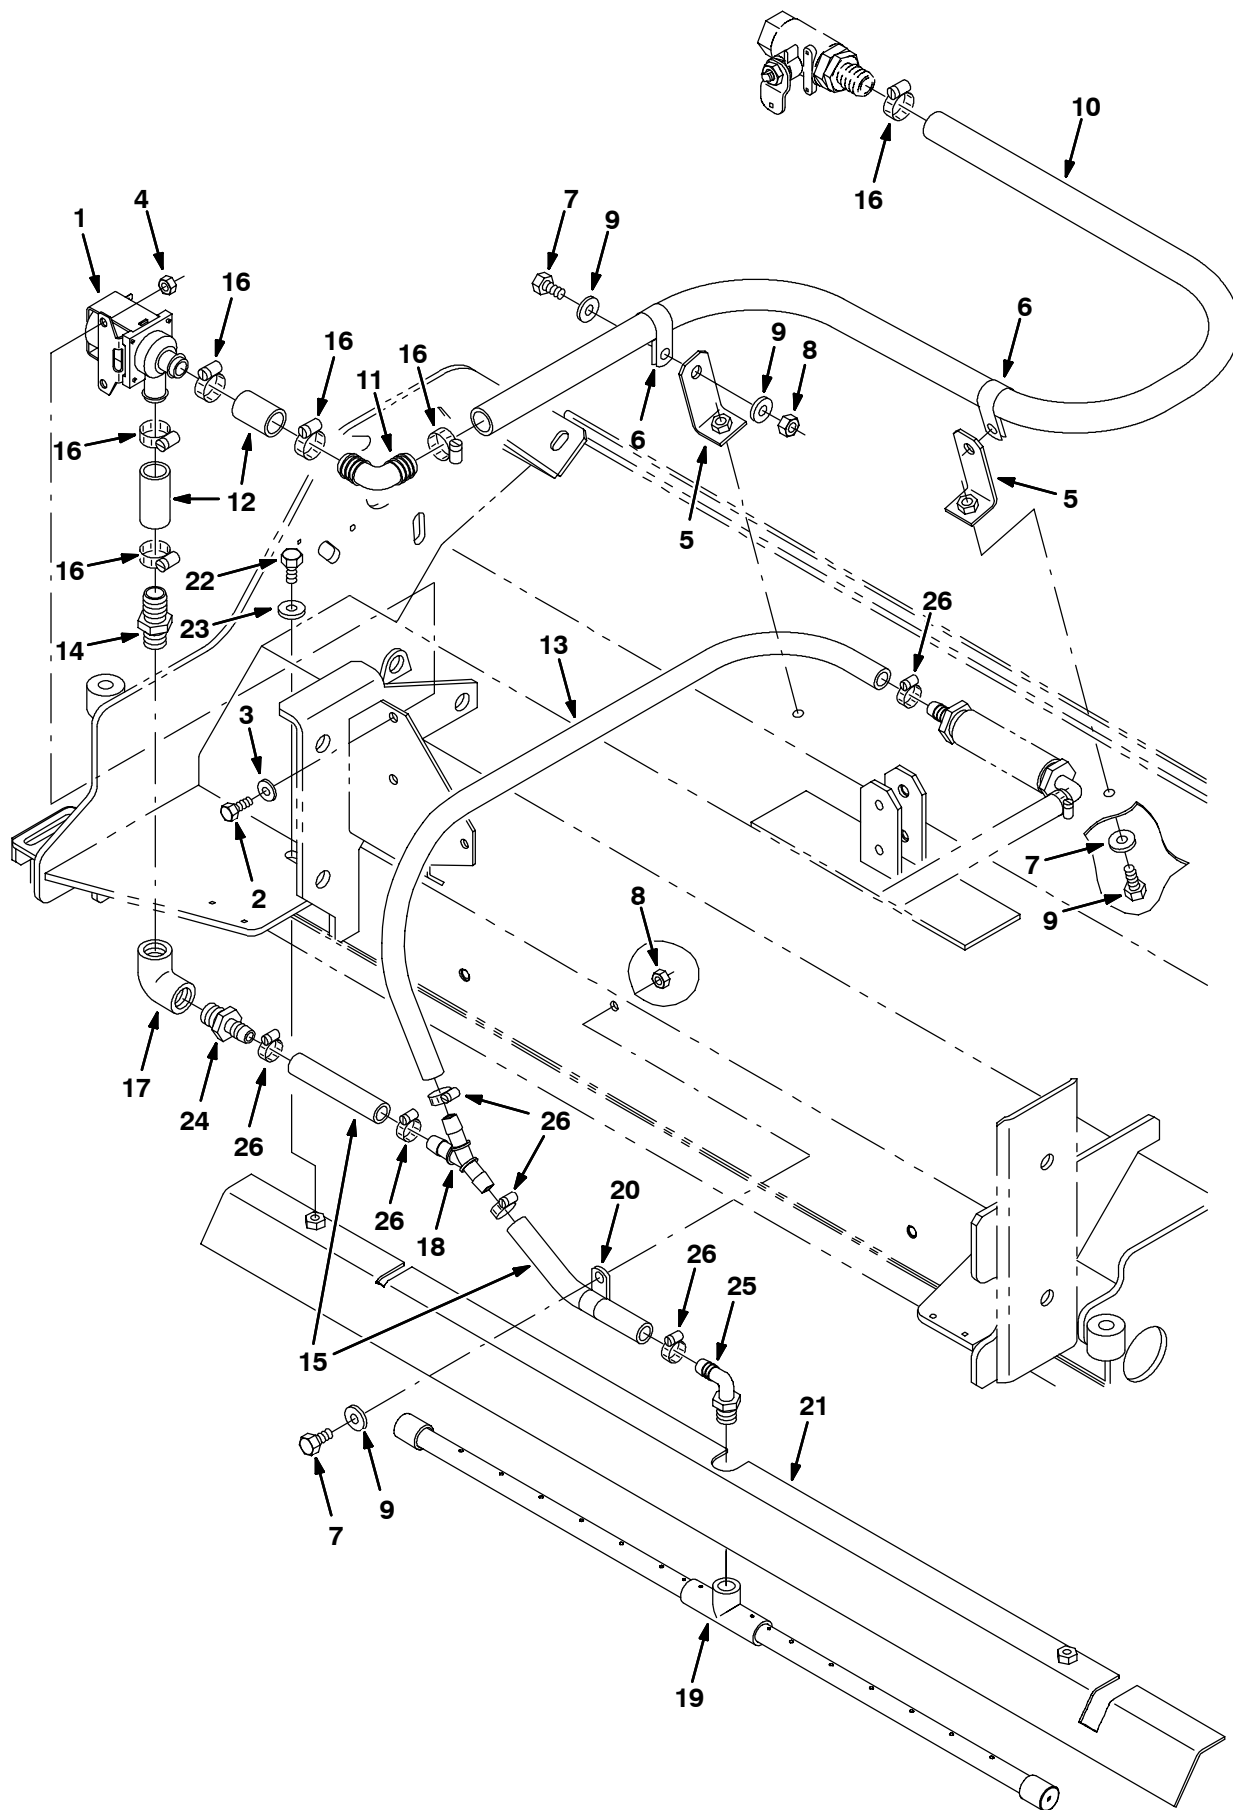


Fig. 30 - Max Pro 1200 (Cylindrical Brush) Solution Valve Group (FaST)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	84028	(000000-	) Valve, Water	1
2	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	2
3	01684	(000000-	) Washer, Flt, .25 Ss	2
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	386490	(000000-	) Angle	2
6	69234	(000000-	) Clamp, Cable, Stl, 1.00d X 0.62w, 1h	2
7	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	5
8	08709	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI	3
9	01685	(000000-	) Washer, Flt, .31 Ss	7
10	1015045	(000000-	) Hose, Afmkt, Pvc, Brd 0.75id 8 Ft	1
11	40566	(000000-	) Fitting, Plstc, E90, Bm12/Bm12	3
12	1015048	(000000-	) Hose, Afmkt, Pvc, Brd 0.75id 1 Ft	1
13	1011521	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 2 Ft	1
14	78398	(000000-	) Fitting, Plstc, Str, Bm12/Pm08, Nyl	1
15	1011403	(000000-	) Hose, Afmkt Replmt, Pvc, Brd 0.50id 1 Ft	1
16	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	6
17	79572	(000000-	) Fitting, Plstc, E90, Pf08/Pf08	1
18	1010668	(000000-	) Fitting, Plstc, Y, Bm08/Bm08/Bm08 Nyl	1
19	1010832	(000000-	) Bar Assy, Spray [7300/8300]	1
20	07471	(000000-	) Clamp, Cable, Stl, 0.75d X 0.75w, 1h	1
21	1014875	(000000-	) Bracket, Spray Bar, 48" [7300/8300]	1
22	49826	(000000-	) Screw, Hex, M8 X 1.25 X 16, Ss, NI	2
23	32492	(000000-	) Washer, Flat, 0.38 Std	2
24	79273-4	(000000-	) Fitting, Plstc, Str, Bm08/Pm08	1
25	64778	(000000-	) Fitting, Plstc, E90, Bm08/Pm06	1
26	54333	(000000-	) Clamp, Hose, Wormdrive, 0.31-0.88d	6

Fig. 31 - Max Pro 1200 (Cylindrical Brush) Edge Scrub Group

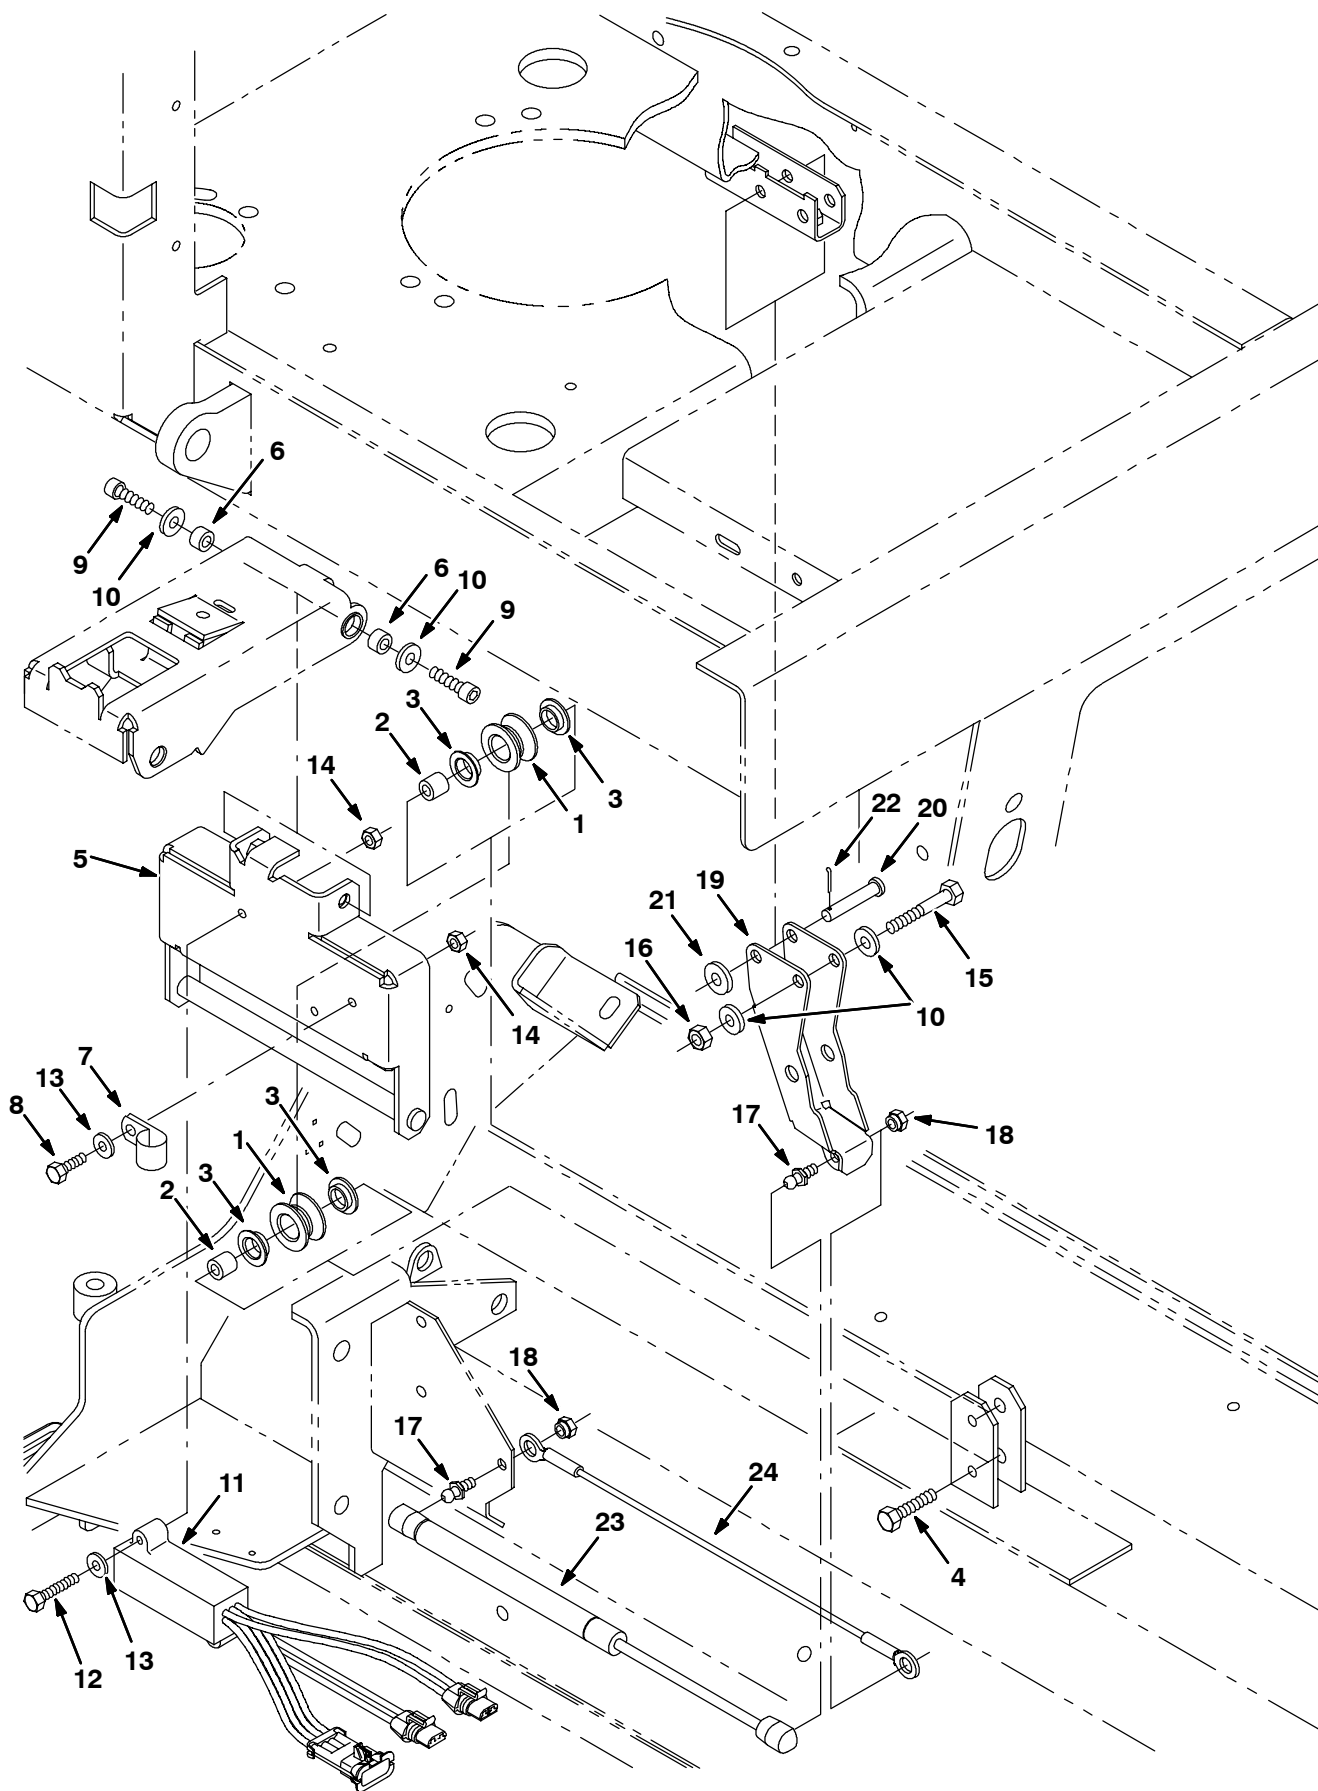


Fig. 31 - Max Pro 1200 (Cylindrical Brush) Edge Scrub Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	363120	(000000-	) Roller	2
2	222277	(000000-	) Sleeve	2
3	04843	(000000-	) Bushing, Flng, 0.63b 0.72d 0.25l	4
4	222505	(000000-	) Screw, Hex, M08 X 1.25 X 45, Ss	2
5	386040	(000000-	) Rail Wldt, Lift, Cyl Head	1
6	222556	(000000-	) Sleeve	2
7	67767	(000000-	) Clamp, Cable, Stl, 0.69d X 0.62w, 1h	1
8	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	1
9	39308	(000000-	) Screw, Soc, M08 X 1.25 X 25, 12.9	2
10	01685	(000000-	) Washer, Flt, .31 Ss	4
11	363237	(000000-	) Shunt, 2Hd Mtrs, Scrub 515, Red	1
12	33930	(000000-	) Screw, Hex, M06 X 1.0 X 40, Ss	2
13	01684	(000000-	) Washer, Flt, .25 Ss	3
14	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	3
15	77270	(000000-	) Screw, Hex, M08 X 1.25 X 60, Ss	1
16	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	1
17	58494	(000000-	) Stud, Ball, .39d .31-16, Gasspring	2
18	14725	(000000-	) Nut, Retainer, .31-18	2
19	386048	(000000-	) Arm Wldt, Pivot, Side, [7300/8300]	1
20	29584	(000000-	) Pin, Clevis, 0.37 D X 2.00l	1
21	01686	(000000-	) Washer, Flt, .38 Ss	1
22	39005	(000000-	) Pin, Cotter, .094 X 0.75	1
23	364858	(000000-	) Gasspring, 56lb, 6.3strk	1
24	364404	(000000-	) Cable, .13d, 15.5l, .50eye /.50eye	1

Fig. 32 - Max Pro 1200 (Cylindrical Brush) Right Side Squeegee Group

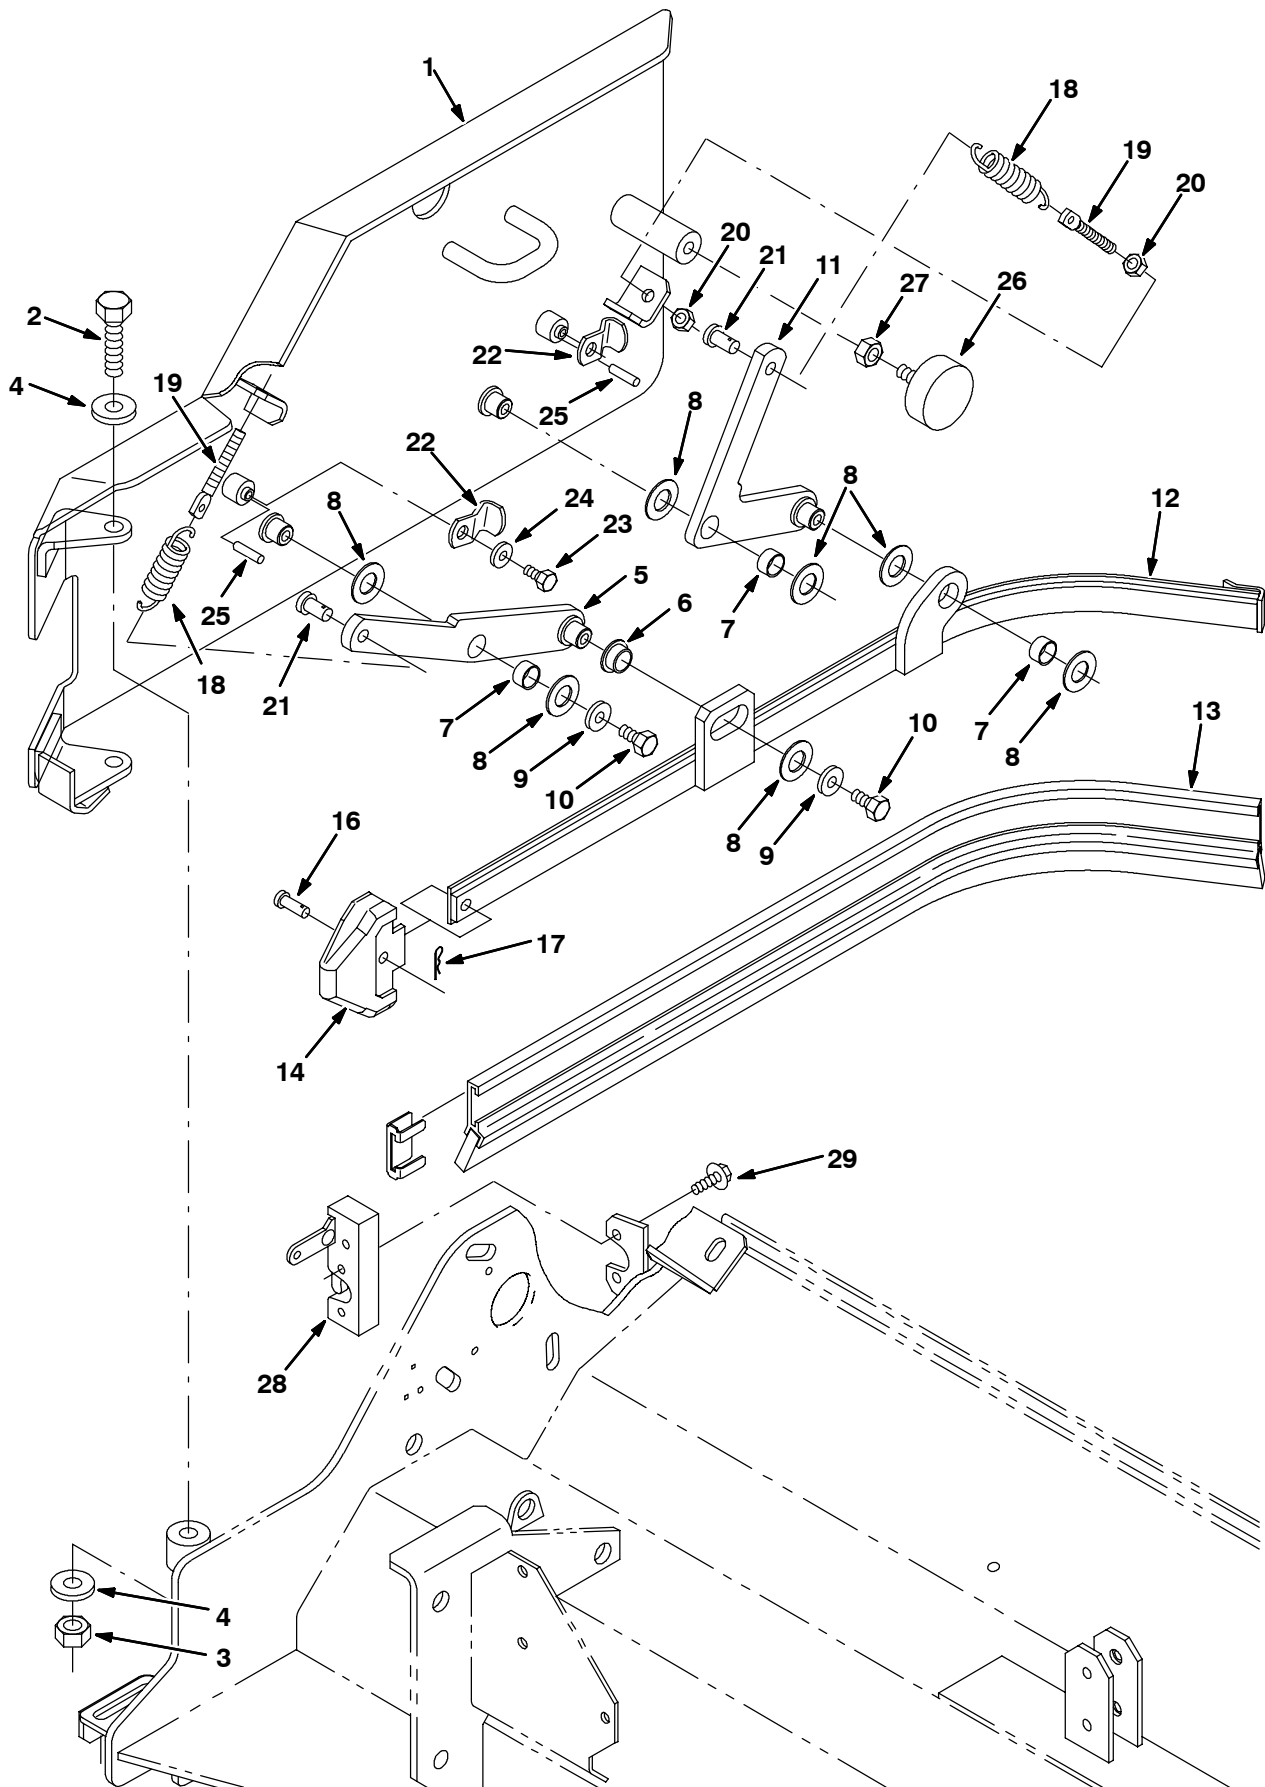


Fig. 32 - Max Pro 1200 (Cylindrical Brush) Right Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387271	(000000-	) Guard Wldt, Rh, [Mp1200]	1
2	09774	(000000-	) Screw, Hex, M12 X 1.75 X 50, Ss	2
3	09741	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI, Ss	2
4	33925	(000000-	) Washer, Flat, M12, 13x24x2.5ss	4
5	386269	(000000-	) Arm Wldt, Front, Rh	1
6	25735	(000000-	) Bushing, Flng, 0.63b 0.75d 0.38l	1
7	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
8	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
9	01686	(000000-	) Washer, Flt, .38 Ss	4
10	386868	(000000-	) Screw, Hex, M08x1.25 X12, Ss	4
11	386268	(000000-	) Arm Wldt, Rear, Rh	1
12	386263	(000000-	) Frame Wldt, Sqge, Side, Rh	1
13	386260	(000000-	) Squeegee, Side	1
14	386986	(000000-	) Guide, Point, Side Sqge	1
15	86759	(000000-	) Retainer, Sqge	1
16	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
17	08085	(000000-	) Pin, Hair Cotter, 0.31 D .058 Wir	1
18	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
19	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
20	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
21	41305	(000000-	) Pin, Clevis, 0.37 D X 0.75l	2
22	386507	(000000-	) Arm, Latch	2
23	09744	(000000-	) Screw, Hex, M06 X 1.0 X 12, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	2
25	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
26	70756	(000000-	) Bumper, Rbr, 2.0d 0.75t .38-16	1
27	01692	(000000-	) Nut, Hex, Std, .38-16, Ss	1
28	72439	(000000-	) Latch	1
29	16949	(000000-	) Screw, Hex, .25-20 X 0.75, Sems	4

Fig. 33 - Max Pro 1200 (Cylindrical Brush) Left Side Squeegee Group

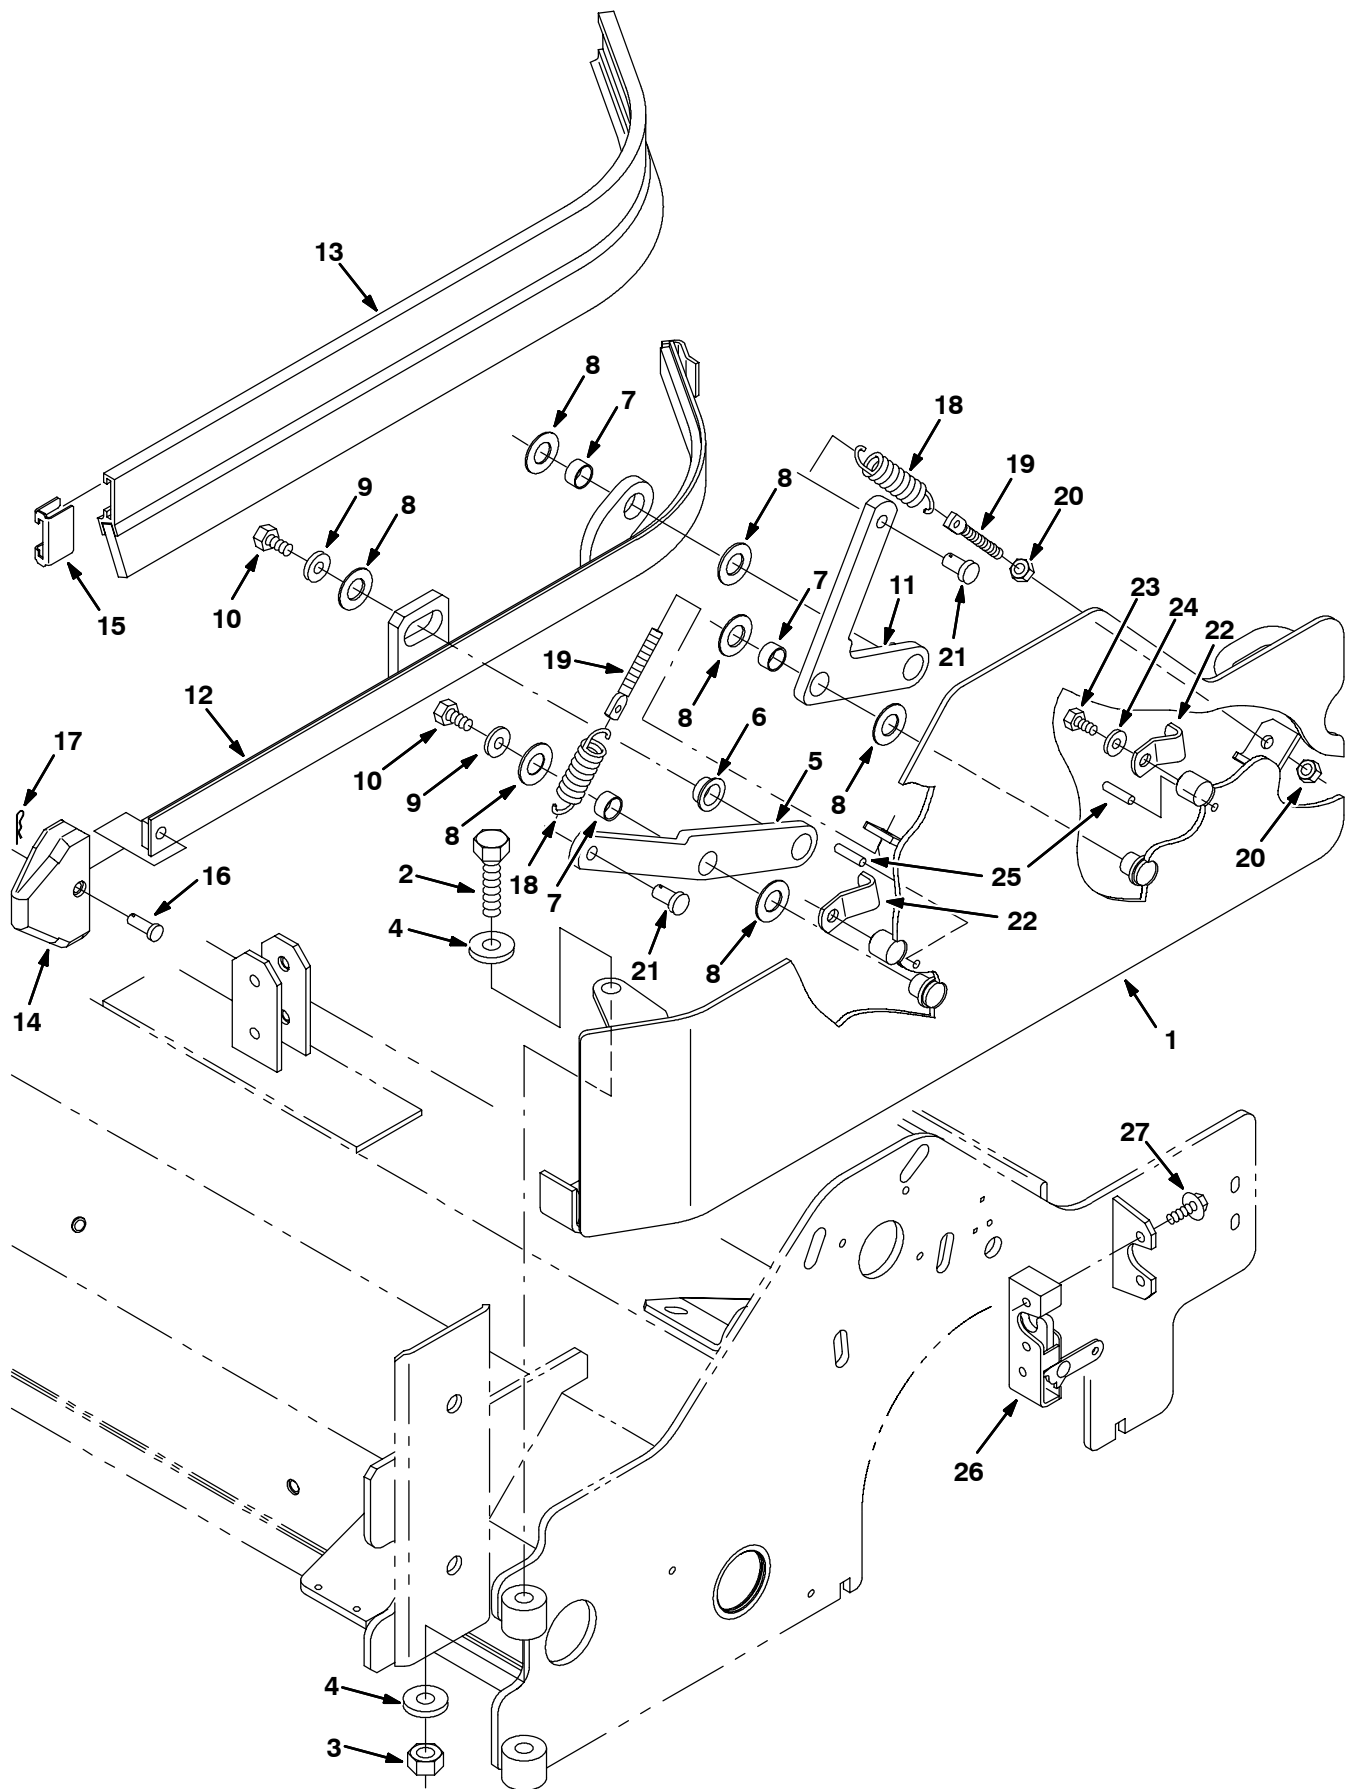


Fig. 33 - Max Pro 1200 (Cylindrical Brush) Left Side Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386496	(000000-	) Guard Wldt, Lh	1
2	09774	(000000-	) Screw, Hex, M12 X 1.75 X 50, Ss	2
3	09741	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI, Ss	2
4	33925	(000000-	) Washer, Flat, M12, 13x24x2.5ss	4
5	386276	(000000-	) Arm Wldt, Front, Lh	1
6	25735	(000000-	) Bushing, Fling, 0.63b 0.75d 0.38l	1
7	71607	(000000-	) Bushing, Sleeve, 0.63b 0.72d 0.38l	3
8	64425	(000000-	) Washer, Thrust, 0.61b 1.25d .06, Fgl	7
9	01686	(000000-	) Washer, Flt, .38 Ss	4
10	386868	(000000-	) Screw, Hex, M08x1.25 X12, Ss	4
11	386275	(000000-	) Arm Wldt, Rear, Lh	1
12	386262	(000000-	) Frame Wldt, Sqge, Side, Lh	1
13	386260	(000000-	) Squeegee, Side	1
14	386986	(000000-	) Guide, Point, Side Sqge	1
15	86759	(000000-	) Clip, Sqge	1
16	386987	(000000-	) Pin, Clevis, 0.31d 0.88l	1
17	08085	(000000-	) Pin, Hair Cotter, 0.31 D .058 Wir	1
18	87816	(000000-	) Spring, Extn, 0.75od X 0.09wir, 2.5l	2
19	386088	(000000-	) Bolt, Eye, M8 X 1.25, 2.75l	2
20	07786	(000000-	) Nut, Hex, Std, M08 X 1.25, Ss	4
21	41305	(000000-	) Pin, Clevis, 0.37 D X 0.75l	2
22	386507	(000000-	) Arm, Latch	2
23	09744	(000000-	) Screw, Hex, M06 X 1.0 X 12, Ss	2
24	01684	(000000-	) Washer, Flt, .25 Ss	2
25	17404	(000000-	) Pin, Roll, .250 D X 0.75l, .250/.256	2
26	59661	(000000-	) Latch	1
27	16949	(000000-	) Screw, Hex, .25-20 X 0.75, Sems	4

Fig. 34 - Max Pro 1200 (Cylindrical Brush) Debris Tray Group

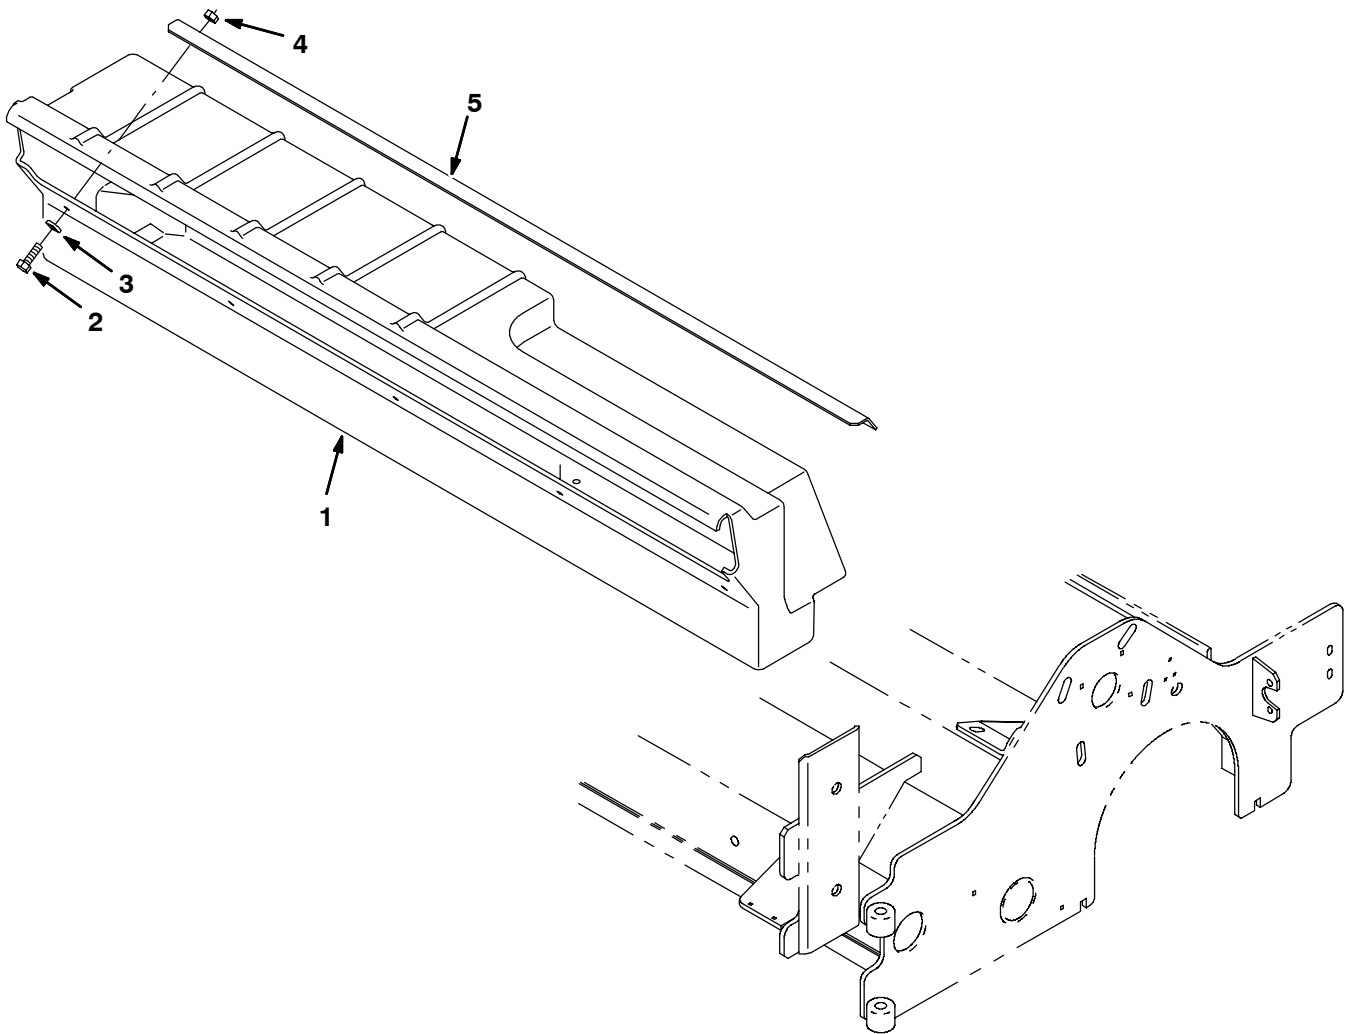


Fig. 34 - Max Pro 1200 (Cylindrical Brush) Debris Tray Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	387672	(000000-	) Tray, Debris, 48L, W/Holes	1
2	08716	(000000-	) Screw, Hex, M6X1.0X20, Ss	5
3	01684	(000000-	) Washer, Flat, 0.25 Ss	5
4	08712	(000000-	) Nut, Hex, Lock, M6X1.0, Ss, NI	5
5	387254	(000000-	) Angle	1

Fig. 35 - Max Pro 1200 (Cylindrical Brush) Vacuumized Debris Tray Group

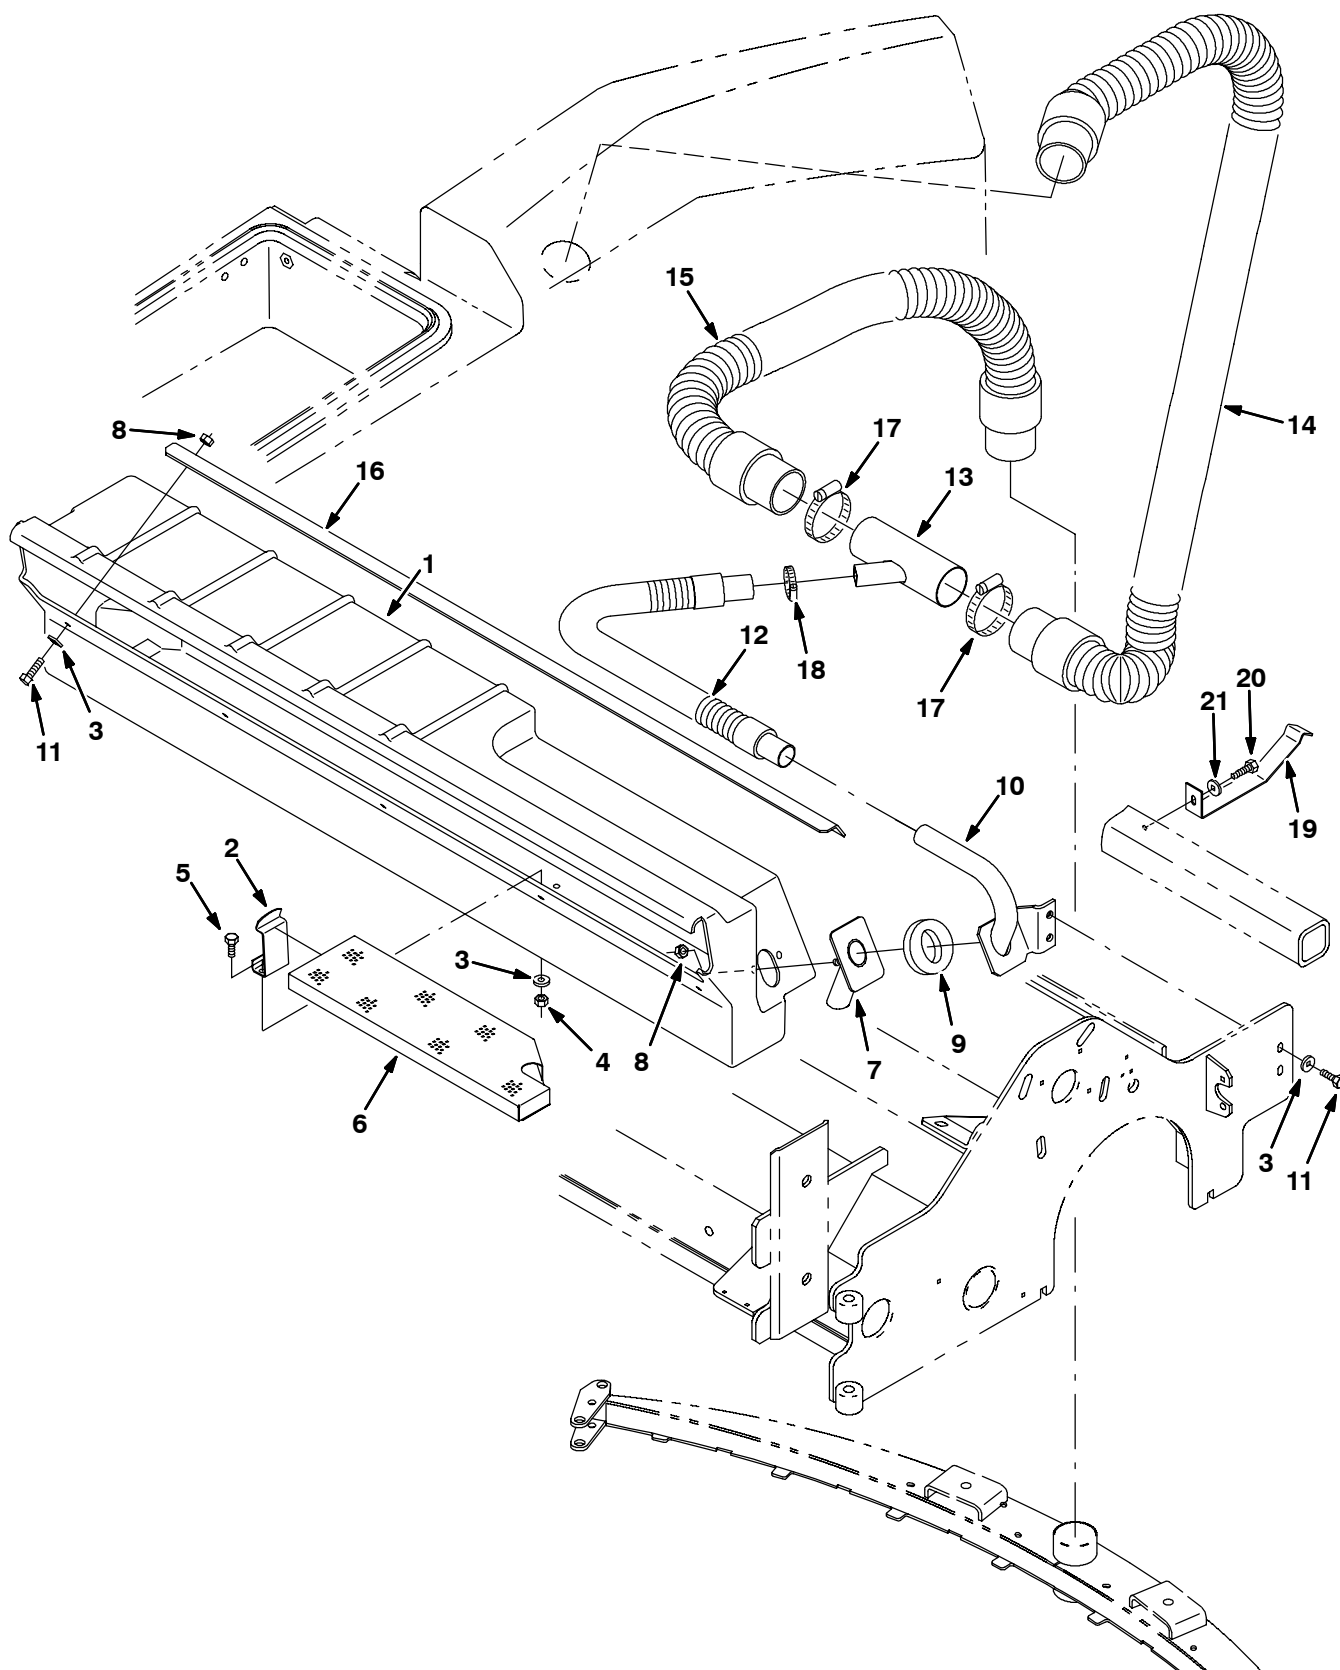


Fig. 35 - Max Pro 1200 (Cylindrical Brush) Vacuumized Debris Tray Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386513	(000000-	) Tray, Debris, 48.0l	1
2	87244	(000000-	) Clip, Spring, Prop Arm	1
3	01684	(000000-	) Washer, Flt, .25 Ss	14
4	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	2
5	09744	(000000-	) Screw, Hex, M06 X 1.0 X 12, Ss	2
6	386500	(000000-	) Screen Wldt	1
7	386503	(000000-	) Tube Wldt	1
8	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	7
9	386504	(000000-	) Gasket, Foam	1
10	386510	(000000-	) Tube Wldt, Upper	1
11	08716	(000000-	) Screw, Hex, M06 X 1.0 X 20, Ss	7
12	222788	(000000-003545	) Hose Assy, W/2cuff, 1.0d, 23l	1
12	387517	(003546-	) Hose Assy, W/2cuff, 1.0d, 41l	1
13	386518	(000000-	) Tube Wldt	1
14	386514	(000000-003545	) Hose, Vacuum, 58.5l	1
14	1005133	(003546-	) Hose Assy, W/2cuff, 2.0d 75l	1
15	387256	(000000-003545	) Hose, Vacuum, 35.0l	1
15	1005135	(003546-	) Hose Assy, W/2cuff, 2.0d 26l	1
16	387254	(000000-	) Angle	1
17	14432	(000000-	) Clamp, Hose, Wormdrive, 1.81-2.75d	2
18	11399	(000000-	) Clamp, Hose, Wormdrive, 0.81-1.50d	1
19	1002464	(003546-	) Bracket, Tube , Tee	1
20	361339	(003546-	) Screw, Hex, M 6 X 1.0 X 16, Fmg	1
21	32483	(003546-	) Washer, Flat, 0.25 Sae	1

Fig. 36 - ES Pump Group

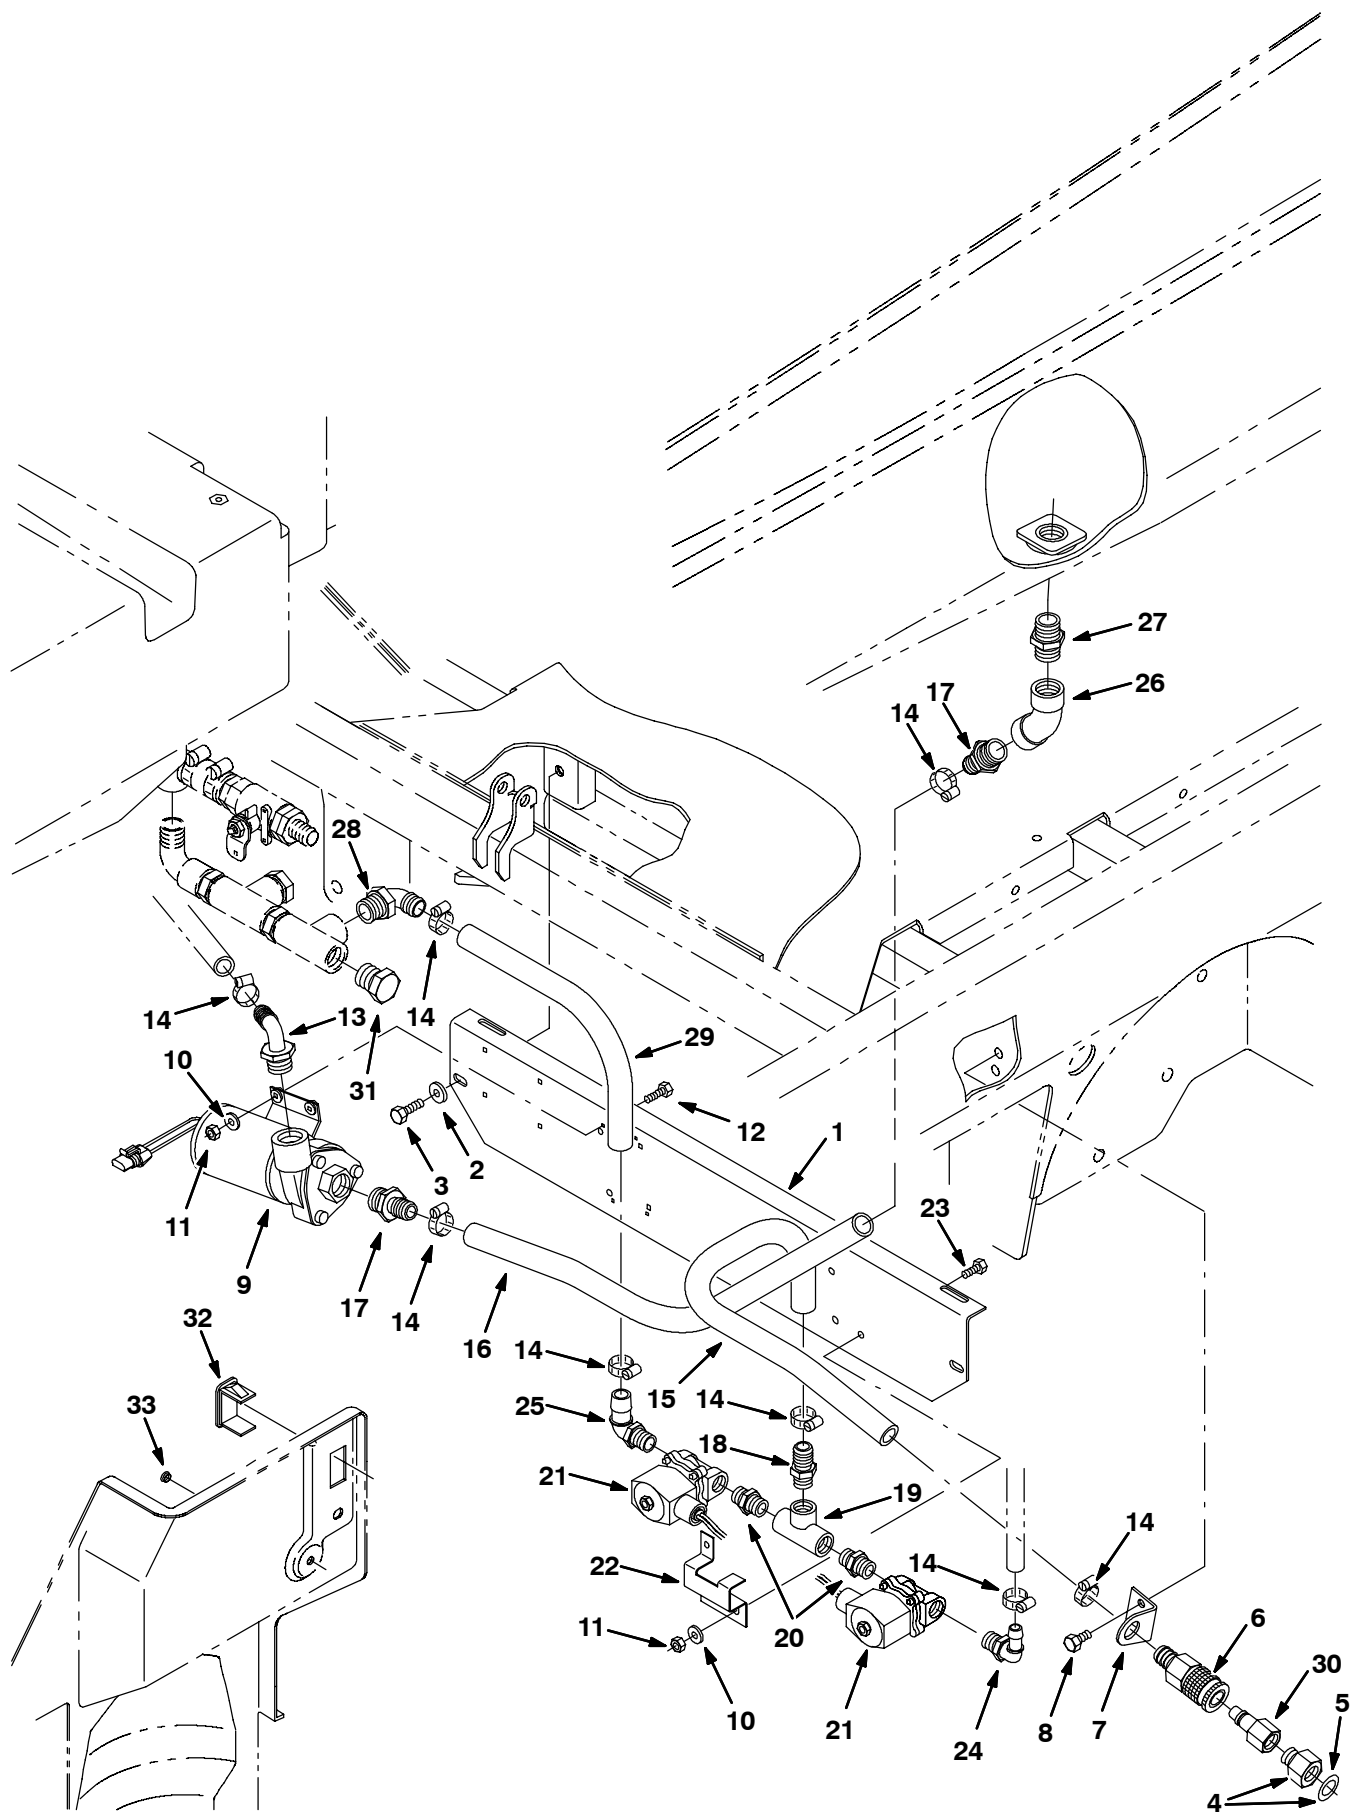


Fig. 36 - ES Pump Group

NOTE: ES™ Kit, TENNANT Part Number 386557, includes Fig. 36, Fig. 37, and Fig. 38.

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386392	(000000-	) Angle, Mtg, Es	1
2	01685	(000000-	) Washer, Flt, .31 Ss	2
3	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	2
▽ 4	375322	(000000-	) Kit, Ftg, Garden Hose	1
▲ 5	01316	(000000-	) Washer, Rbr, .12 0.66B 1.00D	1
6	24105	(000000-	) Fitting, Brs, Qdc, Bm12/Qf08	1
7	386394	(000000-	) Bracket, Mtg, Es	1
8	15675	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss	2
9	369865	(000000-	) Pump, Solution, Impeller, 36vdc	1
10	01684	(000000-	) Washer, Flt, .25 Ss	7
11	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	7
12	09007	(000000-	) Screw, Hex, M06 X 1.0 X 25, Ss	4
13	73468	(000000-	) Fitting, Plstc, E90, Bm10/Pm12	1
14	63810	(000000-	) Clamp, Hose, Wormdrive, 0.56-1.06d	8
15	73475	(000000-	) Hose, Pvc, Brd, 0.75id 1.00od 19.00l	1
16	385666	(000000-	) Hose, Pvc, Brd, 0.75id 1.00od 26.00l	1
17	79273-2	(000000-	) Fitting, Plstc, Str, Bm12/Pm12	2
18	78398	(000000-	) Fitting, Plstc, Str, Bm12/Pm08	1
19	79497	(000000-	) Fitting, Plstc, Tee, Pf08/Pf08/Pf08	1
20	86508	(000000-	) Fitting, Plstc, Str, Pm08/Pm08	2
21	41410	(000000-	) Valve, Solenoid, 36vdc	2
22	364545	(000000-	) Bracket, Sppt, Auto Fill	1
23	15678	(000000-	) Screw, Hex, M06 X 1.0 X 16, Ss	3
24	63244-1	(000000-	) Fitting, Plstc, E90, Bm08/Pm08	1
25	63244-2	(000000-	) Fitting, Plstc, E90, Bm12/Pm08	1
26	10575	(000000-	) Fitting, Plstc, E45, Pf12/Pf12	1
27	24544	(000000-	) Fitting, Plstc, Str, Pm12/Pm12	1
28	14877	(000000-	) Fitting, Plstc, E90, Bm12/Pm12	1
29	387340	(000000-	) Hose, Water, Vyl, Brd, .75ld 14.0L	1
30	33295	(000000-	) Fitting, Qm, Male	1
31	75611	(000000-	) Fitting, Plstc, Plug, Pm12	1
32	398501	(000000-	) Plug, Hole, Rt, Rocker Switch, .87 X 1.7	1
33	33807	(000000-	) Plug, Hole, Rnd, 0.44h .03-.12, Blk Nyl	1

Fig. 37 - ES Tank Group

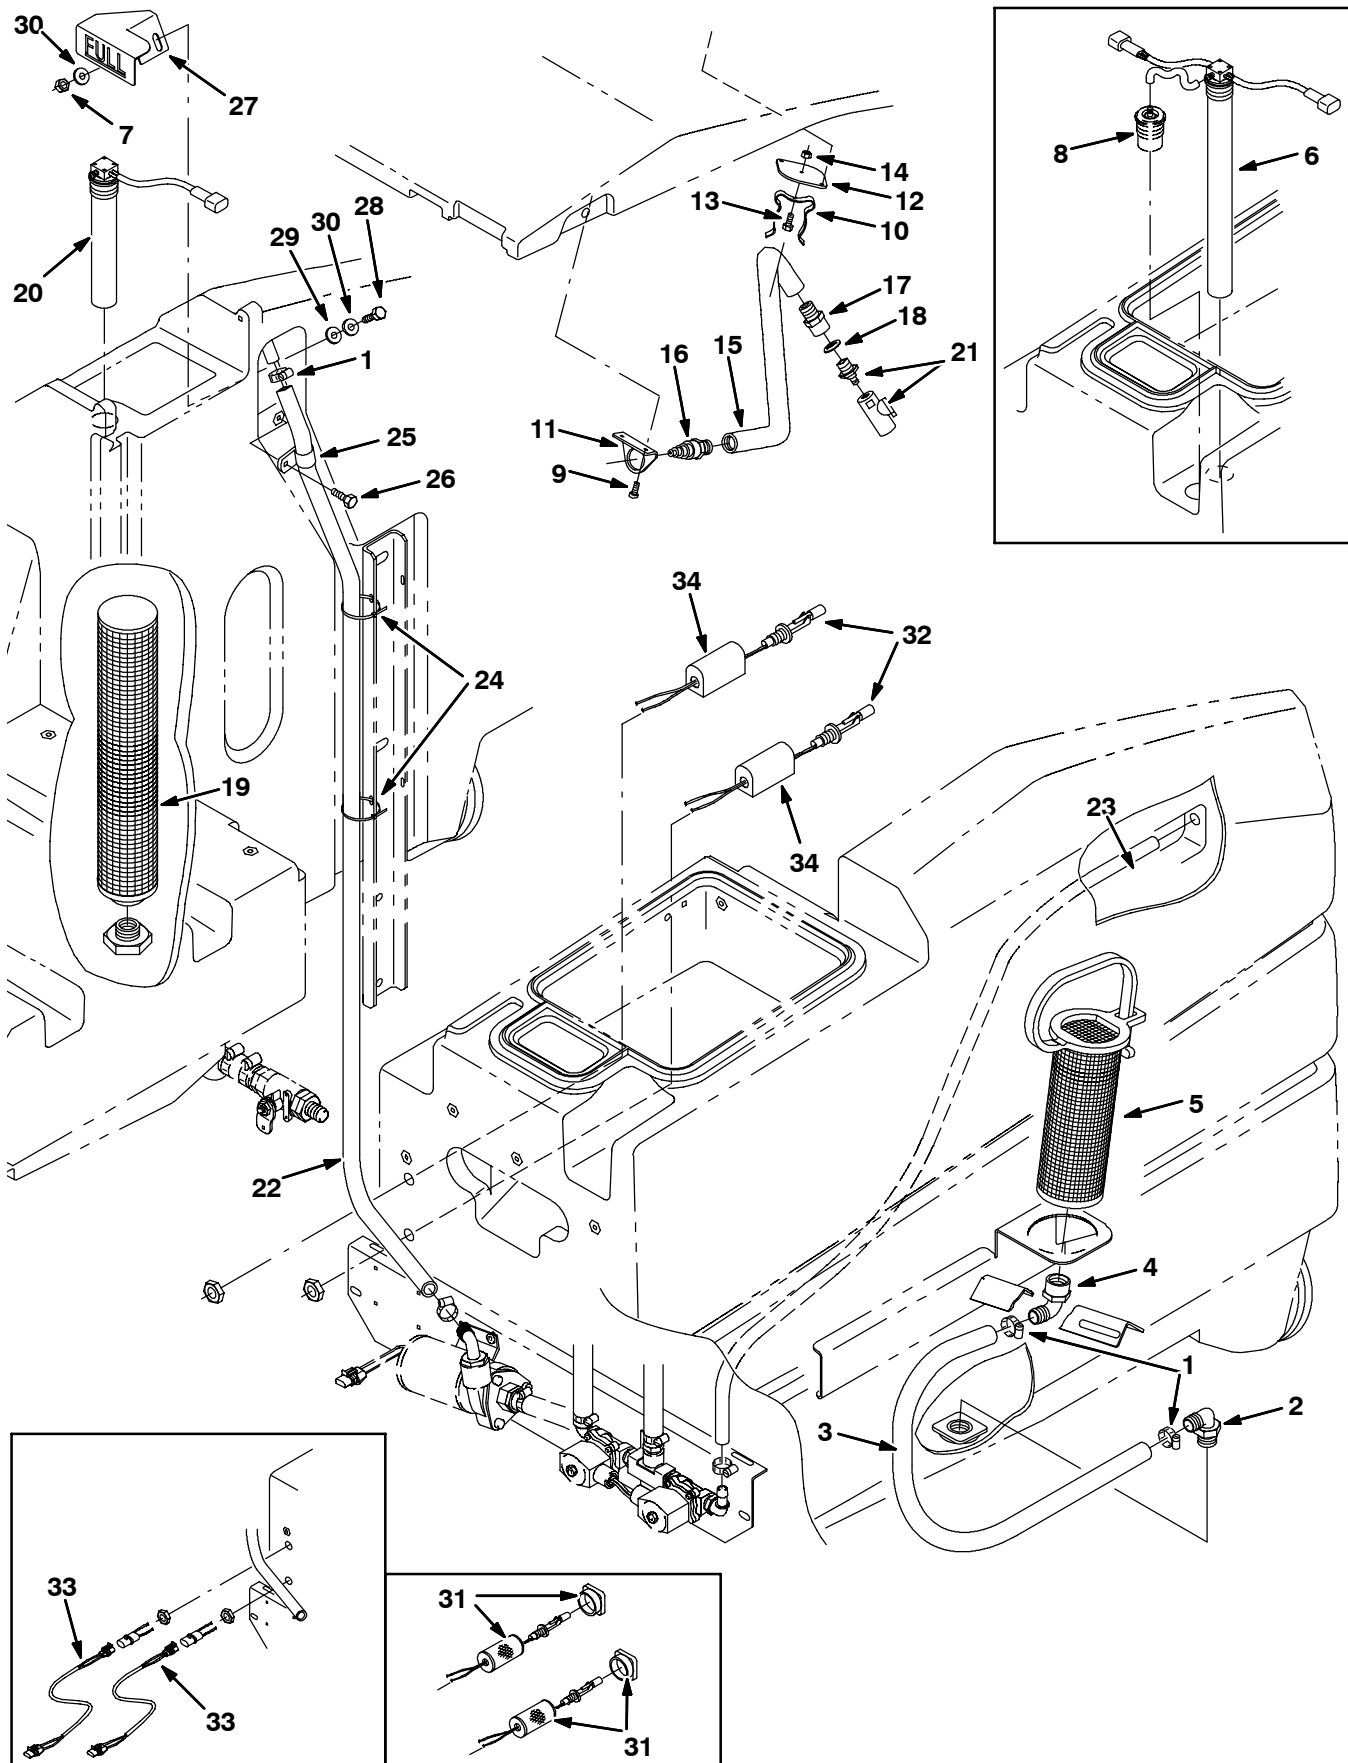


Fig. 37 - ES Tank Group

NOTE: ES™ Kit, TENNANT Part Number 386557, includes Fig. 36, Fig. 37, and Fig. 38.

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	63810	(000000-	) Clamp, Hose, Wormdrive, 0.56-1.06d, .56w	3
2	14877	(000000-	) Fitting, Plstc, E90, Bm12/Pm12	2
3	387266	(000000-	) Hose, Vyl, Brd, .75id 28.0l	1
4	24543	(000000-	) Fitting, Plstc, E90, Bm12/Pf12	1
5	386652	(000000-	) Strainer, Pump, Es	1
6	375427	(000000-003426	) Switch Assy, Dual Press, 14" Tube	1
7	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	1
8	13292	(000000-003426	) Hose, Vacuum, 0.16id X 05.0l	1
9	360943	(000000-	) Screw, Pan, #10-14 X 0.75, F/ Plstc	4
10	67004	(000000-	) Clip, Finger Grip	1
11	387225	(000000-	) Angle, Wand, Clean-Out	1
12	387226	(000000-	) Plate, Wand, Clean-Out	1
13	09206	(000000-	) Screw, Hex, M04 X 0.7 X 12, 8.8	1
14	02850	(000000-	) Nut, Hex, Lock, M04 X 0.7, NI	1
15	387109	(000000-	) Wand, Clean-Out	1
16	387159	(000000-	) Nozzle, Water	1
17	387160	(000000-	) Fitting, Plstc, Str, 08pmxgarden	1
18	387161	(000000-	) Washer, Rbr, .68idx1.0od	1
19	387045	(000000-	) Strainer, Tank, Solution	1
20	375426	(000000-	) Switch Assy, Press, 3 Inch, 8" Tube	1
21	382991	(000000-	) Valve, Flow Control, Hose Adapter	1
22	387236	(000000-	) Hose, Vyl, Brd, .62id 55.0l	1
23	375308	(000000-	) Hose, Pvc, Clr, 0.50id 0.69od 50.00l	1
24	49266	(000000-	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	2
25	69234	(000000-	) Clamp, Cable, Stl, 1.00d X 0.62w, 1h	1
26	49826	(000000-	) Screw, Hex, M08 X 1.25 X 16, Ss, NI	1
27	387061	(000000-	) Bracket, Full	1
28	09011	(000000-	) Screw, Hex, M08 X 1.25 X 30, Ss	1
29	63416	(000000-	) Washer, 0.31b 0.88d .12, Rbr	1
30	01685	(000000-	) Washer, Flt, .31 Ss	2
31	375302	(003427-004029	) Strainer, Soltn, Switch Guard (Repl By 1019285)	2
32	222822	(003427-003859	) Sensor, Level, Liquid [Magnetic]	2
32	385685	(003860-	) Sensor, Level, Liquid [Magnetic]	2
33	369766	(003427-003859	) Harness, Sensor, Jumper	2
34	1019285	(004030-	) Bracket, Protector, Float Switch	2

Fig. 38 - ES Drain Assembly

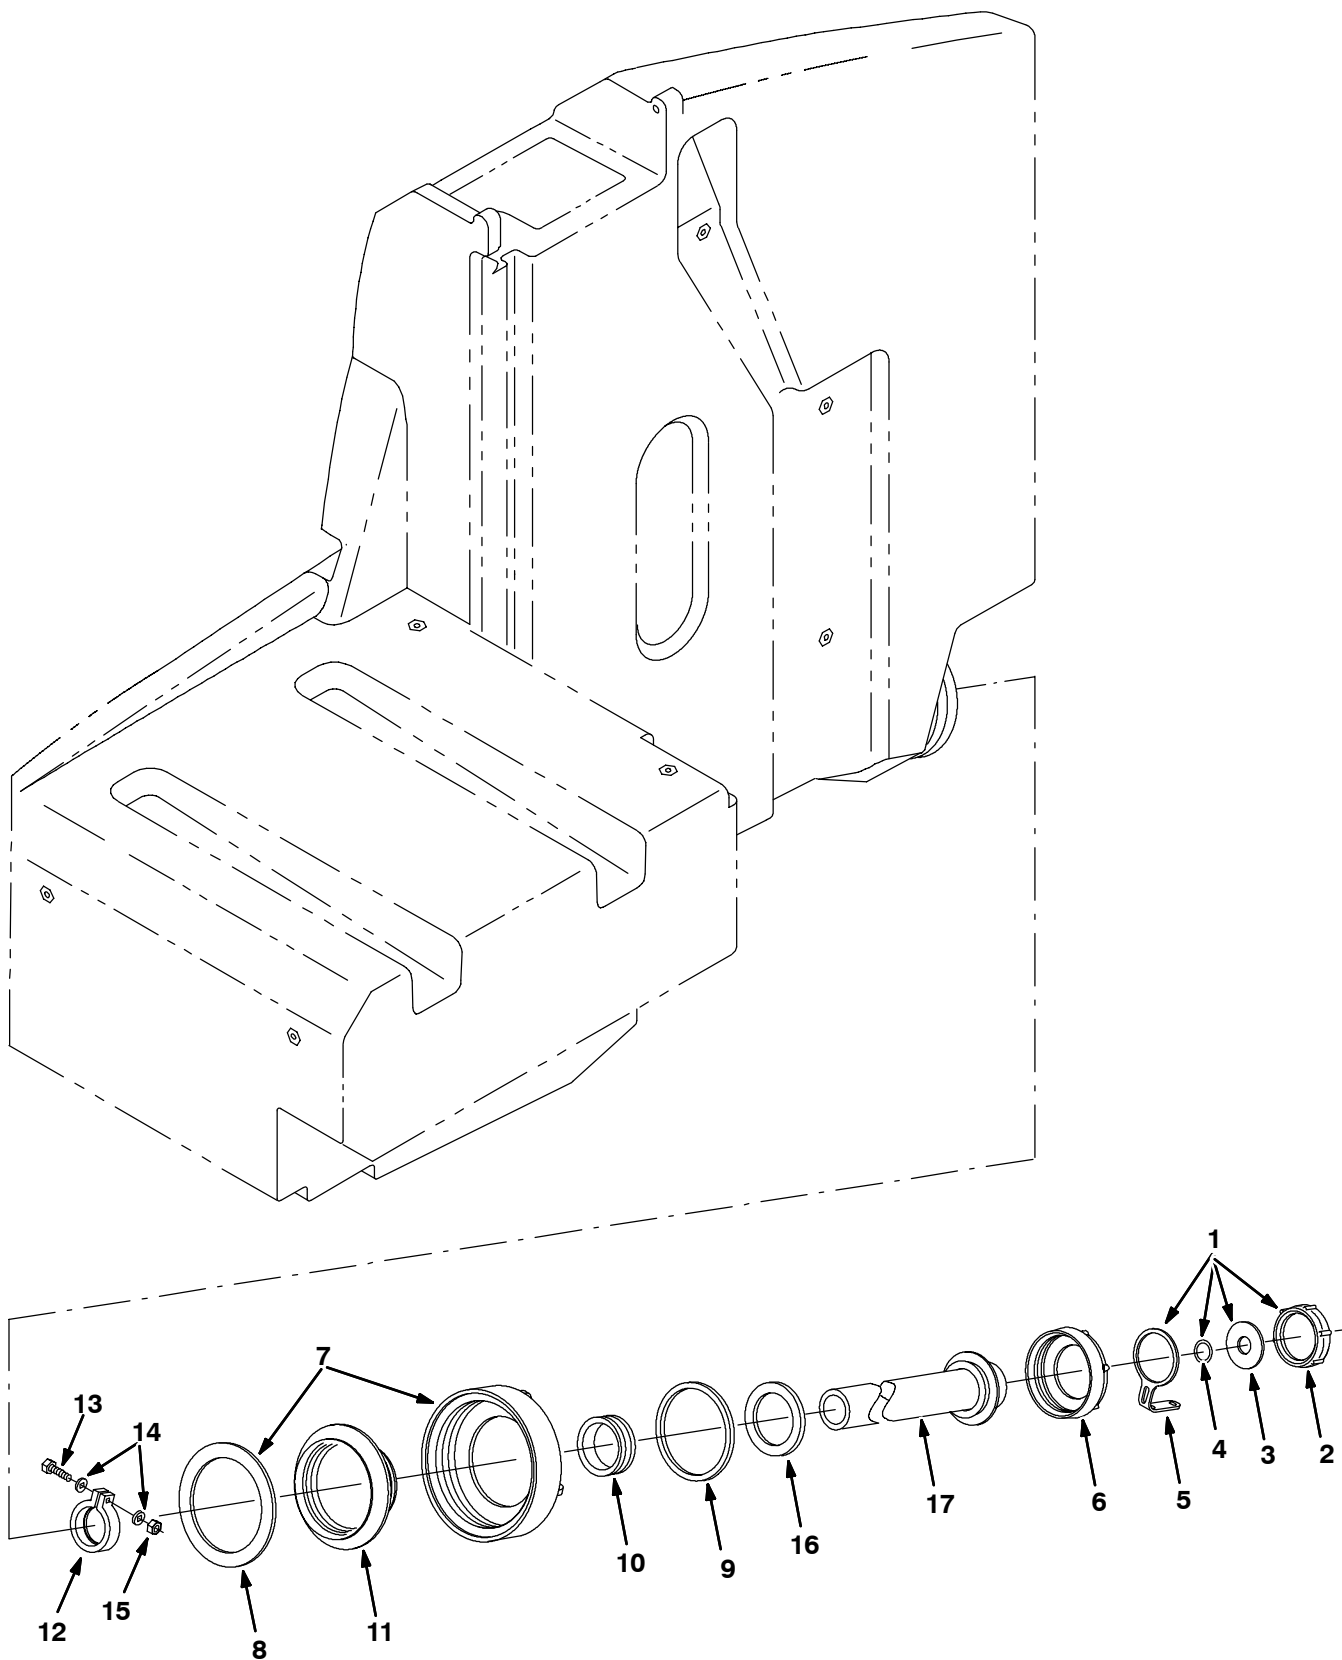


Fig. 38 - ES Drain Assembly

NOTE: ES [™] Kit, TENNANT Part Number 386557, includes Fig. 36, Fig. 37, and Fig. 38.

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387467	(000000-	) Kit, Drain Hose, Solution Side	1
▲▽	1	32501	(000000-	) Kit, Cap, Drain	1
▲▲	2	32613	(000000-	) Cap, Tank, Drain, 2.25 Thread Pye	1
▲▲	3	32614	(000000-	) Gasket, Cap	1
▲▲	4	32669	(000000-	) Ring, Retaining, Ext, 0.75d, Ss	1
▲▲	5	32508	(000000-	) Strap	1
▲	6	14880	(000000-	) Cap, Tank, Drain, 3.85 Thread Pye	1
▲▽	7	24358	(000000-	) Cap, Tank	1
▲▲	8	1031699	(000000-	) Gasket, .19, 4.05id 5.29od [Buna]	1
▲	9	79320	(000000-	) Gasket, Cap, Drain	1
▲	10	41421	(000000-	) Seal	1
▲	11	14864	(000000-	) Cover, Insert	1
▲	12	41454	(000000-	) Clamp, Hose, Plstc, 1.60d X 0.62w	1
▲	13	12316	(000000-	) Screw, Hex, M05 X 0.8 X 25, Ss	1
▲	14	01683	(000000-	) Washer, Flt, #10 Ss	1
▲	15	09739	(000000-	) Nut, Hex, Lock, M05 X 0.8, NI, Ss	1
▲	16	41451	(000000-	) Gasket, Lid	1
▲	17	386423	(000000-	) Hose Assy, Drain	1

Fig. 39 - Positive Solution Control Drain Kit, Recovery Tank

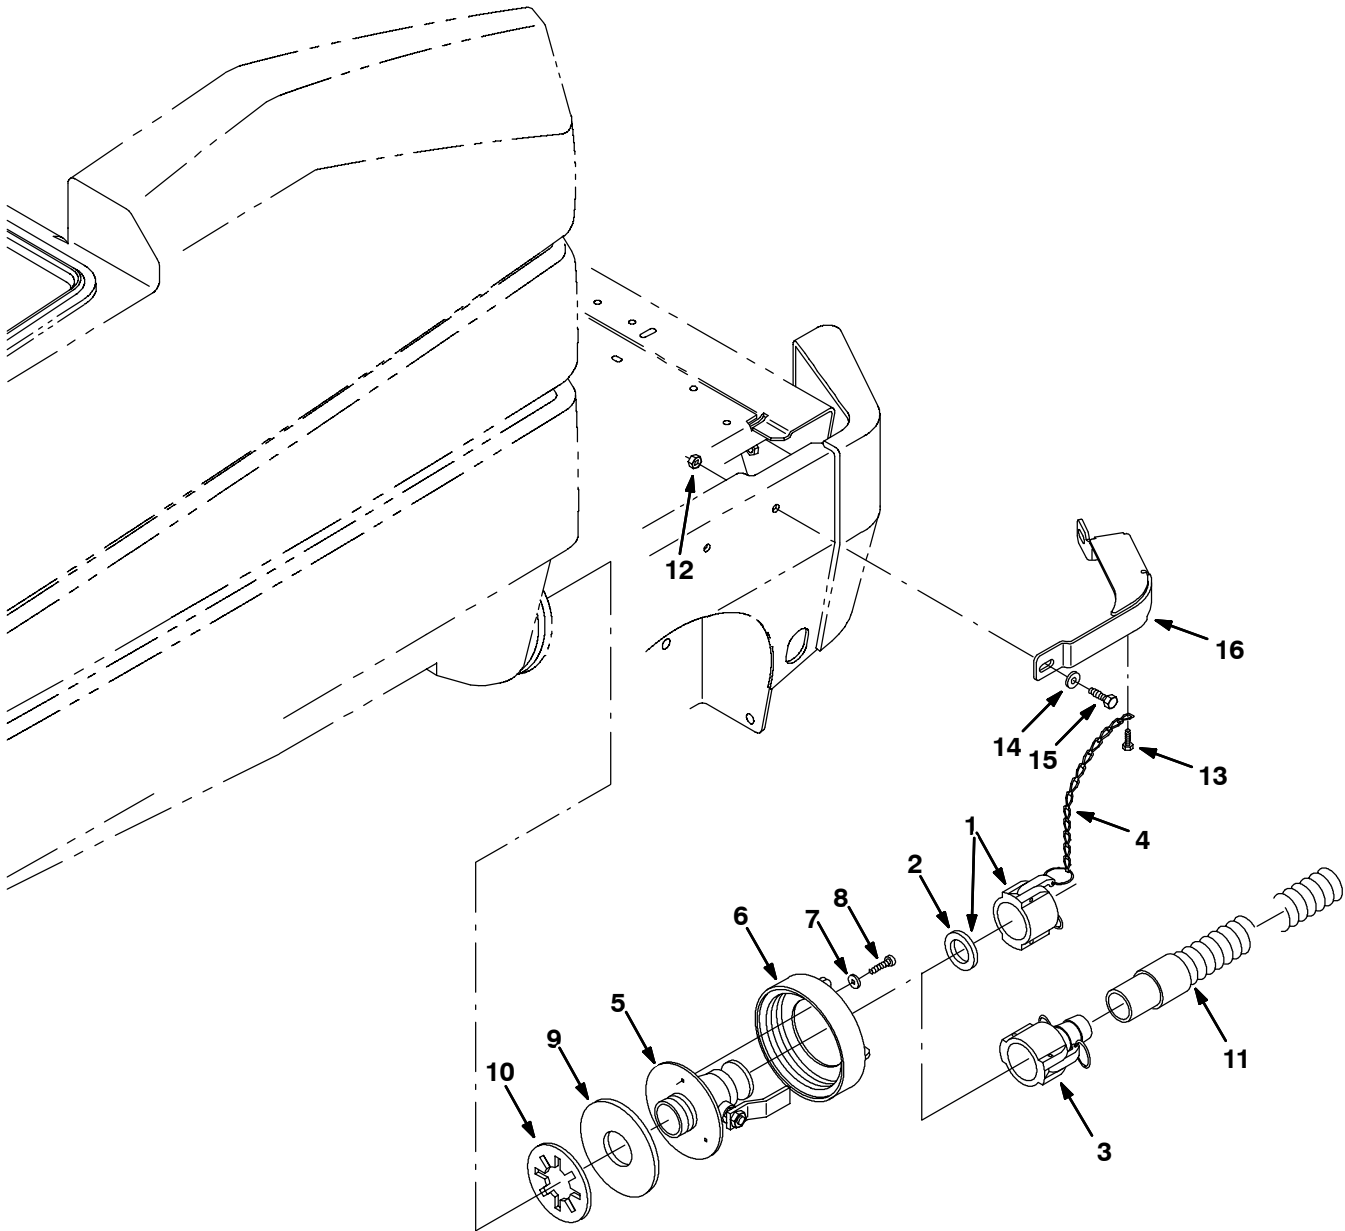


Fig. 39 - Positive Solution Control Drain Kit, Recovery Tank

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387127	(000000-	) Kit, Ci, Drain, Soltn, Pos, Cntrl, Recvy	1
▲▽		387221	(000000-	) Cap Assy	1
▲▲	1	48733	(000000-	) Cap, Dust	1
▲▲	2	371905	(000000-	) Gasket, Cap, Dust	1
▲	3	48734	(000000-	) Fitting, Coupler, Hose, Shank, Fem	1
▲	4	19903	(000000-	) Chain, Sash, #35, 07.2l 13 Link	1
▲	5	387227	(000000-	) Valve, 1.50id, Rwk	1
▲	6	23456	(000000-	) Cap, Tank, Drain, 6.17 Thread Pye	1
▲	7	01684	(000000-	) Washer, Flt, .25 Ss	3
▲	8	363503	(000000-	) Screw, Pan, M06 X 1.0 X 12, Ss	3
▲	9	1031700	(000000-	) Gasket, .19, 2.00ld 5.38OD [BUNA]	1
▲	10	20932	(000000-	) Washer, Polye	1
▲	11	75635	(000000-	) Hose Assy, W/1cuff, 1.5d 120l 1.5/	1
▲	12	07792	(000000-	) Nut, Hex, Flng, M10 X 1.5	2
▲	13	74455	(000000-	) Screw, Hex, M6 X 1.0 X 12, Fmg	1
▲	14	32492	(000000-	) Washer, Flt, .38 Std	2
▲	15	39284	(000000-	) Screw, Hex, M10 X 1.5 X 35, 8.8	2
▲	16	387213	(000000-	) Bumper, Posi Drain, Recvy Side	1

Fig. 40 - Positive Solution Control Drain Kit, Solution Tank

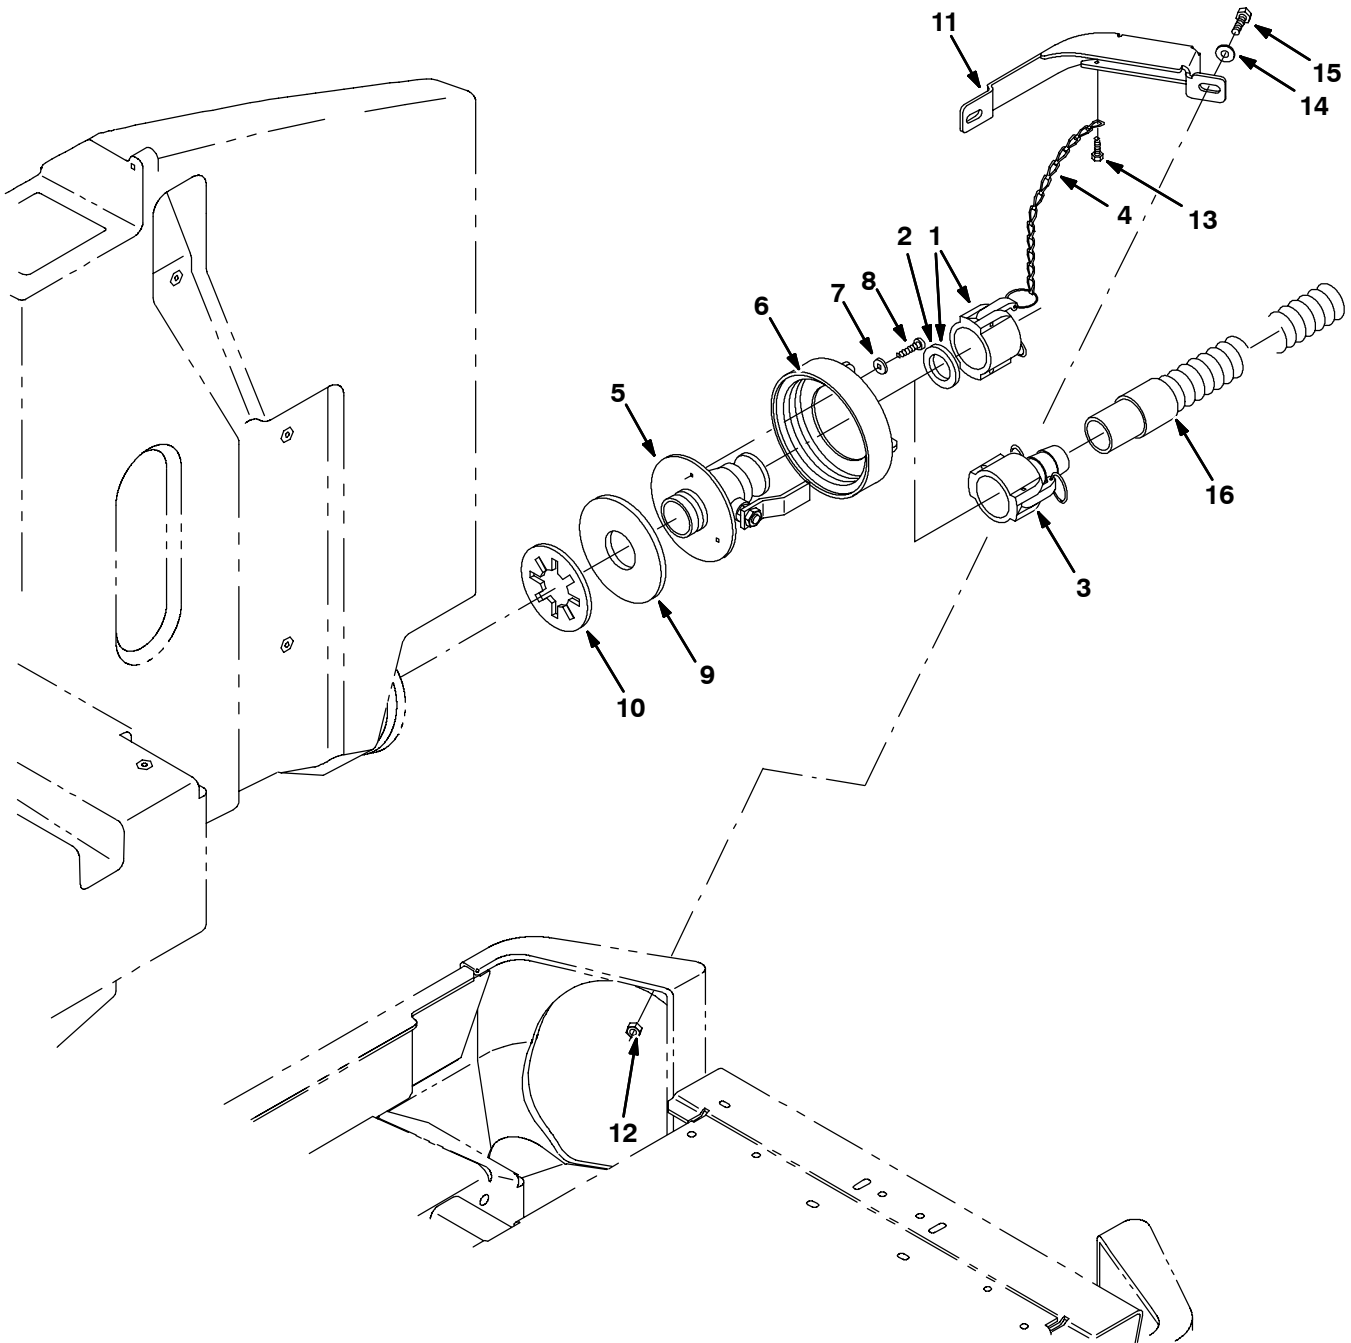


Fig. 40 - Positive Solution Control Drain Kit, Solution Tank

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387483	(000000-	) Kit, Ci, Drain, Soltn, Pos Cntrl, Soltn	1
▲▽	1	48733	(000000-	) Cap, Dust	1
▲▲	2	371905	(000000-	) Gasket, Cap, Dust	1
▲	3	48734	(000000-	) Fitting, Coupler, Hose, Shank, Fem	1
▲	4	19903	(000000-	) Chain, Sash, #35, 07.2l 13 Link	1
▲	5	387227	(000000-	) Valve, 1.50ld, Rwk	1
▲	6	23456	(000000-	) Cap, Tank, Drain, 6.17 Thread Pye	1
▲	7	01684	(000000-	) Washer, Flt, .25 Ss	3
▲	8	363503	(000000-	) Screw, Pan, M06 X 1.0 X 12, Ss	3
▲	9	1031700	(000000-	) Gasket, .19, 2.00ld 5.38OD [BUNA]	1
▲	10	20932	(000000-	) Washer, Polye	1
▲	11	387126	(000000-	) Bumper, Posi Drain, Recvy Side	1
▲	12	07792	(000000-	) Nut, Hex, Flng, M10 X 1.5	2
▲	13	74455	(000000-	) Screw, Hex, M6 X 1.0 X 12, Fmg	1
▲	14	32492	(000000-	) Washer, Flt, .38 Std	2
▲	15	39284	(000000-	) Screw, Hex, M10 X 1.5 X 35, 8.8	2
▲	16	75635	(000000-	) Hose Assy, W/1cuff, 1.5d 120l 1.5/	1

Fig. 41 - Low Water Level Kit

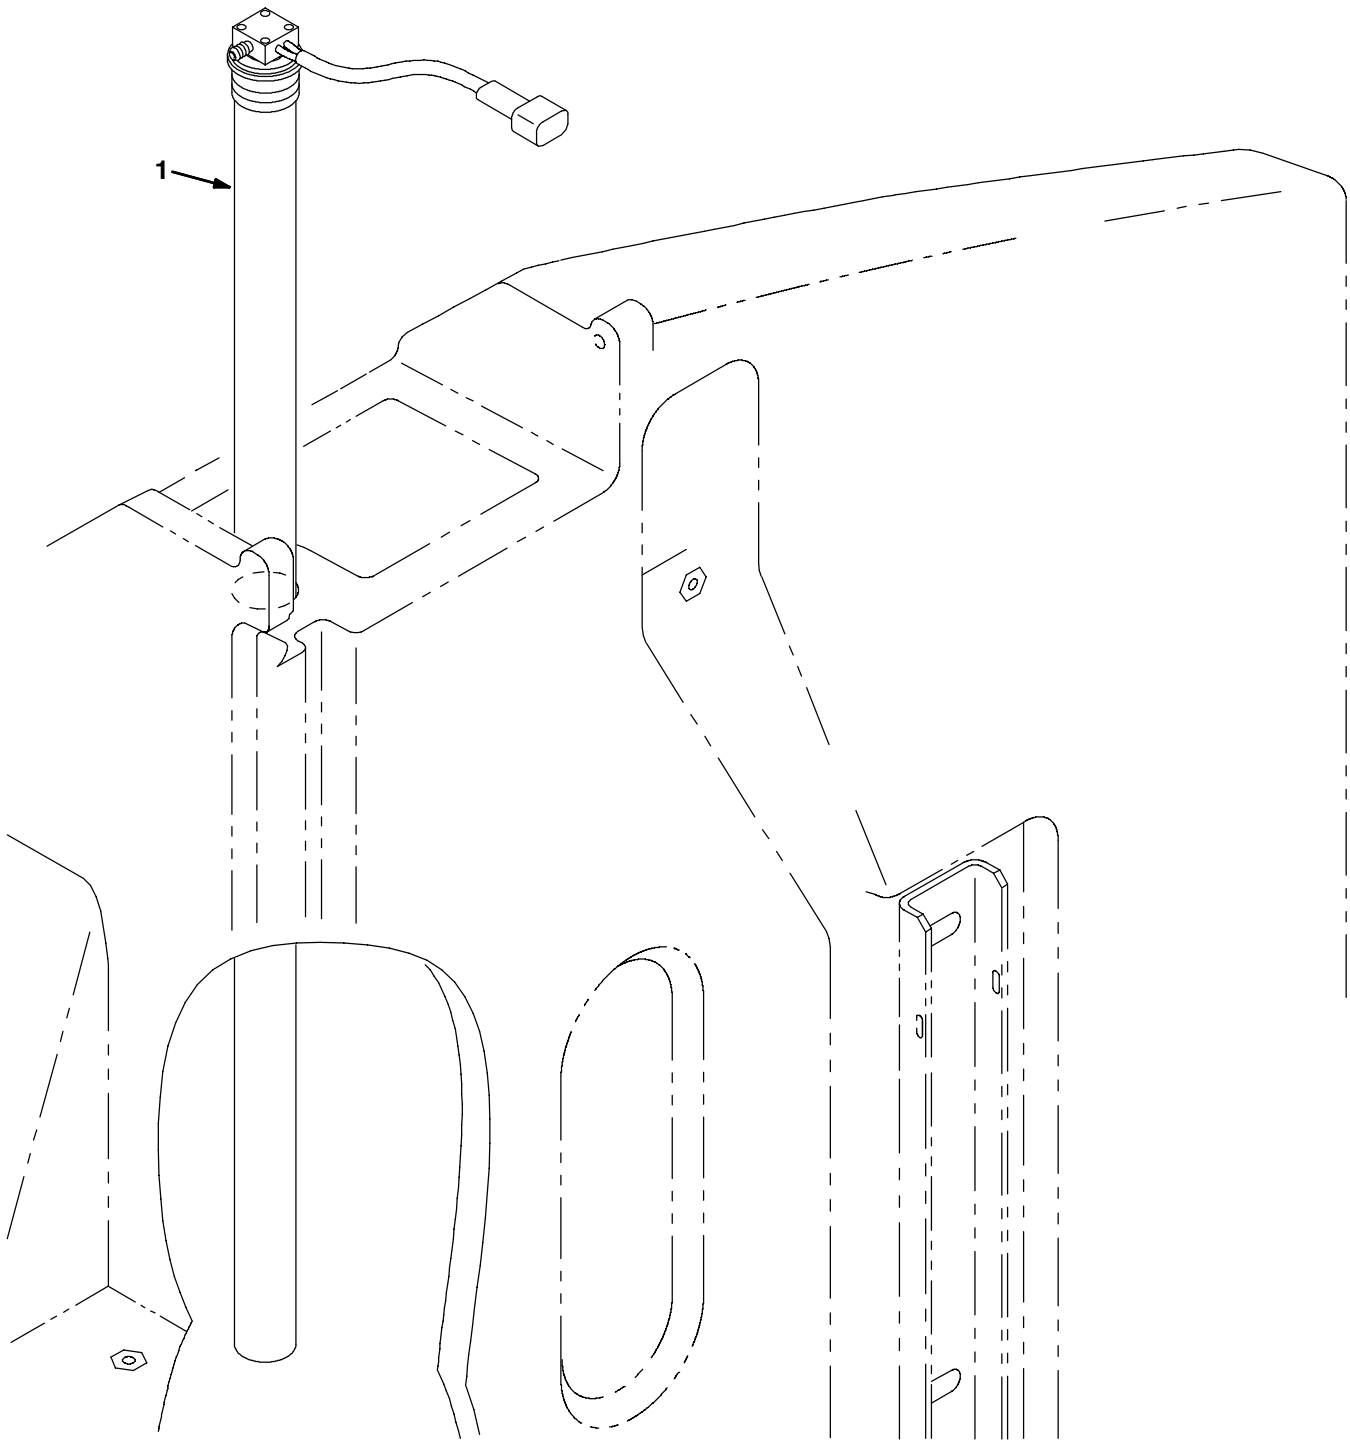


Fig. 41 - Low Water Level Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387003	(000000-	) Kit, Ci, Indicator, Low Water Level	1
▲	1	375431	(000000-	) Kit, Replmt, Press Switch/34" Tube	1

Fig. 42 - Detergent Metering Kit

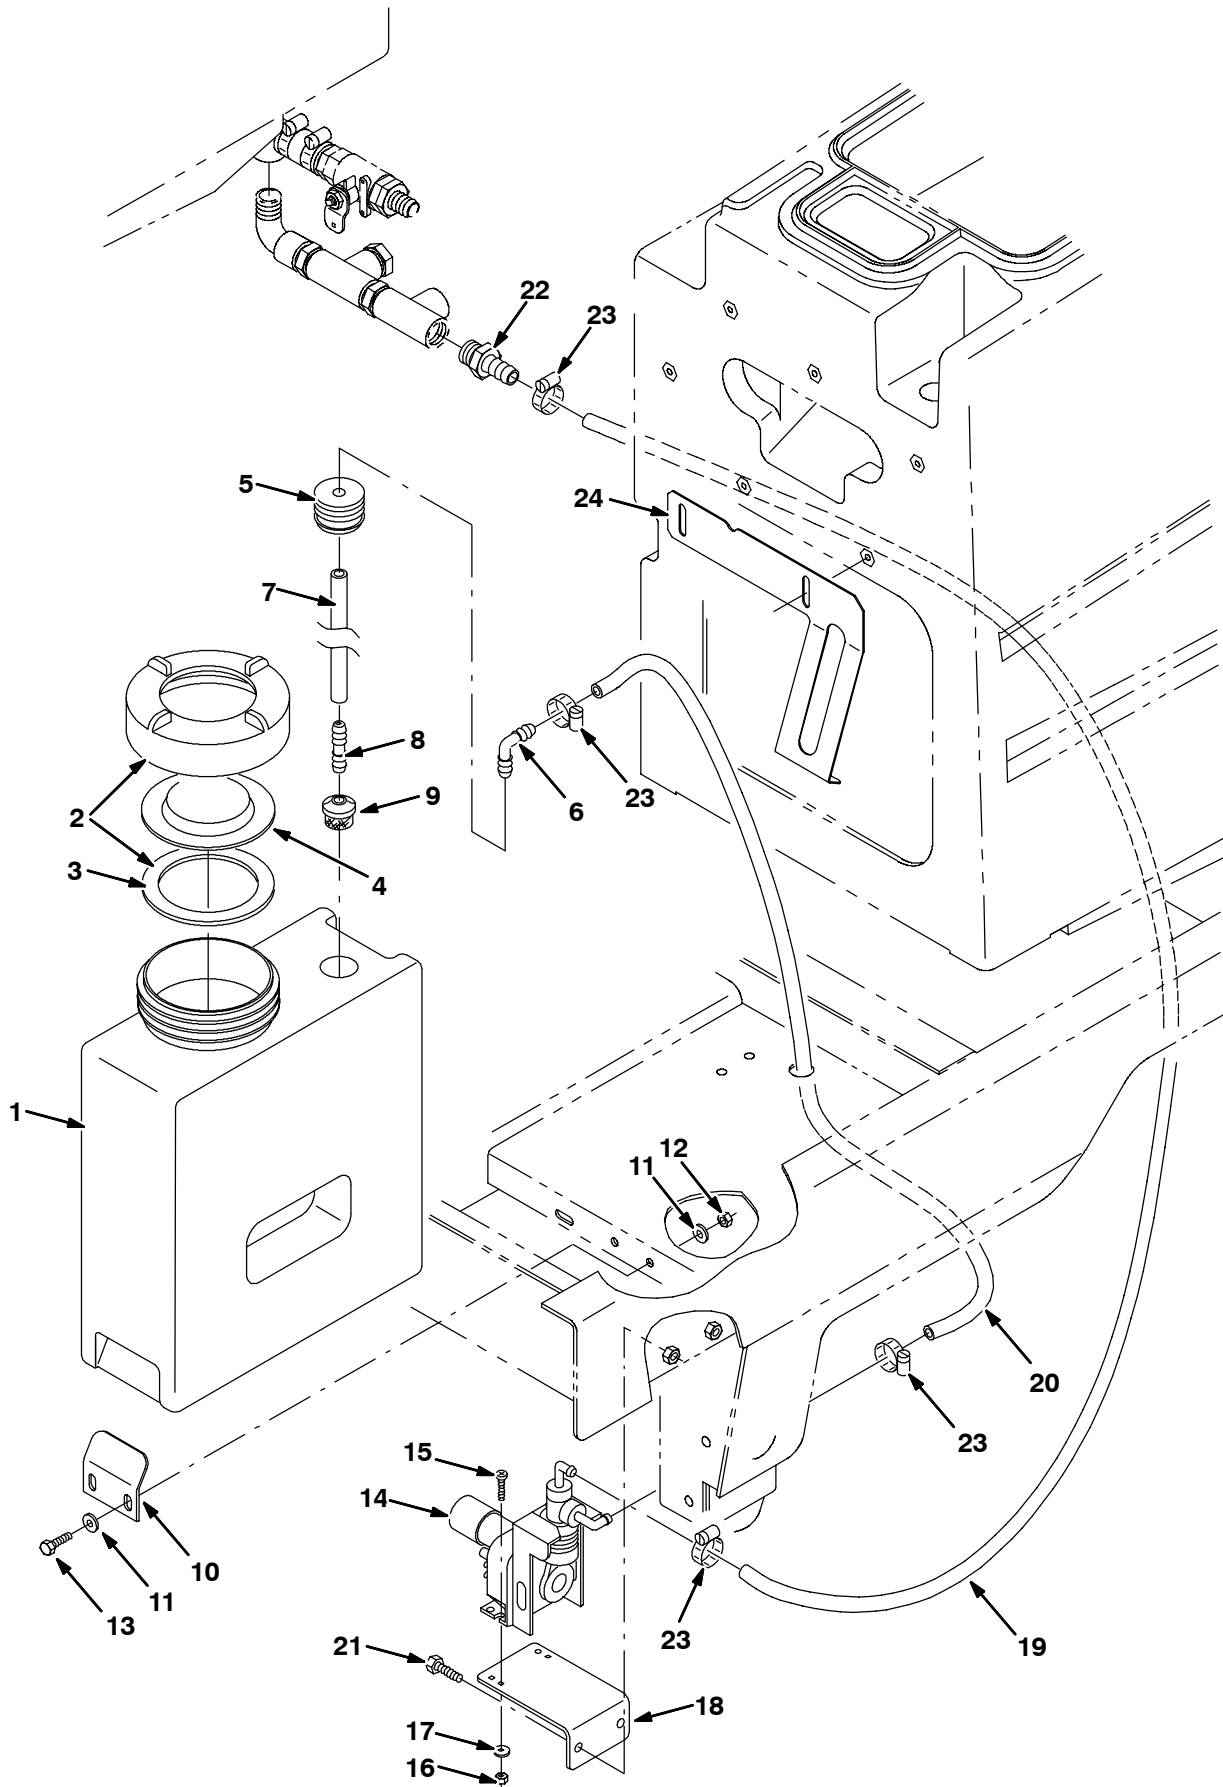


Fig. 42 - Detergent Metering Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386482	(000000-	) Kit, Ci, Detgt Metering	1
▲	1	386163	(000000-	) Tank, Detergent	1
▲▽	2	24358	(000000-	) Cap, Tank	1
▲▲	3	1031699	(000000-	) Gasket, .19, 4.05id 5.29od [Buna]	1
▲	4	86636	(000000-	) Cover, Tank	1
▲	5	20944	(000000-	) Grommet, Pye, 0.37id, F/ 1.5h, .13matl	2
▲	6	20951	(000000-	) Fitting, Plstc, E90, 06bm/06bm	1
▲	7	382452	(000000-	) Hose, Pvc, Brd, 0.38id 0.60od 15.00l	1
▲	8	20950	(000000-	) Fitting, Plstc, Str, Bm06/Bm06	1
▲	9	20952	(000000-	) Screen, Pump	1
▲	10	386395	(000000-	) Plate, Mtg, Tank, Detgt	1
▲	11	01685	(000000-	) Washer, Flt, .31 Ss	4
▲	12	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,NI, Ss	2
▲	13	09023	(000000-	) Screw, Hex, M08 X 1.25 X 35, Ss	2
▲	14	386364	(000000-	) Pump, Detgt, 36vdc (See Breakdown)	1
▲	15	12323	(000000-	) Screw, Pan, M04 X 0.7 X 20, Ss	4
▲	16	33932	(000000-	) Nut, Hex, Lock, M04 X 0.7, NI, Ss	4
▲	17	41579	(000000-	) Washer, Flt, #08 Ss	4
▲	18	386462	(000000-	) Angle, Mtg, Pump, Detergent	1
▲	19	387049	(000000-	) Hose, Vyl, Brd .38id .60od 45.0l	1
▲	20	364669	(000000-	) Hose, Pvc, Brd, 0.38id 0.60od 66.00l	1
▲	21	09023	(000000-	) Screw, Hex, M08 X 1.25 X 35, Ss	2
▲	22	73467	(000000-	) Fitting, Plstc, Str, Bm06/Pm12	1
▲	23	43844	(000000-	) Clamp, Hose, Wormdrive, 0.25-0.62d	4
▲	24	386432	(000000-	) Bracket, Retaining, Tank, Detgt	1

Fig. 43 - Power Wand Hose Assembly

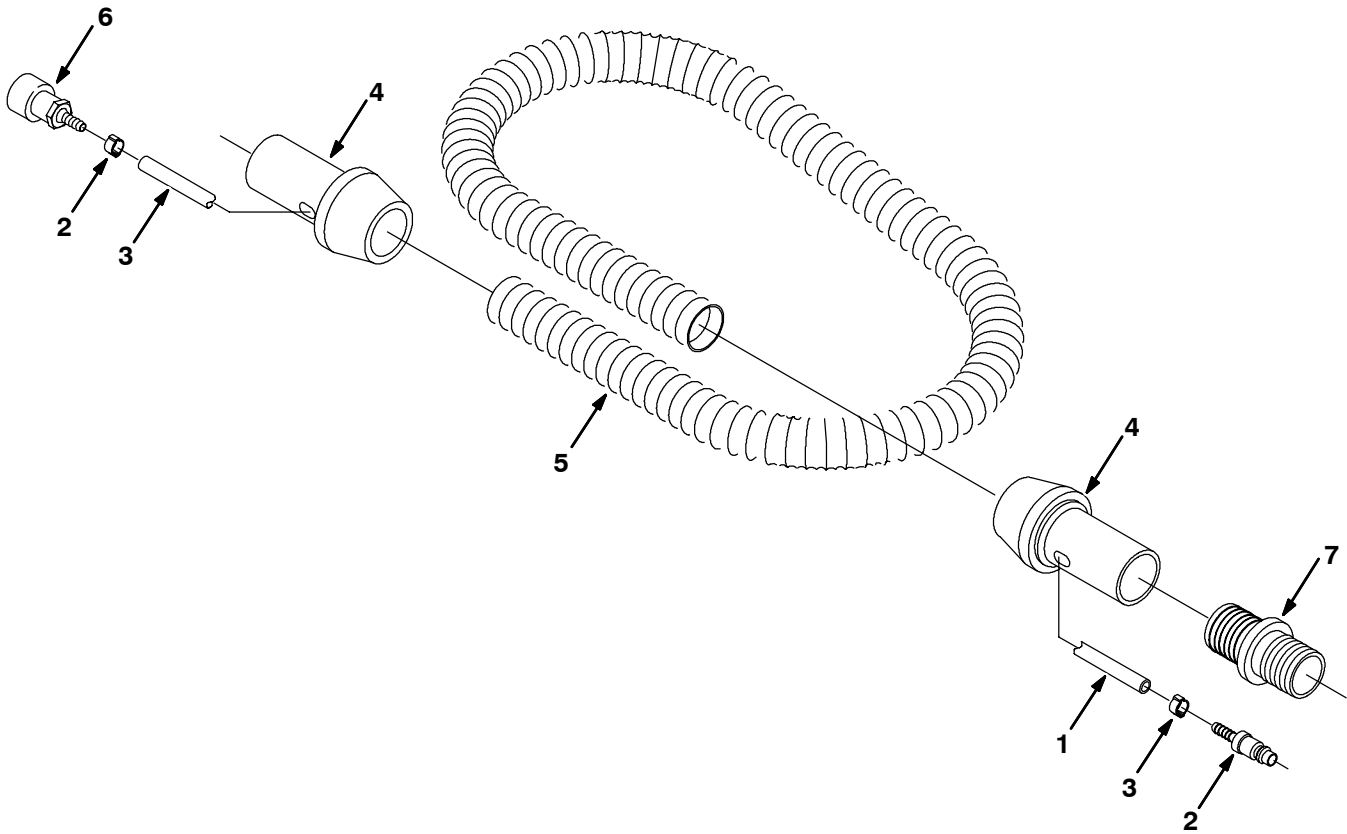


Fig. 43 - Power Wand Hose Assembly

NOTE: Power Wand Kit, Tennant Part Number 387147, includes; Fig. 43, Fig. 44, Fig. 45, and Fig. 46.

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		65341	(000000-	) Hose Assembly	1
▲	1	578318000	(000000-	) Fitting, Quick Disconnect	1
▲	2	578160000	(000000-	) Clamp, Hose	2
▲	3	578820000	(000000-	) Hose	1
▲	4	578072000	(000000-	) Cuff, Swivel	2
▲	5	578276000	(000000-	) Hose, Vacuum	1
▲	6	578071000	(000000-	) Fitting, Quick Disconnect	1
	7	48609	(000000-	) Fitting, Plstc, Str, Bm24/Bm32	1

Fig. 44 - Power Wand Assembly

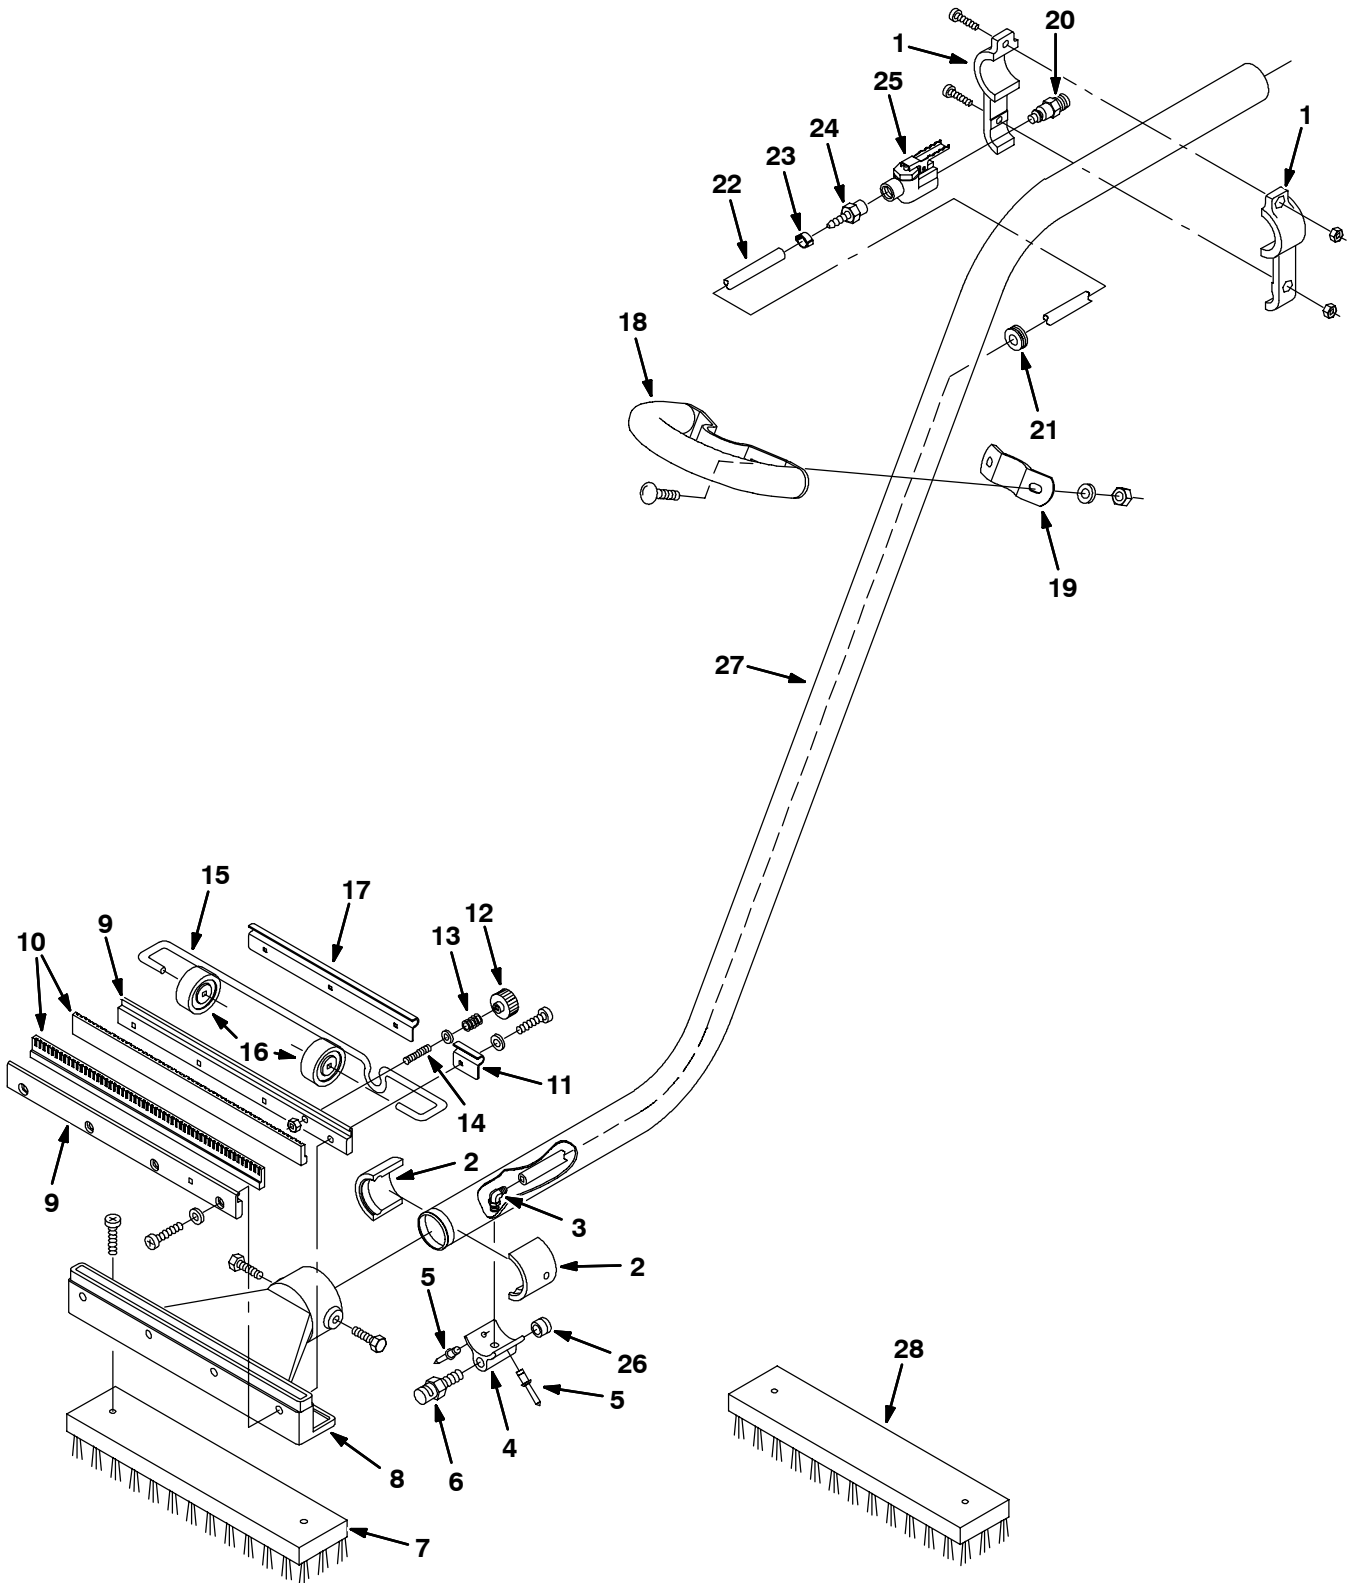


Fig. 44 - Power Wand Assembly

NOTE: Power Wand Kit, Tennant Part Number 387147, includes; Fig. 43, Fig. 44, Fig. 45, and Fig. 46.

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		65340	(000000-	) Kit, Wand, Power [5400]	1
▲	1	578077000	(000000-	) Bracket, Mtg	1
▲	2	578061000	(000000-	) Adaptor	2
▲	3	578214000	(000000-	) Fitting, Elbow	1
▲	4	579112	(000000-	) Adaptor	1
▲	5	602036000	(000000-	) Rivet, Pop	2
▲	6	578066000	(000000-	) Nozzle, Spray	1
▲	7	65610	(000000-	) Brush, Block, Scrub, Poly	1
▲	8	578063000	(000000-	) Head, Wand	1
▲	9	578078000	(000000-	) Strip, Retainer	2
▲	10	578074000	(000000-	) Blade, Squeegee	2
▲	11	578124000	(000000-	) Bracket	1
▲	12	578439	(000000-	) Nut, Thumb, M6 X 30mm Dia	1
▲	13	578228000	(000000-	) Spring, Compression	1
▲	14	578143000	(000000-	) Stud, Adj	1
▲	15	578126000	(000000-	) Axle, Wand	1
▲	16	578125000	(000000-	) Wheel	2
▲	17	578123000	(000000-	) Bracket	1
▲	18	578155000	(000000-	) Handle, Wand	1
▲	19	578154000	(000000-	) Handle, Wand	1
▲	20	578091000	(000000-	) Plug, Qm, .25npt	1
▲	21	578164000	(000000-	) Grommet	1
▲	22	578821000	(000000-	) Hose, Wand	1
▲	23	578161000	(000000-	) Clamp, Hose	2
▲	24	578094000	(000000-	) Fitting, Hose, Barbed, .25npt Mal	1
▲	25	578064000	(000000-	) Valve, Water	1
▲	26	150208	(000000-	) Plug	1
▲	27	578060000	(000000-	) Wand	1
	28	65582	(000000-	) Brush, Block, Scrub, Ab	1

Fig. 45 - Power Wand Pump and Fittings Group

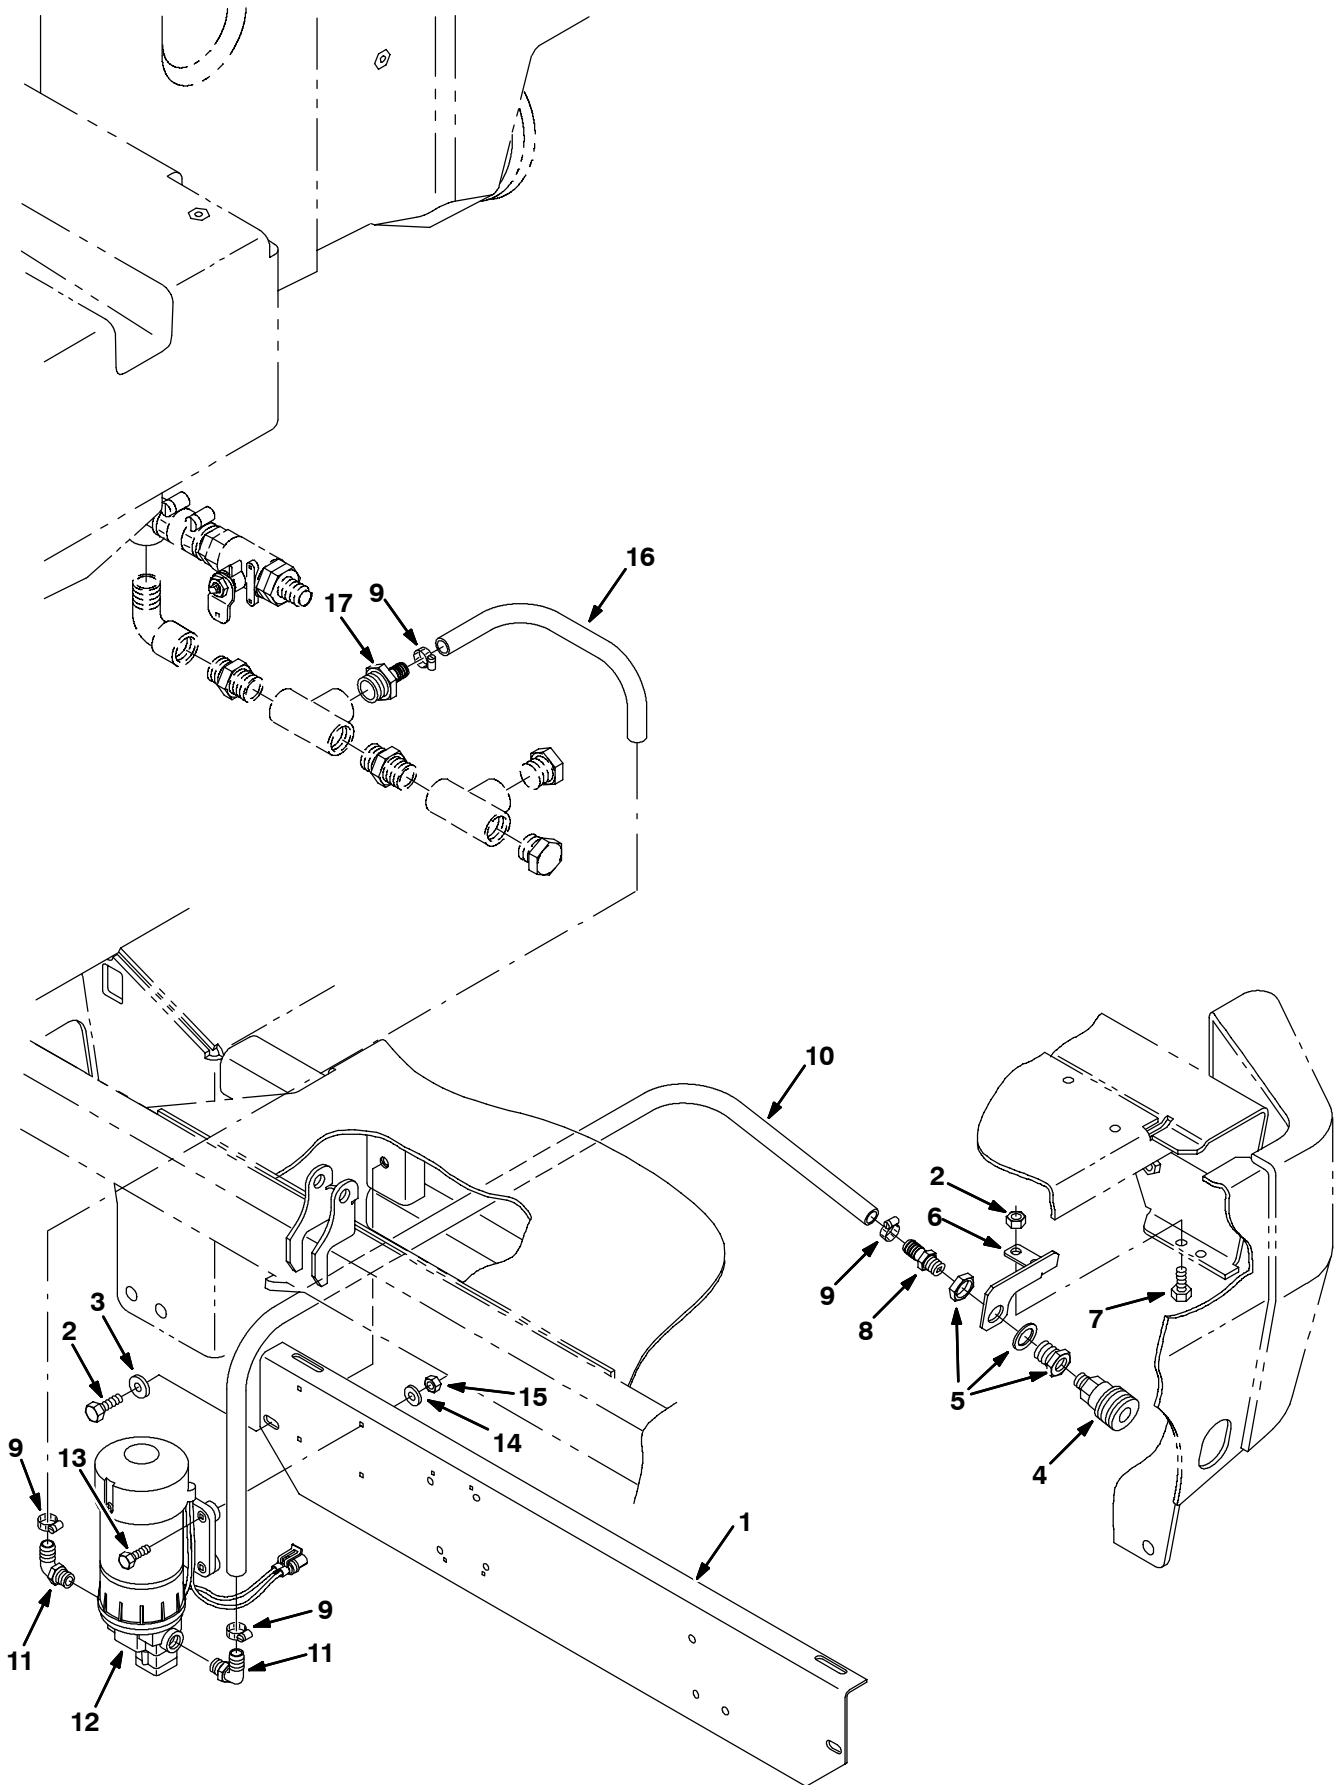


Fig. 45 - Power Wand Pump and Fittings Group

NOTE: Power Wand Kit, Tennant Part Number 387147, includes; Fig. 43, Fig. 44, Fig. 45, and Fig. 46.

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	386392	(000000-	) Angle, Mtg, Es	1
2	09010	(000000-	) Screw, Hex, M08 X 1.25 X 25, Ss	4
3	01685	(000000-	) Washer, Flt, .31 Ss	2
4	65342	(000000-	) Fitting, Brs, Qdc, Pm04/Qf06	1
5	78122	(000000-	) Fitting, Brs, Str, Pf04/Pf04 Bkhd	1
6	386393	(000000-	) Bracket, Power Wand	1
7	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	2
8	48610	(000000-	) Fitting, Plstc, Str, Bm08/Pm04	1
9	54333	(000000-	) Clamp, Hose, Wormdrive, 0.31-0.88d	4
10	84057	(000000-	) Hose, Pvc, Wir, 0.50id 0.74od 47.00l	1
11	65581	(000000-	) Fitting, Plstc, E90, Bm08/Pm04	2
12	387321	(000000-	) Pump Assy, Power Wand (See Breakdown)	1
13	09007	(000000-	) Screw, Hex, M06 X 1.0 X 25, Ss	4
14	01684	(000000-	) Washer, Flt, .25 Ss	4
15	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	4
16	63184	(000000-	) Hose, Pvc, Wir, 0.50id 0.75od 15.50l	1
17	79273-1	(000000-	) Fitting, Plstc, Str, Bm08/Pm12	1

Fig. 46 - Power Wand Mount Group

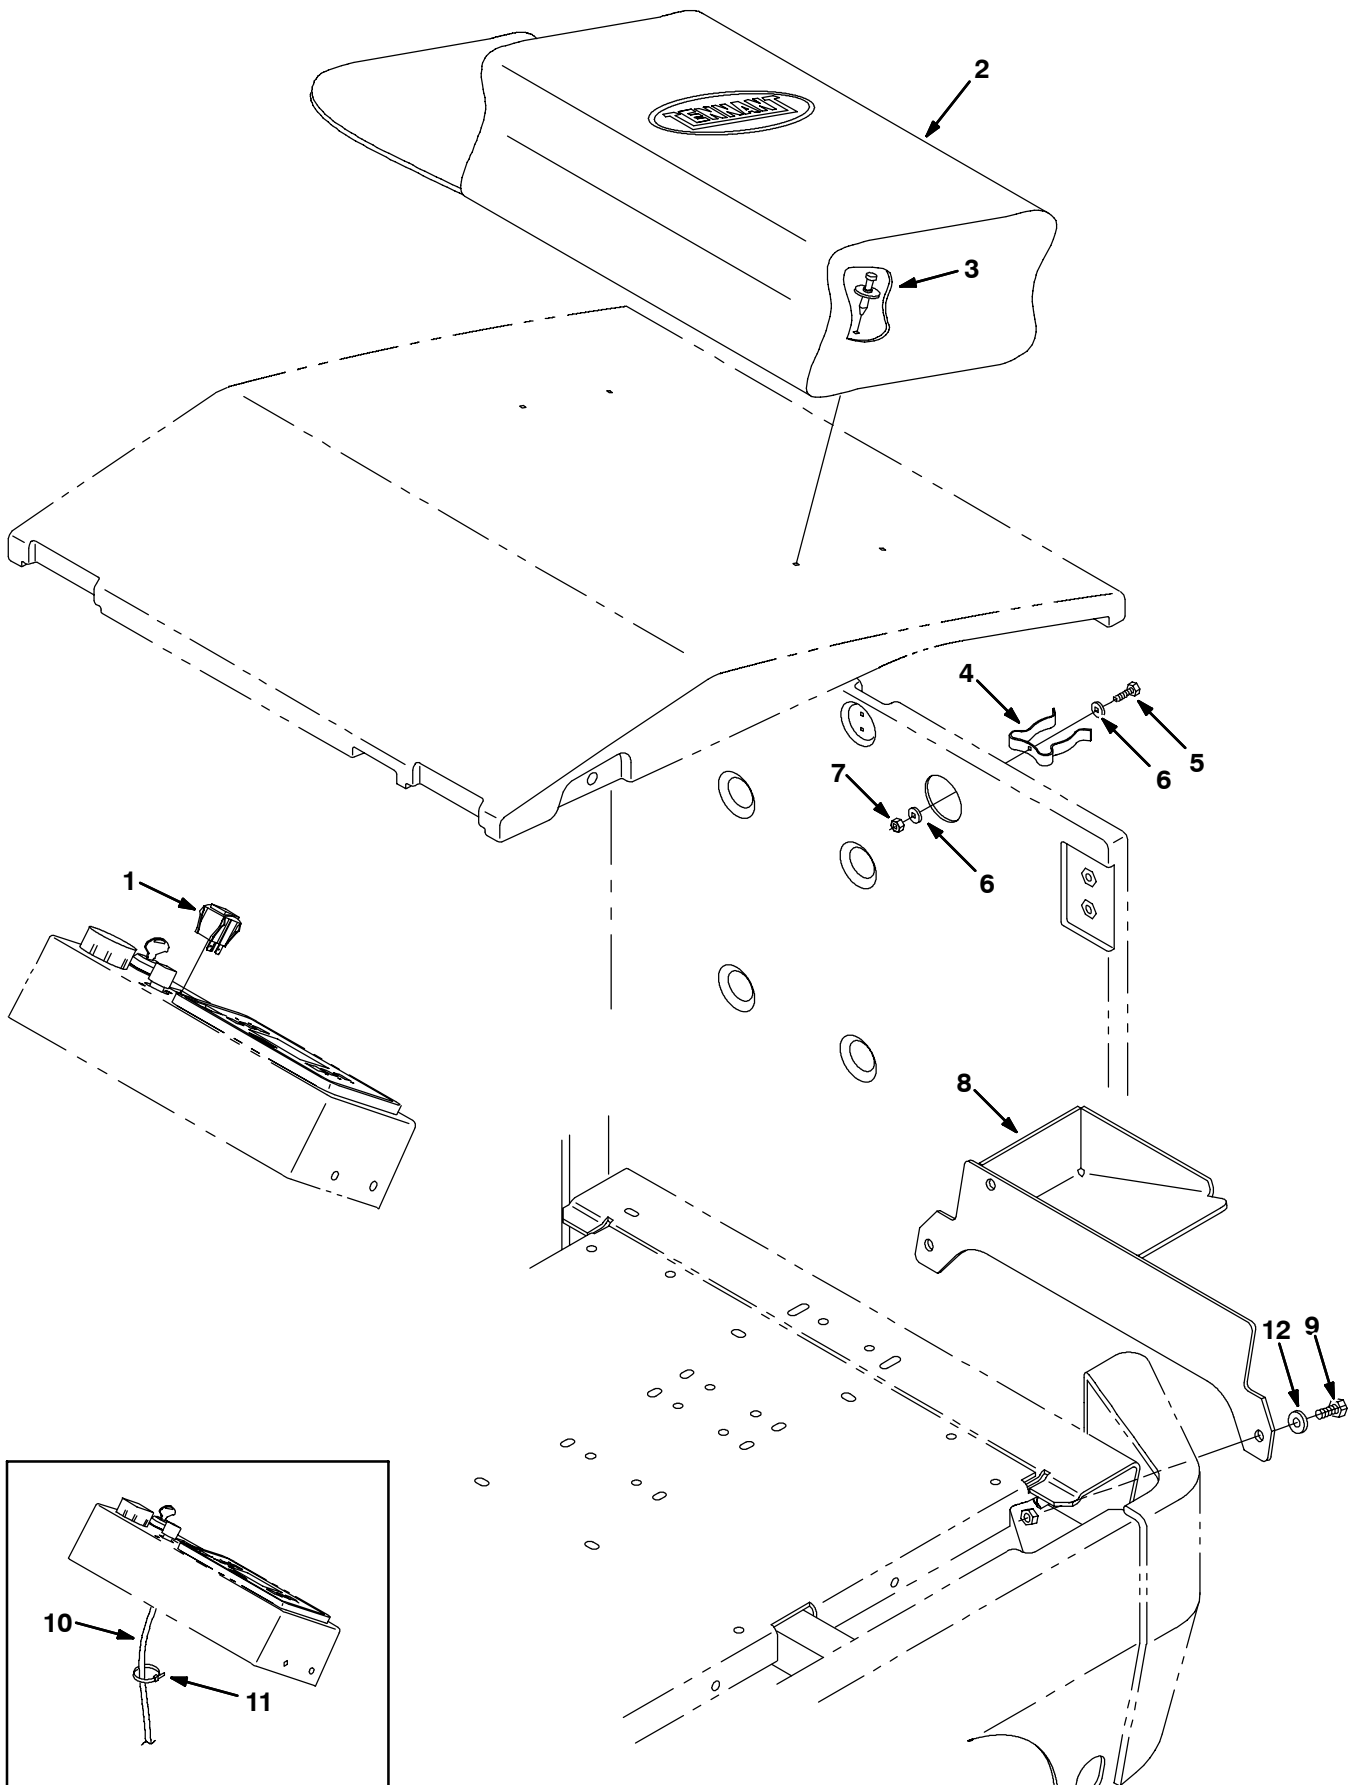


Fig. 46 - Power Wand Mount Group

NOTE: Power Wand Kit, Tennant Part Number 387147, includes; Fig. 43, Fig. 44, Fig. 45, and Fig. 46.

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
1	222117	(000000-	) Switch, Rocker	1
2	65580	(000000-	) Bag, Power	1
3	72968	(000000-	) Rivet, Plstc, .250 X 0.898	2
4	67004	(000000-	) Clip, Finger Grip	1
5	09228	(000000-	) Screw, Hex, M04 X 0.7 X 20, 8.8	1
6	19064	(000000-	) Washer, Flt, #06	2
7	02850	(000000-	) Nut, Hex, Lock, M04 X 0.7, NI	1
8	387050	(000000-	) Tray Wldt, Power Wand	1
9	12273	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss, NI	3
10	387422	(000000-	) Harness, Power Wand, [7300/8300]	1
10	386608	(000000-xxxxxx	) Harness, Power Wand, [7300/8300]	1
10	387422	(xxxxxx-003545	) Harness, Power Wand, [7300/8300]	1
11	49266	(000000-003545	) Tie, Cable, Nyl, 07.3l .19w 1.8 Max D	4
12	01685	(000000-	) Washer, Flt, .31	3

Fig. 47 - Vacuum Wand Kit

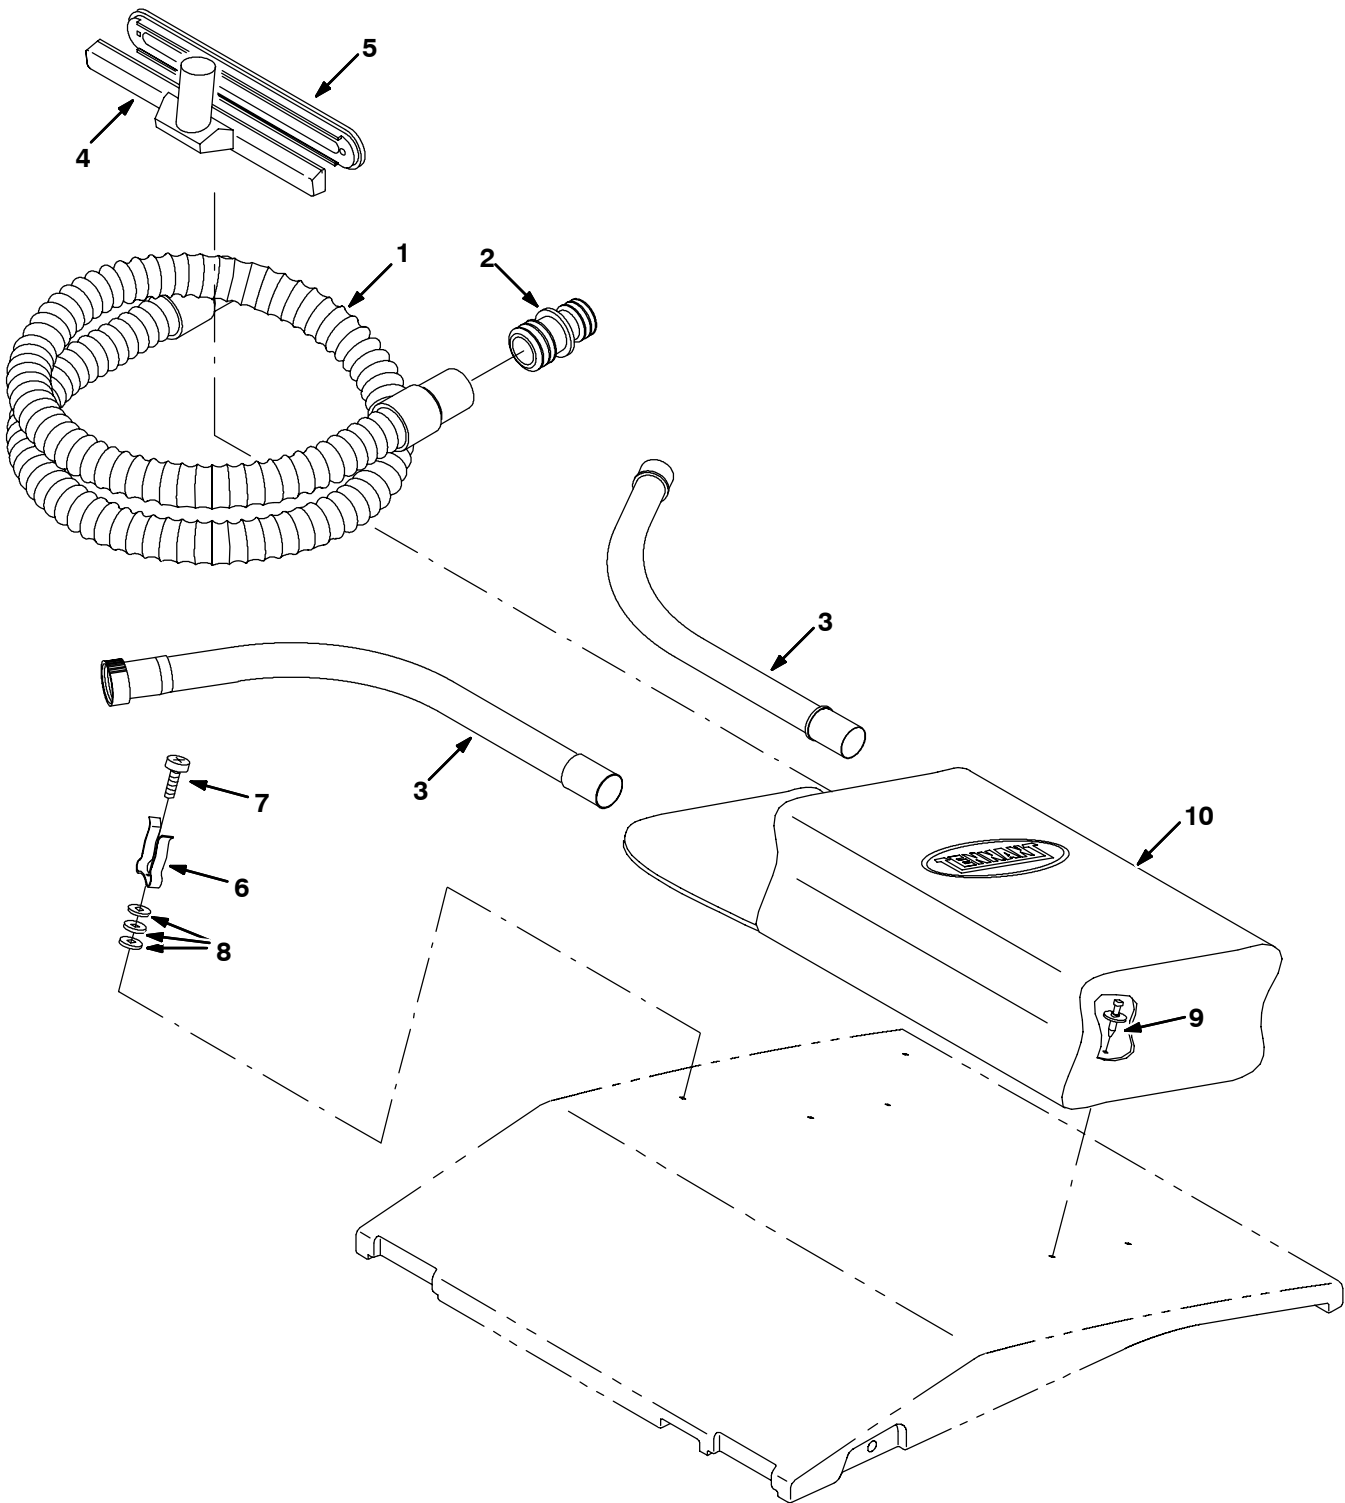


Fig. 47 - Vacuum Wand Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387262	(000000-	) Kit, Ci, Vacuum Wand, [7300/8300]	1
▲	1	86767	(000000-	) Hose Assy, Pvc, W/ Cuff, 1.5d, 90.0l	1
▲	2	48609	(000000-	) Fitting, Plstc, Str, Bm24/Bm32	1
▲	3	63448	(000000-	) Tube, Wand, Vacuum, Metal	1
▲	4	63451	(000000-	) Nozzle, Wand, Plstc, 14.0lg	1
▲	5	63430	(000000-	) Shoe, Plstc, Sqge, 14inch	1
▲	6	67004	(000000-	) Clip, Finger Grip	2
▲	7	360943	(000000-	) Screw, Pan, #10-14X0.75, F/Plstc	2
▲	8	19064	(000000-	) Washer, Flt, #06	6
▲	9	72968	(000000-	) Rivet, Plstc, .250 X 0.898	4
▲	10	65580	(000000-	) Bag, Power	1

Fig. 48 - Max Pro 1200 Rear Squeegee Group

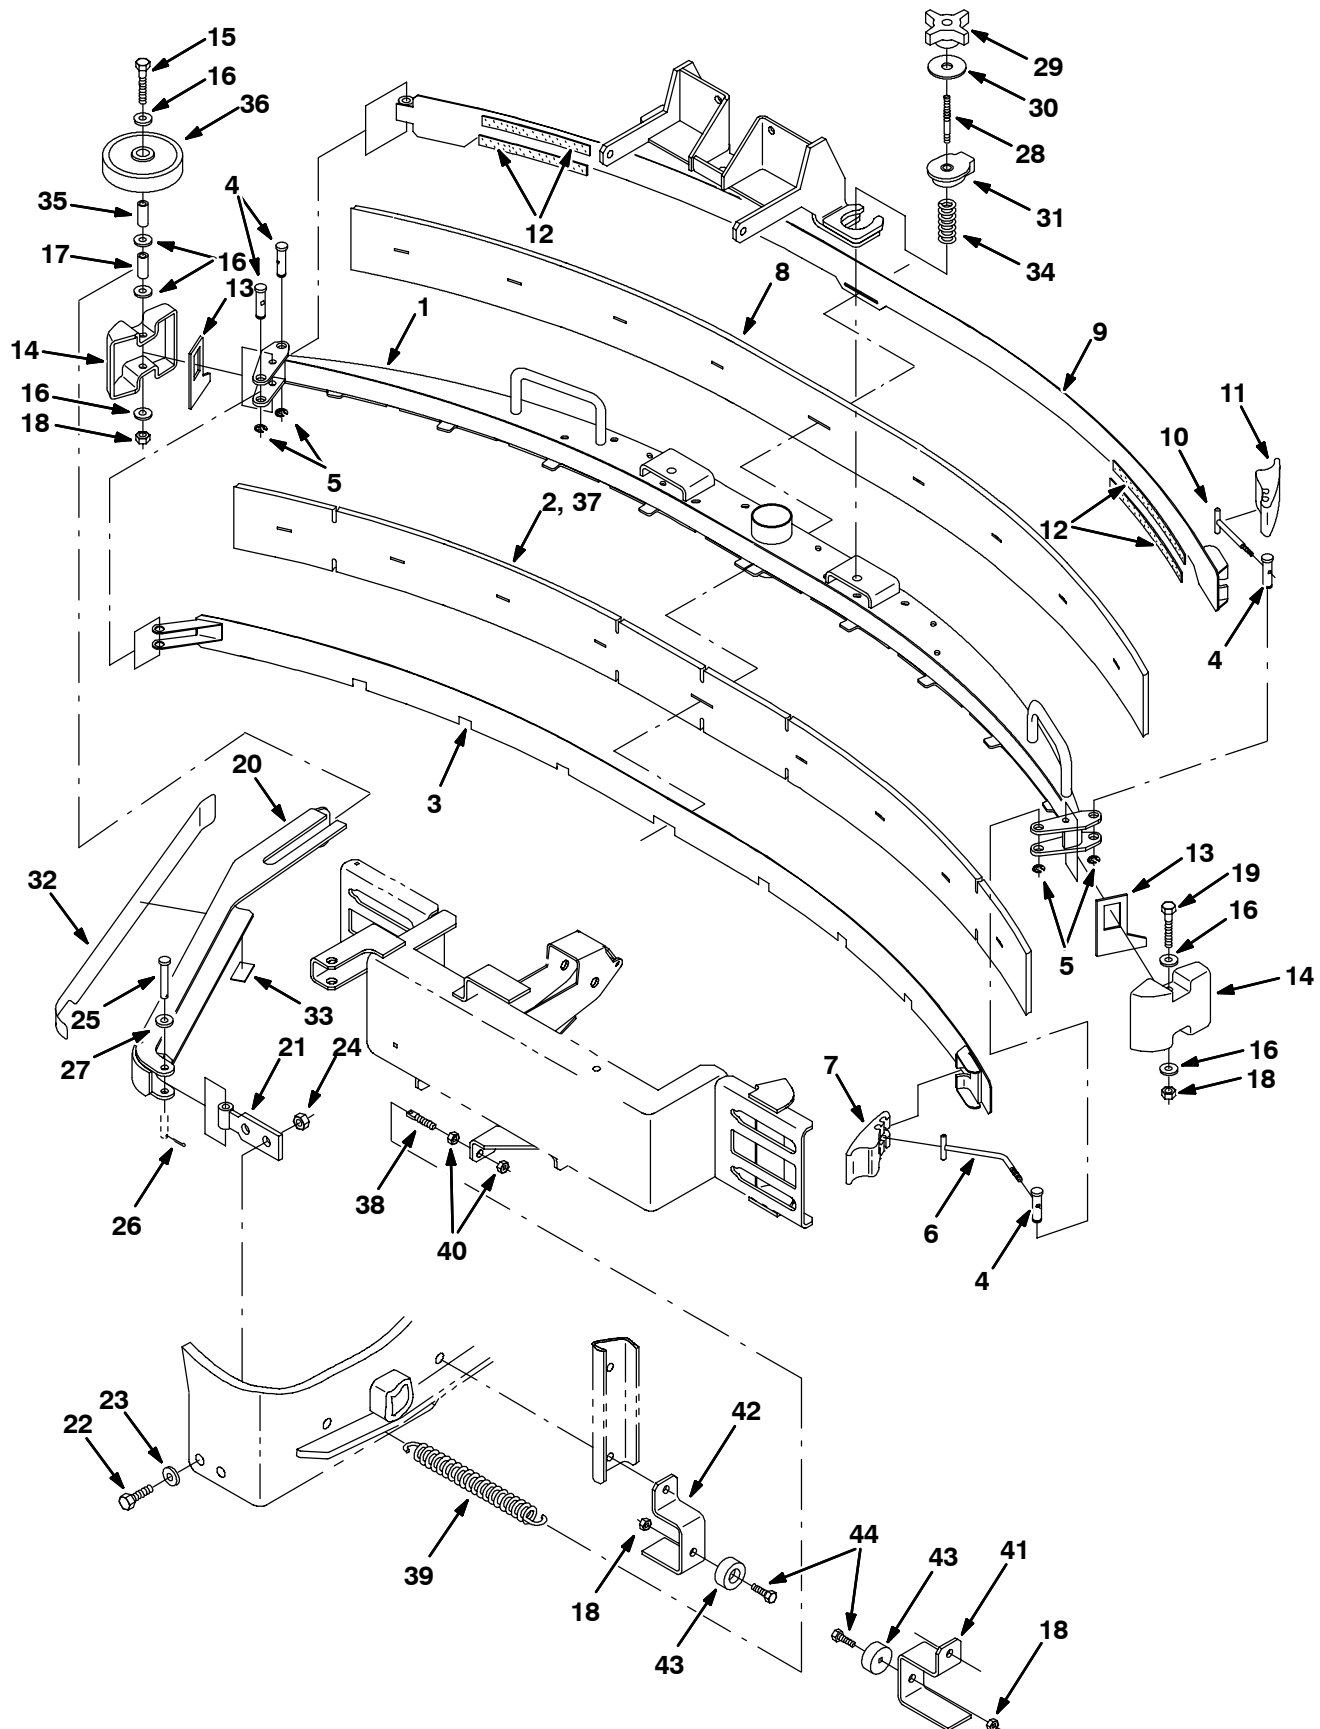


Fig. 48 - Max Pro 1200 Rear Squeegee Group

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386861 (000000-	) Kit, Cl, Squeegee, Rear [Max Pro 1200]	1
▲ 1	386520 (000000-	)	Frame Wldt, Sqge 48.0l	1
▲ 2	386833 (000000-	)	Blade, Sqge, Front 48.0l	1
▲ 3	386835 (000000-	)	Clamp Wldt, Front 48.0l	1
▲ 4	21603 (000000-	)	Pin	4
▲ 5	24555 (000000-	)	Ring, Retaining, Ext	4
▲ 6	386298 (000000-	)	Pin Wldt, Front	1
▲ 7	21601 (000000-	)	Cam	1
▲ 8	386834 (000000-	)	Blade, Sqge, Rear 48.0l	1
▲ 9	386836 (000000-	)	Clamp Wldt, Rear 48.0l	1
▲ 10	21606 (000000-	)	Bar Wldt, Retainer, Sqge, Rear	1
▲ 11	21602 (000000-	)	Cam, Rear	1
▲ 12	03495 (000000-	)	Strip, Nonslip	4
▲ 13	83874 (000000-	)	Gasket, Sqge	2
▲ 14	386264 (000000-	)	Bumper, Sqge	2
▲ 15	387431 (000000-	)	Screw, Hex, M08 X 1.25 X 130 Ss	1
▲ 16	01685 (000000-	)	Washer, Flt, .31 Ss	5
▲ 17	222497 (000000-	)	Sleeve	1
▲ 18	08713 (000000-	)	Nut, Hex, Lock, M08 X 1.25,NI, Ss	4
▲ 19	09767 (000000-	)	Screw, Hex, M08 X 1.25 X 70, Ss	1
▲ 20	387435 (000000-	)	Channel Wldt	1
▲ 21	386234 (000000-	)	Pivot Wldt, Guard	1
▲ 22	12309 (000000-	)	Screw, Hex, M12 X 1.75 X 30, Ss	2
▲ 23	41619 (000000-	)	Washer, Flt, .50 Ss	2
▲ 24	09741 (000000-	)	Nut, Hex, Lock, M12 X 1.75,NI, Ss	2
▲ 25	51813 (000000-	)	Pin, Clevis, 0.37 D X 2.12l	1
▲ 26	08179 (000000-	)	Pin, Cotter, .094 X 1.00	1
▲ 27	01686 (000000-	)	Washer, Flt, .38 Ss	2
▲ 28	387237 (000000-	)	Stud, .31-18 2.75l M8 X 1.25, Ss	2
▲ 29	370100 (000000-	)	Knob, 4-Prong W/.31-18, Insert	2
▲ 30	04414 (000000-	)	Washer, 0.53b 1.88d .12, Stl, Pl	2
▲ 31	387433 (000000-	)	Ring, Mtg, Sqge, .50l	2
▲ 32	387436 (000000-	)	Bumper, Poly-E	1
▲ 33	387438 (000000-	)	Bumper, Poly-E	1
▲ 34	387500 (000000-	)	Spring, Cmpr, .87od .042wir 2.0l	2
▲ 35	363301 (000000-	)	Sleeve, 0.62d 0.34b 1.19l Bnz	1
▲ 36	363162 (000000-	)	Wheel, 4.0d 0.89w 0.64b	1
▲ 37	387258 (000000-	)	Blade, Sqge, Front, Mp1200, Tile	1
▲ 38	386847 (000000-	)	Bolt, Eye, M10x1.5 X 2.0 X .28 Eye	1
▲ 39	71100 (000000-	)	Spring, Extn, 1.69od X 0.20wir, 9.5l	1
▲ 40	32716 (000000-	)	Nut, Hex, Jam, M10 X 1.5, Ss	2
▲ 41	387446 (000000-	)	Channel, Stop, Lh	1
▲ 42	387447 (000000-	)	Channel, Stop, Rh	1
▲ 43	364614 (000000-	)	Bumper, Neo, 1.5d .63t .31h	2
▲ 44	09010 (000000-	)	Screw, Hex, M08 X 1.25 X 25, Ss	2

OPTIONS

Fig. 49 - Max Pro 1200 Rear Squeegee Group (For Vacuumized Side Squeegee)


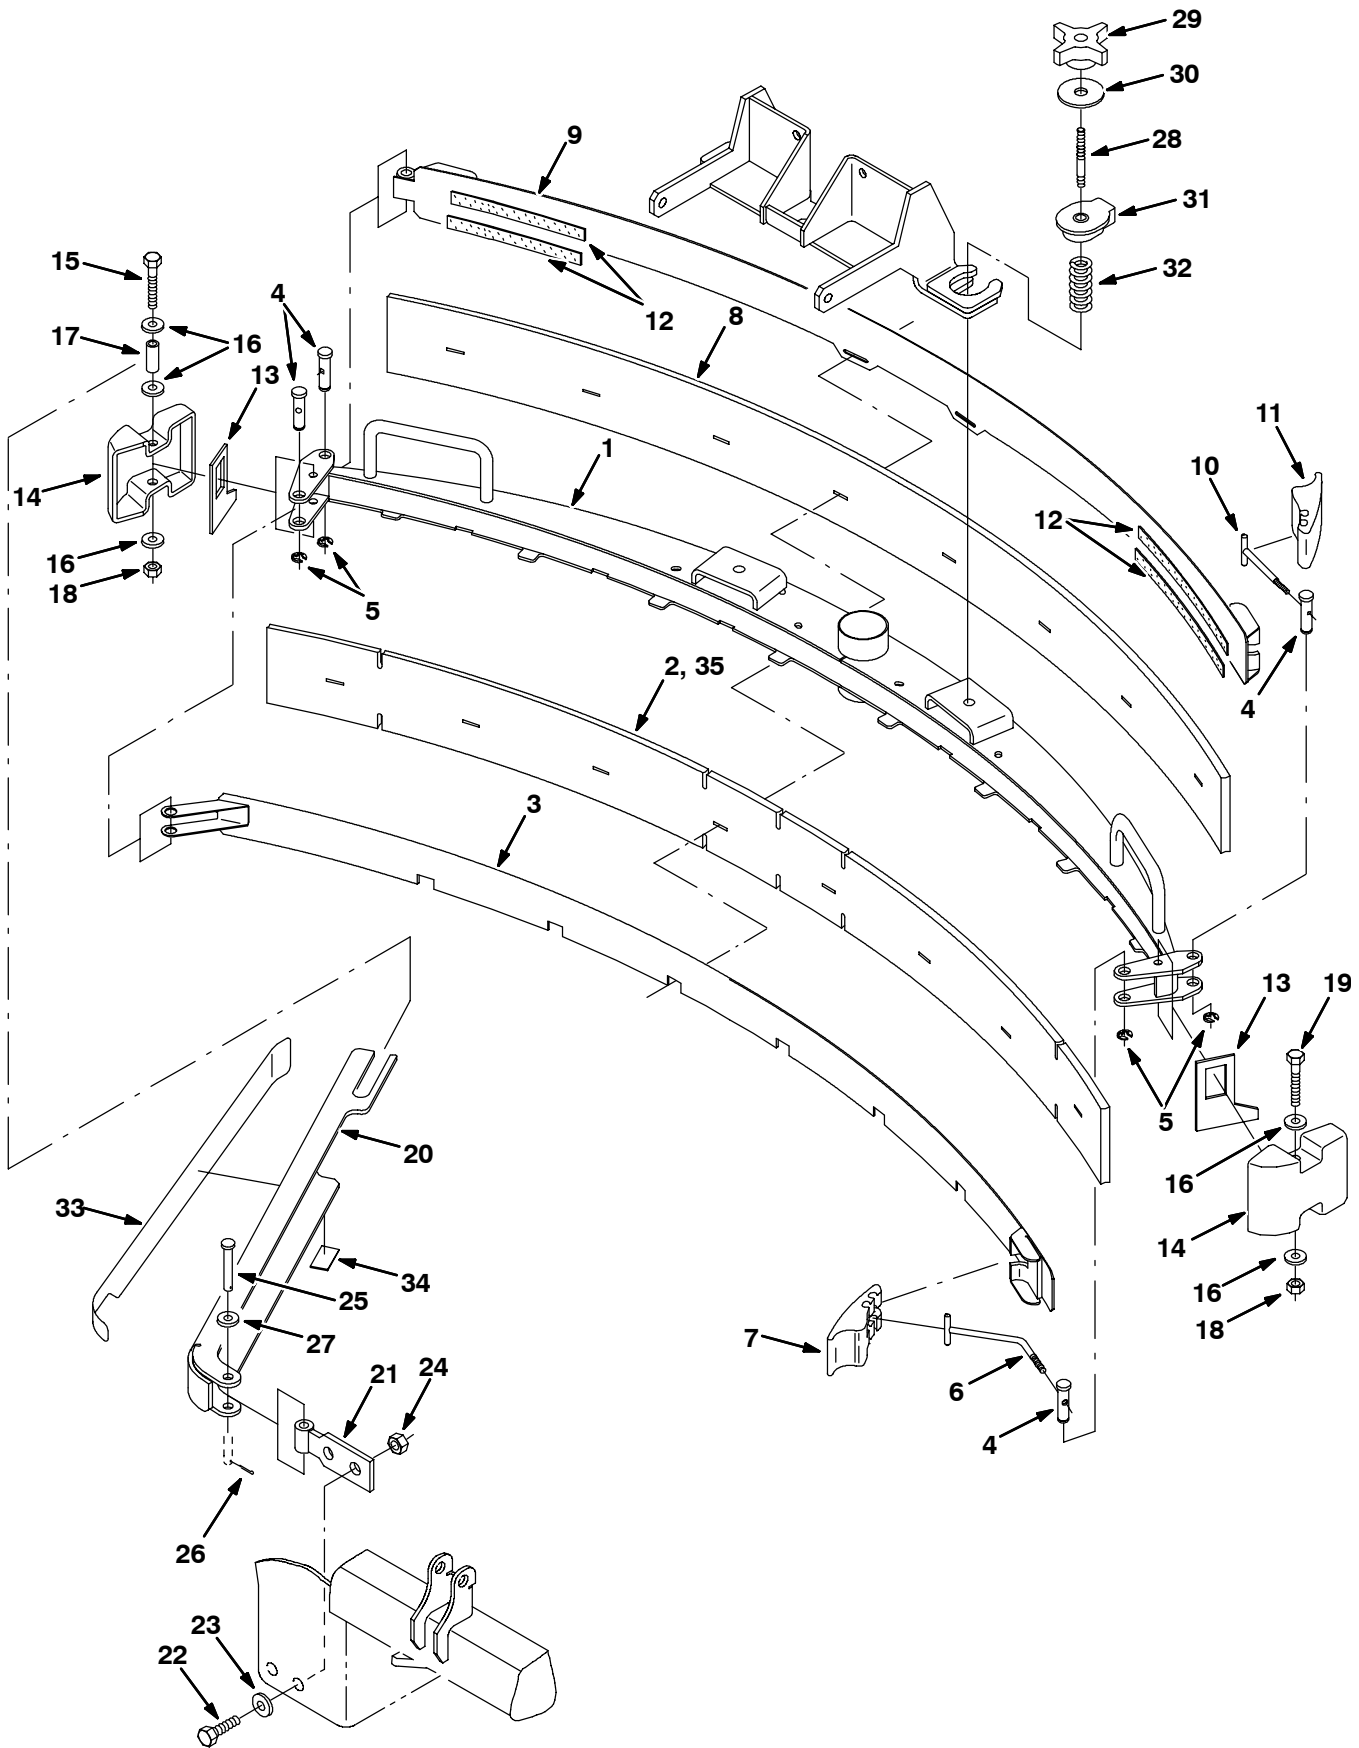


Fig. 49 - Max Pro 1200 Rear Squeegee Group (For Vacuumized Side Squeegee)

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386860	(000000-	) Kit, Cl, Squeegee, Rear (Max Pro™ 1000)	1
▲ 1	386290	(000000-	) Frame Wldt, Sqge	1
▲ 2	386283	(000000-	) Blade, Sqge, Front	1
▲ 3	386285	(000000-	) Clamp Wldt, Front	1
▲ 4	21603	(000000-	) Pin	4
▲ 5	24555	(000000-	) Ring, Retaining, Ext	4
▲ 6	386298	(000000-	) Pin Wldt, Front	1
▲ 7	21601	(000000-	) Cam	1
▲ 8	386284	(000000-	) Blade, Sqge, Rear	1
▲ 9	386286	(000000-	) Clamp Wldt, Rear	1
▲ 10	21606	(000000-	) Bar Wldt, Retainer, Sqge, Rear	1
▲ 11	21602	(000000-	) Cam, Rear	1
▲ 12	03495	(000000-	) Strip, Nonslip	4
▲ 13	83874	(000000-	) Gasket, Sqge	2
▲ 14	386264	(000000-	) Bumper, Sqge	2
▲ 15	386299	(000000-	) Screw, Hex, M08 X 1.25 X 100, Ss	1
▲ 16	01685	(000000-	) Washer, Flt, .31 Ss	5
▲ 17	222497	(000000-	) Sleeve	1
▲ 18	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	2
▲ 19	09767	(000000-	) Screw, Hex, M08 X 1.25 X 70, Ss	1
▲ 20	386266	(000000-	) Channel Wldt	1
▲ 21	386234	(000000-	) Pivot Wldt, Guard	1
▲ 22	12309	(000000-	) Screw, Hex, M12 X 1.75 X 30, Ss	2
▲ 23	41619	(000000-	) Washer, Flt, .50 Ss	2
▲ 24	09741	(000000-	) Nut, Hex, Lock, M12 X 1.75, NI, Ss	2
▲ 25	1039190	(000000-	) Pin, Clevis, 0.25d X 2.00l	1
▲ 26	08178	(000000-	) Pin, Cotter, .062 X 0.75	1
▲ 27	01684	(000000-	) Washer, Flt, .25 Ss	2
▲ 28	387237	(000000-	) Stud, .31-18 2.75l M8 X 1.25, Ss	2
▲ 29	370100	(000000-	) Knob, 4-Prong W/.31-18, Insert	2
▲ 30	04414	(000000-	) Washer, 0.53b 1.88d .12, Stl, Pl	2
▲ 31	387433	(000000-	) Ring, Mtg, Sqge, .50l	2
▲ 32	387500	(000000-	) Spring, Cmpr, .87od .042wir 2.0l	2
▲ 33	387448	(000000-	) Bumper, Poly-E	1
▲ 34	387438	(000000-	) Bumper, Poly-E	1
35	387257	(000000-	) Blade, Sqge, Front, Mp1000, Tile	1


Fig. 50 - Max Pro 1000 Urethane Squeegee Kit

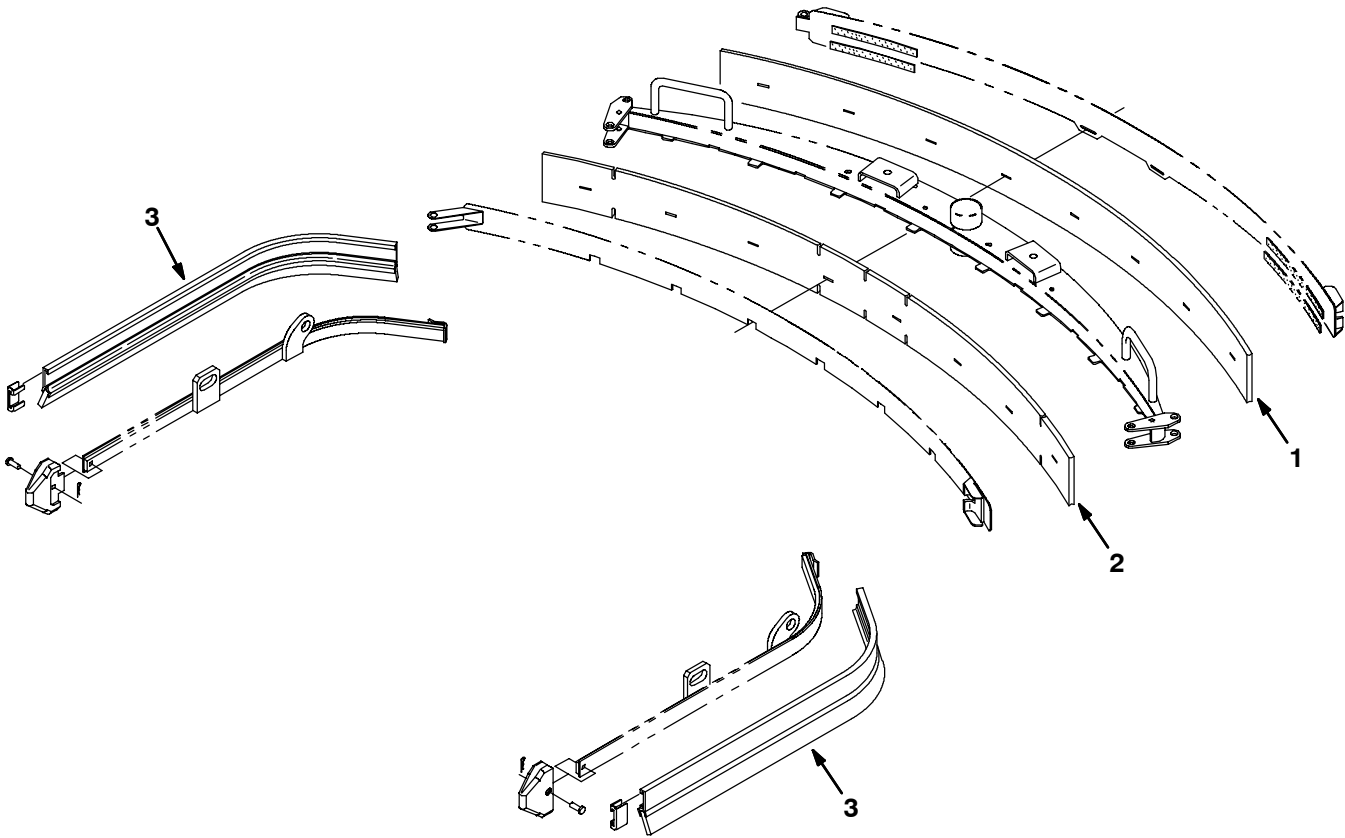

354351

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		9001397	(000000-	) Blade Kit, Sqge, Ure, [Mp1000]	1
▲	1	1022564	(000000-	) Blade, Sqge, Rear	1
▲	2	1022565	(000000-	) Blade, Sqge, Front	1
▲	3	1019344	(000000-	) Squeegee, Side, Ure, [7300/830]	2

Fig. 51 - Max Pro 1200 Urethane Squeegee Kit

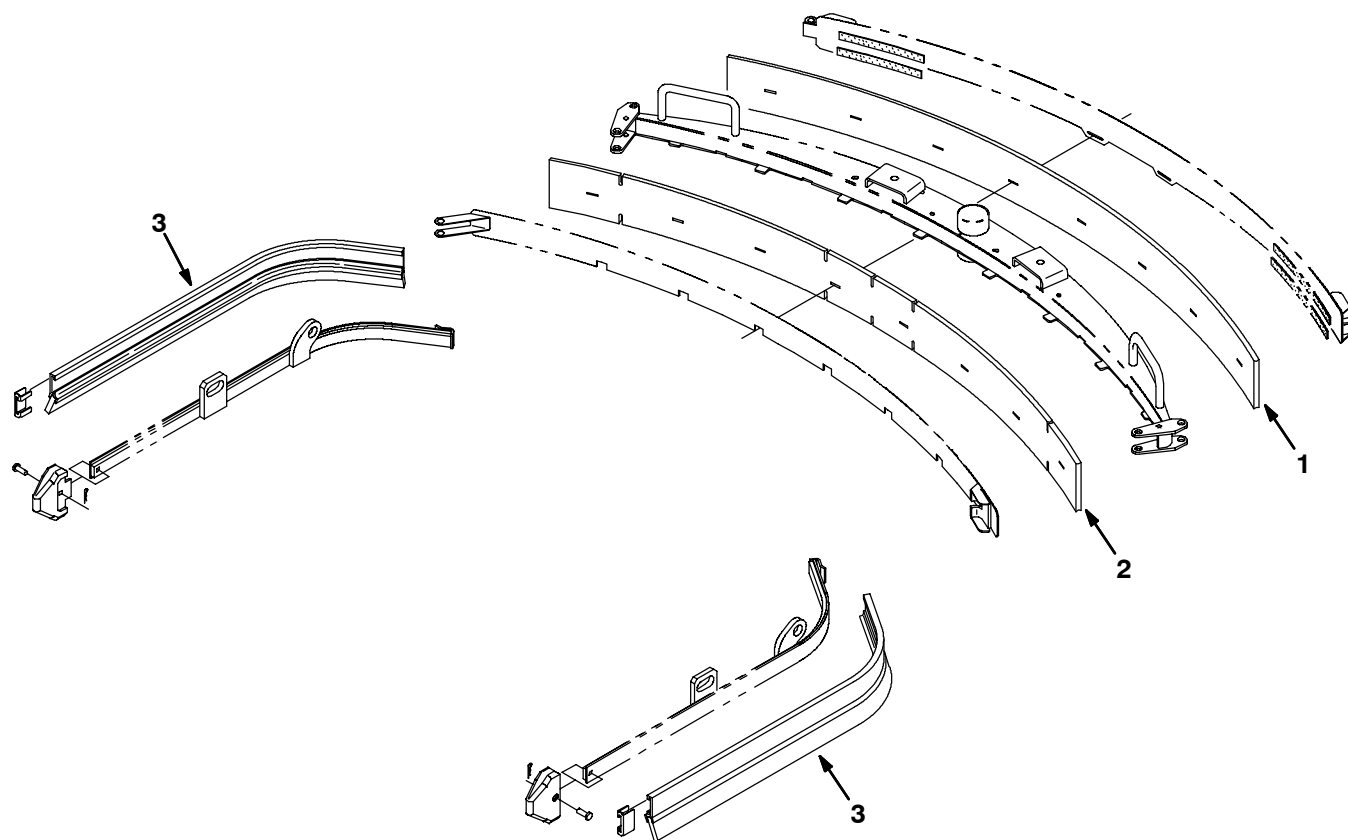

354351

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		9001398	(000000-	) Blade Kit, Sqge, Ure, [Mp1200]	1
▲	1	1022558	(000000-	) Blade, Sqge, Rear	1
▲	2	1022465	(000000-	) Blade, Sqge, Front	1
▲	3	1019344	(000000-	) Squeegee, Side, Ure, [7300/830]	2

Fig. 52 - Battery Rollout Kit

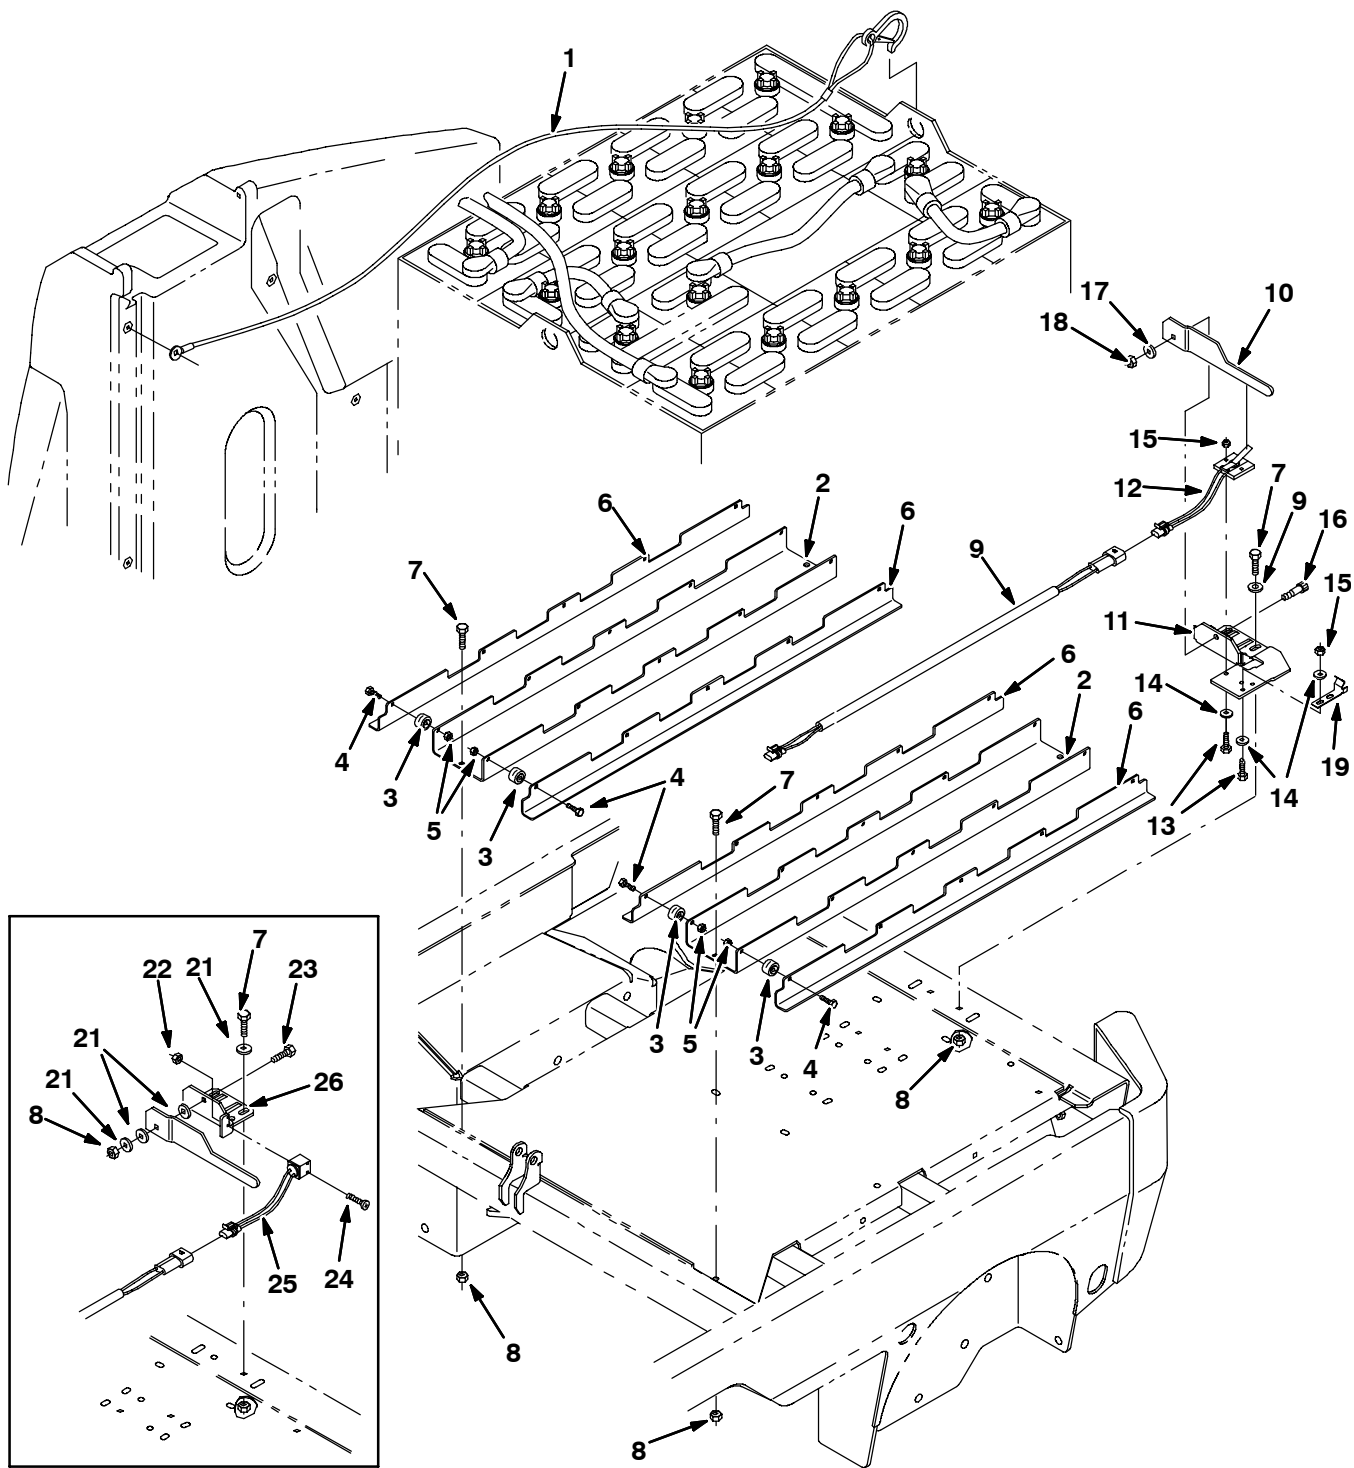


Fig. 52 - Battery Rollout Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387043	(000000-	) Kit, Ci, Battery, Rollout	1
▲	1	386968	(000000-	) Cable, Safety, Battery	1
▲	2	386953	(000000-	) Channel, Battery, R/O	2
▲	3	369415	(000000-	) Bearing, Needle, 0.25b 0.88d 0.50w	20
▲	4	07805	(000000-	) Screw, Hex, M06 X 1.0 X 35, Ss	20
▲	5	08712	(000000-	) Nut, Hex, Lock, M06 X 1.0, NI, Ss	20
▲	6	386952	(000000-	) Angle, Battery, R/O	4
▲	7	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	6
▲	8	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25, NI, Ss	6
▲	9	386607	(000000-	) Harness, Battery, Rollout [7300/8300]	1
▲	10	386954	(000000-	) Bar Wldt, Battery, R/O	1
▲	11	1007129	(003685-	) Stop Wldt	1
▲	12	377341	(003685-	) Switch, Limit, No	1
▲	13	24199	(003685-	) Screw, Hex, M5 X 0.8 X 16, Ss	4
▲	14	01683	(003685-	) Washer, Flat, #10 Ss	6
▲	15	09739	(003685-	) Nut, Hex, Lock, M 5 X 0.8, NI, Ss	4
▲	16	02129	(003685-	) Bolt, Shld, .38DX0.38, .31-18	1
▲	17	39349	(003685-	) Washer, Flat, 0.31 Sae	1
▲	18	01760	(003685-	) Nut, Hex, Lock, .31-18, NI, Thin	1
▲	19	1007107	(003685-	) Latch, Handle	1
▲	20	01685	(003685-	) Washer, Flat, 0.31 Ss	2
	21	01685	(000000-003684	) Washer, Flt, .31 Ss	5
	22	33932	(000000-003684	) Nut, Hex, Lock, M 4 X 0.7, NI Ss	5
	23	09023	(000000-003684	) Screw, Hex, M08 X 1.25 X 35, Ss	1
	24	09198	(000000-003684	) Screw, Pan, M04 X 0.7 X 35, Ss	2
	25	387027	(000000-003684	) Switch, No (Replaced by 398454)	1
	26	387441	(000000-003684	) Stop Wldt (Replaced by 398454)	1

Fig. 53 - Battery Forklift Kit

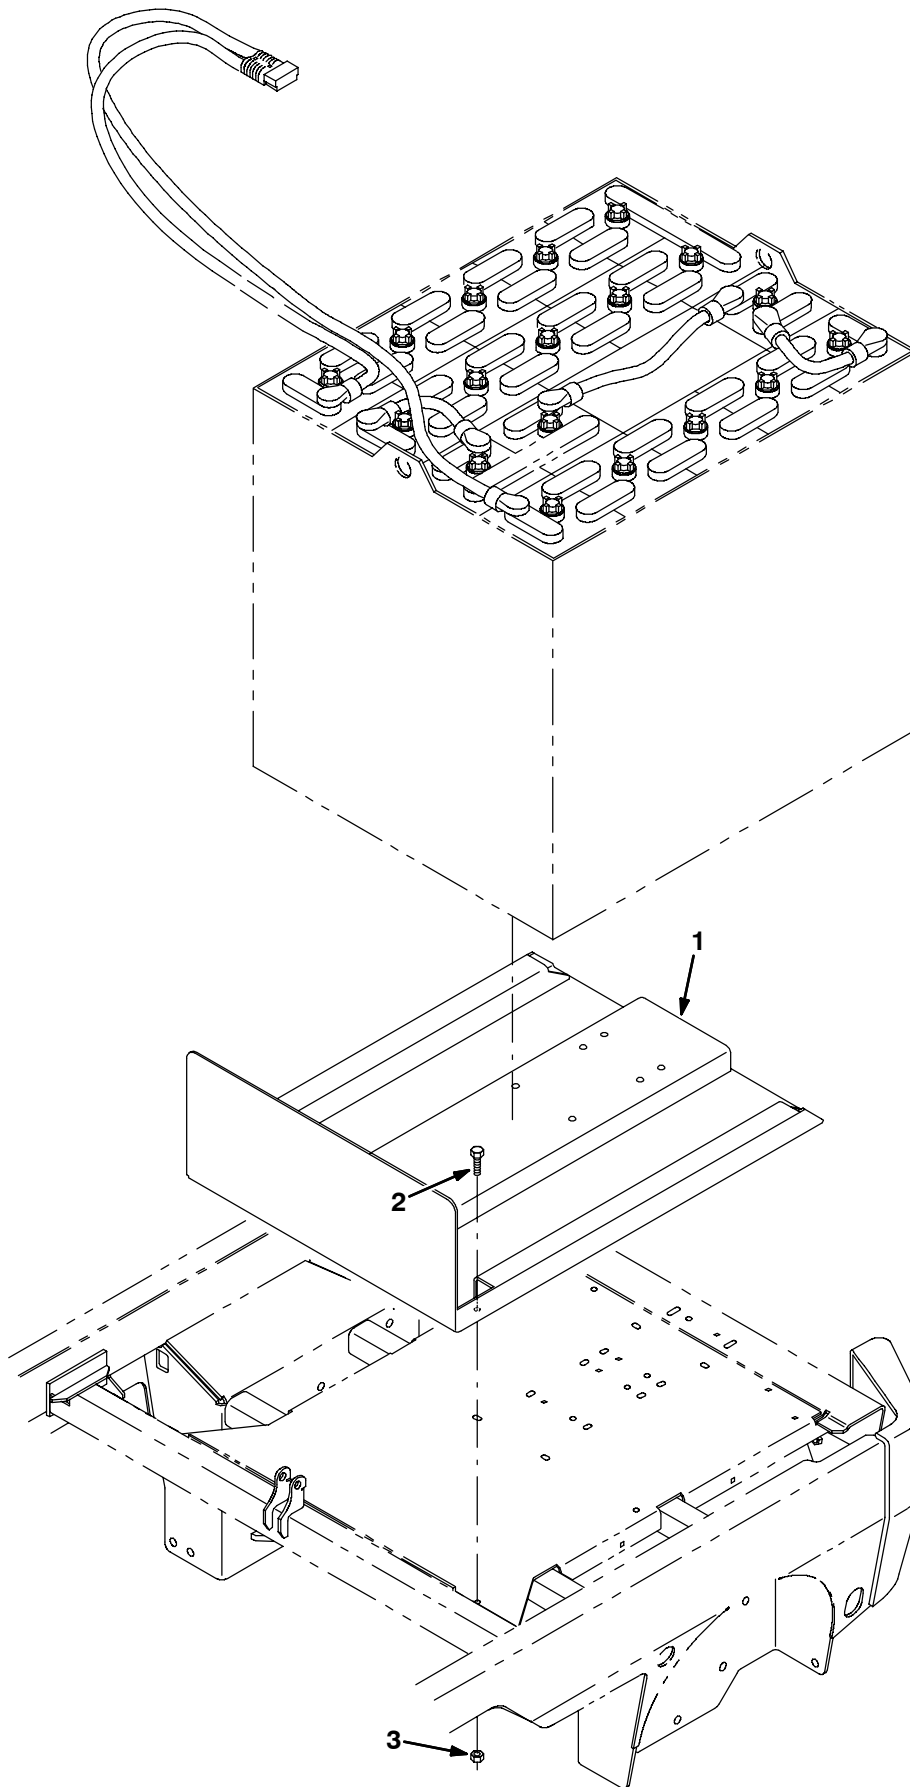


Fig. 53 - Battery Forklift Kit

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387000	(000000-	) Kit, Ci, Fork Lift, Battery	1
▲	1	386632	(000000-	) Cradle Wldt, Battery	1
▲	2	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	4
▲	3	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl, Ss	4

Fig. 54 - Battery Kit, 500AH Wet

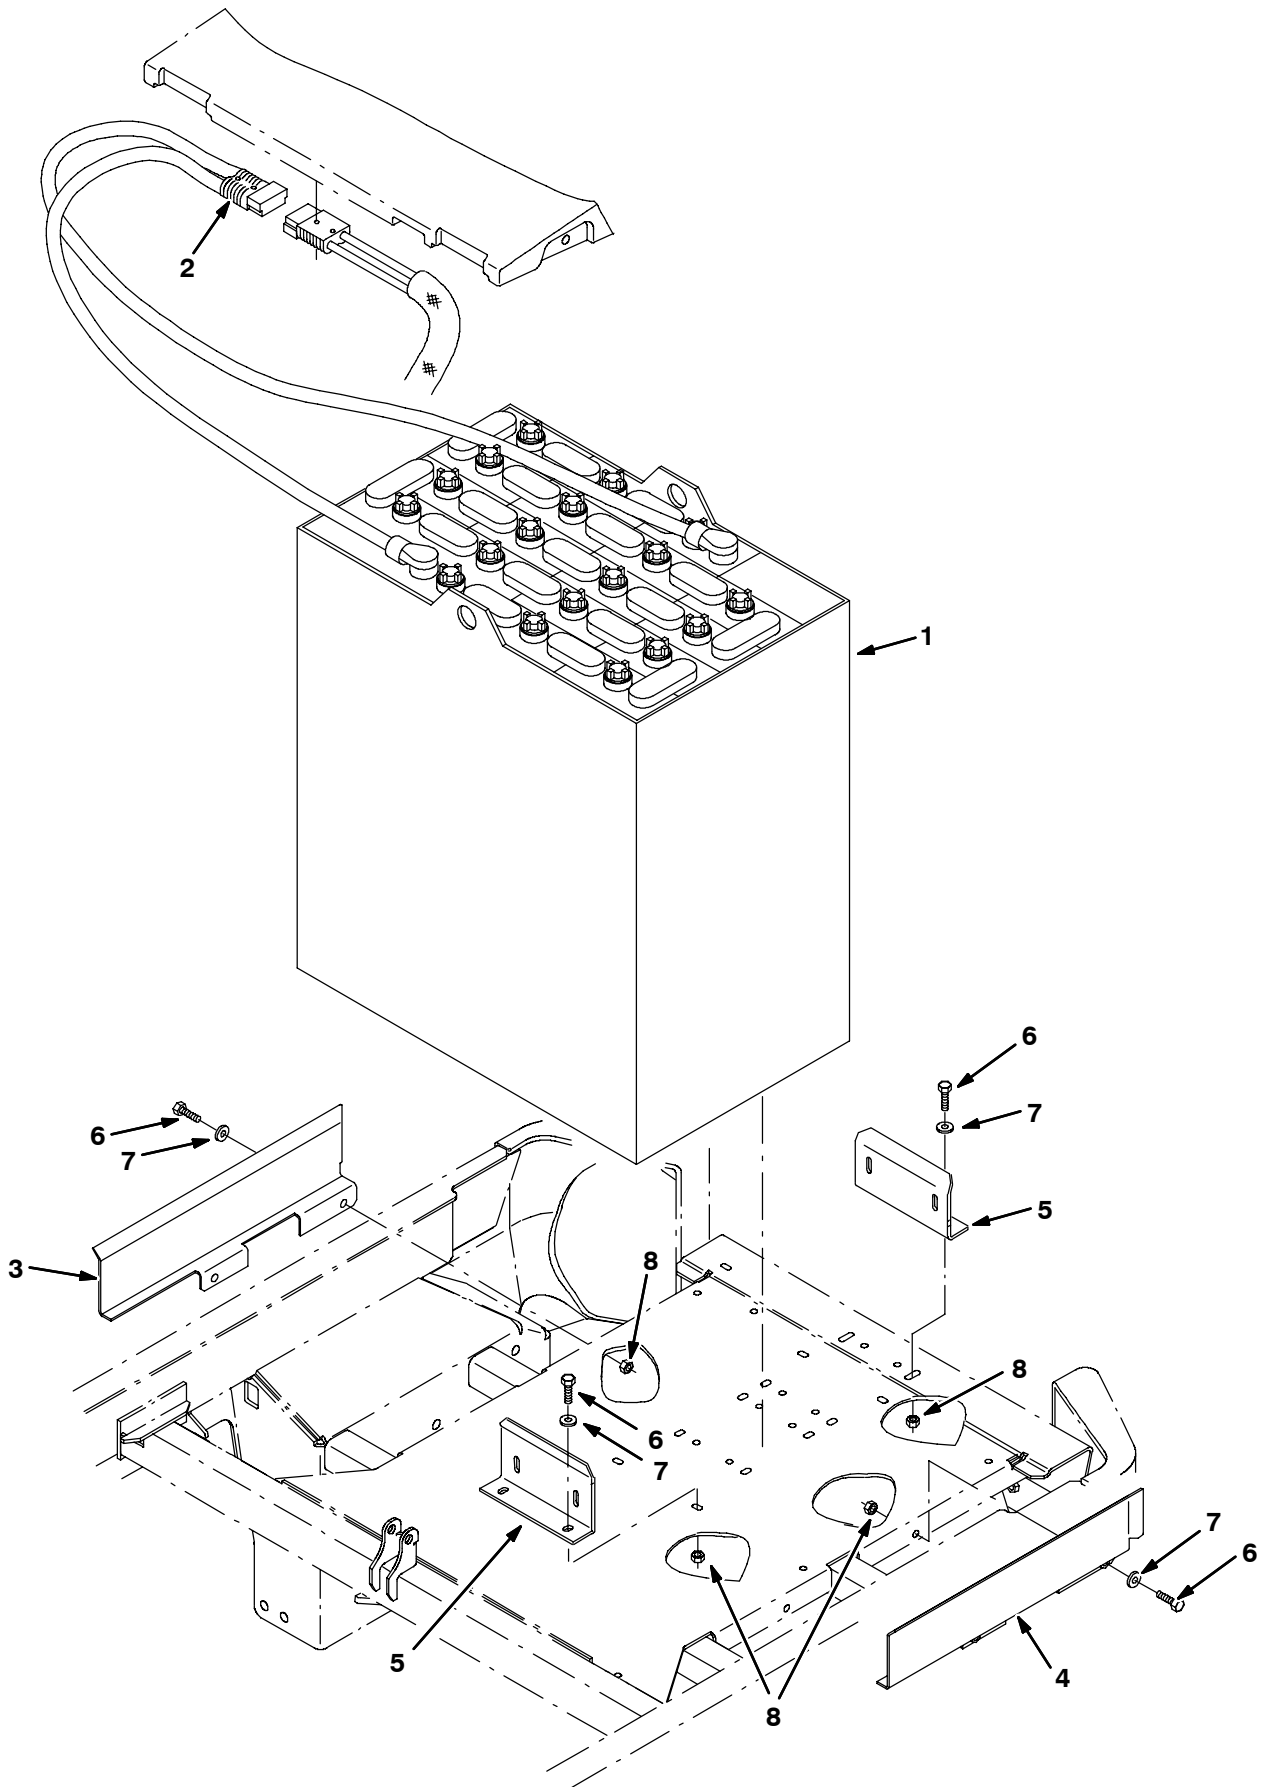


Fig. 54 - Battery Kit, 500AH Wet

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386932	(000000-	) Battery Kit, Wet, 36vdc 0500ah, Ci	1
▲▽	1	386335	(000000-	) Battery, Wet, 36vdc 0500ah	1
▲▲	2	01726	(000000-	) Connector, 350a, Gray [Anderson]	1
▲	3	386675	(000000-	) Spacer, Battery, Rh	1
▲	4	386676	(000000-	) Spacer, Battery, Lh	1
▲	5	386575	(000000-	) Spacer, Battery, Rear	2
▲	6	09740	(000000-	) Screw, Hex, M8 X 1.25 X 20, Ss	8
▲	7	01685	(000000-	) Washer, Flat, 0.38b 0.88d .08, Ss	8
▲	8	08713	(000000-	) Nut, Hex, Lock, M8 X 1.25, NI, Ss	8

Fig. 55 - Battery Kit, 600AH

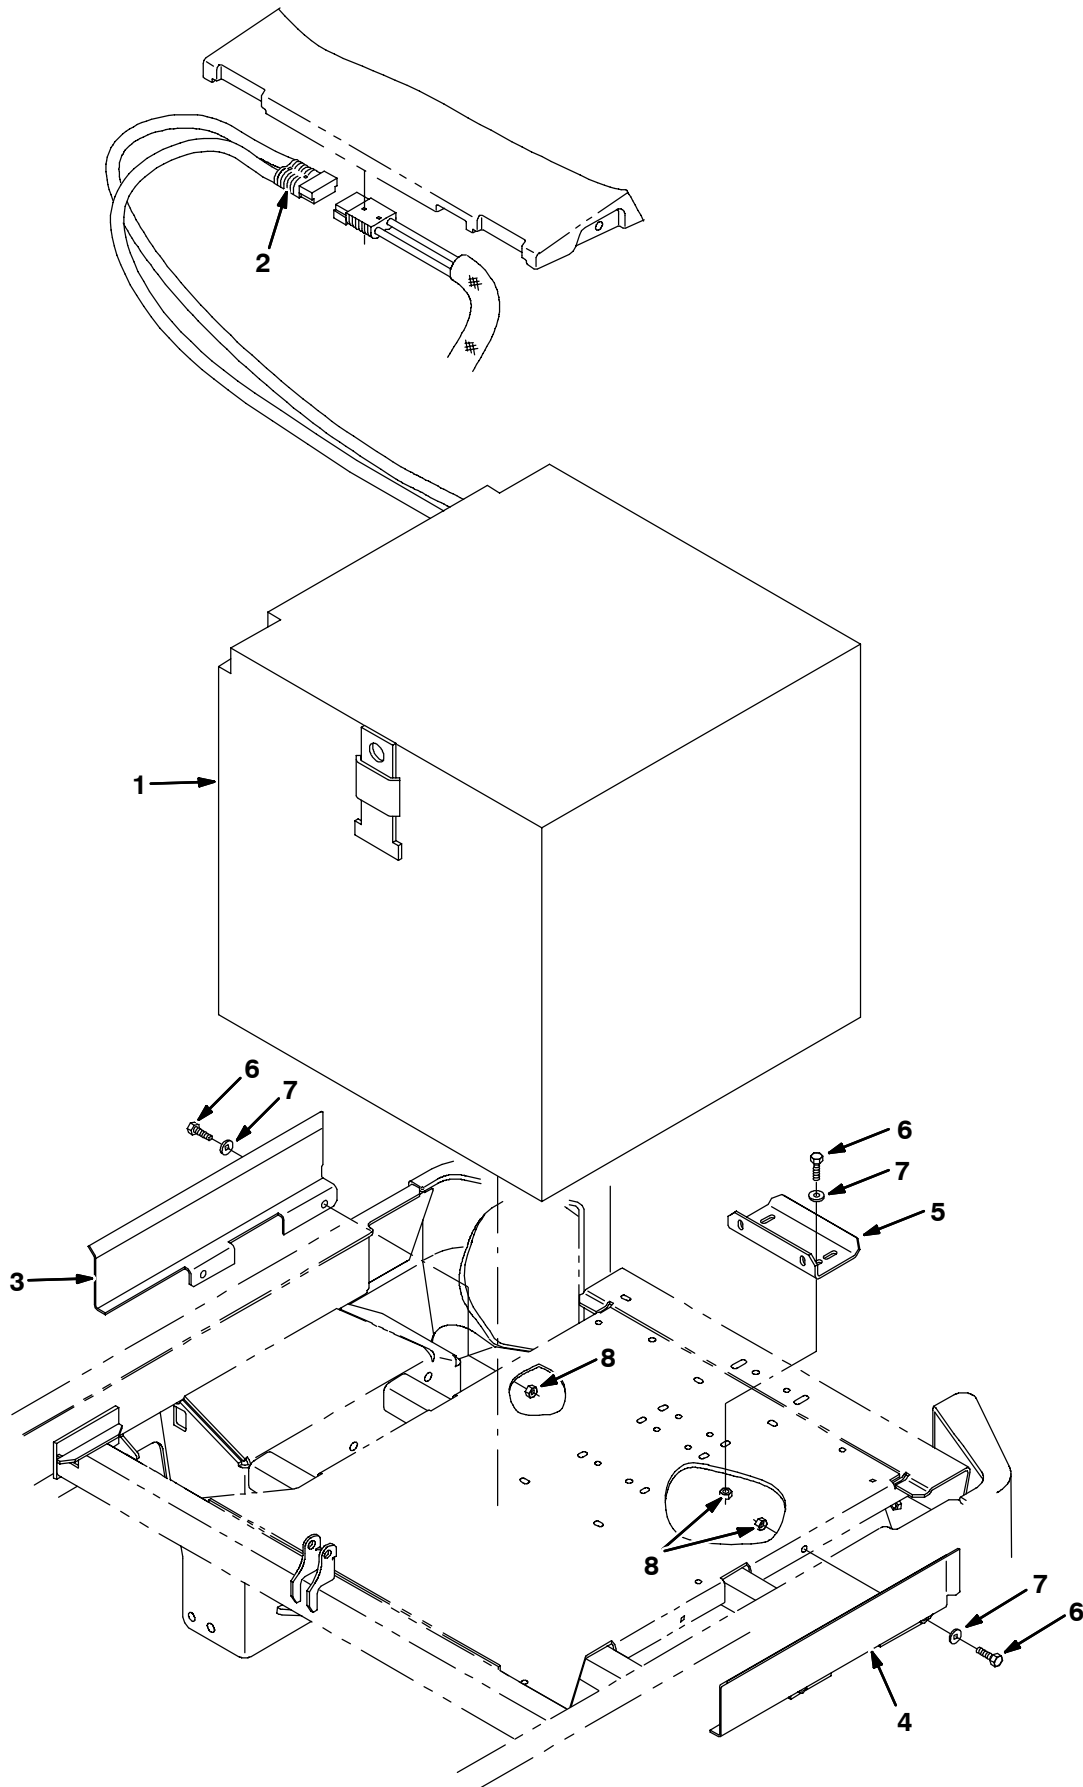


Fig. 55 - Battery Kit, 600AH

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386934	(000000-	) Kit, Ci, Battery, 36vdc, 600ah, Sealed	1
▲▽	1	386334	(000000-	) Battery, 36vdc, 600ah, Sealed	1
▲▲	2	01726	(000000-	) Connector, Anderson, 350A, Gray	1
▲	3	386573	(000000-	) Spacer, Battery, Rh	1
▲	4	386574	(000000-	) Spacer, Battery, Lh	1
▲	5	386575	(000000-	) Spacer, Battery, Rear	1
▲	6	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	6
▲	7	01685	(000000-	) Washer, Flt, .31 Ss	6
▲	8	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl, Ss	6

Fig. 56 - Battery Kit, 750AH Wet

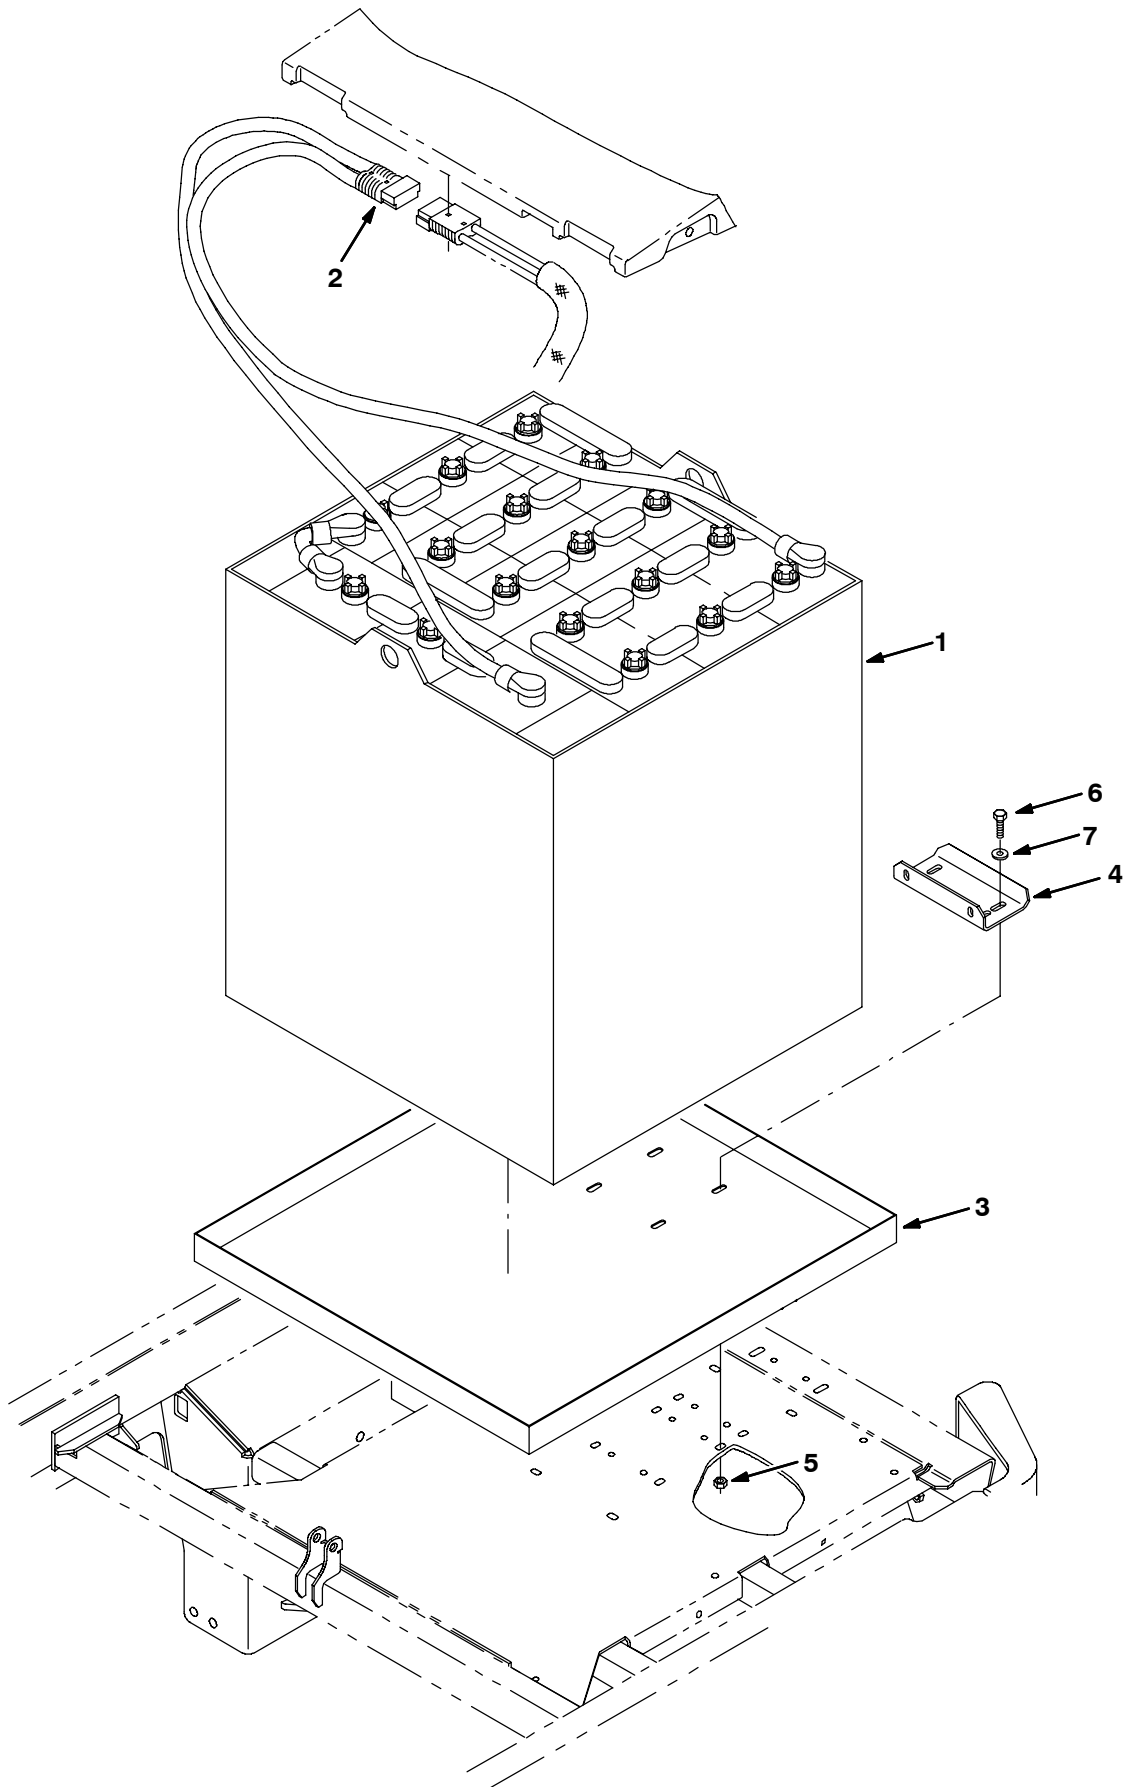


Fig. 56 - Battery Kit, 750AH Wet

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386936	(000000-	) Kit, Ci, Battery, 36vdc, 750ah, Wet	1
▲▽	1	386336	(000000-	) Battery, 36vdc 750ah Wet	1
▲▲	2	01726	(000000-	) Connector, Anderson, 350A, Gray	1
▲	3	387622	(000000-	) Tray Wldt, Battery, 500ah, 750ah	1
▲	4	386575	(000000-	) Spacer, Battery, Rear	1
▲	5	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl, Ss	2
▲	6	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	2
▲	7	01685	(000000-	) Washer, Flt, .31 Ss	2

Fig. 57 - Battery Kit, 1000AH Wet


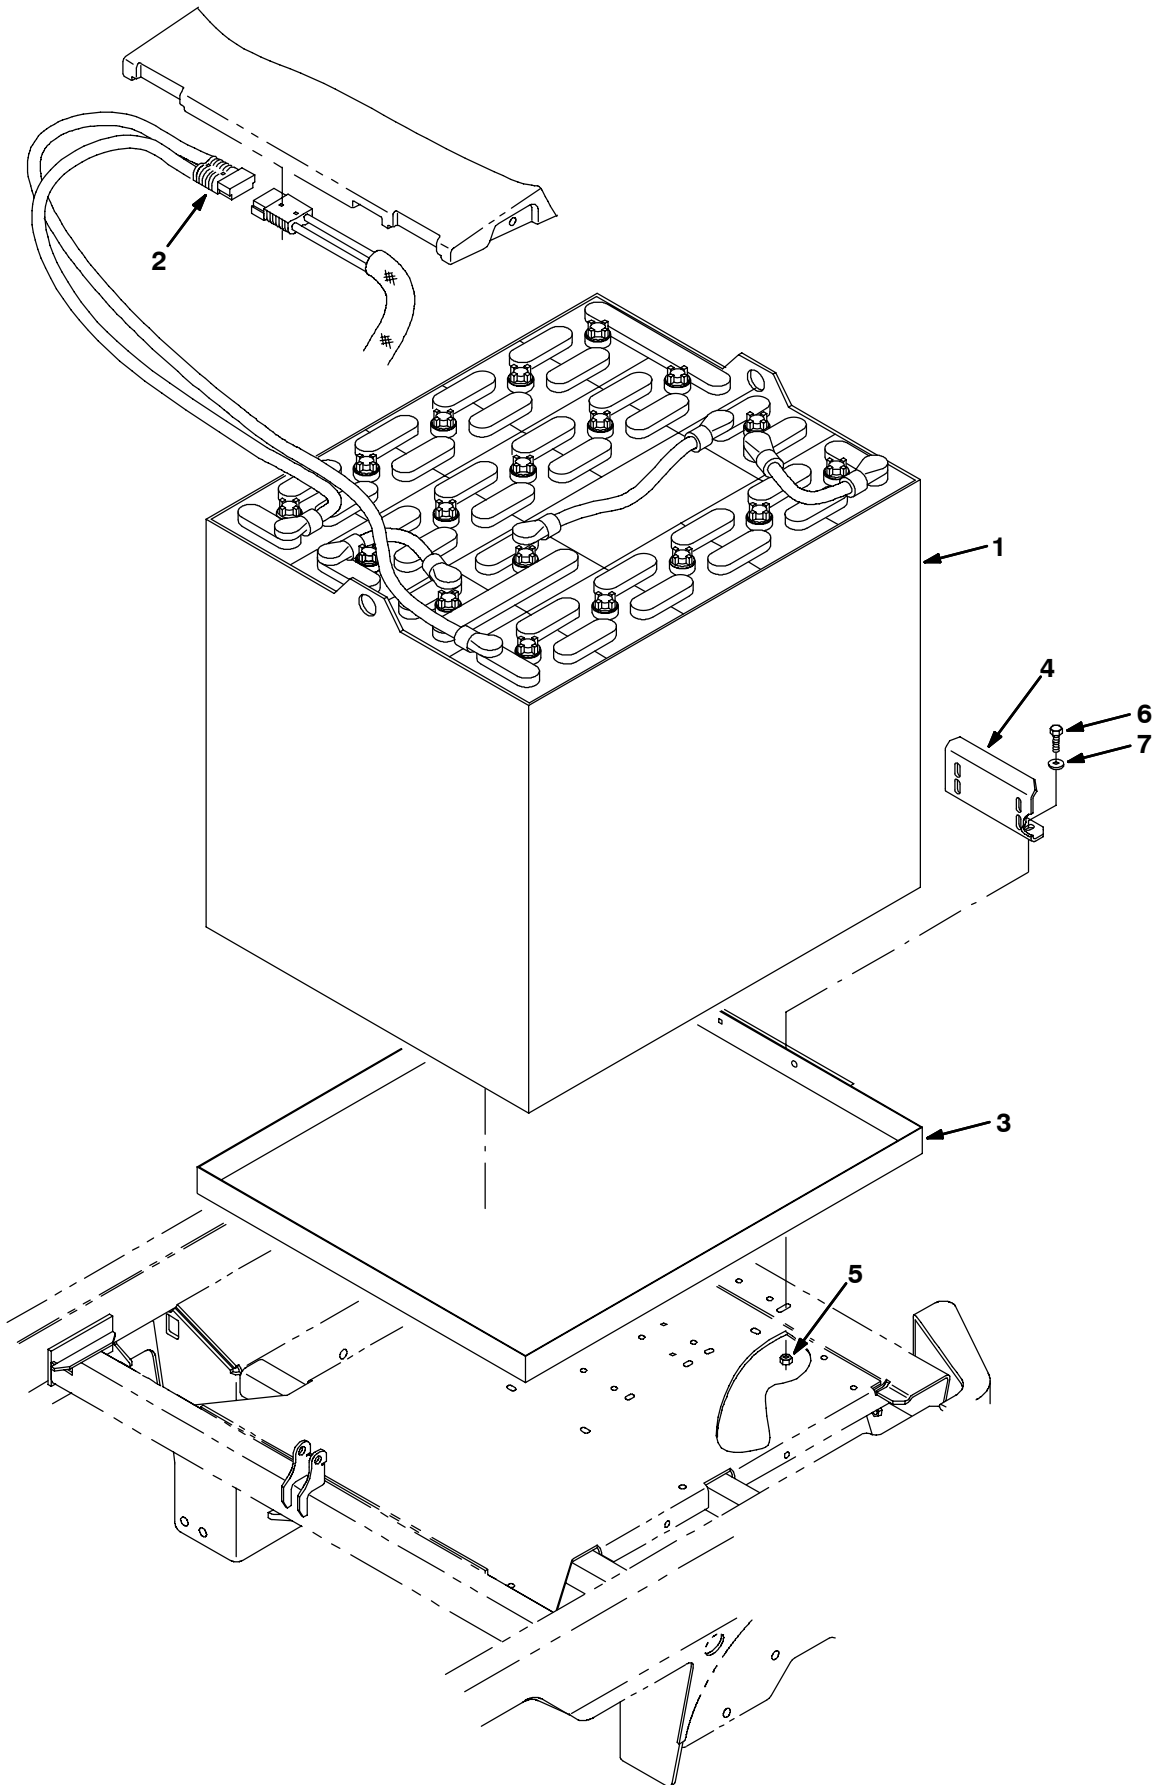


Fig. 57 - Battery Kit, 1000AH Wet

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		386939	(000000-	) Kit, Ci, Battery, 36vdc, 1000Ah, Wet	1
▲▽	1	386337	(000000-	) Battery, 36vdc 1000Ah Wet	1
▲▲	2	01726	(000000-	) Connector, Anderson, 350A, Gray	1
▲	3	387623	(000000-	) Tray Wldt, Battery, 1000ah	1
▲	4	386575	(000000-	) Spacer, Battery, Rear	1
▲	6	09740	(000000-	) Screw, Hex, M08 X 1.25 X 20, Ss	6
▲	7	01685	(000000-	) Washer, Flt, .31 Ss	6
▲	5	08713	(000000-	) Nut, Hex, Lock, M08 X 1.25,Nl, Ss	6


Fig. 58 - Battery Charger Group, 120A, 36V, 60Hz 1Ph (500Ah Batteries)

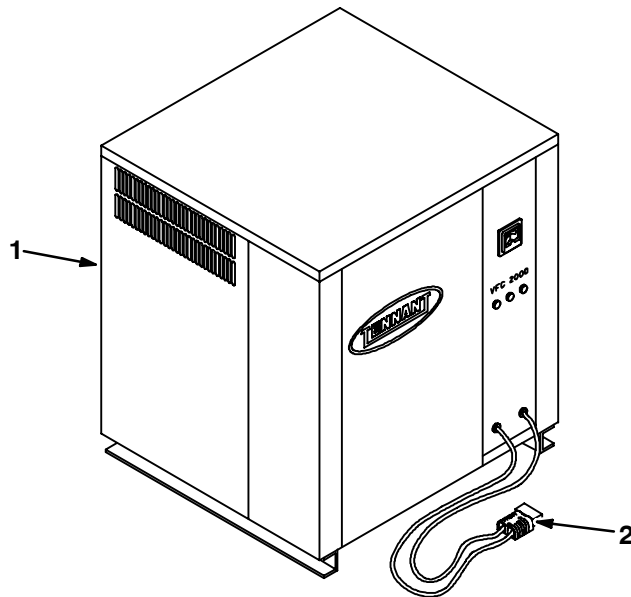

06051 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	398285	(000000-)	Charger, 36V/120A 60H/1Ph 480V	1
▲	2	01726	(000000-)	Connector, Andersn 350A,Gray	1


Fig. 59 - Battery Charger Group, 120A, 36V, 60Hz 3Ph (500Ah Batteries)

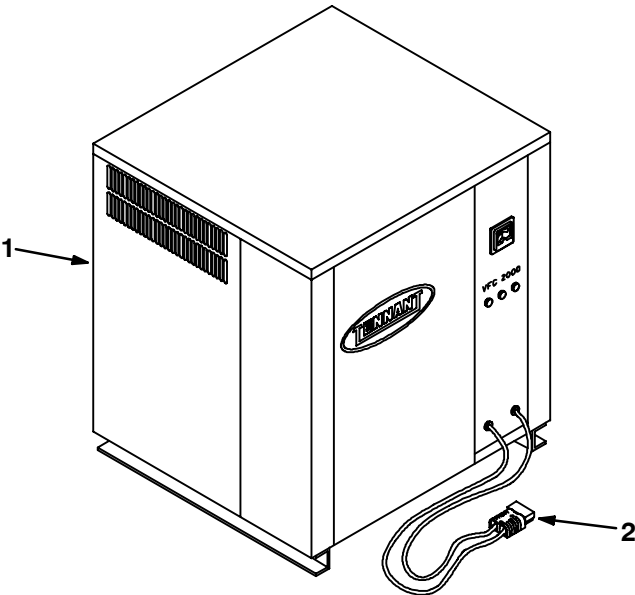

06051 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	398288	(000000-	) Charger, 36V/120A 60H/3Ph 480V	1
▲	2	01726	(000000-	) Connector, Andersn 350A,Gray	1


Fig. 60 - Battery Charger Group, 150A, 36V, 60Hz (750Ah Batteries)

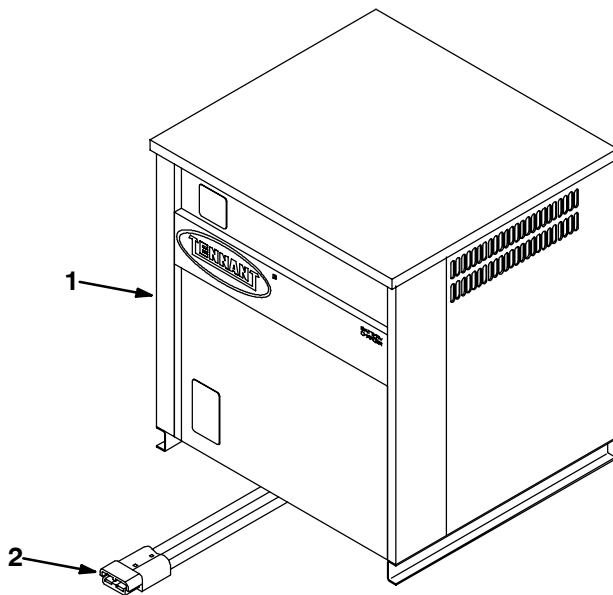

353369 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	398292	(000000-)	Charger, 36V/150A 60Hz	1
▲	2	01726	(000000-)	Connector, Anderson, 350A, Gray	1


Fig. 61 - Battery Charger Group, 93A, 36V, 60Hz 1Ph (600Ah Batteries)

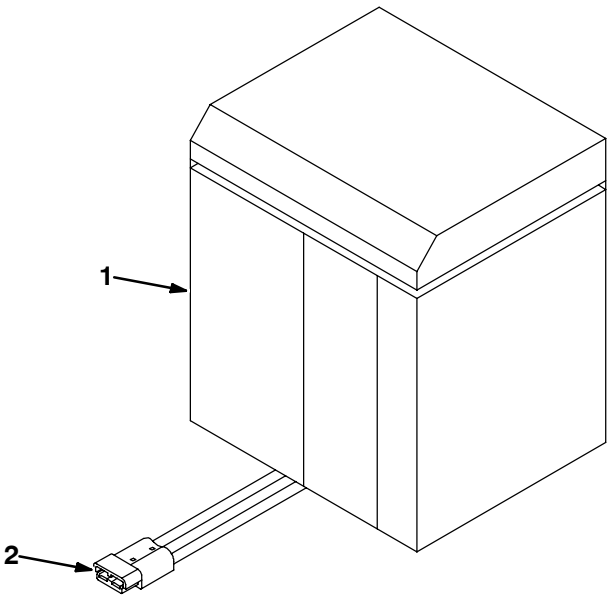

353369 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	386338	(000000-)	Charger, 36V/93A 60Hz, 1Ph, Sealed	1
▲	2	01726	(000000-)	Connector, Anderson, 350A, Gray	1


Fig. 62 - Battery Charger Group, 93A, 36V, 60Hz 3Ph (600Ah Batteries)

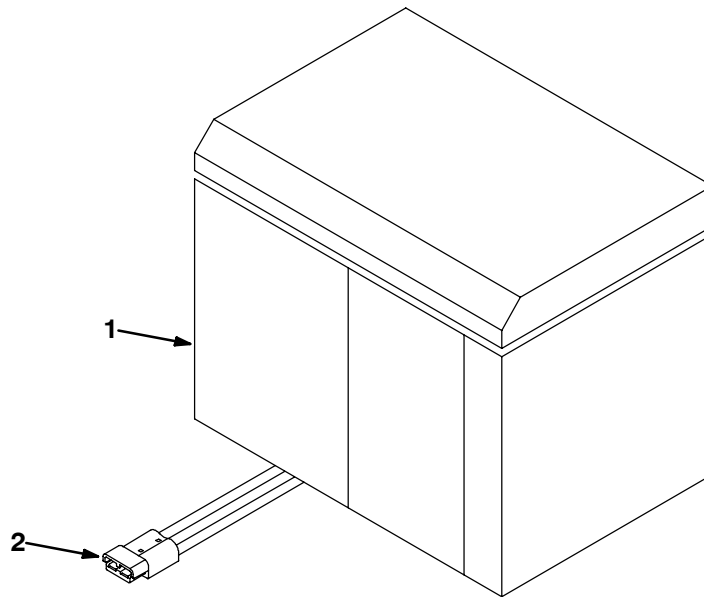

353369 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	386344	(000000-)	Charger, 36V/93A 60Hz, 3Ph, Sealed	1
▲	2	01726	(000000-)	Connector, Anderson, 350A, Gray	1


Fig. 63 - Battery Charger Group, 210A, 36V, 60Hz, 3Ph (1000 Ah Batteries)

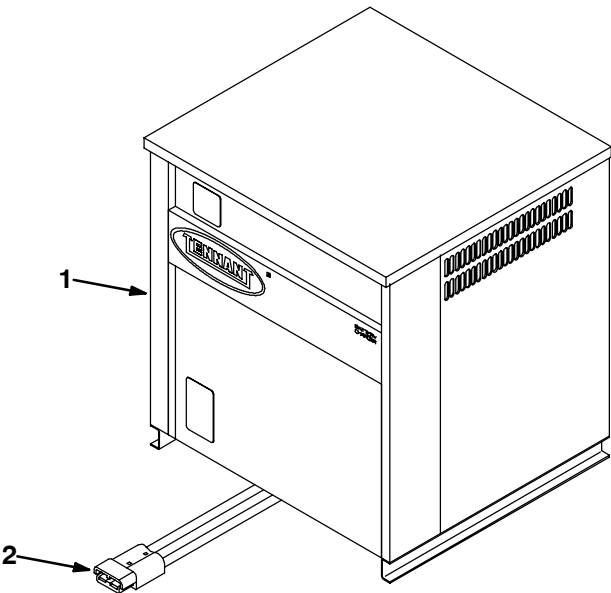

353369 - 8300, NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	398291	(000000-)	Charger, 36V, 210A, 60Hz, 3Ph	1
▲	2	01726	(000000-)	Connector, Anderson, 350A, Gray	1


Fig. 64 - Tire, Non-Mark, Non-Skid, Front Drive

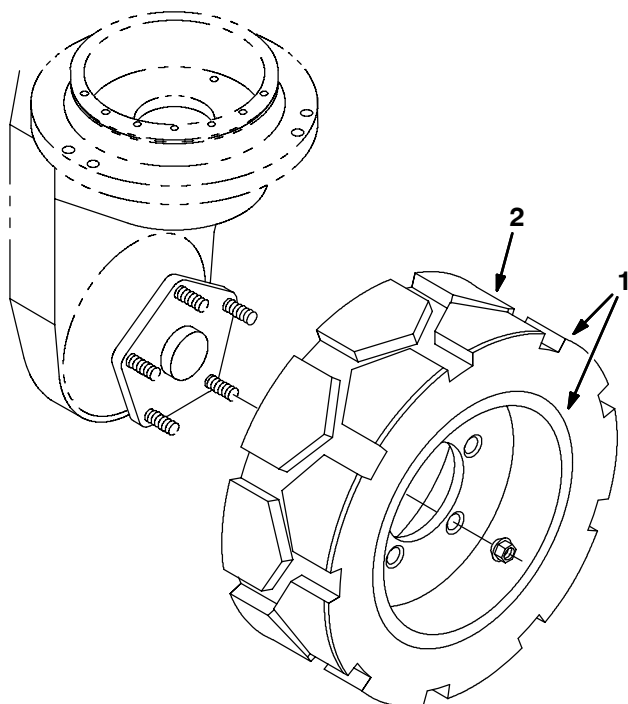

353308-1 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	48591	(000000-)	Tire Assy, Solid, 16.3x6.0 5.7bc/5bolt	1
▲	2	48589	(000000-)	Tire, Non-Skid 16.25x6x11.25	1


Fig. 65 - Non-Mark, Non-Skid Tire, Rear

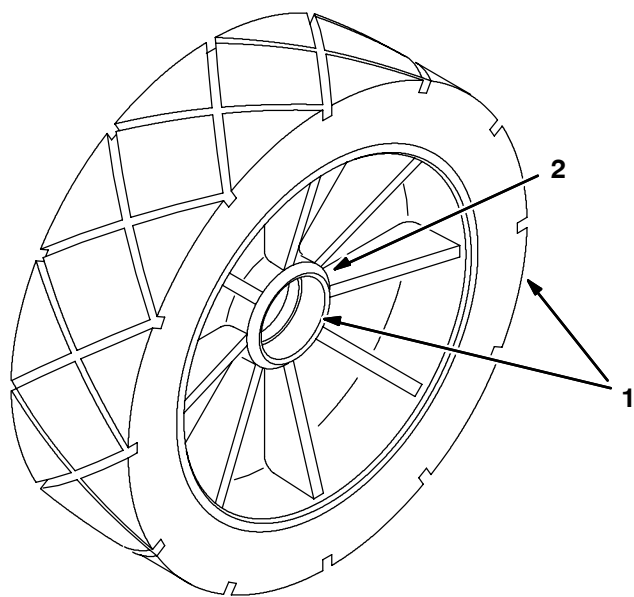

353369 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	1	387015	(000000-)	Tire Assy, 16 X 5 X 12.12 Non-Skid	2
▲	2	51338	(000000-)	Bearing, Cup, 2.56D 0.55W	1

Fig. 66 - Fire Extinguisher Kit

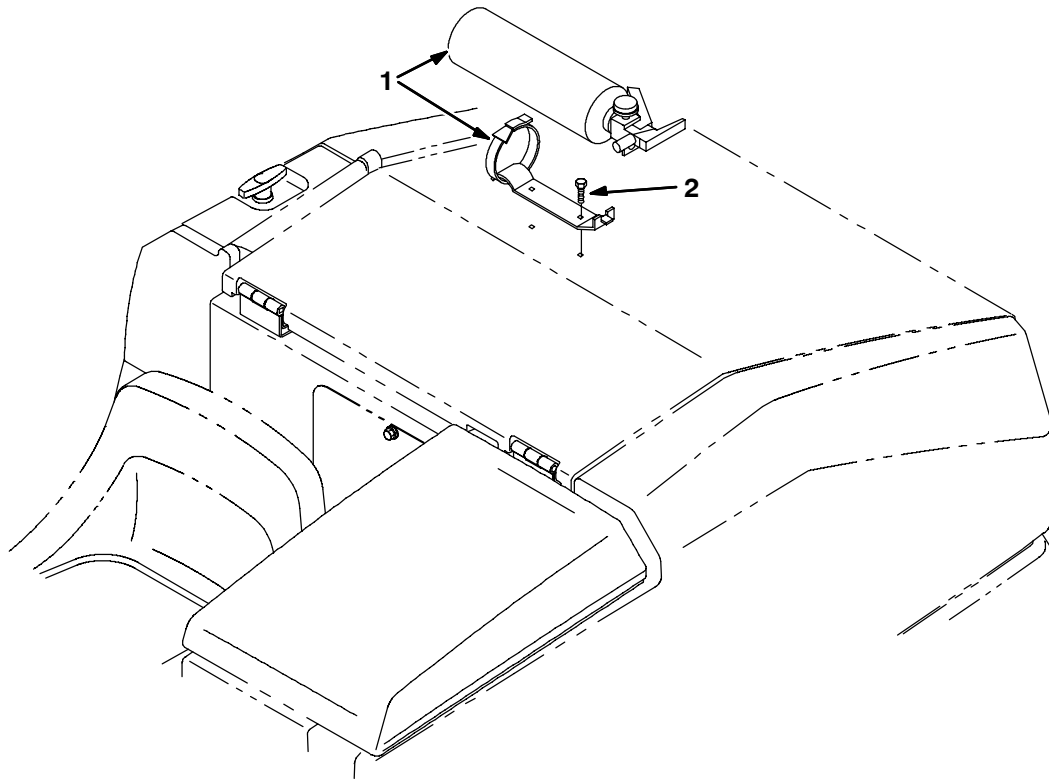

353282 - NA

	Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽		387457	(000000-)	Kit, CI, Extinguisher, Fire, [7300/8300]	1
▲▽	1	25312	(000000-)	Extinguisher, Fire	1
▲▲	2	360973	(000000-)	Screw, Pan, #12-16 x 0.50, F/Plstc	2

Fig. 67 - Documentation Group

07501 - 8300, NA

Ref.	Tenant Part No.	Machine Serial Number	Description	Qty.
	330630	(000000-	) Manual Pkg, (8300 Ele Na)	1
	330631	(000000-	) Manual, Fiche, (8300 Ele)	1
	330635	(000000-	) Manual, Service, (8300 Ele Na)	1
	330632	(000000-	) Manual, Oprtr, (8300 Ele Es Na)	1
	330633	(000000-	) Manual, Oprtr, (8300 Ele Fr Na)	1
	330710	(000000-	) Manual, Cd-Rom, Oprtr & Parts, All (Na)	1
	330715	(000000-	) Manual, Cd-Rom, Service, All	1
	387496	(000000-	) Video, Operator, Vhs, Ntsc [8300]	1
	1041885	(000000-	) Video, Oprtr, Training, Dvd [8300]	1

SECTION 4

Contents	Page
Fig. 1 - Electric Motor Breakdown, 17363 .	4-2
Fig. 2 - Electric Motor Breakdown, 398520	4-4
Fig. 3 - Electric Motor Breakdown, 222409	4-6
Fig. 4 - Electric Motor Breakdown, 374201	4-7
Fig. 5 - Electric Motor Breakdown, 383709	4-8
Fig. 6 - Electric Motor Breakdown, 386050	4-9
Fig. 7 - Electric Motor Breakdown, 386679	4-10
Fig. 8 - Electric Motor Breakdown, 386811	4-11
Fig. 9 - Electric Motor Breakdown, 386687	4-12
Fig. 10 - Water Pump Breakdown, 387321	4-13
Fig. 11 - Metering Solution Pump Breakdown, 386364	4-14
Fig. 12 - Hydraulic Powerunit Breakdown, 368704	4-15
Fig. 13 - Hydraulic Motor Breakdown, 386703	4-16
Fig. 14 - Hydraulic Solenoid Valve Breakdown, 386705	4-17
Fig. 15 - Steering Control Valve Breakdown, 373495	4-18
Fig. 16 - Electric Motor Breakdown, 387585	4-19

Fig. 1 - Electric Motor Breakdown, 17363

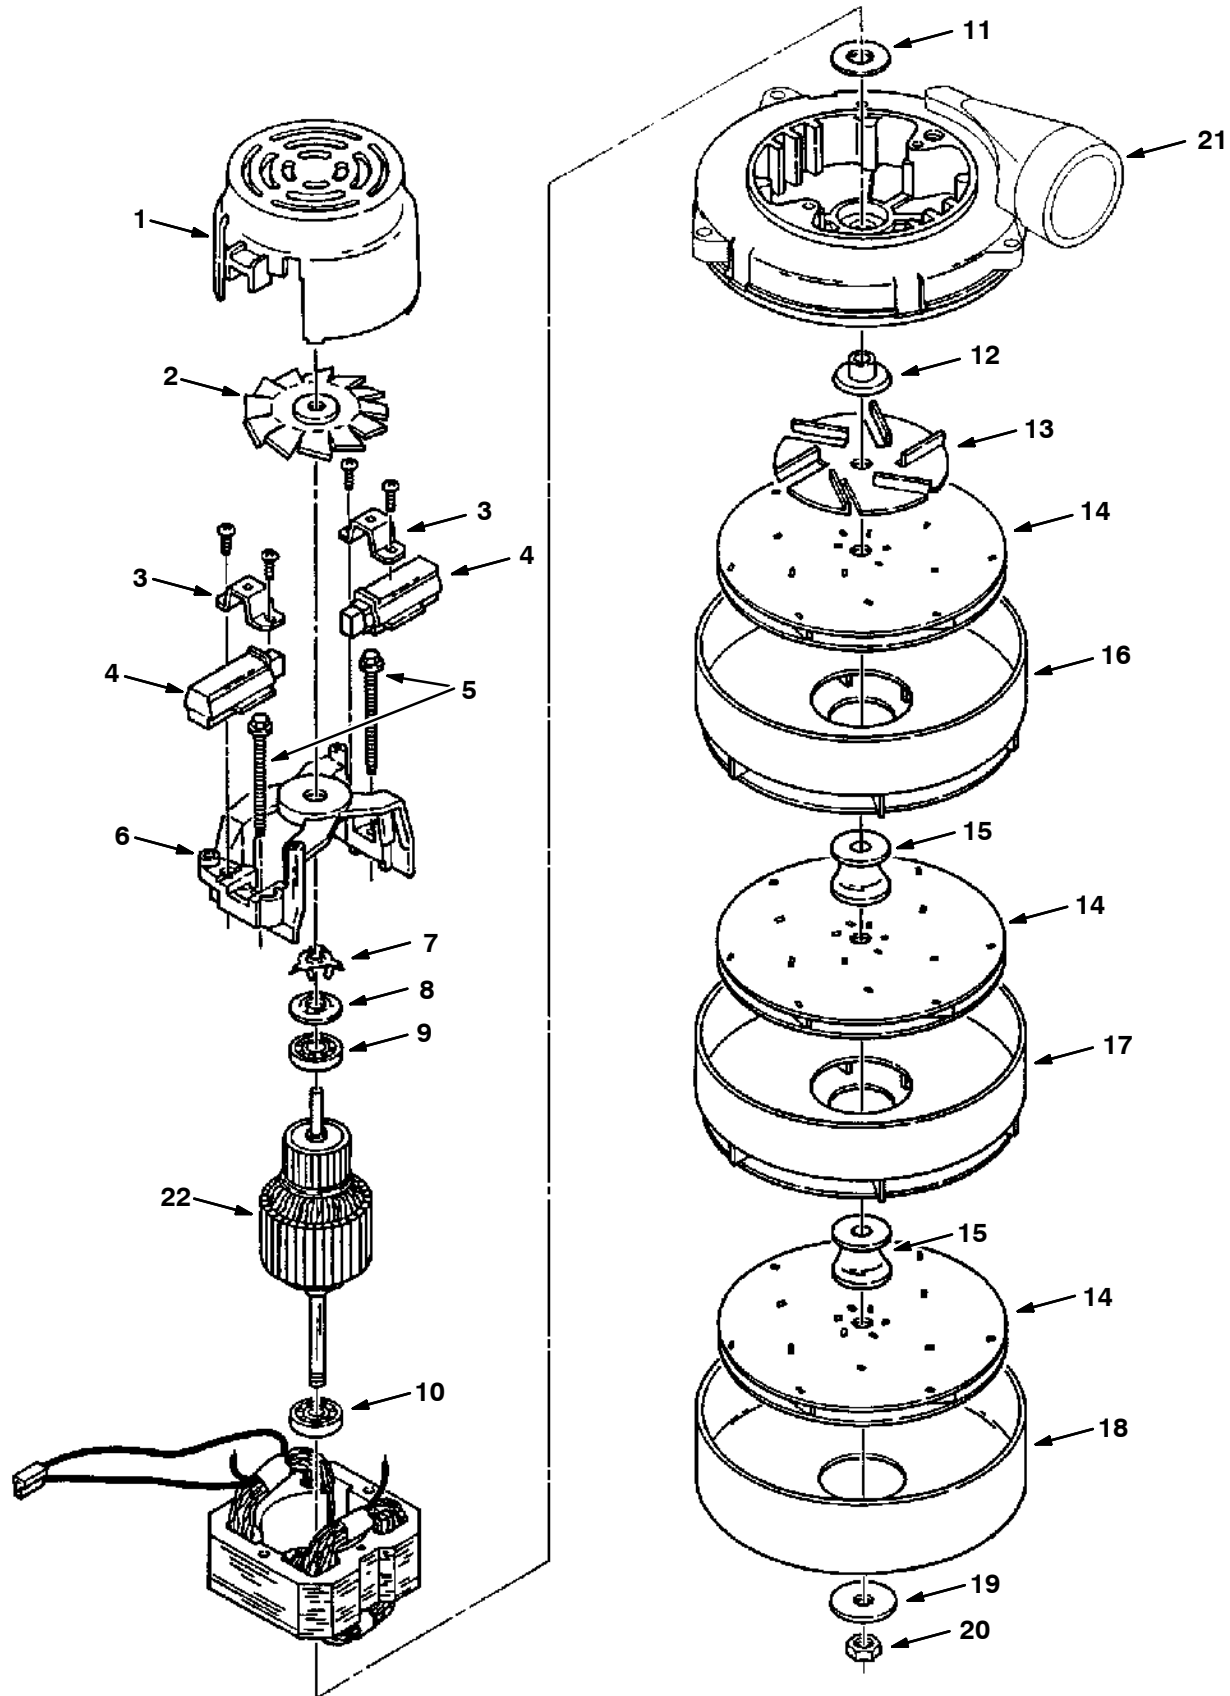


Fig. 1 - Electric Motor Breakdown, 17363

	Ref.	Tenant Part No.	Machine Serial Number	Description	Qty.
▽		17363	(000000-	) Fan vacuum, 36v	1
▲	1	37926	(000000-	) Housing	1
▲	2	61298	(000000-	) Fan	1
▲	3	01982	(000000-	) Clamp	2
▲	4	11756	(000000-	) Brush mechanism	2
▲	5	01969	(000000-	) Screw	2
▲	6	01983	(000000-	) Comm. bracket	1
▲	7	01856	(000000-	) Spring, load	1
▲	8	37909	(000000-	) Disc	1
▲	9	01842	(000000-	) Bearing	1
▲	10	01837	(000000-	) Bearing	1
▲	11	37912	(000000-	) Washer, fl neo, 10.8x22x1.5	1
▲	12	18627	(000000-	) Spacer	1
▲	13	01971	(000000-	) Fan	1
▲	14	18628	(000000-	) Fan, rotating	3
▲	15	18630	(000000-	) Spacer	2
▲	16	61300	(000000-	) Fan, stationary	1
▲	17	61297	(000000-	) Fan, stationary	1
▲	18	61301	(000000-	) Shell	1
▲	19	378983	(000000-	) Washer	1
▲	20	37929	(000000-	) Nut	1
▲		10925	(000000-	) Connector, 2 conductor	1
▲		10926	(000000-	) Terminal, female	2
▲	21	60386	(000000-	) Bracket, far End	1
▲	22	21765	(000000-	) Armature	1

Fig. 2 - Electric Motor Breakdown, 398520


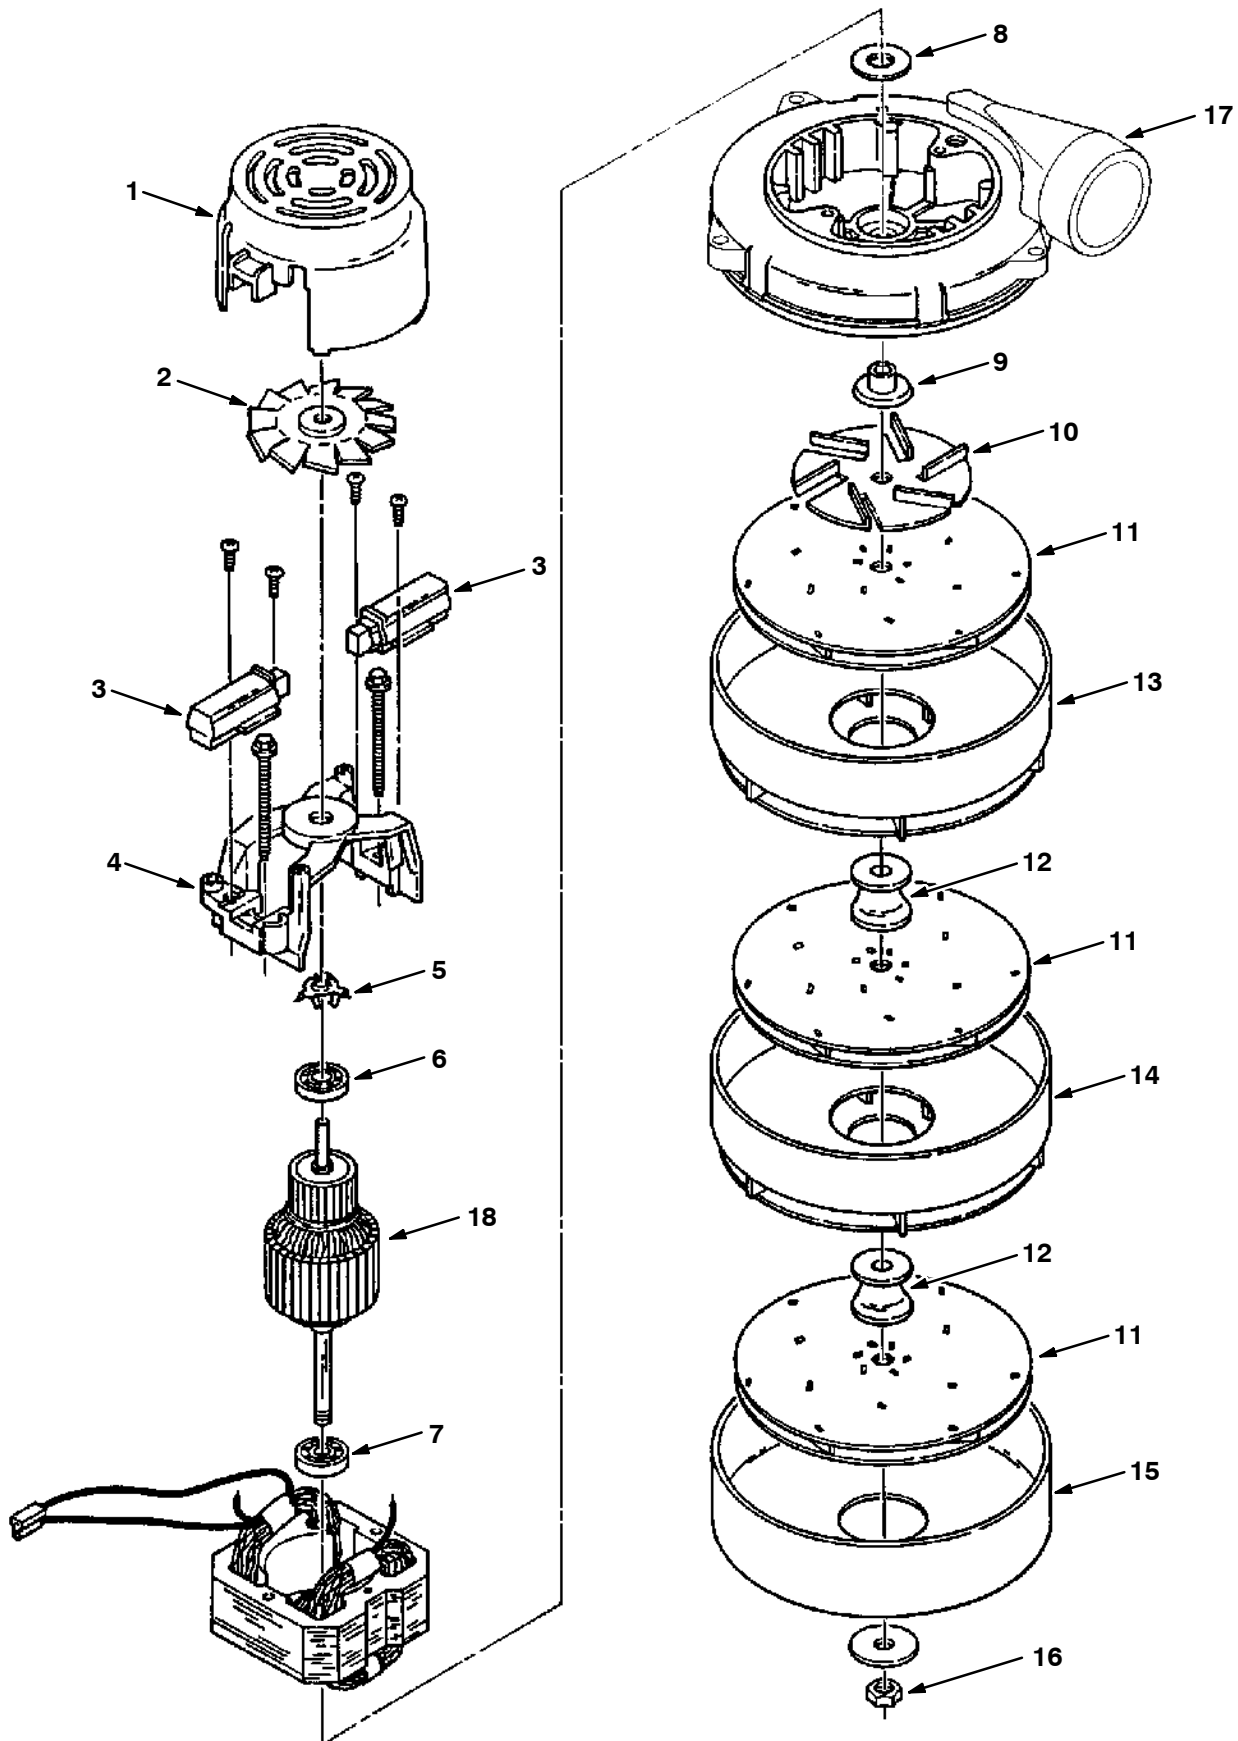


Fig. 2 - Electric Motor Breakdown, 398520

	Ref.	Tennant Part No.	Manufacturer Serial Number	Description	Qty.
▽		398520	(000000-	) Fan, Vacuum	1
▲	1	398511	(000000-	) Housing	1
▲	2	398512	(000000-	) Fan	1
▲	3	398513	(000000-	) Brush Mechanism	2
▲	4	398514	(000000-	) Comm. Bracket	1
▲	5	01856	(000000-	) Spring	1
▲	6	398515	(000000-	) Bearing	1
▲	7	01837	(000000-	) Bearing	1
▲	8	37912	(000000-	) Washer, Neo.	1
▲	9	398516	(000000-	) Spacer	1
▲	10	01971	(000000-	) Fan	1
▲	11	18628	(000000-	) Vacuum Fan	3
▲	12	398517	(000000-	) Spacer	2
▲	13	61300	(000000-	) Stationary Fan	1
▲	14	61297	(000000-	) Stationary Fan	1
▲	15	398518	(000000-	) Shell	1
▲	16	37929	(000000-	) Nut	1
▲	17	60386	(000000-	) Bracket, Fan End	1
▲	18	398519	(000000-	) Armature	1
▲		223264	(000000-	) Seal, Fan	1
▲		10925	(000000-	) Connector, 2 Conductor	1
▲		10926	(000000-	) Terminal, Female	2


Fig. 3 - Electric Motor Breakdown, 222409

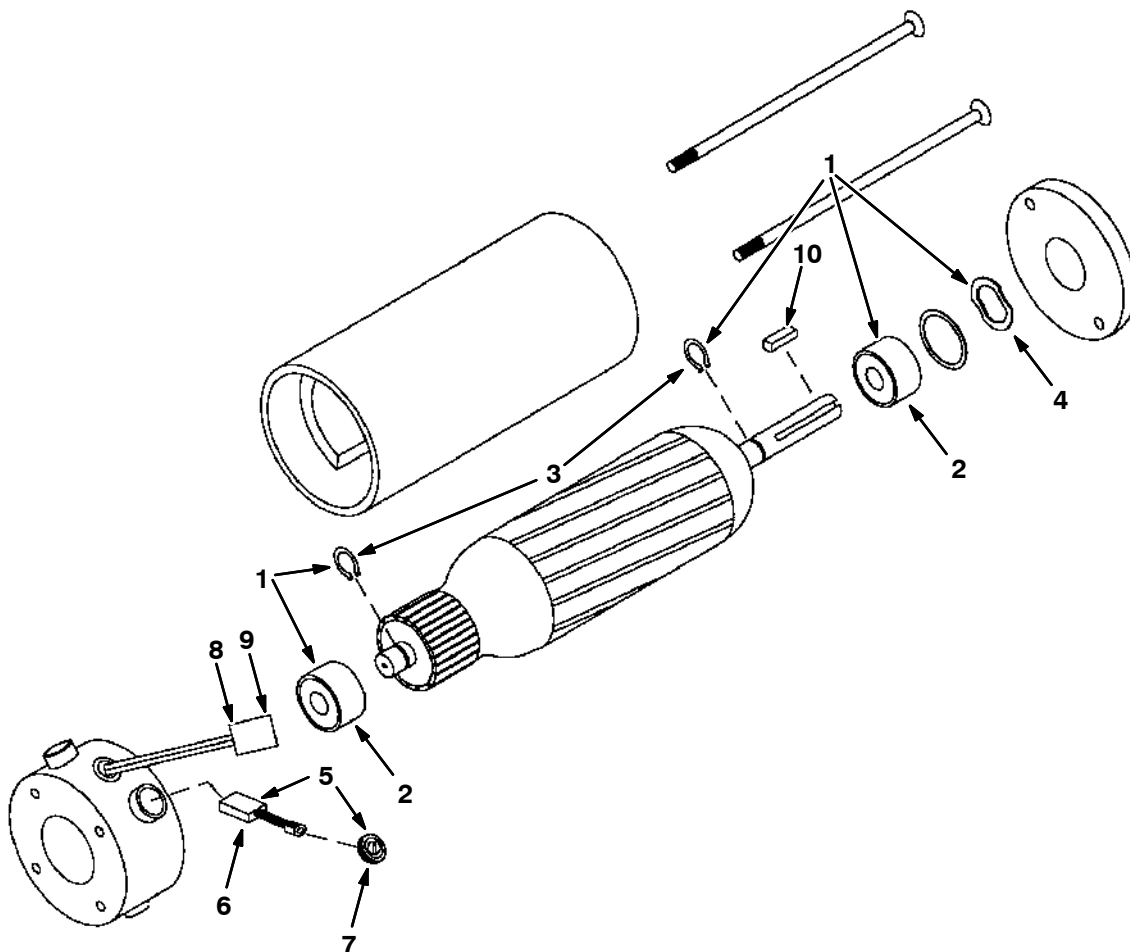

10426

Ref.	Tennant Part No.	Manufacturer Serial Number	Description	Qty.
▽	222409	(000000-)	Motor Assy,EE Vac Fan	1
▲▽	1 222623	(000000-)	Bearing Kit	1
▲▲	2 222635	(000000-)	Bearing	2
▲▲	3 222637	(000000-)	Snap Ring	2
▲▲	4 222638	(000000-)	Wavy Washer	1
▲▽	5 222625	(000000-)	Brush Kit	1
▲▲	6 222627	(000000-)	Brush&Spring Assy	4
▲▲	7 222629	(000000-)	Brush Holder Cap	4
▲	8 10925	(000000-)	Connector, 2 Conductor	1
▲	9 24537	(000000-)	Terminal, Female	2
▲	10 00912	(000000-)	Key, Square	1


Fig. 4 - Electric Motor Breakdown, 374201

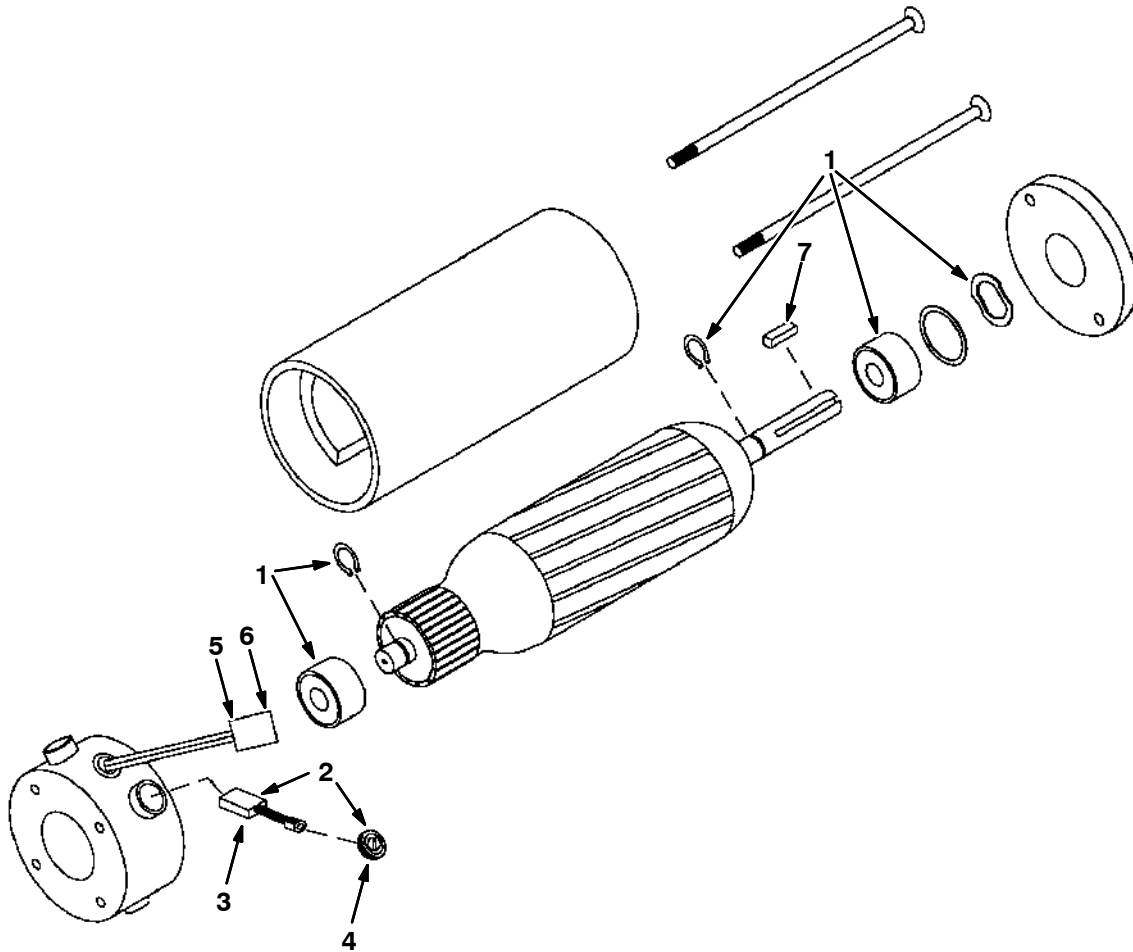

10426

	Ref.	Tennant Part No.	Manufacturer Serial Number	Description	Qty.
▽		374201	(000000-	) Motor Assy,EE Vac Fan	1
▲	1	375176	(000000-	) Bearing Kit	1
▲▽	2	222625	(000000-	) Brush Kit	1
▲▲	3	222627	(000000-	) Brush&Spring Assy	4
▲▲	4	222629	(000000-	) Brush Holder Cap	4
▲	5	10925	(000000-	) Connector, 2 Conductor	1
▲	6	24537	(000000-	) Terminal, Female	2
▲	7	00912	(000000-	) Key, Square	1


Fig. 5 - Electric Motor Breakdown, 383709

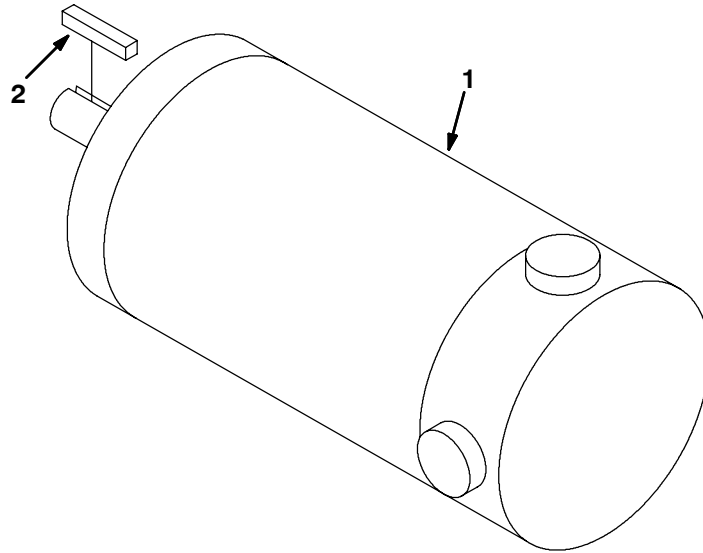

383107


	Ref.	Tennant Part No.	Manufacturer Serial Number	Description	Qty.
▽	1	383709	(000000-	) Motor Assy	1
▲▽		384207	(000000-	) Bearing Kit	1
▲▲		384256	(000000-	) Bearing	2
▲▲		222637	(000000-	) Snap Ring	2
▲▽		384208	(000000-	) Brush Kit	1
▲▲		384257	(000000-	) Brush	2
▲▲		384258	(000000-	) Screw, 6-32	2
▲▲		384259	(000000-	) Spring, Retaining, Brush	2
▲	2	00912	(000000-	) Key, Square	1

Fig. 6 - Electric Motor Breakdown, 386050

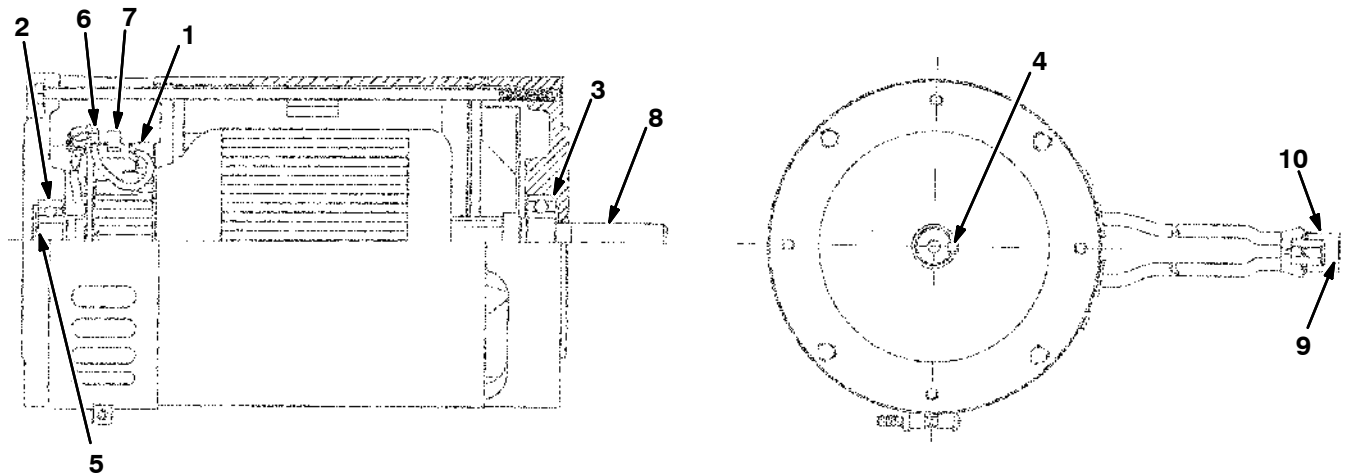


Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386050	(000000-	) Motor, Ele, 36 Vdc 1500 Rpm 1.5 Hp	
▲ 1	41367	(000000-	) Brush	4
▲ 2	41368	(000000-	) Bearing	1
▲ 3	41371	(000000-	) Bearing	1
▲ 4	00918	(000000-	) Key, Sq, 0.19 X 0.19, 01.25L	1
▲ 5	387250	(000000-	) Spring, Bearing	1
▲ 6	21800	(000000-	) Ring, Brush	1
▲ 7	60189	(000000-	) Spring	4
▲ 8	387251	(000000-	) Armature Assy, Complt	1
▲ 9	24537	(000000-	) Terminal, [Metripk630], Fem 10	2
▲ 10	10925	(000000-	) Connector, 2-Conductor	1

Fig. 7 - Electric Motor Breakdown, 386679

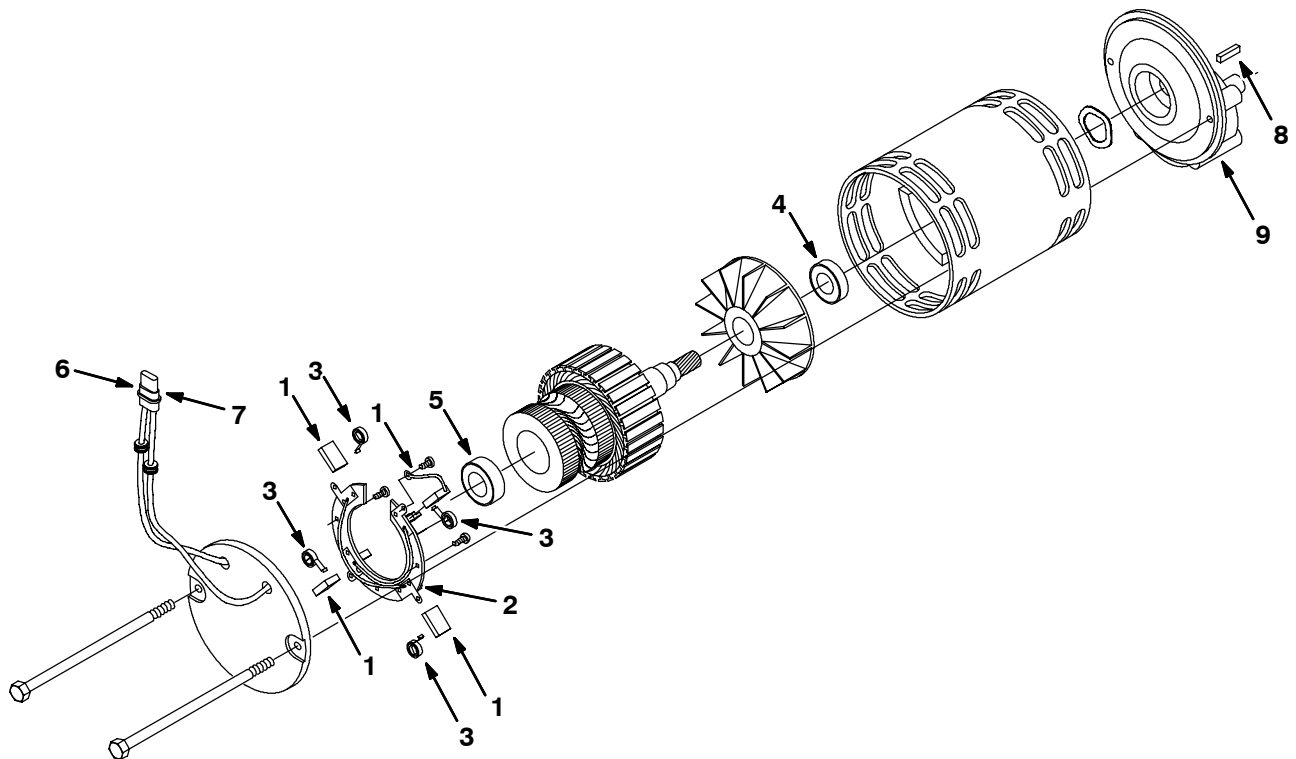


Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386679	(000000-	) Motor, Gear, Ele, 1.5Hp, 36Vdc, 300Rpm	
▲	1 387371	(000000-	) Brush Kit	1
▲▽	2 387373	(000000-	) Brush Holder Assy	1
▲▲	3 387374	(000000-	) Spring, Brush	4
▲	4 41371	(000000-	) Bearing	1
▲	5 41368	(000000-	) Bearing	1
▲	6 10925	(000000-	) Connector Body	1
▲	7 24537	(000000-	) Terminal	2
▲	8 00928	(000000-	) Key Square 0.25 X 0.25, 01.00L	1
▲	9 387372	(000000-	) Gearbox, Motor	1

Fig. 8 - Electric Motor Breakdown, 386811

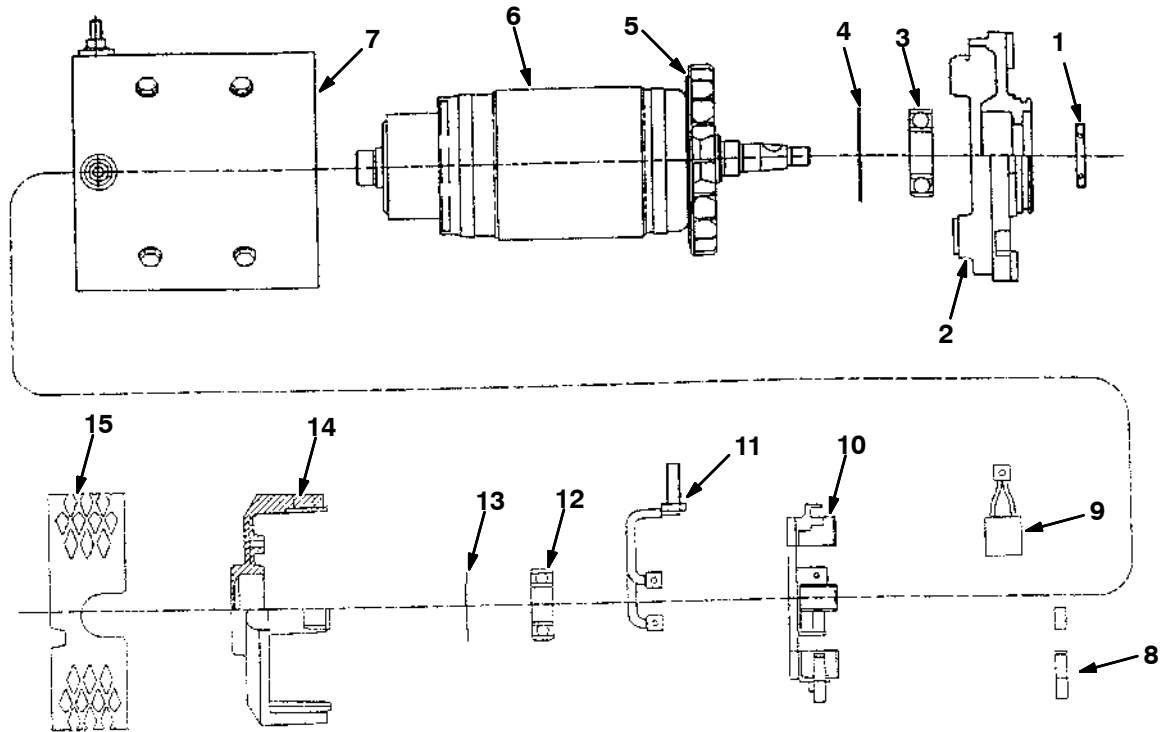


Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386811	(000000-	) Motor, Ele, Traction	
▲ 1	48753	(000000-	) Seal	1
▲ 2	387354	(000000-	) Head, Drive End	1
▲ 3	48754	(000000-	) Bearing	1
▲ 4	387355	(000000-	) Ring, Retaining	1
▲ 5	361966	(000000-	) Armature Fan	1
▲ 6	387356	(000000-	) Armature and Fan Assembly	1
▲ 7	387357	(000000-	) Frame and Field Assembly	1
▲ 8	48755	(000000-	) Spring, Brush	1
▲ 9	385742	(000000-	) Brush, Motor, Ele	4
▲ 10	223677	(000000-	) Brush Palte	1
▲ 11	387358	(000000-	) Wire Assy, Brush	1
▲ 12	48758	(000000-	) Bearing	1
▲ 13	361971	(000000-	) H-016 Wavy Washer	1
▲ 14	387359	(000000-	) Head, Commutator End	1
▲ 15	361973	(000000-	) Headband	1

Fig. 9 - Electric Motor Breakdown, 386687

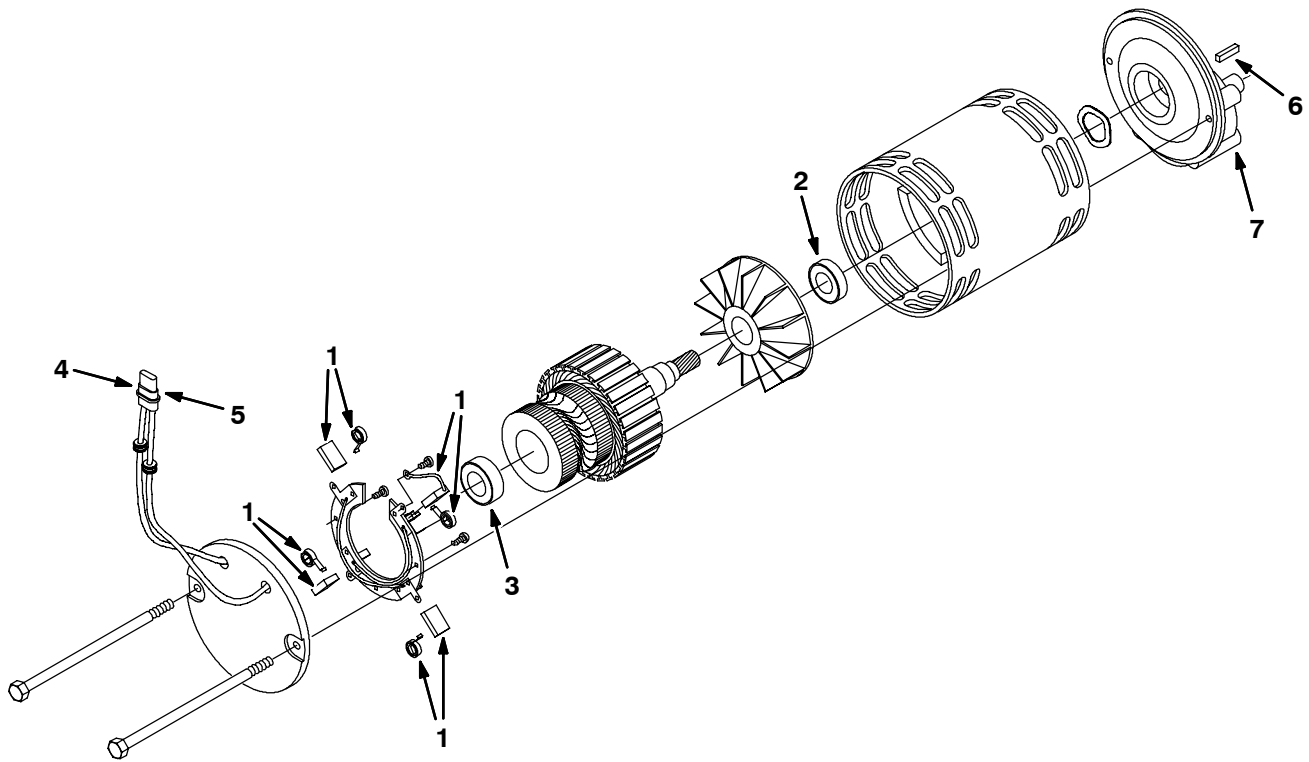


Ref.	Tennant Part No.	Manufacturer Serial Number	Description	Qty.
▽	386687	(000000-	) Motor, Gear, 1.0Hp 36V	1
▲ 1	222606	(000000-	) Brush Kit	1
▲ 2	222618	(000000-	) Bearing	1
▲ 3	222617	(000000-	) Bearing	1
▲ 4	10925	(000000-	) Connector Body	1
▲ 5	24537	(000000-	) Terminal	2
▲ 6	00928	(000000-	) Key Square 0.25 0.25 01.00 Lg	1
▲ 7	374005	(000000-	) Gearbox, Motor	1

Fig. 10 - Water Pump Breakdown, 387321

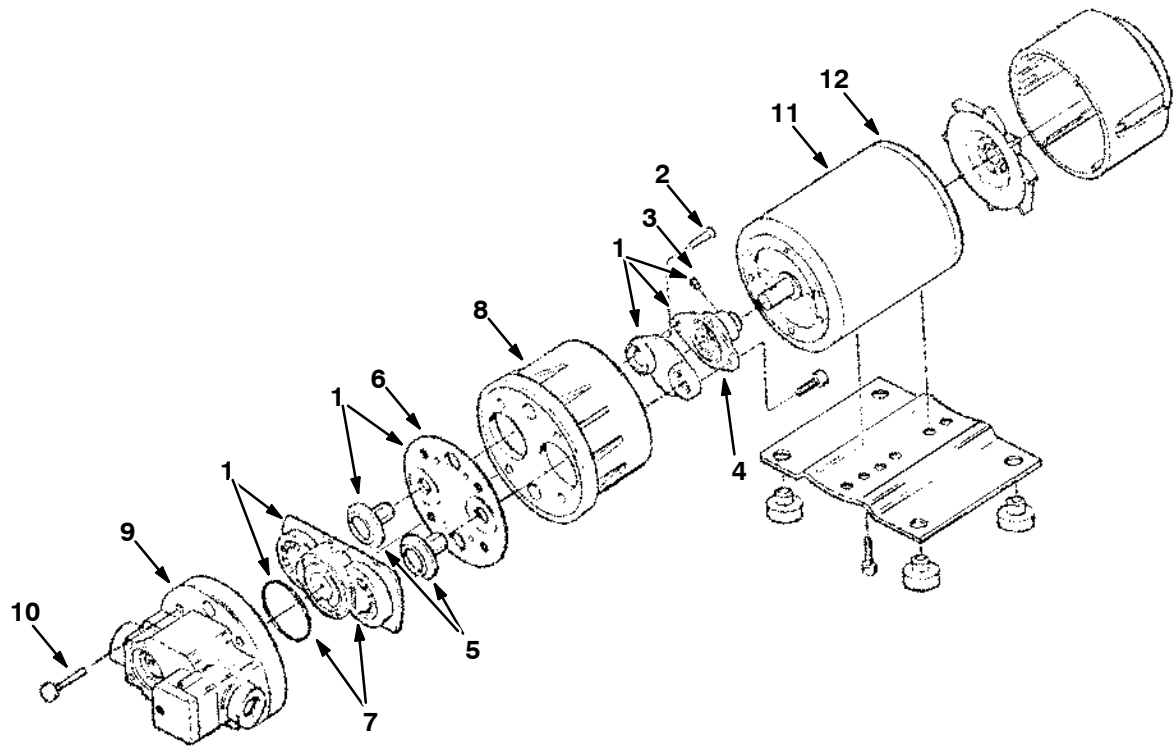

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	387321	(000000-)	Pump kit, Power Wand	1
▲ 1	65678	(000000-)	Seal kit	1
▲ 2	65667	(000000-)	Screw	1
▲ 3	65668	(000000-)	Screw	1
▲ 4	370923	(000000-)	Cam/bearing\Diaphragm Kit	1
▲ 5	65671	(000000-)	Piston	1
▲ 6	65672	(000000-)	Diaphragm kit	1
▲ 7	65673	(000000-)	Check valve assy	1
▲ 8	65670	(000000-)	Bearing cover	1
▲ 9	65674	(000000-)	Switch assy	1
▲ 10	65675	(000000-)	Pump screw	1
▲ 11	65676	(000000-)	Motor	1
▲ 12	65677	(000000-)	Brush/rectifier Assy	1
▲	78950	(000000-)	Connector assy	2
▲	78951	(000000-)	Terminal female	2
▲	10917	(000000-)	Seal connector	2


Fig. 11 - Metering Solution Pump Breakdown, 386364

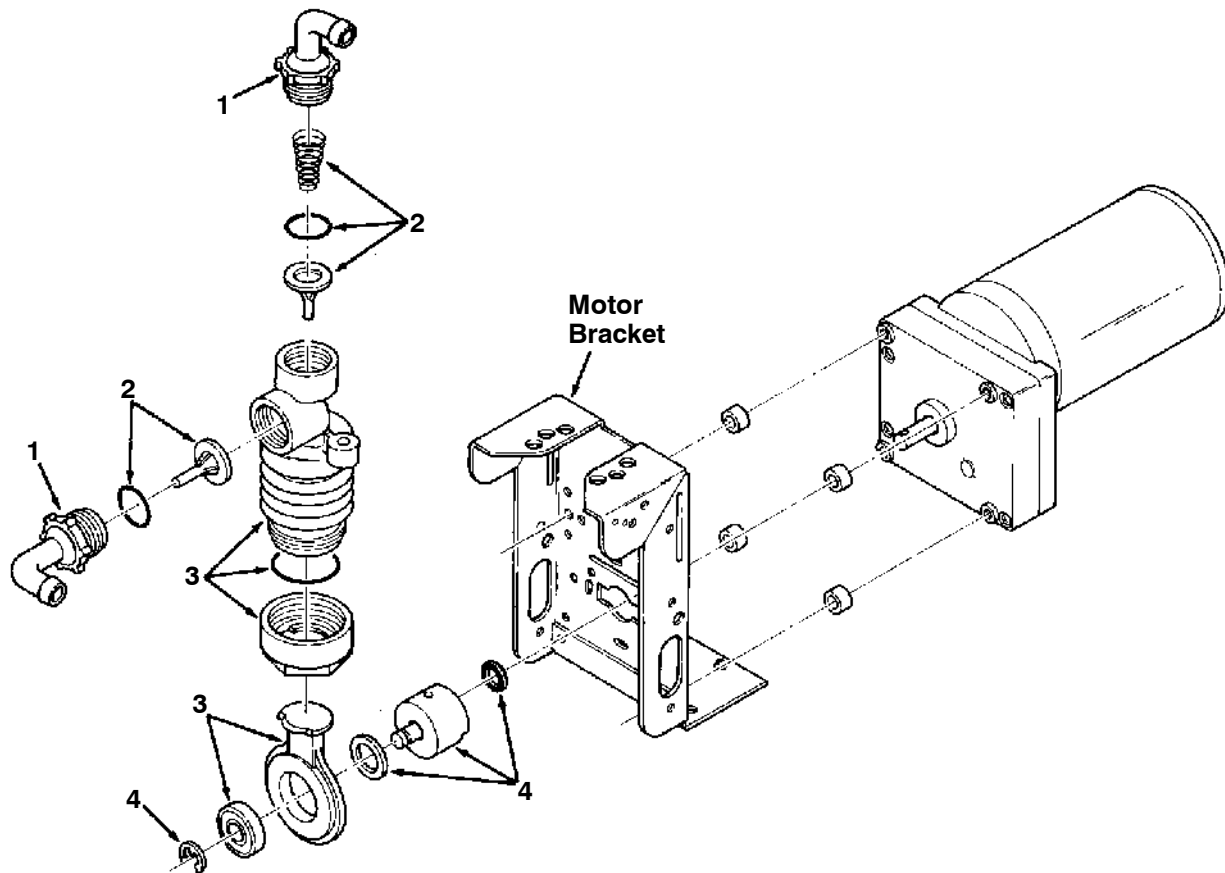

00112 - ALL


Ref.	Tennant Part No.	Manufacturer Serial Number	Description	Qty.
▽	386364	(000000-)	Pump, Metering Solution	1
▲ 1	63923	(000000-)	Connector Kit, Tubing	1
▲ 2	21659	(000000-)	Valve Kit, Pump	1
▲ 3	21661	(000000-)	Replacement Kit, Bellows	1
▲ 4	02430	(000000-)	Crank Replacement Kit	1

Fig. 12 - Hydraulic Powerunit Breakdown, 368704

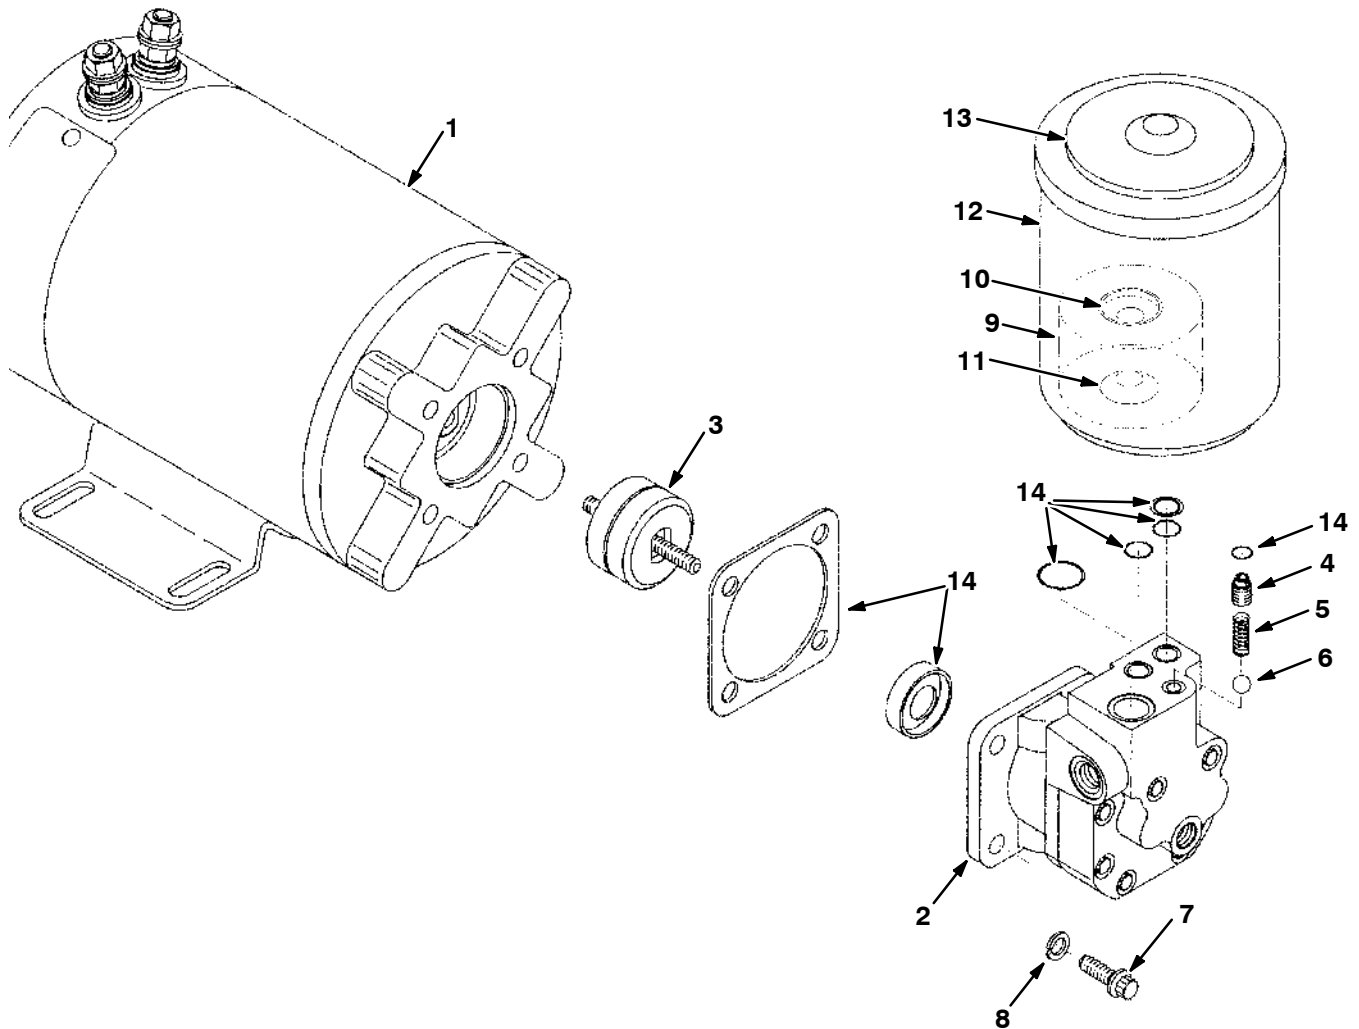


Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386704	(000000-)	Powerunit, Hyd, 36Vdc	1
▲ 1	387597	(000000-)	Motor, Elect	1
▲ 2	387598	(000000-)	Pump assy	1
▲ 3	387599	(000000-)	Coupling, Flexible	1
▲ 4	387600	(000000-)	Screw, Adjuster	1
▲ 5	387607	(000000-)	Spring	1
▲ 6	387608	(000000-)	Ball, Check	1
▲ 7	387609	(000000-)	Screw, Mtg	4
▲ 8	387610	(000000-)	Washer	4
▲ 9	387602	(000000-)	Element, Fltr	1
▲ 10	387603	(000000-)	Seal, Cup, Upper	1
▲ 11	387604	(000000-)	Seal, Cup, Lower	1
▲ 12	387605	(000000-)	Reservoir	1
▲ 13	387606	(000000-)	Cover, Reservoir	1
▲ 14	387601	(000000-)	Kit, Seal	1

Fig. 13 - Hydraulic Motor Breakdown, 386703

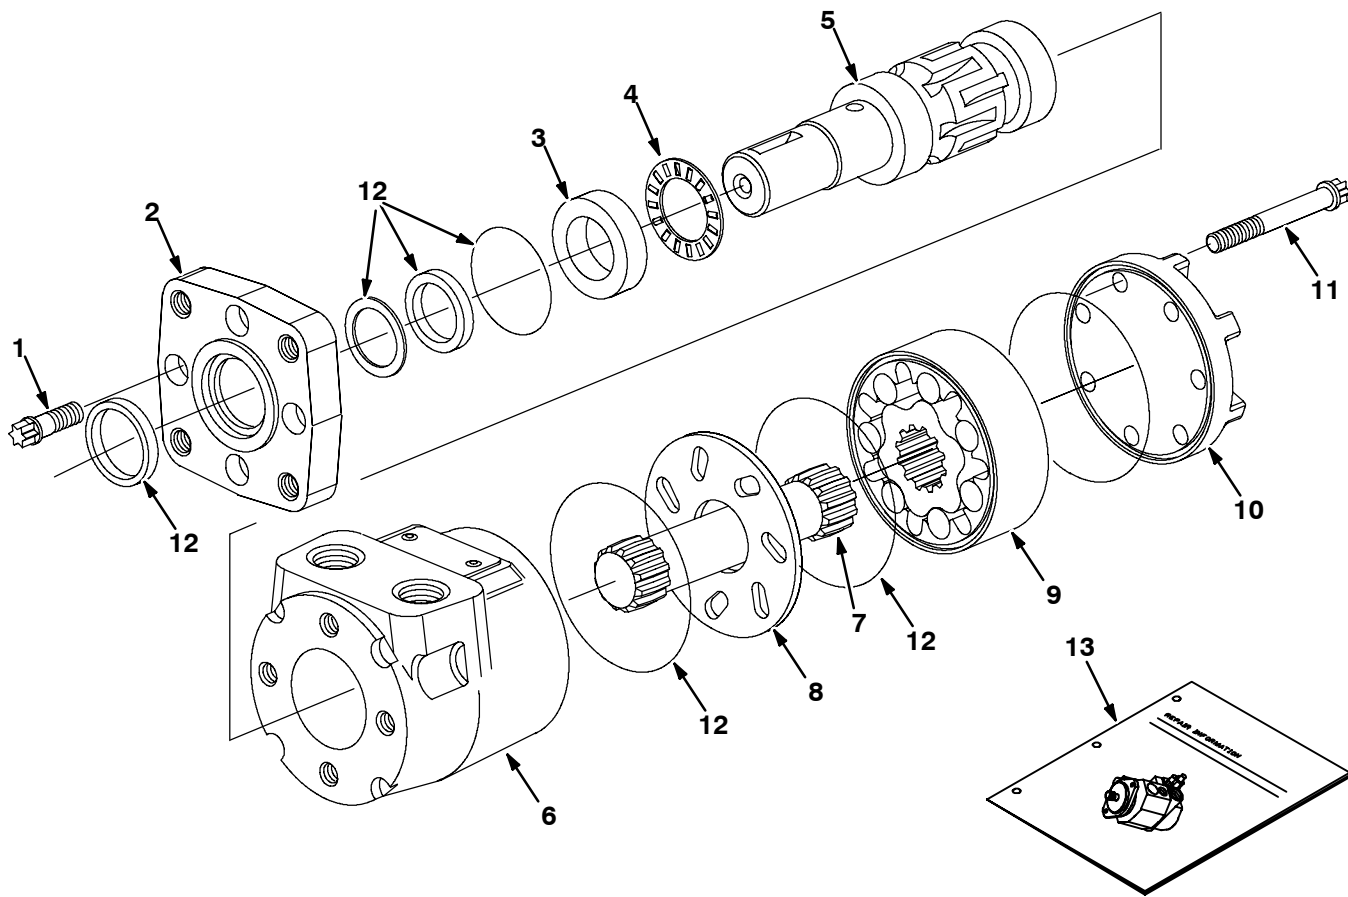


Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386703	(000000-)	Motor, Hyd	1
▲ 1	37555	(000000-)	Screw	4
▲ 2	763504	(000000-)	Flange	1
▲ 3	16695	(000000-)	Race Thrust	1
▲ 4	45628	(000000-)	Bearing, Thrust	1
▲ 5	763508	(000000-)	Shaft, Output	1
▲ 6	22655	(000000-)	Housing	1
▲ 7	373344	(000000-)	Drive, Main Cl	1
▲ 8	22658	(000000-)	Spacer	1
▲ 9	373343	(000000-)	Geroler S/A Cl	1
▲ 10	373422	(000000-)	Cap, End	1
▲ 11	21958	(000000-)	Cap, Screw Cl	7
▲ 12	373423	(000000-)	Kit, Seal, Motor	1
▲ 13	22661	(000000-)	Instruction, Repair	1

Fig. 14 - Hydraulic Solenoid Valve Breakdown, 386705

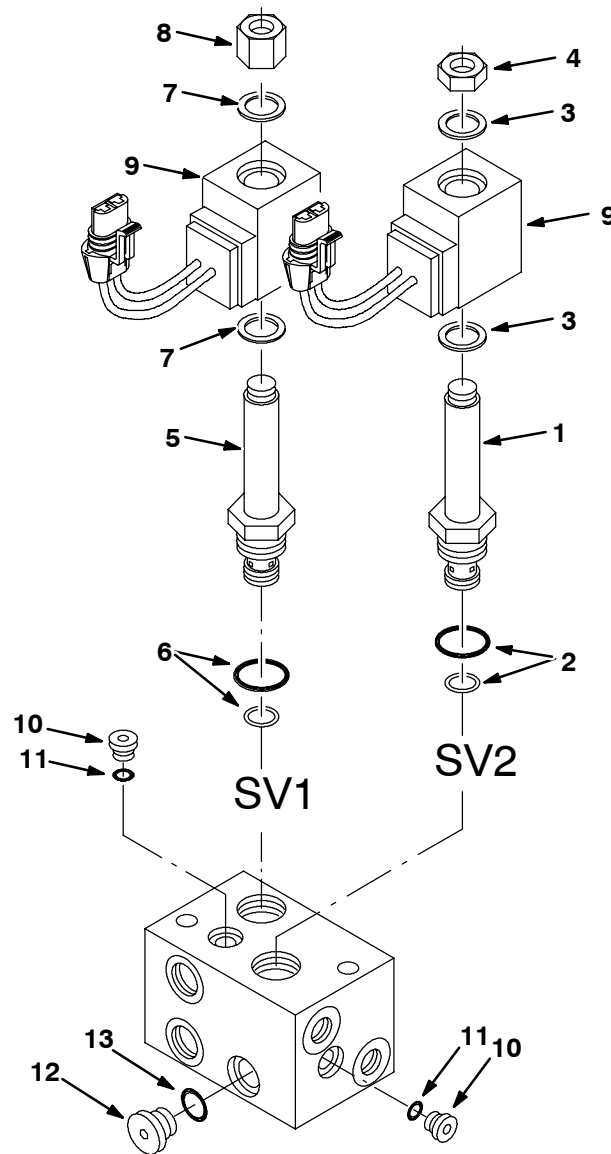


Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	386705	(000000-	) Valve, Hyd, Solenoid	1
▲▽	1 79716	(000000-	) Valve Stem	1
▲▲	2 79711	(000000-	) Kit, Seal, Hyd, Valve	1
▲▲	3 79740	(000000-	) Kit, Seal, Hyd, Valve	1
▲▲	4 79728	(000000-	) Nut	1
▲▽	5 79739	(000000-	) Valve, Stem	1
▲▲	6 79711	(000000-	) Kit, Seal, Hyd, Valve	1
▲▲	7 79740	(000000-	) Kit, Seal, Hyd, Valve	1
▲▲	8 79731	(000000-	) Nut	1
▲	9 373421	(000000-	) Coil 36v	2
▲▽	10 13902	(000000-	) Plug, O-Ring	2
▲▲	11 77001	(000000-	) Seal, O-Ring,	1
▲▽	12 74098	(000000-	) Plug, O-Ring	1
▲▲	13 77003	(000000-	) Seal, O-Ring, .072 X .35id	1

Fig. 15 - Steering Control Valve Breakdown, 373495

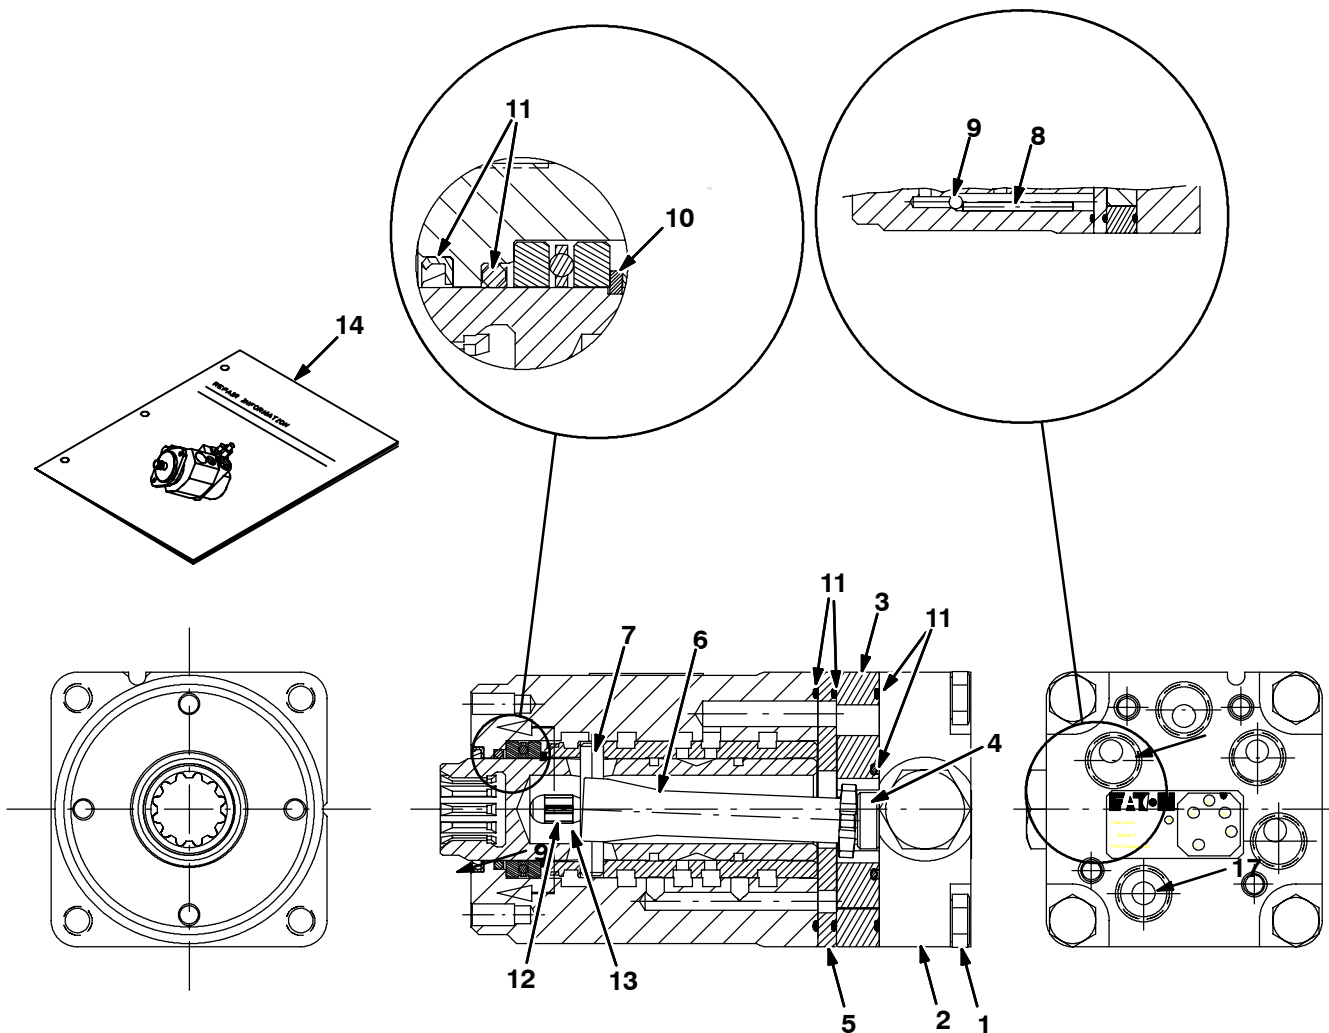

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	373495	(000000-	Steer-Control, Hyd	4
▲ 1	373567	(000000-	Screw, Cap	1
▲ 2	373568	(000000-	Cap, End	1
▲ 3	373569	(000000-	Geroter	1
▲ 4	373570	(000000-	Spacer	1
▲ 5	373571	(000000-	Plate, Wear	1
▲ 6	74231	(000000-	Drive, Valve, Strg	1
▲ 7	74232	(000000-	Pin, Valve, Strg	1
▲ 8	373572	(000000-	Pin	1
▲ 9	74114	(000000-	Ball, Check, Strg Valve	1
▲ 10	74243	(000000-	Ring, Retainer, Valve, Strg	1
▲ 11	74244	(000000-	Kit, Seal, Hyd, Valve, Strg	1
▲ 12	74196	(000000-	Kit, Spring, Valve, Strg	1
▲ 13	21935	(000000-	Bearing Kit	1
▲ 14	74245	(000000-	Instruction, Repair, Valve, Strg	1

Fig. 16 - Electric Motor Breakdown, 387585

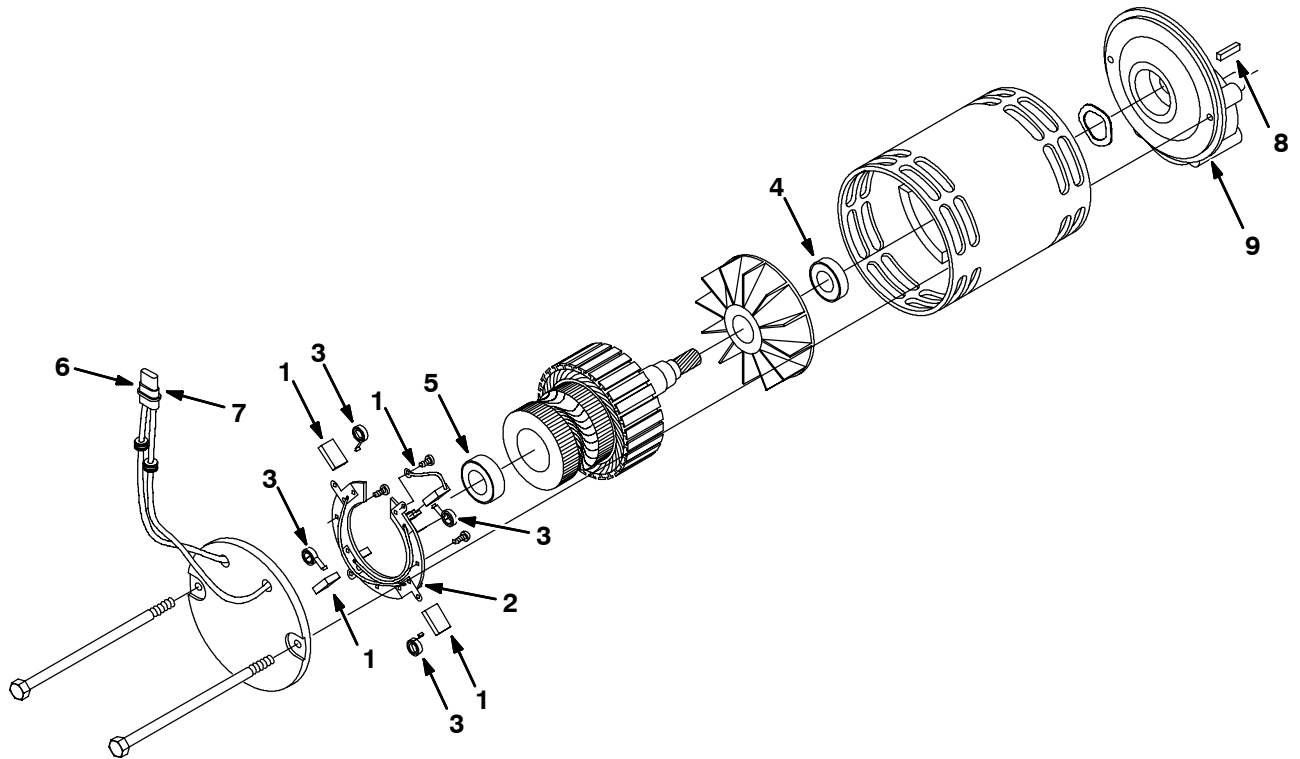

Ref.	Tennant Part No.	Machine Serial Number	Description	Qty.
▽	387585	(000000-	) Motor, Gear, Ele, 1.5Hp, 36Vdc, 300Rpm	
▲ 1	387589	(000000-	) Brush	4
▲ 2	387590	(000000-	) Brush, Board, Assy	1
▲ 3	387592	(000000-	) Spring, Brush	4
▲ 4	387587	(000000-	) Bearing	1
▲ 5	387588	(000000-	) Bearing	1
▲ 6	10925	(000000-	) Connector Body	1
▲ 7	24537	(000000-	) Terminal	2
▲ 8	00928	(000000-	) Key Square 0.25 X 0.25, 01.00L	1
▲ 9	374005	(000000-	) Gearbox, Motor	1

SECTION 5

CONTENTS	PAGE
PART NUMBER TO PAGE NUMBER CROSS REFERENCE LIST	5-2
PART DESCRIPTION TO PAGE NUMBER CROSS REFERENCE LIST	5-12

CROSS REFERENCE

PART NUMBER TO PAGE NUMBER CROSS REFERENCE LIST

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
00500-10	2-91	01856	4-3, 4-5	07786	2-59, 2-61, 2-71, 2-83, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
00910	2-75	01969	4-3	07787	2-77
00911	2-75, 3-41, 3-59	01971	4-3, 4-5	07789	2-107
00912	2-75, 2-91, 3-41, 3-59, 4-6, 4-7, 4-8	01982	4-3	07790	2-85, 2-99, 2-101, 3-9
00918	3-41, 3-59, 4-9	01983	4-3	07791	2-11, 2-25, 2-71, 2-81, 2-92, 3-5, 3-7, 3-19
00926	2-85	02076	2-25	07792	2-63, 3-81, 3-83
00928	4-10, 4-12, 4-19	02129	3-105	07800	2-83
00954	2-91	02430	4-14	07805	3-105
01316	3-75	02850	2-15, 2-35, 2-99, 3-77, 3-95	08085	3-49, 3-51, 3-67, 3-69
01516	2-63	02931	2-63	08175	2-79
01683	2-23, 2-39, 2-41, 2-43, 2-47, 2-97, 2-99, 2-101, 3-79, 3-105	02938	2-101	08178	2-15, 2-65, 2-67, 3-101
01684	2-7, 2-9, 2-11, 2-15, 2-39, 2-45, 2-47, 2-57, 2-59, 2-61, 2-65, 2-67, 2-71, 2-103, 2-105, 3-19, 3-31, 3-33, 3-37, 3-41, 3-43, 3-45, 3-47, 3-49, 3-51, 3-53, 3-55, 3-59, 3-61, 3-63, 3-65, 3-67, 3-69, 3-71, 3-73, 3-75, 3-81, 3-83, 3-93, 3-101	02942	2-71, 3-41, 3-59	08179	2-87, 3-99
01685	2-15, 2-21, 2-27, 2-31, 2-41, 2-47, 2-49, 2-53, 2-55, 2-57, 2-59, 2-61, 2-65, 2-67, 2-71, 3-19, 3-23, 3-25, 3-27, 3-29, 3-31, 3-33, 3-37, 3-43, 3-45, 3-47, 3-57, 3-61, 3-63, 3-65, 3-75, 3-77, 3-87, 3-93, 3-95, 3-99, 3-101, 3-105, 3-109, 3-111, 3-113, 3-115	04414	2-67, 3-99, 3-101	08182	2-23, 2-47, 2-51, 2-57, 2-73, 3-25, 3-31, 3-39, 3-47, 3-57
01686	2-31, 2-41, 2-49, 2-51, 2-57, 2-59, 2-61, 2-63, 2-65, 2-71, 3-11, 3-13, 3-19, 3-23, 3-25, 3-31, 3-33, 3-37, 3-39, 3-41, 3-47, 3-49, 3-51, 3-57, 3-59, 3-65, 3-67, 3-69, 3-99	04417	2-63, 2-65	08236	2-81
01690	2-13	04733-10	2-65	08346	2-51, 3-25, 3-39, 3-57
01692	3-49, 3-67	04733-2	2-71, 3-19	08708	2-13, 2-17, 2-19, 2-23, 2-71, 2-81, 2-91, 2-99, 2-101, 2-107, 3-9
01713	2-11, 2-99, 2-101, 2-103, 2-105	04843	2-39, 2-47, 2-57, 3-31, 3-47, 3-65	08709	2-11, 2-13, 2-23, 2-27, 2-35, 2-39, 2-69, 2-71, 2-75, 2-77, 2-79, 2-81, 2-83, 2-85, 2-92, 2-97, 2-103, 2-105, 3-19, 3-43, 3-45, 3-61, 3-63
01714	2-23, 2-79	05686	2-63	08711	2-19, 2-29, 2-71, 2-87, 3-19, 3-25
01715	2-99, 2-101, 2-103, 2-105	05724	2-9	08712	2-39, 2-51, 2-53, 2-55, 2-57, 2-59, 2-61, 2-65, 2-75, 2-77, 3-27, 3-29, 3-31, 3-33, 3-37, 3-43, 3-45, 3-47, 3-53, 3-55, 3-61, 3-63, 3-65, 3-71, 3-73, 3-75, 3-93, 3-105
01726	3-109, 3-111, 3-113, 3-115, 3-116, 3-117, 3-118, 3-119, 3-120, 3-121	05726	2-9	08713	2-27, 2-31, 2-47, 2-49, 2-59, 2-61, 2-65, 2-67, 2-83, 3-23, 3-25, 3-31, 3-33, 3-35, 3-37, 3-39, 3-57, 3-65, 3-77, 3-87, 3-93, 3-99, 3-101, 3-105, 3-107, 3-109, 3-111, 3-113, 3-115
01760	3-105	06279	2-47, 2-51, 2-65, 3-25, 3-31, 3-39, 3-57	08714	2-49, 2-63, 2-65, 2-83, 3-11, 3-23, 3-25, 3-41, 3-57, 3-59
01837	4-3, 4-5	06415	2-81	08716	2-45, 2-51, 2-57, 2-59, 2-61, 2-65, 2-71, 3-31, 3-33, 3-37, 3-47, 3-53, 3-55, 3-65, 3-71, 3-73
01842	4-3	06474A	2-23	09007	2-17, 2-39, 3-75, 3-93
		06549	2-17, 2-77, 2-81, 2-89, 2-99, 2-101, 3-41, 3-59	09010	2-15, 2-35, 2-49, 2-63, 2-65, 3-23, 3-25, 3-39, 3-57, 3-75, 3-93, 3-99
		06925	2-101		
		06931	2-23, 2-101		
		06942	2-19, 2-33, 2-35, 2-81, 2-85, 2-99, 2-101, 2-106		
		06943	2-11, 2-13, 2-27, 2-75, 2-79, 2-85, 2-91, 3-9		
		06944	2-23, 2-81		
		06945	2-107		
		06946	2-19, 2-99, 2-101		
		06949	3-9		
		06955	2-27, 2-81		
		06958	2-92		
		06960	2-19		
		06961	3-13, 3-15		
		06963	2-23		
		06964	2-83		
		06965	2-83		
		06969	2-29, 3-25		
		06971	2-87		
		06974	2-71, 2-87, 3-19		
		06977	2-75, 2-77		
		07112	2-19, 2-87		
		07259	2-85		
		07450	2-63, 2-65, 2-73		
		07471	3-45, 3-63		
		07514	2-101, 2-103, 2-105		

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
09011	2-31, 3-77	1007337	2-101	1023676	2-29
09023	2-59, 2-61, 3-33, 3-37, 3-87, 3-105	1007344	2-101	1023677	2-29
09026	2-27, 2-83	1007349	2-101	1024009	2-35
09028	2-49, 2-83, 3-11, 3-13, 3-23, 3-25, 3-57	1007353	2-101	1028580	2-107
09030	2-25	1007486	3-25, 3-57	1028581	2-33
09088	2-29	1007632	2-59, 3-33	1031699	2-31, 2-43, 3-79, 3-87
09162	2-74	1008211	2-35	1031700	3-81, 3-83
09198	2-7, 2-9, 3-41, 3-59, 3-105	1008275	3-19	10362	2-91
09206	2-35, 3-77	1010325	2-128	1036255	2-19
09228	3-95	1010614	2-33	1037822	2-3, 2-4, 2-41
09244	2-81, 2-97, 2-107	1010655	2-33	103919	2-67
09252	2-33	1010658	2-33	1039190	3-101
09291	2-73, 3-21, 3-41, 3-59	1010660	2-33	1041885	3-125
09294	2-25	1010661	2-33	10464	3-41, 3-59
09480	2-71, 3-19	1010668	3-45, 3-63	10575	3-75
09718	3-25, 3-39, 3-57	1010713	2-33	10632-12	3-5, 3-7, 3-9
09738	3-41, 3-59	1010791	2-33, 2-35	10632-13	2-17, 2-27
09739	2-43, 2-47, 3-39, 3-57, 3-79, 3-105	1010797	2-35	10632-14	2-97
09740	2-11, 2-15, 2-41, 2-71, 2-83, 3-25, 3-57, 3-105, 3-107, 3-109, 3-111, 3-113, 3-115	1010832	3-63	10632-17	2-97
09741	2-67, 2-77, 3-49, 3-51, 3-67, 3-69, 3-99, 3-101	1010835	2-33	10632-19	2-35
09744	3-49, 3-51, 3-55, 3-67, 3-69, 3-73	1010836	2-33	10632	2-23
09746	2-77	1010871	2-35	10917	4-13
09767	2-67, 3-99, 3-101	1011170	2-35	10925	4-3, 4-5, 4-6, 4-7, 4-9, 4-10, 4-12, 4-19
09770	2-71, 3-19	1011276	2-107	10926	4-3, 4-5
09774	3-49, 3-51, 3-67, 3-69	1011403	2-33, 2-35, 2-37, 2-55, 3-45, 3-63	11329	2-19, 2-75, 2-85
1001062	3-41, 3-59	1011521	2-33, 2-53, 3-29, 3-45, 3-63	11398	2-71, 3-19
1001099	2-51, 3-25, 3-39, 3-57	1011713	3-41, 3-59	11399	2-4, 2-31, 2-53, 3-35, 3-43, 3-45, 3-55, 3-61, 3-63, 3-73
1002464	3-35, 3-55, 3-73	1011835	2-37	11756	4-3
1002789	2-37	10120	2-29	12138	2-77
1002898	2-35	1012528	2-53, 2-55, 3-27, 3-29	12273	2-31, 2-41, 2-53, 2-55, 2-75, 3-27, 3-29, 3-95
1002899	2-35	1013857	2-33	12274	2-101
1005026	2-4	1013866	2-35	12309	2-67, 3-99, 3-101
1005086	2-37	1014056	2-35	12312	2-75, 2-77, 2-99, 2-101
1005133	3-35, 3-55, 3-73	1014082	2-35	12316	2-43, 3-79
1005135	3-35, 3-55, 3-73	1014875	3-63	12317	2-63, 2-65, 3-41, 3-59
1005255	2-35	1014986	2-35	12323	3-87
1005302	2-37	1014987	2-35	12333	2-59, 2-61, 3-33, 3-37
1005304	2-37	1015045	2-55, 3-29, 3-45, 3-63	12459	2-11, 2-47
1005404	2-71	1015048	3-29, 3-45, 3-63	12540	2-25
1005416	2-107	1015090	3-45	13248	2-21, 2-45, 2-47, 3-39, 3-57
1005435	2-35	1015096	2-128	13292	2-41, 2-45, 3-77
1005457	2-71	1015097	3-45	13513	2-23
1005508	2-33	1015558	2-53, 2-55, 3-27	13902	4-17
1005523	2-71	1017015	2-35	14150	2-25
1005552	2-37	1017022	2-35	14242	2-29
1005866	2-33	1017288	2-128	14296	2-25
1006401	3-29	1017289	2-128	14432	3-55, 3-73
1006447	2-33	1017413	2-37	14455	2-47
1006472	2-71	1017415	2-37	14523	2-51
1007107	3-105	1017441	2-71, 3-19	14524	2-51, 3-25, 3-39, 3-57
1007129	3-105	1017802	2-71, 3-19	14555	2-63
		1019285	2-41, 3-77	14595-1	2-79
		1019344	3-102, 3-103	14601	2-23
		1021878	2-35	14605	2-79
		1022465	3-103		
		1022558	3-103		
		1022564	3-102		
		1022565	3-102		

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
14725	2-57, 3-31, 3-47, 3-65	20932	3-81, 3-83	22655	4-16
14838	2-7, 2-9	20944	3-87	22658	4-16
14864	2-43, 3-79	20950	3-87	22661	4-16
14877	3-75, 3-77	20951	3-87	23456	2-31, 3-81, 3-83
14880	2-43, 3-79	20952	3-87	24105	3-75
14953	2-7	21601	2-67, 3-99, 3-101	24198	3-39, 3-57
14967	2-7	21602	2-67, 3-99, 3-101	24199	2-47, 3-105
150208	3-91	21603	2-67, 3-99, 3-101	24254	2-51, 3-25
15023	2-49, 3-23, 3-39, 3-57	21606	2-67, 3-99, 3-101	24299	2-7, 2-9
150525	2-35	21659	4-14	24358	2-43, 3-79, 3-87
15539	2-7, 2-9	21661	4-14	24537	4-6, 4-7, 4-9, 4-10, 4-12, 4-19
15648	2-47, 2-73, 2-83, 3-21	21765	4-3	24543	3-77
15675	2-21, 2-41, 2-45, 3-43, 3-45, 3-61, 3-63, 3-75	21800	4-9	24544	2-31, 3-75
15678	2-53, 2-55, 2-71, 2-75, 2-77, 3-19, 3-27, 3-29, 3-41, 3-43, 3-45, 3-59, 3-61, 3-63, 3-75	21935	4-18	24555	2-67, 3-99, 3-101
15678		21958	4-16	24929	2-33
15840	2-106	222066	2-83	25014	2-73, 3-21
15846	2-103	222117	3-95	25312	3-124
16356	2-53	222196	2-73, 3-21	25537	2-21
16455	2-85	222277	2-57, 3-31, 3-47, 3-65	25538	2-106
16695	4-16	222290	2-17, 2-101, 2-128	25620	2-35
16735	2-11, 2-25, 2-39	222409	2-91, 4-6	25735	2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
16816	2-63	222460	2-27	25887	2-75, 2-77
16879	2-17	222470	2-77	26103	2-83
16914	2-53, 2-55, 3-27, 3-43, 3-61	222496	2-83	26156	2-39
16931	2-11, 2-13, 2-25, 2-35, 2-73, 2-75, 2-77, 2-79, 2-81, 2-87, 2-89, 2-91, 2-92, 2-97, 2-103, 2-105, 3-21	222497	2-67, 3-99, 3-101	26315	2-29
16949	3-49, 3-51, 3-67, 3-69	222505	2-57, 3-31, 3-47, 3-65	26395-1	2-47
17260	2-7	222534	2-17	26395-2	3-5, 3-9
17261	2-7	222539	2-73, 3-21	26428	2-83, 3-41, 3-59
17262	2-7	222556	2-57, 3-31, 3-47, 3-65	27880	2-39
17263	2-7	222606	4-12	27928	2-17
17363	2-45, 4-3	222617	4-12	27980	2-59, 3-33
17404	2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69	222618	4-12	28622	3-9
17461	2-87	222623	4-6	29557	2-51, 3-25, 3-39, 3-57
18627	4-3	222625	4-6, 4-7	29558	2-59
18628	4-3, 4-5	222627	4-6, 4-7	29568	3-33
18630	4-3	222629	4-6, 4-7	29584	2-57, 3-31, 3-47, 3-65
19064	2-35, 3-95, 3-97	222635	4-6	30013	2-69, 3-21
19065	2-89	222637	4-6, 4-8	30241	2-9
19066	2-17, 2-33, 2-81, 2-99, 2-101, 2-103, 2-105, 3-5, 3-9	222638	4-6	30324	2-77
19312	2-99, 2-101	222788	3-55, 3-73	30533	3-15
19314	2-99	222822	2-41, 3-77	31647	2-103, 2-105
19320	2-97	22297	2-45	32124	2-49, 3-23
19577	2-75	223044	2-81	32129	2-91
19903	3-81, 3-83	223054	2-65	32483	2-17, 2-75, 2-81, 2-85, 2-89, 2-99, 2-101, 2-103, 2-106, 3-9, 3-35, 3-55, 3-73
20802	2-13	223078	2-21	32485	2-23, 2-73, 2-75, 3-21
20806	2-65	223090	2-23	32486	2-19, 2-23, 2-29, 2-71, 2-73, 2-75, 2-77, 2-79, 2-87, 3-9, 3-19, 3-21, 3-25
20807	3-27	223094	2-23	32490	2-23, 2-27, 2-33, 2-35, 2-53, 2-55, 2-71, 2-75, 2-81, 2-89, 2-99, 2-101, 2-103, 2-105, 3-27, 3-29
20810	2-31	223239	2-23		
20833	2-3, 2-4, 2-63	223264	2-3, 2-4, 2-5, 2-45, 4-5		
		223320	2-23		
		223470	2-69, 3-21		
		223499	2-31		
		223515	3-27		
		223528	2-31		
		223595	3-17		
		223599	2-13		
		223600	2-23		
		223601	2-23		
		223677	4-11		
		223699	2-53		

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
32491	2-11, 2-13, 2-25, 2-35, 2-39, 2-69, 2-71, 2-73, 2-75, 2-77, 2-79, 2-81, 2-83, 2-87, 2-89, 2-91, 2-92, 2-97, 2-99, 2-101, 3-17, 3-19, 3-21, 3-25	360686	2-3, 2-5, 2-91	369766	2-41, 3-77
32492	2-65, 2-73, 2-75, 2-81, 2-91, 3-13, 3-21, 3-45, 3-63, 3-81, 3-83	360768	2-85	369795	2-71, 3-19
32493	2-11, 2-47, 3-15, 3-31, 3-39, 3-57	360801	2-15, 2-41, 2-71, 3-19	369796	2-71, 3-19
32501	2-43, 3-79	360824	2-89	369865	3-75
32508	2-43, 3-79	360826	2-89	370020	2-7
32525	2-91	360943	3-5, 3-9, 3-77, 3-97	370080	2-7
32613	2-43, 3-79	360973	3-124	370090	2-7
32614	2-43, 3-79	360980	2-25	370095	2-9
32669	2-43, 3-79	361043	2-95	370100	2-67, 3-99, 3-101
32716	2-63, 2-87, 3-99	361076	2-17	370156	2-101
32731	2-83	361144	2-17	370923	4-13
32746	2-7, 2-9	361339	2-11, 3-35, 3-55, 3-73	371905	3-81, 3-83
32815	2-103, 2-105	361966	4-11	373343	4-16
32940	2-79	361971	4-11	373344	4-16
32969	2-29	361973	4-11	373421	4-17
32978	2-89	363087	2-73, 3-21	373422	4-16
32980	2-11, 2-23, 2-99, 2-101, 3-9	363113	3-25, 3-39, 3-57	373423	4-16
32981	2-23	363120	2-57, 3-31, 3-47, 3-65	373495	2-19, 4-18
32982	2-99, 2-101, 2-103	363151	2-65	373496	2-19
32983	2-21, 3-17	363152	2-57, 3-47	373567	4-18
32984	2-35, 2-99, 2-101, 2-103, 2-105	363162	3-99	373568	4-18
32988	2-103, 2-105	363236	2-57	373569	4-18
330630	3-125	363237	2-57, 3-47, 3-65	373570	4-18
330631	3-125	363238	3-31	373571	4-18
330632	3-125	363301	3-99	373572	4-18
330633	3-125	363385	2-25	374005	4-12, 4-19
330635	3-125	363453	2-39	374183	2-77
330710	3-125	363468	3-41, 3-59	374185	2-77
330715	3-125	363503	3-81, 3-83	374201	2-91, 4-7
33295	3-75	363617	2-91	374204	2-106
33401	2-91	363796	2-3	375176	4-7
33807	3-75	363827	2-81	375213	2-3, 2-4, 2-89
33924	2-83	363856	2-69	375301	3-41, 3-59
33925	3-49, 3-51, 3-67, 3-69	363981	2-79	375302	2-41, 3-77
33930	2-57, 2-103, 2-105, 3-31, 3-47, 3-65	364085	2-81	375308	3-77
33932	3-41, 3-59, 3-87, 3-105	364404	2-57, 3-31, 3-47, 3-65	375322	3-75
33948	2-65	364545	3-75	375411	2-21
34195	2-49, 3-23	364587	2-85	375426	3-77
35836	2-77, 3-41, 3-59	364614	2-51, 2-63, 3-99	375427	3-77
35973	2-75, 2-77	364631	2-53, 2-55, 3-27, 3-29	375429	2-41
360181	2-91	364669	3-87	375431	2-31, 3-85
360357	2-71, 3-19	364672	2-85	37555	4-16
360369	2-21	364858	2-57, 3-31, 3-47, 3-65	377084	2-107
360370	2-21	364895	3-43, 3-61	377341	3-105
360491	2-83	364896	3-43, 3-61	377349	2-43
360518	2-81	364899	3-43, 3-61	377364	2-49, 3-23
360520	2-17, 3-5, 3-7	365032	3-7	377398	3-41, 3-59
		365033	3-7	378805	2-75
		365093	2-31	378951	2-7
		365096	2-31	378976	2-49, 3-23
		365156	2-49, 3-23, 3-39, 3-57	378983	4-3
		365164	2-53, 2-55	37909	4-3
		365180	2-51, 3-25, 3-39, 3-57	37912	4-3, 4-5
		365252	2-11	379120	2-85
		36593	2-91	379202	2-77
		36643	2-75	379217	2-27
		367404	2-81	37926	4-3
		367452	2-83	37929	4-3, 4-5
		369415	3-105	379891	2-89
		369702	2-11	381867	2-95

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
382452	3-87	386150	2-19	386324	2-31
382991	3-77	386157	2-11	386325	2-41
383709	2-75, 4-8	386159	2-11	386330	2-41
383721	2-97, 2-107	386160	2-31, 2-41	386333	2-129
383722	2-97, 3-5, 3-7	386162	2-31	386334	3-111
383723	2-97	386163	3-87	386335	3-109
383724	2-97	386200	2-11	386336	3-113
383725	2-97	386201	2-15	386337	3-115
383727	2-97	386202	2-15	386338	3-119
383728	2-97	386204	2-19	386344	3-120
383835	2-89	386209	2-19	386346	2-17
384207	4-8	386214	2-19	386348	2-99, 2-101
384208	4-8	386215	2-19	386349	2-45
384256	4-8	386216	2-19	386351	2-39
384257	4-8	386217	2-19	386352	2-75
384258	4-8	386222	3-9	386353	2-75
384259	4-8	386222	2-31	386354	2-75
385666	3-75	386223	2-3, 2-4, 2-41	386355	2-74
385682	3-27	386224	2-31	386356	2-59, 2-61, 3-33, 3-37
385685	2-41, 3-77	386228	2-21	386359	2-75
385726	2-23	386229	2-27	386360	2-74
385727	2-23	386230	2-7	386361	2-75
385742	4-11	386231	2-9	386364	3-87, 4-14
385750	2-41	386234	2-67, 3-99, 3-101	386367	2-29
385935	2-7, 2-9	386240	2-7	386370	2-29
385936	2-7, 2-9	386241	2-9	386375	2-27
385938	2-5, 2-77	386250	2-7	386378	2-29
386024	2-3	386251	2-9	386379	2-29
386025	2-3	386252	2-63	386380	2-49
386026	2-4	386256	2-63	386387	2-3, 2-4, 2-49
386027	2-4	386257	3-41, 3-59	386388	2-3, 2-4, 2-49
386031	2-47	386260	2-3, 2-4, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69	386390	2-59, 2-61, 3-33, 3-37
386040	3-47, 3-65	386262	2-61, 3-37, 3-51, 3-69	386391	2-59, 2-61, 3-33, 3-37
386043	2-57, 3-31	386263	2-59, 3-33, 3-49, 3-67	386392	3-75, 3-93
386048	2-57, 3-31, 3-47, 3-65	386264	2-67, 3-99, 3-101	386393	3-93
386049	2-47	386266	2-67, 3-101	386394	3-75
386050	3-41, 3-59, 4-9	386267	2-3, 2-4, 2-41	386395	3-87
386053	2-4, 3-41, 3-59	386268	3-49, 3-67	386413	2-15
386058	3-41, 3-59	386269	3-49, 3-67	386414	2-41
386062	2-75, 3-41, 3-59	386274	3-41, 3-59	386415	3-11
386063	3-41, 3-59	386275	3-51, 3-69	386416	3-11
386066	3-41, 3-59	386276	3-51, 3-69	386417	3-11
386067	2-75, 3-41, 3-59	386279	2-65	386419	2-31
386070	3-39, 3-57	386282	3-55	386420	2-31
386071	3-39, 3-57	386283	2-3, 2-4, 2-67, 3-101	386421	2-31
386072	3-41, 3-59	386284	2-3, 2-4, 2-67, 3-101	386423	2-43, 3-79
386080	3-41, 3-59	386285	2-67, 3-101	386424	2-41
386081	3-39, 3-57	386286	2-67, 3-101	386425	2-41
386088	2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69	386290	2-67, 3-101	386426	2-77
386099	3-39	386298	2-67, 3-99, 3-101	386428	2-77
386108	2-41	386299	2-67, 3-101	386429	2-39
386109	2-31, 2-41	386303	2-99, 2-101	386432	3-87
386116	2-39	386307	2-106	386433	2-15
386119	2-39	386308	2-106	386437	2-15
386127	2-97	386311	2-17	386444	2-41
386128	2-97	386320	2-31	386445	2-41
386129	2-17	386321	2-45	386450	2-11
386130	2-129	386323	2-3, 2-4, 2-5, 2-45	386458	2-25
386149	2-19			386459	2-25
				386461	2-15

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
386462	3-87	386657	2-73, 3-21	386865	3-39, 3-57
386463	2-89	386658	2-73, 3-21	386868	3-49, 3-51, 3-67, 3-69
386475	2-11	386659	2-73, 3-21	386874	3-57
386482	3-87	386660	2-73, 3-21	386875	3-13
386490	3-43, 3-45, 3-61, 3-63	386661	2-71	386876	3-25, 3-57
386493	3-39, 3-57	386662	3-19	386890	2-77
386495	3-49	386663	2-71, 3-19	386891	2-75
386496	3-51, 3-69	386664	2-71, 3-19	386894	2-77
386500	3-55, 3-73	386666	2-71, 3-19	386897	2-75
386503	3-55, 3-73	386668	3-19	386900	2-77
386504	3-55, 3-73	386675	3-109	386905	2-71, 3-19
386507	3-49, 3-51, 3-67, 3-69	386676	3-109	386908	2-81
386510	3-55, 3-73	386679	2-49, 4-10	386909	2-73, 3-21
386513	3-73	386686	2-91	386910	2-71
386514	2-5, 3-35, 3-55, 3-73	386687	2-49, 4-12	386911	2-11
386518	3-35, 3-55, 3-73	386687AM	3-23	386915	2-27
386520	3-99	386689	2-85	386919	2-89
386536	2-85	386690	2-85	386920	2-106
386539	2-87	386694	2-85	386921	2-106
386540	2-85	386696	2-85	386922	2-106
386554	2-87	386701	2-19	386923	2-11
386555	2-87	386702	2-19	386924	2-17
386558	2-25	386703	2-19, 4-16	386932	3-109
386563	2-97, 2-106	386704	2-92, 4-15	386934	3-111
386565	2-13	386705	2-92, 4-17	386936	3-113
386566	2-81	386711	2-95	386939	3-115
386569	2-85	386752	2-81	386952	3-105
386570	2-81	386753	3-21	386953	3-105
386573	3-111	386757	2-11	386954	3-105
386574	3-111	386761	2-15	386958	3-15
386575	3-109, 3-111, 3-113, 3-115	386767	2-13	386961	2-47
386577	2-79	386769	2-13	386962	2-85
386578	2-79	386774	2-13	386963	3-17
386579	2-79	386777	2-13	386968	3-105
386581	2-83	386783	2-87	386969	2-79
386591	2-83	386784	2-87	386970	2-81
386598	2-85	386785	2-41	386971	2-81
386599	2-85	386801	2-85	386972	2-79
386600	2-127	386804	2-103, 2-105	386973	2-15
386601	2-127	386806	2-106	386979	2-13
386605	3-7	386808	2-17, 2-89	386981	2-3
386606	3-9	386809	2-17, 2-89	386982	2-3
386607	3-105	386810	2-99, 2-101	386983	3-13
386608	3-95	386811	2-25, 4-11	386984	3-13
386609	3-5	386816	3-23	386985	2-47
386610	2-103, 2-105	386825	2-3, 3-23	386986	2-59, 2-61, 3-33, 3-35, 3-37, 3-49, 3-51, 3-67, 3-69
386617	2-83	386826	2-3, 3-23	386987	2-59, 2-61, 3-33, 3-35, 3-37, 3-49, 3-51, 3-67, 3-69
386621	2-83	386827	3-25, 3-57		
386625	2-83	386828	2-3, 2-5, 2-83		
386626	2-3, 2-5, 2-83	386829	2-3, 2-5, 2-83		
386628	2-79	386833	2-3, 2-4, 3-99		
386629	2-79	386834	2-3, 2-4, 3-99		
386632	3-107	386835	3-99	386988	2-47
386634	2-15	386836	3-99	386989	2-89
386642	3-13	386841	3-41, 3-59	386993	2-15
386643	2-31	386842	3-41, 3-59	386995	2-15
386646	3-21	386844	3-39, 3-57	386997	2-87
386652	3-77	386847	2-65, 3-99	386998	2-87
386656	2-73, 3-21	386860	2-67, 3-101	386999	2-87
		386861	3-99	387000	3-107
				387003	3-85

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
387010	2-29	387227	3-81, 3-83	387384	2-89
387014	2-3, 2-29	387230	3-25	387385	2-89
387015	3-123	387233	2-83	387386	2-89
387019	2-81	387234	2-83	387387	2-91
387023	2-3, 2-4	387235	2-83	387392	2-23
387027	3-105	387236	3-77	387393	2-19
387032	2-129	387237	2-67, 3-99, 3-101	387397	2-83
387035	2-25	387245	3-25, 3-57	387398	2-83
387036	2-87	387250	4-9	387399	2-83
387040	2-11	387251	4-9	387400	2-83
387041	2-11	387253	3-53, 3-55	387402	2-77
387043	3-105	387254	3-71, 3-73	387403	2-75
387045	3-77	387256	2-5, 3-35, 3-55, 3-73	387404	2-89
387049	3-87	387257	2-67, 3-101	387405	2-73, 3-21
387050	3-95	387258	3-99	387406	2-5, 2-81
387055	2-3, 2-77	387262	3-97	387407	2-5, 2-81
387059	2-3, 2-75	387266	3-77	387408	2-5, 2-91
387061	2-31, 3-77	387268	2-83	387413	2-5, 2-81
387068	2-129	387271	3-67	387422	3-95
387071	2-13	387274	2-83	387423	2-127
387072	2-13	387275	2-83	387424	2-127
387073	2-13	387279	2-87	387425	2-39
387074	2-13	387281	2-95	387426	2-65
387075	2-13	387282	2-95	387429	2-65
387076	2-13	387283	2-89	387430	2-65
387077	2-13	387284	2-89	387431	3-99
387078	2-13	387294	2-3, 2-4, 2-49	387432	2-65
387080	3-25, 3-57	387295	2-81	387433	2-67, 3-99, 3-101
387081	2-91	387296	2-83	387435	3-99
387082	2-91	387300	3-7	387436	3-99
387084	2-69	387301	3-5	387438	2-67, 3-99, 3-101
387085	3-21	387302	2-127	387441	3-105
387087	2-11	387317	3-21	387442	2-79
387090	2-69	387319	2-81	387446	3-99
387095	2-81	387320	2-75, 2-77	387447	3-99
387097	2-47	387321	3-93, 4-13	387448	2-67, 3-101
387109	3-77	387335	2-85	387452	2-99, 2-101
387111	2-83	387340	3-75	387453	2-97
387113	2-74	387344	3-9	387454	2-19
387119	2-75	387345	2-85	387457	3-124
387120	2-77	387346	2-25	387467	3-79
387126	3-83	387347	2-85	387468	2-69, 3-21
387127	3-81	387348	2-15	387470	2-77
387138	2-11	387349	2-91	387472	2-85
387144	2-87	387351	2-92	387476	2-69
387151	2-73, 3-21	387354	4-11	387477	2-79
387152	2-77	387355	4-11	387478	3-21
387153	2-75	387356	4-11	387483	3-83
387157	3-5	387357	4-11	387496	3-125
387158	3-9	387358	4-11	387498	2-81
387159	3-77	387359	4-11	387499	2-45
387160	3-77	387361	2-11	387500	2-67, 3-99, 3-101
387161	3-77	387371	4-10	387507	2-4
387162	3-25	387372	4-10	387509	3-35
387201	2-43	387373	4-10	387516	3-35
387208	3-9	387374	4-10	387517	2-5, 3-35, 3-55, 3-73
387213	3-81	387376	2-91	387520	2-129
387221	3-81	387380	2-39	387525	2-129
387225	3-77	387382	2-39	387529	2-106
387226	3-77	387383	2-89	387542	2-89

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
387543	2-89	39309	2-87	41619	2-47, 2-67, 3-99, 3-101
387545	2-4, 3-35	39311	2-103, 2-105	41702	2-99, 2-101
387546	2-4, 3-35	39312	2-23, 2-77	42011	2-39
387585	2-49, 4-19	39323	3-41, 3-59	42120-1	2-85
387587	4-19	39338	2-91	42133A	2-31
387588	4-19	39348	2-103, 2-105	43290	2-47
387589	4-19	39349	2-27, 2-69, 2-75, 2-77, 2-99, 2-101, 3-5, 3-7, 3-21, 3-105	43500	2-65
387590	4-19			43555	2-33
387592	4-19	39350	2-81	43844	3-87
387593	2-41	39527	2-75	43957	2-25
387597	4-15	39717	2-23	44078	2-17
387598	4-15	397916	2-9	44681-1	3-5, 3-7
387599	4-15	397976	2-9	44681-2	3-5, 3-7
387600	4-15	39807	3-9	44681	3-5, 3-7
387601	4-15	398285	3-116	44906	3-19
387602	4-15	398288	3-117	44961	2-53, 2-55, 3-27, 3-29
387603	4-15	398291	3-121	45272	3-5, 3-7
387604	4-15	398292	3-118	45283	3-5, 3-7
387605	4-15	398468	2-33	45391	3-9
387606	4-15	398501	3-75	45595	2-106
387607	4-15	398511	4-5	45628	4-16
387608	4-15	398512	4-5	45888	2-85
387609	4-15	398513	4-5	46390	3-41, 3-59
387610	4-15	398514	4-5	46390AM	2-74, 2-77
387615	2-41	398515	4-5	46563	2-27
387622	3-113	398516	4-5	48589	3-122
387623	3-115	398517	4-5	48591	3-122
387634	2-97	398518	4-5	48609	3-89, 3-97
387636	2-97	398519	4-5	48610	3-93
387637	2-97	398520	2-45, 4-5	48732	3-41, 3-59
387639	2-101	398526	2-107, 3-9	48733	3-81, 3-83
387640	2-97	398802	3-35	48734	3-81, 3-83
387641	2-105	40566	2-53, 2-55, 3-27, 3-29, 3-43, 3-45, 3-61, 3-63	48753	4-11
387648	2-101			48754	4-11
387654	2-11	40607	2-45	48755	4-11
387656	2-27	40678-1	2-53, 2-55, 2-85	48758	4-11
387659	2-25	40814	3-39, 3-57	49142	3-27
387660	2-3, 2-25	41178	2-13, 2-77	49263	2-49, 3-23
387671	3-53	41186	2-49, 3-23	49266	2-21, 2-53, 2-55, 2-81, 2-89, 3-5, 3-9, 3-27, 3-29, 3-77, 3-95
387672	3-71	41187	2-25		
387684	2-31	41305	3-49, 3-51, 3-67, 3-69	49694	3-25, 3-57
387686	2-41	41315	3-43, 3-61	49697	2-15, 2-89
387700	2-23	41341	2-73, 3-21	49740	2-31
39005	2-27, 2-29, 2-51, 2-57, 2-65, 2-71, 2-73, 3-19, 3-21, 3-25, 3-31, 3-39, 3-47, 3-57, 3-65	41342	2-79, 2-99, 2-101	49745	2-31
		41345	2-11, 2-25	49800	2-15
390879	2-73, 3-21	41359	2-79, 2-81, 2-103	49826	3-45, 3-63, 3-77
390880	2-63	41360	2-75	49914	2-73, 3-21
390992	2-79	41367	4-9	50388	2-75, 2-77
391451	2-31	41368	4-9, 4-10	51103	2-79
391953	2-17	41371	4-9, 4-10	51109	2-27
39277	2-11, 2-71, 2-81, 2-91, 3-5, 3-7, 3-19	41401	2-106	51225	2-47
		41410	3-75	51338	3-123
39278	2-79, 2-85	41421	2-43, 3-79	51338AM	2-29
39281	2-77	41430	2-23, 3-13, 3-15	51339	2-29
39283	2-81	41451	2-43, 3-79	51414	2-81
39284	2-23, 2-77, 3-81, 3-83	41454	2-43, 3-79	51528	2-73, 3-21
39308	2-23, 2-57, 3-31, 3-47, 3-65	41561	2-91	51534	2-65
		41579	2-7, 2-9, 3-87	51564	2-87

CROSS REFERENCE

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
51727	2-79	602036000	3-91	69234	3-43, 3-45, 3-61, 3-63, 3-77
51813	3-99	60278	2-127	69582	2-27
53268	2-33	603103000	2-106	69785	2-31
53466	2-35	60386	4-3, 4-5	70158	2-29
53782	2-65	61297	4-3, 4-5	70161	2-29
54333	2-33, 2-35, 2-37, 2-53, 2-55, 3-27, 3-29, 3-45, 3-63, 3-93	61298	4-3	70709	2-19
54390	2-29	61300	4-3, 4-5	70717	2-87
54577	2-29	61301	4-3	70756	3-49, 3-67
54620	2-87	613735	2-35	71026	2-99
54743	2-15	61791	2-25	71100	2-65, 3-99
54995	2-85	63147	2-57, 3-47	71101	2-3, 2-4, 2-65
55586	2-92	63184	3-93	71529	2-103
55685	2-19	63244-1	3-75	71607	2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
56185	2-19	63244-2	3-27, 3-75	71658	2-65
56690	2-19, 2-92	63248-1	2-9	72164	3-9
56992	2-85	63248-2	2-9	72171	3-9
57379	2-31	63248-3	2-9	72172	3-9
57598	2-71, 3-19	63248-4	2-9	72174	3-9
578060000	3-91	63416	2-31, 3-77	72439	3-49, 3-67
578061000	3-91	63430	3-97	72897	2-85
578063000	3-91	63448	3-97	72898	2-85
578064000	3-91	63451	3-97	72899	2-85
578066000	3-91	63740	2-105	72946	2-51, 3-25, 3-31, 3-39, 3-57
578071000	3-89	63810	2-53, 3-27, 3-29, 3-75, 3-77	72950	3-27
578072000	3-89	63923	4-14	72968	2-49, 3-23, 3-95, 3-97
578074000	3-91	63987-1	2-53, 2-55, 3-27, 3-29	73077	2-85
578077000	3-91	64425	2-59, 2-61, 2-65, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69	73467	3-87
578078000	3-91			73468	3-75
578091000	3-91	64489	2-73, 3-21	73474	2-53, 2-55, 3-27, 3-43, 3-61
578094000	3-91	64533	2-13, 2-69	73475	3-75
578123000	3-91	64743	2-37	74027	2-81
578124000	3-91	64778	2-37, 3-45, 3-63	74098	4-17
578125000	3-91	65340	3-91	74114	4-18
578126000	3-91	65341	3-89	74142	2-19
578143000	3-91	65342	3-93	74196	4-18
578154000	3-91	65580	3-95, 3-97	74231	4-18
578155000	3-91	65581	3-93	74232	4-18
578160000	3-89	65582	3-91	74243	4-18
578161000	3-91	65610	3-91	74244	4-18
578164000	3-91	65665	2-17	74245	4-18
578214000	3-91	65667	4-13	74454	2-91
578228000	3-91	65668	4-13	74455	2-23, 3-81, 3-83
578276000	3-89	65670	4-13	75611	2-31, 2-43, 3-75
578318000	3-89	65671	4-13	75635	3-81, 3-83
578439	3-91	65672	4-13	75939	2-106
578820000	3-89	65673	4-13	76062	2-99, 2-101
578821000	3-91	65674	4-13	76316	2-92
579112	3-91	65675	4-13	763504	4-16
57984	2-19	65676	4-13	763508	4-16
58327	2-3, 2-5, 2-75	65677	4-13	76570	2-69, 2-77, 2-83, 3-21
58359	2-85	65678	4-13	76653	2-59, 2-61, 3-33, 3-37
58494	2-57, 3-31, 3-47, 3-65	66211	2-29	77001	4-17
59009	2-27	66213	2-3, 2-4, 2-29	77003	4-17
59542	2-85	67004	3-77, 3-95, 3-97	77097	2-85
59661	3-51, 3-69	67767	2-11, 2-57, 3-27, 3-29, 3-31, 3-47, 3-65	77227	2-63
59840	2-85			77228	2-63
59940	2-19	68106	2-89		
60189	4-9				

Part Number	Page Number	Part Number	Page Number
77270	3-31, 3-65	86759	2-59, 2-61, 3-33, 3-35, 3-37, 3-49, 3-51, 3-67, 3-69
77272	2-63	86767	3-97
77275	3-39, 3-57	86824	2-55, 3-27
77276	3-39, 3-57	86860	2-27, 2-71, 3-19
77277	3-39, 3-57	86866	2-59, 2-61, 3-33, 3-35, 3-37
77334	3-27, 3-29	87147	2-85
77347	2-31, 2-41	87172	2-71, 3-19
77488	2-65	87244	3-55, 3-73
77605	2-77	87299	2-91
78122	3-93	87308	2-89
78398	3-45, 3-63, 3-75	87346	2-11
78553	2-17	87349	2-99, 2-101
78740	2-31	87355	2-25
78842	2-31	87419	2-7, 2-9
78950	4-13	87482	2-99
78951	4-13	87483	2-99, 2-103
78979	2-63	87507	2-99
79217	2-63	87546	2-89
79273-1	2-37, 3-93	87709	3-5, 3-7
79273-2	2-31, 3-75	87725	2-23
79273-4	2-53, 2-55, 3-27, 3-45, 3-63	87750	2-25
79320	2-3, 2-4, 2-5, 2-43, 3-79	87816	2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
79350	2-39	87838	2-91
79497	3-75	87839	2-25
79572	3-45, 3-63	87840	2-25
79711	4-17	87841	2-25
79716	4-17	87849	2-25
79728	4-17	87948	2-11
79731	4-17	87949	2-11
79739	4-17	9001397	3-102
79740	4-17	9001398	3-103
80127	2-71, 3-19		
80235	2-79		
80487	2-79		
80491	2-59, 2-61, 3-33, 3-37		
81710	2-75		
81751	2-71		
81767	3-19		
81771	3-59		
81812	2-89		
81818	2-77, 3-41		
81919	2-71, 3-19		
81922	2-99, 2-101		
81952	2-63		
82829	2-15		
82839	2-23		
83052	3-41, 3-59		
83733	2-29		
83874	2-67, 3-99, 3-101		
84028	2-53, 2-55, 3-27, 3-29, 3-43, 3-45, 3-61, 3-63		
84057	3-93		
84593	2-63		
86333	2-73		
86375	2-99		
86393	2-103		
86508	3-75		
86636	2-31, 3-87		

PART DESCRIPTION TO PAGE NUMBER CROSS REFERENCE LIST

A

Actuator, 36Vdc, 01.8 Stroke 300Lb, 3-21
 Actuator, 36vdc, 01.8stroke 300lb, 2-73
 Actuator, 36vdc, 02.1stroke 500lb, 2-65
 Actuator, 36vdc, 02.7stroke 500lb, 2-57, 3-47
 Actuator, 36vdc, 05.0stroke 600lb, 2-79
 Actuator, 36vdc, 7.0stroke, 700lb, 2-47
 Actuator, Mount, 2-79
 Actuator, Rollout, 2-87
 Adapter, Brush, 2-71, 3-19
 Adaptor, Brush, 2-7, 2-9
 Adaptor, 3-91
 Alarm Assy, Backup, 12-48vdc 82-102dba, 3-9
 Alarm, Warning, 10-48vdc, 2-17
 Angle, 1.00 0.75 .12t 00.8l Hr, 3-33
 Angle, Battery, R/O, 3-105
 Angle, Bumper, Mtg, Lh, 3-21
 Angle, Bumper, Mtg, Rh, 2-81
 Angle, Cable, Keeper, 2-79
 Angle, Cable, Keeper, 2-79
 Angle, Mtg, Es, 3-75, 3-93
 Angle, Mtg, Fltr Shaker, 2-89
 Angle, Mtg, Front, 2-83
 Angle, Mtg, Pump, Detergent, 3-87
 Angle, Rh, 2-11
 Angle, Wand, Clean-Out, 3-77
 Angle, 2-79, 2-81, 2-91, 2-92, 3-43, 3-45, 3-53, 3-55, 3-61, 3-63, 3-71, 3-73
 Arm Assy, Flap, Lower, 2-83
 Arm Wldt, Brush (Replaced by 374186), 2-77
 Arm Wldt, Brush, Idler, 2-77
 Arm Wldt, Brush, 2-74, 2-75, 2-77
 Arm Wldt, Flap, 2-83
 Arm Wldt, Front, Lh, 3-51, 3-69
 Arm Wldt, Front, Rh, 3-49, 3-67
 Arm Wldt, Lift, Hopper, W/ Label, [8300], 2-85
 Arm Wldt, Lift, Scrub Head, [7300], 2-47
 Arm Wldt, Pivot, Side, [7300/8300], 2-57, 3-31, 3-47, 3-65
 Arm Wldt, Rear, Lh, 3-51, 3-69
 Arm Wldt, Rear, Rh, 3-49, 3-67
 Arm Wldt, 2-65, 2-87
 Arm, Cntrl, Throttle, Electronic, 2-23
 Arm, Latch, 3-49, 3-51, 3-67, 3-69
 Arm, Mtg, Side Sqge Frame, Ele, 2-59, 2-61, 3-33, 3-37
 Arm, Safety W/ Label, [8300], 2-85
 Arm, 2-83
 Armature and Fan Assembly, 4-11
 Armature Assy, Complt, 4-9
 Armature Fan, 4-11
 Armature, 4-3, 4-5
 Axle, Wand, 3-91

B

Bag, Power, 3-95, 3-97
 Ball, Check, Strg Valve, 4-18
 Ball, Check, 4-15
 Balljoint, .25-28 Fem/.25-28mal, 2-23
 Bar Assy, Spray [7300/8300], 3-63
 Bar Wldt, Battery, R/O, 3-105
 Bar Wldt, Flap, Lh, 2-83
 Bar Wldt, Flap, Rh, 2-83
 Bar Wldt, Retainer, Sqge, Rear, 2-67, 3-99, 3-101
 Bar, 2-31, 2-41
 Battery Kit, Wet, 36vdc 0500ah, Ci, 3-109
 Battery, 36vdc 1000Ah Wet, 3-115
 Battery, 36vdc 750ah Wet, 3-113
 Battery, 36vdc, 600ah, Sealed, 3-111
 Battery, Wet, 36vdc 0500ah, 3-109
 Bearing Assy, 2-91
 Bearing cover, 4-13
 Bearing Kit, 4-6, 4-7, 4-8, 4-18
 Bearing, Ball, 0.59b 1.26d 0.35w, 2-75
 Bearing, Ball, 0.67b 1.57d 0.47w, 2-91
 Bearing, Ball, 0.79b 1.85d 0.55w, 2-74, 2-77, 3-41, 3-59
 Bearing, Ball, 1.00b 2.00d 0.50w, 2-85
 Bearing, Cone, 1.38b 0.71w, 2-29
 Bearing, Cup, 2.56D 0.55W, 3-123
 Bearing, Cup, 2.56d 0.55w, 2-29
 Bearing, Flange, 2-19
 Bearing, Needle, 0.25b 0.88d 0.50w, 3-105
 Bearing, Self Align, 1.25b 2.00d, 2-85
 Bearing, Sleeve, 0.62od, 2-83
 Bearing, Sleeve, 1.25id, 2-85
 Bearing, Sleeve, 1.75id, 2-85
 Bearing, Thrust, 0.66b 1.25d 0.06w, 2-63, 2-65, 2-73
 Bearing, Thrust, 0.75b 1.25d 0.06w, 2-65
 Bearing, Thrust, 2-27, 2-71, 3-19, 4-16
 Bearing, W/ Collar, 0.75b 1.85d 1.06w, 2-75, 2-77
 Bearing, 2-25, 4-3, 4-5, 4-6, 4-8, 4-9, 4-10, 4-11, 4-12, 4-19
 Bellcrank, Head Lift, 2-47
 Belt, Drive (Cylindrical Brush), 3-41, 3-59
 Belt, Drive, 2-4
 Belt, V, [3v] 33.5l, 2-3, 2-5, 2-91
 Belt, V, [Hc41] 41.0l, 2-3, 2-5, 2-75
 Belt, V, 2-75
 Blade Assy, Sqge, Side, 2-4, 3-35
 Blade Kit, Sqge, Ure, [Mp1000], 3-102
 Blade Kit, Sqge, Ure, [Mp1200], 3-103
 Blade, Sqge, Front 48.0l, 2-3, 2-4, 3-99
 Blade, Sqge, Front, Mp1000, Tile, 2-67, 3-101
 Blade, Sqge, Front, Mp1200, Tile, 3-99
 Blade, Sqge, Front, 2-3, 2-4, 2-67, 3-101, 3-102, 3-103
 Blade, Sqge, Rear 48.0l, 2-3, 2-4, 3-99
 Blade, Sqge, Rear, 2-3, 2-4, 2-67, 3-101, 3-102, 3-103
 Blade, Squeeggee, 2-4, 3-35, 3-91

Block, Adj, 2-73, 3-21
 Bolt, Carriage, .38-16 X 2.00, 2-75
 Bolt, Eye, M10x1.5 X 2.0 X .28 Eye, 2-65, 3-99
 Bolt, Eye, M8 X 1.25, 2.75l, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Bolt, Shld, .38DX0.38, .31-18, 3-105
 Bolt, 2-25
 Boot, 90deg .50d .57d X .84, 2-25
 Boot, Protector, Circuitbreaker, 2-97
 Box, Accelerator, 2-23
 Box, Circuitboard, 2-106
 Brace, Hppr, External, 2-81
 Brace, Hppr, Internal, 2-81
 Bracket Wldt [7300/8300 FaST], 2-35
 Bracket Wldt [7300/8300-FaST], 2-35
 Bracket Wldt, Mtg, Fan, 2-45
 Bracket Wldt, Mtg, Guard, Side Brush, 2-71
 Bracket Wldt, Mtg, Motor, [8300], 2-71
 Bracket Wldt, Mtg, Spring, 2-59, 3-33
 Bracket Wldt, Pivot, 2-63
 Bracket Wldt, Steering, Tilt, 2-19
 Bracket Wldt, Tank, 2-41
 Bracket Wldt, 2-39
 Bracket, Adaptor, Mtg, Kick In, Frame, 3-25, 3-57
 Bracket, Bearing, Mtg, 2-77
 Bracket, Bearing, 2-77
 Bracket, Bumper, 2-81
 Bracket, Cable Cntrl, 2-39
 Bracket, Cntrl, Water, 2-39
 Bracket, Fan End, 4-5
 Bracket, far End, 4-3
 Bracket, Full, 2-31, 3-77
 Bracket, Guard, 2-39
 Bracket, Hopper, Lh, 2-85
 Bracket, Hopper, Rh, 2-85
 Bracket, Latch, Door, 2-11
 Bracket, Lh, 2-11
 Bracket, Motor, Mtg, 2-71, 3-19
 Bracket, Mtg, Circuitbreaker, [Hi-Mag], 2-97
 Bracket, Mtg, Controller, Sgl, 2-101
 Bracket, Mtg, Es, 3-75
 Bracket, Mtg, Pump, Detgt [7300/8300], 2-35
 Bracket, Mtg, Relay, 2-101
 Bracket, Mtg, Tank, 2-31, 2-41
 Bracket, Mtg, Valve, Solenoid, 2-33
 Bracket, Mtg, 2-11, 3-5, 3-9, 3-91
 Bracket, Panel, 2-25
 Bracket, Pivot, 2-73, 3-21
 Bracket, Power Wand, 3-93
 Bracket, Protector, Float Switch, 2-41, 3-77
 Bracket, Retainer, Filter, 2-41
 Bracket, Retainer, Spring, 2-7, 2-9
 Bracket, Retaining, Filter, 2-41
 Bracket, Retaining, Tank, Detgt, 3-87
 Bracket, Retaining, 2-41
 Bracket, Rh, 2-11

Bracket, Sppt, Auto Fill, 3-75
 Bracket, Spray Bar, 40" [7300/8300], 3-45
 Bracket, Spray Bar, 48" [7300/8300], 3-63
 Bracket, Stop, Frame, 2-49, 3-23
 Bracket, Switch, 2-81
 Bracket, Tube, Tee, 3-35, 3-55, 3-73
 Bracket, 2-15, 2-73, 2-91, 3-21, 3-25, 3-91
 Brake Assy, 2-29
 Brake Repair Kit, 2-29
 Brake Shoes, 2-29
 Brush, 4-19
 Brush Assy - S.sw - 19.0 Dia, Polypr, 2-7, 2-9
 Brush Assy, Disk, Scb, 16.0 D, Nyl, 2-9
 Brush Assy, Disk, Scb, 16.0 D, Pyp, 2-9
 Brush Assy, Disk, Scb, 16.0 D, Super Abr, 2-9
 Brush Assy, Disk, Scb, 20.0 D, Nyl, 2-7
 Brush Assy, Disk, Scb, 20.0 D, Pyp, 2-7
 Brush Assy, Disk, Scb, 20.0D, Super Abr, 2-7
 Brush Holder Assy, 4-10
 Brush Holder Cap, 4-6, 4-7
 Brush Kit, 4-6, 4-7, 4-8, 4-10, 4-12
 Brush Mechanism, 4-5
 Brush mechanism, 4-3
 Brush Palte, 4-11
 Brush, Block, Scrub, Ab, 3-91
 Brush, Block, Scrub, Poly, 3-91
 Brush, Board, Assy, 4-19
 Brush, Conveyor, Cyl, 35l, 4sr, 2-5
 Brush, Motor, Ele, 4-11
 Brush, Scrub, 39l, 20sr, Nyl, Spl, 2-7
 Brush, Scrub, 39l, 20sr, Pyp, Spl, 2-7
 Brush, Scrub, 39l, 20sr, Super Abr, Spl, 2-7
 Brush, Scrub, 47l, 20sr, Nyl, Spl, 2-9
 Brush, Scrub, 47l, 20sr, Pyp, Spl, 2-9
 Brush, Scrub, 47l, 20sr, Super Abr, Spl, 2-9
 Brush, Swp, 36l, 6dr, Spl, 2-7, 2-9
 Brush, Swp, 36L, Window, Pp, Spl, 2-7, 2-9
 Brush&Spring Assy, 4-6, 4-7
 Brush/rectifier Assy, 4-13
 Brush, 4-8, 4-9
 Brushholder, Motor, Ele, 2-71, 3-19
 Bumper Wldt, Lh, 2-81, 3-21
 Bumper Wldt, Rh, 2-81
 Bumper Wldt, 2-81, 3-21
 Bumper, Neo, 1.5d .63t .31h, 2-51, 2-63, 3-99
 Bumper, Poly-E, 2-67, 3-99, 3-101
 Bumper, Posi Drain, Recvy Side, 3-81, 3-83
 Bumper, Pye, 2-49, 3-23, 3-39, 3-57
 Bumper, Rbr, 1.00d 0.38t .25-20, 2-13
 Bumper, Rbr, 1.19d .72l, 2-47
 Bumper, Rbr, 2.0d 0.75t .38-16, 3-49, 3-67
 Bumper, Rear, Lh, 3-11
 Bumper, Rear, Rh, 3-11
 Bumper, Side, Scb Head, Wide, 3-25, 3-57
 Bumper, Sqge, 2-67, 3-99, 3-101
 Bumper, 3-39, 3-57

Busbar, .06 0.6w 2.5l 2/.28h, 2-99, 2-103
 Busbar, Fuse, .6 0.6w 0.8h 2.0l, 2-99
 Bushing Assy, Flng, 2 Hole, 0.50b, 2-19
 Bushing Assy, Flng, 4 Hole, 1.57b, Stl, 2-91
 Bushing, Flng, 0.50b 0.59d 0.38l, 2-47, 2-73, 2-83
 Bushing, Flng, 0.63b 0.72d 0.25l, 2-39, 2-47, 2-57, 3-31, 3-47, 3-65
 Bushing, Flng, 0.63b 0.75d 0.38l, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Bushing, Flng, 1.00b 1.13d 0.38l, 2-29
 Bushing, Flng, 1.50B 0.59D 0.38L, 3-21
 Bushing, Flng, 1.50b 1.65d 1.00l, 2-87
 Bushing, Sleeve, 0.37b 0.50d 0.50l, 2-27
 Bushing, Sleeve, 0.50b 0.59d 0.25l, Bnz, 2-83
 Bushing, Sleeve, 0.63b 0.72d 0.25l, 2-83
 Bushing, Sleeve, 0.63b 0.72d 0.38l, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Bushing, Sleeve, 0.88b 1.00d 0.75l, Bnz, 2-85
 Bushing, Taper Lock, 2-19
 Button, Plug, 0.50H .03-.12 [Black Nyl], 2-85
 Button, Plug, 1.1 X 1.1h, Black, Plstc, 2-17

C

Cable, .12d, 13.3l, .2clevis/.2clevis, 2-3, 2-4, 2-65
 Cable, .13d, 10.0l, .51eye /.51eye, 2-71, 3-19
 Cable, .13d, 15.5l, .50eye /.50eye, 2-57, 3-31, 3-47, 3-65
 Cable, Brush, Lift, 2-79
 Cable, Flap, Lift, 2-79
 Cable, Pull, 2-27
 Cable, Push Pull, 2-39
 Cable, Ribbon, 34 Conductor, 2-17
 Cable, Safety, Battery, 3-105
 Cam, Front, 3-41, 3-59
 Cam, Rear, 2-67, 3-41, 3-59, 3-99, 3-101
 Cam/bearing/Diaphragm Kit, 4-13
 Cam, 2-67, 3-99, 3-101
 Cap Assy, 3-81
 Cap, Brush, Motor, Ele, 2-71, 3-19
 Cap, Brush, 3-19
 Cap, Dust, 3-81, 3-83
 Cap, End, 4-16, 4-18
 Cap, Hub 2.567 Hole, 2-29
 Cap, Neoprene Black, 2-65, 3-27
 Cap, Plastic, 2-31
 Cap, Screw Cl, 4-16
 Cap, Tank, Drain, 2.25 Thread Pye, 2-43, 3-79
 Cap, Tank, Drain, 3.85 Thread Pye, 2-43, 3-79
 Cap, Tank, Drain, 6.17 Thread Pye, 2-31, 3-81, 3-83
 Cap, Tank, 2-43, 3-79, 3-87

Cap, Tube, 2-19
 Cap, Vyl, .234id .750l .04, 2-15
 Caster Kit, Sqge, Replmt, 2-63
 Chain, Arm, 2-87
 Chain, Coil, Str, #210, 09.0l 07 Link, 2-65
 Chain, Drive, 2-87
 Chain, Roller, #40 X 109 Pitches, 2-19
 Chain, Sash, #35, 07.2l 13 Link, 3-81, 3-83
 Channel Wldt, Steering, 2-11
 Channel Wldt, 2-63, 2-67, 2-83, 3-99, 3-101
 Channel, Battery, R/O, 3-105
 Channel, Harness, 2-41
 Channel, Spring, 2-65
 Channel, Stop, Lh, 3-99
 Channel, Stop, Rh, 3-99
 Channel, 2-31, 2-41, 2-73, 3-21
 Charger, 36V, 210A, 60Hz, 3Ph, 3-121
 Charger, 36V/120A 60H/1Ph 480V, 3-116
 Charger, 36V/120A 60H/3Ph 480V, 3-117
 Charger, 36V/150A 60Hz, 3-118
 Charger, 36V/93A 60Hz, 1Ph, Sealed, 3-119
 Charger, 36V/93A 60Hz, 3Ph, Sealed, 3-120
 Check valve assy, 4-13
 Chrome Pltd Cam Shaft, 2-29
 Circuitboard, Assy, [7300/8300], 2-106
 Circuitboard, Pedal, 2-23
 Circuitboard, Sweeper, [8300], 2-106
 Circuitbreaker, 10.0a, 2-97, 2-107
 Circuitbreaker, 15.0a, 2-97
 Circuitbreaker, 20.0a, 2-97
 Circuitbreaker, 25.0a, 2-97
 Circuitbreaker, 40.0a (Power Steering Option), 2-97
 Circuitbreaker, 50.0a (Center Brush Option), 2-97
 Circuitbreaker, 15.0 A, 3-5, 3-7
 Circuitbreaker, 20.0a [Resettable], 2-97
 Circuitbreaker, 30.0a, Resettable, 2-97
 Circuitbreaker, 40a, (Max Prot 1000 Disk W/Std Motor), 2-97
 Circuitbreaker, 40a, (Max Prot 1200 Disk), 2-97
 Circuitbreaker, 45a, (Max Prot 1000 Cylindrical), 2-97
 Circuitbreaker, 45a, (Max Prot 1000 Disk W/Hd Motor), 2-97
 Circuitbreaker, 45a, (Max Prot 1200 Cylindrical), 2-97
 Circuitbreaker, 50.0a, 2-97
 Circuitbreaker, 30.0a, 2-97
 Clamp Wldt, Front 48.0l, 3-99
 Clamp Wldt, Front, 2-67, 3-101
 Clamp Wldt, Rear 48.0l, 3-99
 Clamp Wldt, Rear, 2-67, 3-101
 Clamp, Cable, Stl, 0.38d X 0.38w, 1h, 3-5, 3-9
 Clamp, Cable, Stl, 0.56d X 0.38w, 1h, 2-47
 Clamp, Cable, Stl, 0.63d X 0.75w, 1h, 2-15

CROSS REFERENCE

Clamp, Cable, Stl, 0.69d X 0.62w, 1h,
2-11, 2-57, 3-27, 3-29, 3-31, 3-47,
3-65
Clamp, Cable, Stl, 0.75d X 0.75w, 1h,
3-45, 3-63
Clamp, Cable, Stl, 0.88d X 0.62w, 1h,
2-53, 2-55, 2-85
Clamp, Cable, Stl, 1.00d X 0.62w, 1h,
3-43, 3-45, 3-61, 3-63, 3-77
Clamp, Cable, Stl, 1.50d X 1.00w, 1h, 2-35
Clamp, Hose .40 - .42 2 Wire, 2-35
Clamp, Hose, Plstc, 1.60d X 0.62w, 2-43,
3-79
Clamp, Hose, Wormdrive, 0.25-0.62d,
3-87
Clamp, Hose, Wormdrive, 0.31-0.88d,
.31w, 2-53
Clamp, Hose, Wormdrive, 0.31-0.88d,
2-33, 2-35, 2-37, 2-55, 3-27, 3-29,
3-45, 3-63, 3-93
Clamp, Hose, Wormdrive, 0.50-1.06d,
2-55, 3-27
Clamp, Hose, Wormdrive, 0.56-1.06d,
.56w, 2-53, 3-27, 3-29, 3-77
Clamp, Hose, Wormdrive, 0.56-1.06d,
3-75
Clamp, Hose, Wormdrive, 0.81-1.50d, 2-4,
2-31, 2-53, 3-35, 3-43, 3-45, 3-55,
3-61, 3-63, 3-73
Clamp, Hose, Wormdrive, 1.56-2.50d,
2-45
Clamp, Hose, Wormdrive, 1.62-3.50d,
2-33
Clamp, Hose, Wormdrive, 1.81-2.75d,
3-55, 3-73
Clamp, Hose, 3-89, 3-91
Clamp, Ribbon Cable, Hold-Down, 2-17,
2-89
Clamp, Ribbon Cable, 2-17, 2-89
Clamp, 4-3
Clevis, Adj, 0.19pin, #10-32, 2-39
Clevis, Adj, 0.25pin, .25-28, 2-79
Clevis, Adj, 0.38pin, 0.31-24, Lh, Pl, 2-29
Clevis, Adj, 0.38pin, 0.31-24, Pl, 2-29
Clevis, Adj, 1.12pin, 1.00-14, 2-79
Clip, Finger Grip, 3-77, 3-95, 3-97
Clip, Motor, Ele, 2-71, 3-19
Clip, Spring, Prop Arm, 2-85, 3-55, 3-73
Clip, Sprocket, 2-25
Clip, Sqge, 3-49, 3-51, 3-69
Coil 36v, 4-17
Collar Wldt, 2-75, 3-41, 3-59
Column, Steering (Replaced by 387653),
2-19
Column, Steering, #14.0L .81D 36Tooth,
2-19
Comm. Bracket, 4-5
Comm. bracket, 4-3
Connector assy, 4-13
Connector Body, 4-10, 4-12, 4-19
Connector Kit, Tubing, 4-14
Connector, 2 Conductor, 4-5, 4-6, 4-7
Connector, 2 conductor, 4-3

Connector, 2-Conductor, 4-9
Connector, 350a, Gray [Anderson], 3-109
Connector, Andersn 350A, Gray, 3-116,
3-117
Connector, Anderson, 350A, Gray, 3-111,
3-113, 3-115, 3-118, 3-119, 3-120,
3-121
Contact, Switch, 2-17
Contactor, 36vdc, [Spno], 2-99
Contactor, 36vdc, 100a, Spst, 2-101
Contactor, 36vdc, 200a, Dpdt, 2-101
Contactor, 36vdc, 200a, Spst, 2-101
Contactor, 36vdc, Spdt, 2-99
Contactor, 36vdc, 2-99
Controller, Motor, 36vdc, 1205, 2-99
Controller, Motor, 36vdc400A, 2-101
Conveyor, Cyl, 35L, 4Sr, Pp, 2-77
Coupling Body, Qf, Pm08, 2-37
Coupling Insert, Qm, Bm08, 2-37
Coupling, Fem, W/ Valve, .25 Brb, 2-35
Coupling, Flexible, 4-15
Coupling, Mal, .25 Npt, 2-35
Cover Wldt, Top, 2-13
Cover Wldt, 2-15
Cover, Chain, 2-87
Cover, Controlbox, 2-97
Cover, Drive, 3-41, 3-59
Cover, Hopper, 2-89
Cover, Idler, 3-41, 3-59
Cover, Insert, 2-43, 3-79
Cover, Rear, 2-15
Cover, Reservoir, 4-15
Cover, Tank, Solution, 2-31
Cover, Tank, Top, 2-15
Cover, Tank, 2-31, 3-87
Cover, Vac Fan, W/ Label, [8300], 2-91
Cover, 2-106
Cradle Wldt, Battery, 3-107
Crank Replacement Kit, 4-14
Cuff, Swivel, 3-89
Cup Holder, 2-13
Cup Wldt, Skid, 2-11
Cylinder, Hyd, 2.0b, . L, 12.00strk, 2500,
2-85

D

Detergent Pkg, 2 Liter, Sgl, 365, 2-35
Detergent Pkg, 2 Liter, Sgl, 665, 2-35
Detergent Pkg, 4 Liter, Sgl [Tco 665], 2-35
Device, Centering, 2-7, 2-9
Diaphragm kit, 4-13
Diode, Ele, Plug, 2-17, 2-101, 2-128
Disc, 4-3
Disk Assy, Pad Drive, 16d, 2-9
Disk Assy, Pad Drive, 20d, 2-7
Disk, Pad Drive, W/ Face, 16d, 2-9
Disk, Pad Drive, W/ Face, 20d, 2-7
Door Wldt, Side, 2-13
Door, Brush, Lh, 2-69, 3-21
Door, Brush, Rh, 2-69
Door, Brush, 2-75, 2-77
Drive, Main Cl, 4-16

Drive, Valve, Strg, 4-18
Drum, Cable, Lift, 2-65
Duct, Vinyl 3.5l, 2-73
Duct, Vyl, 0.40 X 0.75 .25d 23.0l, 3-7
Duct, Vyl, 0.40 X 0.75 .25d 48.0l, 3-7

E

Ear, 2-87
Element, Fltr, 4-15
Extinguisher, Fire, 3-124

F

Fan Assy, Vacuum (See Breakdown)
(Replaced by 398520), 2-45
Fan Assy, Vacuum (See Breakdown), 2-45
Fan vacuum, 36v, 4-3
Fan, rotating, 4-3
Fan, stationary, 4-3
Fan, Vacuum, 4-5
Fan, 4-3, 4-5
Filter Assy, Air, Molded Ure, 2-35
Filter, Foam, 2-37
Filter, Inline, Pf06/Pf06, 80 Mesh, 2-37
Filter, Panl, Dust, 2.0 X 06.1 X 07.6, 2-3,
2-4, 2-41
Filter, Pkg, Dust, Panl, 81plts, 2-3, 2-4
Filter, Soltn, 20mesh, Pf16 3.1d 02.3l,
2-31
Fitting 1/8mx1/4h Barb Brs, 2-35
Fitting Assy, Cap, 0.067b, Pf04, 2-33
Fitting Assy, Cap, 0.086b, Pf04, 2-33
Fitting, Brs, E90, Cf03/Pf02, 2-35
Fitting, Brs, E90, Pm04/Bm08, 2-33
Fitting, Brs, Qdc, Bm12/Qf08, 3-75
Fitting, Brs, Qdc, Pm04/Qf06, 3-93
Fitting, Brs, Str, Pf04/Pf04 Bkhd, 3-93
Fitting, Brs, Str, Pm02/Bm03, 2-45
Fitting, Brs, Str, Pm04/Pm04, 2-33
Fitting, Brs, Str, Pm04/Pm06, 2-33
Fitting, Brs, Tee, Pf04/Pf04/Pm04, 2-33
Fitting, Brs, Tee, Pf04/Pm04/Pf04, 2-33
Fitting, Coupler, Hose, Shank, Fem, 3-81,
3-83
Fitting, Elbow, 3-91
Fitting, Grease, E90 Pm04 .75L, 3-25,
3-39, 3-57
Fitting, Grease, Str Pm04 .47l, 2-85
Fitting, Grease, 2-25
Fitting, Hose, Barbed, .25npt Mal, 3-91
Fitting, Hyd, E90, Jm04/Om04, 2-85
Fitting, Hyd, Rst, Jm04/.047, 2-85
Fitting, Hyd, Str, Jm04/Om04, 2-92
Fitting, Hyd, Str, Jm04/Om06, 2-19
Fitting, Hyd, Str, Jm04/Om10, 2-19
Fitting, Hyd, Str, Jm06/Om06, 2-19, 2-92
Fitting, Hyd, Tee, Jm06/Jm06/Om06, 2-92
Fitting, Plstc, [90 Bm03/Pm02], 2-41
Fitting, Plstc, Bkhd, Pf12/Pf12, 2-43
Fitting, Plstc, Bkhd, Pf16/Pf16, 2-31
Fitting, Plstc, Cap, Pf04, 2-35

Fitting, Plstc, Cap, Pf08, 2-53, 2-55, 3-27
 Fitting, Plstc, E45, Pf12/Pf12, 3-75
 Fitting, Plstc, E90, 06bm/06bm, 3-87
 Fitting, Plstc, E90, 16bm/16pm, 2-31
 Fitting, Plstc, E90, Bm04/Pm04 Nyl, 2-35
 Fitting, Plstc, E90, Bm08/Bm08, 2-53, 2-55, 3-27, 3-29
 Fitting, Plstc, E90, Bm08/Pm04 Nyl, 2-33
 Fitting, Plstc, E90, Bm08/Pm04, 3-93
 Fitting, Plstc, E90, Bm08/Pm06, 2-37, 3-45, 3-63
 Fitting, Plstc, E90, Bm08/Pm08, 3-75
 Fitting, Plstc, E90, Bm08/Pm12, Nyl, 2-37
 Fitting, Plstc, E90, Bm10/Pm12, 3-75
 Fitting, Plstc, E90, Bm12/Bm12, 2-53, 2-55, 3-27, 3-29, 3-43, 3-45, 3-61, 3-63
 Fitting, Plstc, E90, Bm12/Pf12, 3-77
 Fitting, Plstc, E90, Bm12/Pm08, 3-27, 3-75
 Fitting, Plstc, E90, Bm12/Pm12, 3-75, 3-77
 Fitting, Plstc, E90, Pf08/Pf08, 3-45, 3-63
 Fitting, Plstc, E90, Pm12/Pf12, 2-31
 Fitting, Plstc, Plug, Pm12, 2-31, 2-43, 3-75
 Fitting, Plstc, Plug, PM16, 2-31
 Fitting, Plstc, Rst, .500d/.31id, 3-27, 3-29
 Fitting, Plstc, Str, 08pmxgarden, 3-77
 Fitting, Plstc, Str, Bm04/Bm08, 2-35
 Fitting, Plstc, Str, Bm06/Bm06, 3-87
 Fitting, Plstc, Str, Bm06/Pm12, 3-87
 Fitting, Plstc, Str, Bm08/Bm08, 2-53, 2-55, 3-27, 3-29
 Fitting, Plstc, Str, Bm08/Pm04, 3-93
 Fitting, Plstc, Str, Bm08/Pm06, 2-37
 Fitting, Plstc, Str, Bm08/Pm08, 2-53, 2-55, 3-27, 3-45, 3-63
 Fitting, Plstc, Str, Bm08/Pm12, 2-37, 3-93
 Fitting, Plstc, Str, Bm10/Bm10, 2-53, 2-55
 Fitting, Plstc, Str, Bm12/Pm08, Nyl, 3-45, 3-63
 Fitting, Plstc, Str, Bm12/Pm08, 3-75
 Fitting, Plstc, Str, Bm12/Pm12, 2-31, 3-75
 Fitting, Plstc, Str, Bm24/Bm32, 3-89, 3-97
 Fitting, Plstc, Str, Pm08/Pm08, 3-75
 Fitting, Plstc, Str, Pm12/Bm16, 2-31
 Fitting, Plstc, Str, Pm12/Pm12, 2-31, 3-75
 Fitting, Plstc, Str, Pm16/Pm16 Close, 2-31
 Fitting, Plstc, Tee, Bm08/Pm04/Bm08 Nyl, 2-33, 2-35
 Fitting, Plstc, Tee, Bm10/Bm10/Bm10, 2-53
 Fitting, Plstc, Tee, Bm12/Bm12/Bm12, 3-43, 3-61
 Fitting, Plstc, Tee, Bm16/Pf12/Bm16, 2-31
 Fitting, Plstc, Tee, Pf08/Pf08/Pf08, 3-75
 Fitting, Plstc, Tee, Pf12/Pf12/Pf12, 2-31
 Fitting, Plstc, Y, Bm08/Bm08/Bm08 Nyl, 3-45, 3-63
 Fitting, Qm, Male, 3-75
 Fitting, Quick Disconnect, 3-89
 Flange, Brg, 1.9id 2h, 2-75, 2-77
 Flange, 4-16
 Flap, Front, 2-3, 2-5, 2-83

Flasher, 12/48vdc 5a #6309/12-48vdc, 3-9
 Frame and Field Assembly, 4-11
 Frame Assy, Sqge, Side, Vacuum, Rh, 3-35
 Frame Wldt, Scb Head, 2-Brush, Ele, 2-49
 Frame Wldt, Scb Head, 3-Brush, Ele, 3-23
 Frame Wldt, Sqge 48.0l, 3-99
 Frame Wldt, Sqge, Side, Lh, 2-61, 3-37, 3-51, 3-69
 Frame Wldt, Sqge, Side, Rh, 2-59, 3-33, 3-49, 3-67
 Frame Wldt, Sqge, 2-67, 3-101
 Frame, 2-11
 Fuse 20a,3ag,Slo-blo, 2-106
 Fuse, .25d 10a 32vdc, 2-106
 Fuse, 200amp, 2-99, 2-101

G

Gasket, .19, 2.00ld 5.38OD [BUNA], 3-81, 3-83
 Gasket, .19, 4.05id 5.29od [Buna], 2-31, 2-43, 3-79, 3-87
 Gasket, Cap, Drain, 2-3, 2-4, 2-5, 2-43, 3-79
 Gasket, Cap, Dust, 3-81, 3-83
 Gasket, Cap, 2-43, 3-79
 Gasket, Cover, Controller, 2-97
 Gasket, Cover, Tank, Solution, 2-31
 Gasket, Cover, 3-41, 3-59
 Gasket, Foam, 3-55, 3-73
 Gasket, Lid, 2-43, 3-79
 Gasket, Mtg, Fan, 2-3, 2-4, 2-5, 2-45
 Gasket, Sqge, 2-67, 3-99, 3-101
 Gasket, Tank, Recovery, 2-3, 2-4, 2-41
 Gasket, 2-106
 Gasspring, 56lb, 6.3strk, 2-57, 3-31, 3-47, 3-65
 Gear, Drive, 2-25
 Gearbox, 90, Drive Wheel, Rear, [Hu], 2-25
 Gearbox, Motor, 4-10, 4-12, 4-19
 Geroler S/A Cl, 4-16
 Geroter, 4-18
 Grommet, Level Sensing 1.6 D 9.6L, 2-31
 Grommet, Pye, 0.37id, F/ 1.5h, .13matl, 3-87
 Grommet, Rbr, 0.38id, F/ 0.5h, .12matl, 3-5, 3-7, 3-9
 Grommet, Rbr, 0.50id, F/ 0.8h, .12matl, 2-97
 Grommet, Rbr, 0.89id, F/ 1.2h, .14matl, 2-23
 Grommet, Rbr, 1.00id, F/ 1.4h, .12matl, 2-97
 Grommet, Rbr, 1.0b, 2-97, 2-106
 Grommet, Rbr, 1.50id, F/ 1.8h, .31matl, 2-17, 2-27
 Grommet, Rbr, 2.13id, F/ 2.5h, .12 Matl, 2-35
 Grommet, Ribbon Cable, .63 X 1.81, 2-17
 Grommet, 3-91

Guard Wldt, Lh, 3-51, 3-69
 Guard Wldt, Light, Revl/Fish, 3-5, 3-7
 Guard Wldt, Oprtr, Top, 3-13
 Guard Wldt, Rh, [Mp1200], 3-67
 Guard Wldt, Rh, 3-49
 Guard Wldt, Sqge (MP□20), 3-25, 3-57
 Guard, Brush, Side, 2-71, 3-19
 Guard, Bumper, 3-25, 3-57
 Guard, Kick In, Scb Head, 2-51, 3-25, 3-39, 3-57
 Guard, Light, 3-9
 Guard, Side Brush, 2-71
 Guide, Point, Side Sqge, 2-59, 2-61, 3-33, 3-35, 3-37, 3-49, 3-51, 3-67, 3-69

H

H-016 Wavy Washer, 4-11
 Handle Wldt, Steering, Tilt, 2-19
 Handle, Wand, 3-91
 Handle, 2-31
 Harness [Fast 7300/8300], 2-128
 Harness, Switch, Key, Diode, 2-101
 Harness, Backup Alarm, Shrd, 3-9
 Harness, Battery, Connecting, 2-103, 2-105
 Harness, Battery, Rollout [7300/8300], 3-105
 Harness, Fast, 7300/8300, 2-128
 Harness, Hppr, 2-127
 Harness, Jumper, Arm, 2-127
 Harness, Light, Revl, Shrd, 3-5
 Harness, Main, 7300/8300, 2-127
 Harness, Power Wand, [7300/8300], 3-95
 Harness, Rear, [Fast 7300/8300], 2-128
 Harness, Sensor, Jumper, 2-41, 3-77
 Harness, Solenoid, Shagr, [6200], 2-89
 Harness, Warning Light, Alarm, 3-7
 Harness, Wire, Jumper, Reverse Switch, 3-9
 Harness, Wire, Jumper, Seat Switch, 2-127
 Head, Commutator End, 4-11
 Head, Drive End, 4-11
 Head, Wand, 3-91
 Headband, 4-11
 Headlight, 36vdc, 15cp 0.7a [#0534242], 2-81
 Headlight, 36Vdc, 60 Watt 1.7A, 3-9
 Hinge Assy, 2-15
 Hinge Wldt, W/ Pin, 2-15
 Hinge, .25pin .25 3.0w 05.0l 6/0.44h, 2-69
 Hinge, 2-13
 Hook Wldt, Latch, 3-41, 3-59
 Hopper, Sweeper, [8300], 2-81
 Horn, 36vdc, DbA, 2-11
 Hose Assembly, 3-89
 Hose Assy, Drain, 2-43, 3-79
 Hose Assy, Pvc, W/ Cuff, 1.5d, 90.0l, 3-97
 Hose Assy, W/1cuff, 1.5d 120l 1.5/, 3-81, 3-83
 Hose Assy, W/2 Cuff, 1.0d 41.0l, 2-5, 3-35
 Hose Assy, W/2 Cuff, 1.0D 44L 1.0/1.0, 3-35

CROSS REFERENCE

Hose Assy, W/2cuff, 1.0d, 23l, 3-55, 3-73
Hose Assy, W/2cuff, 1.0d, 41l, 3-55, 3-73
Hose Assy, W/2cuff, 2.0d 26l, 3-35, 3-55, 3-73
Hose Assy, W/2cuff, 2.0d 75l, 3-35, 3-55, 3-73
Hose, Afrmkt Replmt, Pvc, Brd 0.50id 1 Ft, 2-33, 2-35, 2-37, 3-45, 3-63
Hose, Afrmkt Replmt, Pvc, Brd 0.50id 2 Ft, 2-33, 3-29, 3-45, 3-63
Hose, Afrmkt Replmt, Pvc, Brd 0.50id 20ft, 2-37
Hose, Afrmkt Replmt, Pvc, Brd 0.50id 3 Ft, 3-29
Hose, Afrmkt, Pvc, Brd 0.50id 1ft, 2-55
Hose, Afrmkt, Pvc, Brd 0.50id 2ft, 2-53
Hose, Afrmkt, Pvc, Brd 0.75id 1 Ft, 3-29, 3-45, 3-63
Hose, Afrmkt, Pvc, Brd 0.75id 8 Ft, 3-29, 3-45, 3-63
Hose, Afrmkt, Pvc, Brd, 0.75id 8 Ft, 2-55
Hose, Afrmkt, Pvc, Clr 0.25id 1 Ft, 2-35
Hose, Afrmkt, Pvc, Clr 0.25id 2 Ft, 2-35
Hose, Hyd, Tc 06, Jf str/E90 , 48.0l, 2-95
Hose, Hyd, Med06, Jf06str /Jf06e90 , 26.0, 2-95
Hose, Hyd, Tc 04, Jf04str /Jf04e90 , 20.0, 2-95
Hose, Hyd, Tc 04, Jf04str /Jf04e90 , 30.0, 2-95
Hose, Hyd, Tc 06, Jf06str /Jf06e90 , 24.0, 2-95
Hose, Pvc, Brd, 0.38id 0.60od 15.00l, 3-87
Hose, Pvc, Brd, 0.38id 0.60od 66.00l, 3-87
Hose, Pvc, Brd, 0.50id 0.73od 33.00l, 3-27
Hose, Pvc, Brd, 0.50id 0.75od 14.00l, 3-27
Hose, Pvc, Brd, 0.50id 0.80od 18.00l, 3-27
Hose, Pvc, Brd, 0.62id 0.91od 10.30l, 2-53
Hose, Pvc, Brd, 0.75ID 1.00OD 02.00L, 3-43
Hose, Pvc, Brd, 0.75id 1.00od 02.00l, 3-27
Hose, Pvc, Brd, 0.75id 1.00od 19.00l, 3-75
Hose, Pvc, Brd, 0.75id 1.00od 2.00l, 3-61
Hose, Pvc, Brd, 0.75id 1.00od 26.00l, 3-75
Hose, Pvc, Brd, 0.75id 1.00od 44.50l, 3-27, 3-43, 3-61
Hose, Pvc, Brd, 0.75id 1.03od 01.50l, 3-43, 3-61
Hose, Pvc, Brd, 0.75id 1.03od 02.00l, 2-53, 2-55
Hose, Pvc, Brd, 0.75ID 1.03OD 05.00L, 3-43
Hose, Pvc, Brd, 0.75id 1.03od 05.00l, 3-61

Hose, Pvc, Brd, 0.75id 1.03od 11.00l, 3-43, 3-61
Hose, Pvc, Brd, 0.75id 1.03od 44.50l, 2-53, 2-55
Hose, Pvc, Clr, 0.50id 0.69od 50.00l, 3-77
Hose, Pvc, Wir, 0.50id 0.74od 47.00l, 3-93
Hose, Pvc, Wir, 0.50id 0.75od 15.50l, 3-93
Hose, Vacuum, 0.16id X 05.0l, 2-41, 2-45, 3-77
Hose, Vacuum, 35.0l, 2-5, 3-35, 3-55, 3-73
Hose, Vacuum, 58.5l, 2-5, 3-35, 3-55, 3-73
Hose, Vacuum, 89.0l, 2-41
Hose, Vacuum, 91.0l, 2-3, 2-4
Hose, Vacuum, 2-3, 2-4, 2-45, 3-89
Hose, Vyl, Brd .38id .60od 45.0l, 3-87
Hose, Vyl, Brd, .62id 55.0l, 3-77
Hose, Vyl, Brd, .75id 28.0l, 3-77
Hose, Wand, 3-91
Hose, Water, 1.0id 2.25l, 2-31
Hose, Water, 1.0id 4.5l, 2-31
Hose, Water, Vyl, Brd, .75id 14.0L, 3-75
Hose, 3-89
Housing Wldt, Brush [Mp1200], 3-57
Housing Wldt, Brush, Side, 2-73, 3-21
Housing Wldt, Brush, 3-39
Housing, Vacfan, Rear, 9.0d, Impeller, 2-91
Housing, 2-87, 4-3, 4-5, 4-16
Hub Wldt, 2-87
Hub, Drive, Brush, Disk, 0.75B 6T, 2-49
Hub, Drive, Brush, 3-23

I

Impeller, 9.00d X 1.40w X 0.376b, 2-91
Instruction, Repair, Valve, Strg, 4-18
Instruction, Repair, 4-16
Insulator, Panel & Switchboard, 2-101
Insulator, Panel, 2-99

K

Key Square 0.25 0.25 01.00 Lg, 4-12
Key Square 0.25 X 0.25, 01.00L, 4-10, 4-19
Key, Ignition, 2-17
Key, Sq, 0.12 X 0.12, 01.00l, 2-91
Key, Sq, 0.19 X 0.19, 00.62l, 2-75
Key, Sq, 0.19 X 0.19, 00.75l, 2-75, 3-41, 3-59
Key, Sq, 0.19 X 0.19, 01.00l, 2-75, 2-91, 3-41, 3-59
Key, Sq, 0.19 X 0.19, 01.25L, 4-9
Key, Sq, 0.19 X 0.19, 01.25l, 3-41, 3-59
Key, Sq, 0.25 X 0.25, 00.75l, 2-85
Key, Square, 4-6, 4-7, 4-8
Key, Woodruff, 0.19 0.75, [ASA#0606], 2-91
Kit, Brake, 2-3, 2-4
Kit, Brush, Motor, Ele, 2-71, 3-19
Kit, Brush, Motor, 3-19

Kit, Cap, Drain, 2-43, 3-79
Kit, Cl, Alarm, Backup, 36Vdc, 3-9
Kit, Ci, Battery, 36vdc, 1000Ah, Wet, 3-115
Kit, Ci, Battery, 36vdc, 600ah, Sealed, 3-111
Kit, Ci, Battery, 36vdc, 750ah, Wet, 3-113
Kit, Ci, Battery, Rollout, 3-105
Kit, Ci, Bumper, Rear, 3-11
Kit, Ci, Detgt Metering, 3-87
Kit, Ci, Drain, Soltn, Pos Cntrl, Soltn, 3-83
Kit, Ci, Drain, Soltn, Pos, Cntrl, Recvy, 3-81
Kit, Cl, Extinguisher, Fire, [7300/8300], 3-124
Kit, Ci, Fltr, [8300], 2-89
Kit, Ci, Fork Lift, Battery, 3-107
Kit, Ci, Indicator, Low Water Level, 3-85
Kit, Cl, Light, Revl W/ Ohg, 3-7
Kit, Cl, Light, Revl W/O OHG, 3-5
Kit, Ci, Ohg, [7300/8300], 3-13
Kit, Ci, Seat, Suspension, 3-17
Kit, Ci, Seatbelt, 3-15
Kit, Cl, Squeegee, Rear (Max Prot 1000), 2-67, 3-101
Kit, Cl, Squeegee, Rear [Max Pro 1200], 3-99
Kit, Ci, Vacuum Wand, [7300/8300], 3-97
Kit, Cover, Recvy, W/Gasket, 2-41
Kit, Drain Hose, Solution Side, 3-79
Kit, Ftg, Garden Hose, 3-75
Kit, Maint, 800hr
[8300-Mp1200-Disk-Vac], 2-4
Kit, Maint, 800hr, [8300-Mp1000-Cyl], 2-4
Kit, Maint, 800hr, [8300-Mp1000-Disk], 2-3
Kit, Maint, 800hr, [8300-Mp1200-Cyl], 2-4
Kit, Maint, 800hr, [8300-Mp1200-Disk], 2-3
Kit, Modif, Ftg Location, [Discvac], 2-4
Kit, Panel, Lh, 2-89
Kit, Panel, Rh, 2-89
Kit, Replmt, Press Switch/34" Tube, 2-31, 3-85
Kit, Seal, Hyd, Valve, Strg, 4-18
Kit, Seal, Hyd, Valve, 4-17
Kit, Seal, Motor, 4-16
Kit, Seal, 4-15
Kit, Spring, Valve, Strg, 4-18
Kit, Switch, Micro, 3-9
Kit, Valve, Check, 2-31
Kit, Wand, Power [5400], 3-91
Knob, 0.50-20, 1.38d, Plstc, 2-39
Knob, 4-Prong W/.31-18, Insert, 2-67, 3-99, 3-101
Knob, Adj, 2-63
Knob, Plastic, 2-73, 2-77, 3-21
Knob, Tapered, 2-85
Knob, 2-19, 2-63, 2-77

L

Label Set, Info & Hzd, 2-129
 Label Set, Info/Hzrd, [Max Pro], 3-39, 3-57
 Label Set, Info/Hzrd, [Maxpro], 2-49, 3-23
 Label Set, Operational, 7300/8300, 2-129
 Label, Attention Fast Users, 2-31
 Label, Brush, Side, Adj, 2-73, 3-21
 Label, Fast, 2-107
 Label, Sqge, 2-129
 Label, Switch, Fast, 2-107
 Label, 2-129
 Lamp, 40vdc, 0.9a, [50cp#1062], 3-5, 3-7
 Lamp, 36vdc, 32cp .72a, [#sp7], 2-81
 Lamp, 2-11
 Lampholder, 2-11
 Latch, Double Scrub, Side Sqge, 2-59,
 2-61, 3-33, 3-37
 Latch, Handle, 3-105
 Latch, Trigger, 2-13, 2-69
 Latch, 2-15, 2-89, 3-41, 3-49, 3-51, 3-59,
 3-67, 3-69
 Leg, 2-83
 Lens, Amber, Light, Revl, 3-5, 3-7
 Lens, Rev. Light, Blue, 3-5, 3-7
 Lens, Rev. Light, Red, 3-5, 3-7
 Lever Assy, Flap, 2-85
 Lever Wldt, Flap, 2-85
 Lever Wldt, 2-27
 Lever, Valve, Water, 2-39
 Light, Revl, 36vdc, Amb, Rework 44684,
 3-5, 3-7
 Light, Spot, 36vdc, 60w Rework 72173,
 3-9
 Link Wldt, Head, Drag, 3-25, 3-39, 3-57
 Link, .38 1.0w 07.5l 2/1.5h, 2-51
 Link, Chain, Roller, #40, 2-19, 2-87
 Link, Lift, Squeegee, 2-51

M

Manifold, Plastic, 3-27
 Manifold, Soltn, Cntrl, 2-53, 2-55, 3-27,
 3-29
 Manual Pkg, (8300 Ele Na), 3-125
 Manual, Cd-Rom, Oprtr & Parts, All (Na),
 3-125
 Manual, Cd-Rom, Service, All, 3-125
 Manual, Fiche, (8300 Ele), 3-125
 Manual, Oprtr, (8300 Ele Es Na), 3-125
 Manual, Oprtr, (8300 Ele Fr Na), 3-125
 Manual, Service, (8300 Ele Na), 3-125
 Module, 2-99
 Molding, Trim, .19-.31 12.00, 2-19
 Motor Assy, EE Vac Fan, 4-6, 4-7
 Motor Assy, 4-8
 Motor Ele, 36Vdc, Rh Rep By 1008274,
 2-71
 Motor, Ele, 36vdc 0.9hp 1800rpm (See
 Breakdown), 2-75
 Motor, Ele, 36 Vdc 1500 Rpm 1.5 Hp, 4-9
 Motor, Ele, 36Vdc (See Breakdown) (Repl.
 by 374201), 2-91

Motor, Ele, 36Vdc 0.08Hp 0068Rpm
 04.5A, 3-19
 Motor, Ele, 36Vdc 0.75 Hp 2500Rpm (See
 Breakdown), 2-91
 Motor, Ele, 36vdc 1.00hp 0300rpm, Gear
 (Standard) □(See Breakdown), 2-49
 Motor, Ele, 36vdc 1.50hp 0300rpm, Gear
 (Heavy Duty)□(See Breakdown), 2-49
 Motor, Ele, 36Vdc 1.50Hp 1500Rpm
 43.0A, 3-41, 3-59
 Motor, Ele, 36vdc 1500rpm 1.5hp (See
 Breakdown)□(Repl By 377398AM),
 3-41, 3-59
 Motor, Ele, 36Vdc, Hp, 0080Rpm, Lh (Rep
 By 1008275), 3-19
 Motor, Ele, Traction, 4-11
 Motor, Ele, Vdc 3.0hp Traction,[201] (See
 Breakdown), 2-25
 Motor, Elect, 4-15
 Motor, Gear, 1.0Hp 36V, 4-12
 Motor, Gear, 36vdc, 120w, 75rpm, 2-71
 Motor, Gear, Ele, 1.0hp, 36vdc, 300rpm
 (See Breakdown), 3-23
 Motor, Gear, Ele, 1.5hp, 36vdc, 300rpm
 (Replaced by 387585AM) (See
 Breakdowns), 2-49
 Motor, Gear, Ele, 1.5Hp, 36Vdc, 300Rpm,
 4-10, 4-19
 Motor, Hyd (See Breakdowns), 2-19
 Motor, Hyd, 4-16
 Motor, 4-13

N

Nozzle, Spray, 3-91
 Nozzle, Wand, Plstc, 14.0lg, 3-97
 Nozzle, Water, 3-77
 Nut, Hex, Cplg, M08X1.25, 2-101
 Nut, Hex, Flexlock, .31-24, 2-91
 Nut, Hex, Flng, .38-16, 2-59, 3-33
 Nut, Hex, Flng, M06 X 1.0, 2-85, 2-99,
 2-101, 3-9
 Nut, Hex, Flng, M08 X 1.25, 2-11, 2-71,
 2-81, 2-92, 3-5, 3-7, 3-19
 Nut, Hex, Flng, M10 X 1.5, 2-63, 3-81,
 3-83
 Nut, Hex, Flng, M5 X 0.8, 2-107
 Nut, Hex, Jam, .62-18, Ss, Lh, 3-39, 3-57
 Nut, Hex, Jam, .62-18, Ss, 3-39, 3-57
 Nut, Hex, Jam, M10 X 1.5, Ss, 2-63, 2-87,
 3-99
 Nut, Hex, Jam, M20 X 1.5, 2-19
 Nut, Hex, Lock, .25-20, NI, 2-23
 Nut, Hex, Lock, .25-28, NI, 2-23
 Nut, Hex, Lock, .31-18, NI, Thin, 3-105
 Nut, Hex, Lock, .31-18, NI, 2-21, 3-17
 Nut, Hex, Lock, .38-16, NI, Thin, 2-75
 Nut, Hex, Lock, .44-20, NI, Thin, 2-39
 Nut, Hex, Lock, .50-13, NI, Ss, 2-63
 Nut, Hex, Lock, .62-18, NI, Thin, 3-39,
 3-57
 Nut, Hex, Lock, #06-32, NI, 2-106
 Nut, Hex, Lock, M 4 X 0.7, NI Ss, 3-105

Nut, Hex, Lock, M 4 X 0.7, NI, 2-35
 Nut, Hex, Lock, M 5 X 0.8, NI, 2-101
 Nut, Hex, Lock, M 5 X 0.8, NI, Ss, 3-105
 Nut, Hex, Lock, M 6 X 1.0, NI, 2-71, 2-101,
 2-107
 Nut, Hex, Lock, M 8 X 1.25 NI, 2-105
 Nut, Hex, Lock, M 8 X 1.25, NI, Ss, 3-25,
 3-57
 Nut, Hex, Lock, M04 X 0.7, NI, Ss, 3-41,
 3-59, 3-87
 Nut, Hex, Lock, M04 X 0.7, NI, 2-15, 2-99,
 3-77, 3-95
 Nut, Hex, Lock, M05 X 0.8, NI, Ss, 2-43,
 2-47, 3-39, 3-57, 3-79
 Nut, Hex, Lock, M05 X 0.8, NI, 2-17, 2-77,
 2-81, 2-89, 2-99, 3-41, 3-59
 Nut, Hex, Lock, M06 X 1.0, NI, Ss, 2-39,
 2-51, 2-53, 2-55, 2-57, 2-59, 2-61,
 2-65, 2-75, 2-77, 3-27, 3-29, 3-31,
 3-33, 3-37, 3-43, 3-45, 3-47, 3-55,
 3-61, 3-63, 3-65, 3-73, 3-75, 3-93,
 3-105
 Nut, Hex, Lock, M06 X 1.0, NI, 2-13, 2-17,
 2-19, 2-23, 2-81, 2-91, 2-99, 3-9
 Nut, Hex, Lock, M08 X 1.25, NI, Ss, 2-27,
 2-31, 2-47, 2-49, 2-59, 2-61, 2-65,
 2-67, 2-83, 3-23, 3-31, 3-33, 3-35,
 3-37, 3-39, 3-57, 3-65, 3-77, 3-87,
 3-93, 3-99, 3-101, 3-105, 3-107,
 3-111, 3-113, 3-115
 Nut, Hex, Lock, M08 X 1.25, NI, 2-11, 2-13,
 2-23, 2-25, 2-27, 2-39, 2-69, 2-71,
 2-75, 2-77, 2-79, 2-81, 2-83, 2-85,
 2-92, 2-97, 2-103, 3-19, 3-43, 3-45,
 3-61, 3-63
 Nut, Hex, Lock, M10 X 1.5, NI, SS, 3-41,
 3-59
 Nut, Hex, Lock, M10 X 1.5, NI, Ss, 2-49,
 2-63, 2-65, 2-83, 3-11, 3-23, 3-25,
 3-57
 Nut, Hex, Lock, M10 X 1.5, NI, 2-23, 3-13,
 3-15
 Nut, Hex, Lock, M12 X 1.75, NI, 2-71
 Nut, Hex, Lock, M12 X 1.75, NI, Ss, 2-67,
 2-77, 3-49, 3-51, 3-67, 3-69, 3-99,
 3-101
 Nut, Hex, Lock, M12 X 1.75, NI, 2-19, 2-29,
 2-87, 3-19
 Nut, Hex, Lock, M6X1.0, Ss, NI, 3-53, 3-71
 Nut, Hex, Lock, M8 X 1.25, NI, Ss, 3-109
 Nut, Hex, Lock, M8 X 1.25, NI, 2-35
 Nut, Hex, Std, .75-16, 2-75
 Nut, Hex, Std, 1.00-20, 2-29
 Nut, Hex, Std, .25-20, Ss, 2-13
 Nut, Hex, Std, .25-20, 2-99, 2-101
 Nut, Hex, Std, .25-28, 2-23, 2-79
 Nut, Hex, Std, .31-24, 2-99, 2-101, 2-103,
 2-105
 Nut, Hex, Std, .38-16, Ss, 3-49, 3-67
 Nut, Hex, Std, .38-16, 3-21
 Nut, Hex, Std, .50-20, 2-25
 Nut, Hex, Std, #10-32, 2, 2-11, 2-99,
 2-101, 2-103, 2-105

CROSS REFERENCE

Nut, Hex, Std, M06 X 1.0, 2-79, 2-81, 2-103
 Nut, Hex, Std, M08 X 1.25, Ss, 2-59, 2-61, 2-71, 2-83, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Nut, Hex, Std, M08 X 1.25, 2-103, 2-105
 Nut, Hex, Std, M10 X 1.25, 2-73
 Nut, Hex, Std, M10 X 1.5, Ss, 2-77
 Nut, Hex, Std, M10 X 1.5, 2-23, 2-77
 Nut, Hex, Std, M12 X 2.0, 3-25
 Nut, Retainer, .31-18, 2-57, 3-31, 3-47, 3-65
 Nut, Thumb, M6 X 30mm Dia, 3-91
 Nut, Wheel, M14-1.5, 2-25
 Nut, 4-3, 4-5, 4-17

P

Pad, Buff, 16.0d, Red, 2-9
 Pad, Buff, 20.0d, Red, 2-7
 Pad, Polish, 16.0d, White, 2-9
 Pad, Polish, 20.0d, White, 2-7
 Pad, Scrub, 16.0d, Blue, 2-9
 Pad, Scrub, 20.0d, Blue, 2-7
 Pad, Strip, 16.0d, Brown, 2-9
 Pad, Strip, 20.0d, Brown, 2-7
 Pad, 2-27
 Panel Assy, Touch [8300], 2-17
 Panel Wldt, Front W/ Label, 2-15
 Panel Wldt, Perma-Filter, 2-89
 Panel, Access, 2-89
 Panel, Instmt, 2-17
 Panel, Motor, Cover W/ Label, 2-25
 Pedal Assy, Foot, 2-23
 Pedal Wldt, Accelerator, 2-23
 Pedal, Brake, 2-27
 Pin Wldt, Front, 2-67, 3-99, 3-101
 Pin Wldt, Hinge, 2-13
 Pin, Arm, Safety, 2-85
 Pin, Clevis, .625 Dia X 5.25l, 3-41, 3-59
 Pin, Clevis, 0.19 D X 0.63l, 2-65
 Pin, Clevis, 0.25 D X 0.75l, 2-79
 Pin, Clevis, 0.25 D X 1.00l, 2-79
 Pin, Clevis, 0.25 D X 2.44l, 2-65
 Pin, Clevis, 0.25d X 2.00l, 3-101
 Pin, Clevis, 0.31 D X 0.75l, 2-29
 Pin, Clevis, 0.31 D X 0.88l, 3-35
 Pin, Clevis, 0.31 D X 1.00l, 2-27
 Pin, Clevis, 0.31d 0.88l, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Pin, Clevis, 0.37 D X 0.62l, 2-71, 3-19
 Pin, Clevis, 0.37 D X 0.75l, 3-49, 3-51, 3-67, 3-69
 Pin, Clevis, 0.37 D X 1.00l, 2-29, 2-59, 2-61, 3-33, 3-37
 Pin, Clevis, 0.37 D X 1.31l, 2-51, 3-25, 3-39, 3-57
 Pin, Clevis, 0.37 D X 1.50l, 2-59
 Pin, Clevis, 0.37 D X 1.75l, 2-87
 Pin, Clevis, 0.37 D X 2.00l, 2-57, 3-31, 3-47, 3-65
 Pin, Clevis, 0.37 D X 2.12l, 3-99
 Pin, Clevis, 0.37 D X 3.25l, 2-71, 3-19

Pin, Clevis, 0.37 D X 4.00l, 2-73
 Pin, Clevis, 0.37D X 4.00L, 3-21
 Pin, Clevis, 0.38 D X 2.50l, 2-51, 3-25, 3-39, 3-57
 Pin, Clevis, 0.50 D X 1.75l, 2-47
 Pin, Clevis, 0.50 D X 1.87l, 2-57, 3-47
 Pin, Clevis, 0.50 D X 2.00l, 2-65
 Pin, Clevis, 0.50 D X 2.50l, 2-47, 2-51, 2-65, 3-25, 3-31, 3-39, 3-57
 Pin, Clevis, 0.50 D X 2.62l, 2-79
 Pin, Clevis, 0.50 D X 3.50l, 2-23
 Pin, Clevis, 0.50 D X 4.00l, 2-73, 3-21
 Pin, Clevis, 0.50 D X 5.50l, 2-47
 Pin, Clevis, 0.50D X 4.00L, 3-21
 Pin, Clevis, 0.75 D X 6.50l, 2-81
 Pin, Clevis, 2-85
 Pin, Cotter, .062 X 0.75, 2-15, 2-65, 2-67, 3-101
 Pin, Cotter, .094 X 0.75, 2-27, 2-29, 2-51, 2-57, 2-65, 2-71, 3-19, 3-21, 3-25, 3-31, 3-39, 3-47, 3-57, 3-65
 Pin, Cotter, .094 X 1.00, 2-87, 3-99
 Pin, Cotter, .125 X 0.75, 2-51, 3-25, 3-39, 3-57
 Pin, Cotter, .125 X 1.00, 2-23, 2-47, 2-51, 2-57, 2-73, 3-25, 3-31, 3-39, 3-47, 3-57
 Pin, Cotter, .125 X 1.25, 2-79
 Pin, Cotter, .156 X 1.25, 2-81
 Pin, Hair Cotter, 0.31 D .058 Wir, 3-49, 3-51, 3-67, 3-69
 Pin, Hair Cotter, 0.38 D .072 Wir, 2-59, 2-61, 3-33, 3-35, 3-37
 Pin, Hair Cotter, 0.62 D .120 Wir, 3-41, 3-59
 Pin, Hair Cotter, 0.69 D .092 Wir, 2-71, 3-19
 Pin, Hinge, Cover, 2-31
 Pin, Prong, 2-106
 Pin, Roll, .180 D X 1.25L, .187/.192, 2-83
 Pin, Roll, .250 D X 0.75l, .250/.256, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Pin, Roll, .250 D X 1.50l, .250/.256, 2-29
 Pin, Roll, .250 D X 2.00l, .250/.256, 2-71, 3-19
 Pin, Roll, .310 D X 0.75l, .312/.318, 2-25
 Pin, Valve, Strg, 4-18
 Pin, 2-19, 2-67, 2-85, 3-99, 3-101, 4-18
 Piston, 4-13
 Pivot Wldt, Guard, 2-67, 3-99, 3-101
 Pivot Wldt, Sqge Caster, 2-63
 Pivot, 2-75, 2-87
 Plate Wldt, Floor, 2-11
 Plate Wldt, Stop, 3-39, 3-57
 Plate Wldt, 2-91
 Plate, Adapter, Brush, 2-71, 3-19
 Plate, Controlbox, 2-97
 Plate, Cover, 2-11
 Plate, Door, Brush, 2-77
 Plate, Floor, Upper, 2-11
 Plate, Floor, 2-11
 Plate, Headlight, 2-81

Plate, Hinge, 2-15
 Plate, Latch, Lower, 2-89
 Plate, Latch, Upper, 2-89
 Plate, Mtg, Contactor, 2-99, 2-101
 Plate, Mtg, Door, 2-13
 Plate, Mtg, Tank, Detgt, 3-87
 Plate, Orifice, 0.067id, 2-33
 Plate, Orifice, 0.086id, 2-33
 Plate, Pin, Clevis, Upper, 2-85
 Plate, Seat, 2-21
 Plate, Slide, 2-65
 Plate, Spacer, Lift Arm, 2-85
 Plate, Stop, 2-27
 Plate, Wand, Clean-Out, 3-77
 Plate, Wear, 4-18
 Plate, 2-15, 2-71, 2-81, 3-19
 Plug, Cap, 2-31, 2-41
 Plug, Drive, Brush, Mach, 2-75
 Plug, Drive, Brush, Splined, 2-75, 2-77, 3-41, 3-59
 Plug, Hole, Rnd, 0.44h .03-.12, Blk Nyl, 3-75
 Plug, Hole, Rt, Rocker Switch, .87 X 1.7, 3-75
 Plug, Idler, Brush, 2-77
 Plug, O-Ring, 4-17
 Plug, Qm, .25npt, 3-91
 Plug, Resistor, 2-128
 Plug, 2-25, 3-91
 Powerunit, Hyd, 36Vdc (See Breakdowns), 2-92
 Powerunit, Hyd, 36Vdc, 4-15
 Pump Assy, Power Wand (See Breakdown), 3-93
 Pump assy, 4-15
 Pump kit, Power Wand, 4-13
 Pump screw, 4-13
 Pump, Air, Ele, 36vdc, 2-35
 Pump, Detgt, 36vdc (See Breakdown), 3-87
 Pump, Detgt, 560s, 2-35
 Pump, Metering Solution, 4-14
 Pump, Soltn, Ele, 36vdc, 2-33
 Pump, Solution, Impeller, 36vdc, 3-75

R

Race Thrust, 4-16
 Rail Wldt, Lift, Cyl Head, 3-47, 3-65
 Rail Wldt, Lift, Disk Head, 2-57, 3-31
 Rail, 2-21
 Relay, 36vdc, 5a, Spdt, [Greenwich], 3-9
 Relay, 36vdc, 05a, Spdt N/O [Greenwich], 2-107
 Relay, 36vdc, 100a, Sp N/O [White], 2-101
 Replacement Kit, Bellows, 4-14
 Reservoir, 4-15
 Resistor, 040.00 Ohm, 40watt, 2-101
 Resistor, 040.00ohm, 40watt, 2-99
 Retainer, Bearing, 2-77, 3-41, 3-59
 Retainer, Blade, Front, 3-35
 Retainer, Front, 2-75, 2-77

Retainer, Ring, 2-85
 Retainer, Spring, 2-23
 Retainer, Sqge, 2-59, 2-61, 3-33, 3-35, 3-37, 3-67
 Retainer, 2-75, 2-77
 Return Spring-Brakes, 2-29
 Ring, Brush, 4-9
 Ring, Mtg, Sqge, .50l, 2-67, 3-99, 3-101
 Ring, Retainer, Valve, Strg, 4-18
 Ring, Retaining, Ext, 0.50d, Hd, 2-87
 Ring, Retaining, Ext, 0.59d, Basic, 2-63
 Ring, Retaining, Ext, 0.75d, Hd, 2-83, 3-41, 3-59
 Ring, Retaining, Ext, 0.75d, Ss, 2-43, 3-79
 Ring, Retaining, Ext, 0.75d, 2-85
 Ring, Retaining, Ext, 0.88d, 2-85
 Ring, Retaining, Ext, 1.00od, 2-85
 Ring, Retaining, Ext, 1.75d, Hd, 2-85
 Ring, Retaining, Ext, 2-67, 3-99, 3-101
 Ring, Retaining, Int, 1.85d, Basic, 3-41, 3-59
 Ring, Retaining, Int, 2.00d, 2-85
 Ring, Retaining, 4-11
 Rivet, Plstc, .25 D X 0.75, 2-11
 Rivet, Plstc, .250 X 0.898, 2-49, 3-23, 3-95, 3-97
 Rivet, Pop, 3-91
 Rod Wldt, Cover, 2-13
 Rod Wldt, 2-39
 Rod, Link, 3-39, 3-57
 Rod, Rear Door, 2-15
 Rod, Thrd, 2 End M08x1.25 01.2, 2-77
 Rod, Thrd, 2 End M10x1.5 07.4, 2-63
 Rod, Thrd, 2 End, .25-28 04.4l, 2-23
 Rod, Thrd, Full, .25-20 01.5l, 2-99, 2-101
 Rod, Threaded, 2-29
 Rod-End, .62-18rh Fem 0.50-18stud, 3-39, 3-57
 Rod-End, .625-18, Lh, 3-39, 3-57
 Rod-End, M10 X 1.5rh Fem M10 X 1.5stud, 2-63
 Rod, 2-15
 Roller, 2-51, 2-57, 3-25, 3-31, 3-39, 3-47, 3-57, 3-65

S

Screen Wldt, 3-55, 3-73
 Screen, 50 Mesh, Ss, 2-33
 Screen, Filter, 80 Mesh, 2-37
 Screen, Pump, 3-87
 Screw, 6-32, 4-8
 Screw, Adjuster, 4-15
 Screw, Btn, M08 X 1.25 X 25, Ss, 2-69, 3-21
 Screw, Cap, 4-18
 Screw, Flat, #06-32 X 0.38, Al, 2-106
 Screw, Flat, M05 X 0.8 X 16, 10.9, 2-89
 Screw, Flat, M06 X 1.0 X 20, 10.9, 2-17
 Screw, Flat, M06 X 1.0 X 25, 10.9, 2-81
 Screw, Flat, M08 X 1.25 X 20, 10.9, 2-91
 Screw, Hex, .25-20 X 0.38, 5, 2-99

Screw, Hex, .25-20 X 0.75, Sems, 3-49, 3-51, 3-67, 3-69
 Screw, Hex, .31-18 X 1.00, Ss, NI, 2-49, 3-23
 Screw, Hex, .38-16 X 1.00, NI, 2-49, 3-23
 Screw, Hex, .50-13 X 0.75, 5, 3-9
 Screw, Hex, .50-13 X 3.00, Ss, 2-63
 Screw, Hex, #06-20 X 0.50, Fmg, [Ab], 2-91
 Screw, Hex, #10-24 X 0.50, Ss, 2-39
 Screw, Hex, M 5 X 0.8 X 12, 8.8, 2-101
 Screw, Hex, M 6 X 1.0 X 16, 8.8, 2-101
 Screw, Hex, M 6 X 1.0 X 16, Fmg, 3-35, 3-55, 3-73
 Screw, Hex, M 6 X 1.0 X 20, NI, 2-101
 Screw, Hex, M 6 X 1.0 X 20, Ss, 2-71
 Screw, Hex, M 6 X 1.0 X 40, Ss, 2-105
 Screw, Hex, M 8 X 1.25 X 20, 8.8, 2-105
 Screw, Hex, M 8 X 1.25 X 20, Ss, 2-71
 Screw, Hex, M 8 X 1.25 X 50, Ss, 3-25, 3-57
 Screw, Hex, M04 X 0.7 X 12, 8.8, 3-77
 Screw, Hex, M04 X 0.7 X 20, 8.8, 3-95
 Screw, Hex, M04 X 0.7 X 20, Fmg, 2-99
 Screw, Hex, M05 X 0.8 X 12, 8.8, 2-75, 2-77, 2-99
 Screw, Hex, M05 X 0.8 X 12, Ss, 3-41, 3-59
 Screw, Hex, M05 X 0.8 X 16, 8.8, 2-81, 2-97
 Screw, Hex, M05 X 0.8 X 16, Ss, 2-47
 Screw, Hex, M05 X 0.8 X 25, Ss, 2-43, 3-79
 Screw, Hex, M06 X 1.0 X 12, 8.8, 2-89
 Screw, Hex, M06 X 1.0 X 12, Ss, 3-49, 3-51, 3-55, 3-67, 3-69, 3-73
 Screw, Hex, M06 X 1.0 X 16, 8.8, 2-19, 2-81, 2-85, 2-99, 2-106
 Screw, Hex, M06 X 1.0 X 16, Fmg, 2-11
 Screw, Hex, M06 X 1.0 X 16, Ss, NI, 2-75, 2-85
 Screw, Hex, M06 X 1.0 X 16, Ss, 2-53, 2-55, 2-71, 2-75, 2-77, 3-19, 3-27, 3-29, 3-41, 3-43, 3-45, 3-59, 3-61, 3-63, 3-75
 Screw, Hex, M06 X 1.0 X 20, 8.8, 2-13, 2-27, 2-75, 2-79, 2-85, 2-91, 3-9
 Screw, Hex, M06 X 1.0 X 20, Fmg, 2-47
 Screw, Hex, M06 X 1.0 X 20, Ss, 2-45, 2-51, 2-59, 2-61, 2-65, 3-31, 3-33, 3-37, 3-55, 3-73
 Screw, Hex, M06 X 1.0 X 25, 8.8, 2-23, 2-81
 Screw, Hex, M06 X 1.0 X 25, Ss, 2-17, 2-39, 3-75, 3-93
 Screw, Hex, M06 X 1.0 X 35, 8.8, 2-19
 Screw, Hex, M06 X 1.0 X 35, Ss, 3-105
 Screw, Hex, M06 X 1.0 X 40, Ss, 2-57, 2-103, 3-31, 3-47, 3-65
 Screw, Hex, M06 X 1.0 X 50, 8.8, 3-9
 Screw, Hex, M06 X 1.0 X 20, 8.8, 2-11
 Screw, Hex, M06 X 1.0 X 20, Fmg, 2-11

Screw, Hex, M06 X 1.0 X 20, Ss, 3-47, 3-65
 Screw, Hex, M06 x 1.0 x 35, 8.8, 2-99
 Screw, Hex, M06 X 1.25 X 25, Ss, NI, 2-57
 Screw, Hex, M06-1.0 X 12, Fmg, 2-23
 Screw, Hex, M08 X 1.00 X 20, Ss, 2-57
 Screw, Hex, M08 X 1.25 X 12, 8.8, 2-75, 2-77
 Screw, Hex, M08 X 1.25 X 16, 8.8, 2-25, 2-39, 2-81
 Screw, Hex, M08 X 1.25 X 16, Ss, NI, 3-77
 Screw, Hex, M08 X 1.25 X 16, Ss, 2-21, 2-41, 2-45, 3-43, 3-45, 3-61, 3-63, 3-75
 Screw, Hex, M08 X 1.25 X 20, 8.8, 2-11, 2-13, 2-25, 2-73, 2-75, 2-77, 2-79, 2-87, 2-89, 2-91, 2-92, 2-97, 2-103
 Screw, Hex, M08 X 1.25 X 20, Ss, NI, 2-31, 2-41, 2-53, 2-55, 2-75, 3-27, 3-29, 3-95
 Screw, Hex, M08 X 1.25 X 20, Ss, 2-11, 2-15, 2-41, 2-83, 3-25, 3-105, 3-107, 3-111, 3-113, 3-115
 Screw, Hex, M08 X 1.25 X 25, 8.8, 2-11, 2-71, 2-81, 2-91, 3-5, 3-7, 3-19
 Screw, Hex, M08 X 1.25 X 25, Ss, NI, 2-59, 2-61, 3-33, 3-37
 Screw, Hex, M08 X 1.25 X 25, Ss, 2-15, 2-49, 2-63, 2-65, 3-23, 3-39, 3-57, 3-75, 3-93, 3-99
 Screw, Hex, M08 X 1.25 X 30, 8.8, 2-69, 2-77, 2-83, 3-21
 Screw, Hex, M08 X 1.25 X 30, Ss, 2-31, 3-77
 Screw, Hex, M08 X 1.25 X 35, 8.8, 2-27, 2-81
 Screw, Hex, M08 X 1.25 X 35, Ss, 2-59, 2-61, 3-33, 3-37, 3-87, 3-105
 Screw, Hex, M08 X 1.25 X 40, 8.8, 2-79, 2-99, 2-101
 Screw, Hex, M08 X 1.25 X 40, Ss, 2-27, 2-83
 Screw, Hex, M08 X 1.25 X 45, Ss, 2-57, 3-31, 3-47, 3-65
 Screw, Hex, M08 X 1.25 X 50, 8.8, 2-79, 2-85
 Screw, Hex, M08 X 1.25 X 60, Ss, 3-31, 3-65
 Screw, Hex, M08 X 1.25 X 70, Ss, 2-67, 3-99, 3-101
 Screw, Hex, M08 X 1.25 X 80, 8.8, 2-92
 Screw, Hex, M08 X 1.25 X 100, Ss, 2-67, 3-101
 Screw, Hex, M08 X 1.25 X 130 Ss, 3-99
 Screw, Hex, M08 X 1.25 X 16, 8.8, 2-11
 Screw, Hex, M08 X 1.25 X 160, 8.8, 2-47
 Screw, Hex, M08 X 1.25 X 20, 8.8, 2-11, 3-21
 Screw, Hex, M08 X 1.25 X 20, Ss, 3-57
 Screw, Hex, M08 X 1.25 X 25, Ss, 3-25, 3-57

CROSS REFERENCE

Screw, Hex, M08x1.25 X12, Ss, 3-49, 3-51, 3-67, 3-69	Screw, Pan, #06-32X0.38, 1, 2-97	Seat, Suspension, 3-17
Screw, Hex, M08X1.25X90, 8.8, 2-77	Screw, Pan, #10-14 X 0.75, F/Plstc, 3-77	Seat, 2-21
Screw, Hex, M10 X 1.5 X 16, 8.8, 2-19	Screw, Pan, #10-14 X 0.75, F/Plstc, 3-5, 3-9	Seatbelt, 3-15
Screw, Hex, M10 X 1.5 X 20, 8.8, 3-13, 3-15	Screw, Pan, #10-14X0.75, F/Plstc, 3-97	Sensor, Level, Liquid [Magnetic], 2-41, 3-77
Screw, Hex, M10 X 1.5 X 20, Ss, 2-73, 3-21, 3-41, 3-59	Screw, Pan, #12-16 x 0.50, F/Plstc, 3-124	Sensor, Level, Liquid, 14vdc 01a .62-11, 2-41
Screw, Hex, M10 X 1.5 X 25, 8.8, 2-81	Screw, Pan, M 4 X 0.7 X 6, 4.8, 2-101	Sensor, Pedal Position, 2-23
Screw, Hex, M10 X 1.5 X 25, Ss, N, 2-71	Screw, Pan, M 5 X 0.8 X 6, 4.8, 2-101	Shaft, Drive, Brush, 3-41, 3-59
Screw, Hex, M10 X 1.5 X 25, Ss, NI, 3-19	Screw, Pan, M04 X 0.7 X 10, Ss, 2-15, 2-89	Shaft, Output, 4-16
Screw, Hex, M10 X 1.5 X 25, Ss, 2-49, 2-83, 3-11, 3-13, 3-23, 3-25, 3-57	Screw, Pan, M04 X 0.7 X 20, Ss, 3-87	Shaft, Thrd, 3-21
Screw, Hex, M10 X 1.5 X 30, Ss, 2-65, 3-41, 3-59	Screw, Pan, M04 X 0.7 X 35, Ss, 2-7, 3-41, 3-59, 3-105	Shaft, Threaded, 2-73, 2-77
Screw, Hex, M10 X 1.5 X 35, 8.8, 2-23, 2-77, 3-81, 3-83	Screw, Pan, M04 X 0.7 X 35, Ss, 2-9	Shaft, 2-29, 2-74, 2-75, 2-87, 2-91
Screw, Hex, M10 X 1.5 X 35, Ss, 2-31, 2-41	Screw, Pan, M05 X 0.8 X 6, 4.8, 2-23	Sheave, [3v], 1grv, 02.6pd 0.63b, 2-91
Screw, Hex, M10 X 1.5 X 60, 8.8, 2-23	Screw, Pan, M05 X 0.8 X 25, Ss, 3-39, 3-57	Sheave, [3v], 1grv, 04.7pd 0.75b, 2-91
Screw, Hex, M10 X 1.5 X 60, Ss, 2-63, 2-65	Screw, Pan, M06 X 1.0 X 10, Ss, 3-41, 3-59	Sheave, Flat, 2.6d 0.62w, 0.38b, 2-75
Screw, Hex, M10 X 1.5 X 90, Ss, 2-77	Screw, Pan, M06 X 1.0 X 12, Ss, 3-81, 3-83	Sheave, Idler, 15mm Id, 2.44pd, 2-79
Screw, Hex, M10 X 1.5 X 30, Ss, 2-63	Screw, Pan, M06 X 1.0 X 35, Ss, 2-7	Sheave, 2-74, 2-75
Screw, Hex, M10 X 1.5 X 50, Ss, 2-83	Screw, Pan, M06 X 1.0 X 35, Ss, 2-9	Shell, 4-3, 4-5
Screw, Hex, M10 X 1.5 X 80, 8.8, 2-83	Screw, Pan, M06-1.0 X 12, NI, 2-81	Shoe, Plstc, Sqge, 14inch, 3-97
Screw, Hex, M10 X 1.50 X 70, 8.8, 2-83	Screw, Set, .31-18 X 0.50, Soc, 2-91	Shunt, 2 Hd Mtrs, Scrub 515, Red (For Heavy Duty Motor), 2-57
Screw, Hex, M12 X 1.75 X 40, 8.8, 3-25	Screw, Set, #10-32 X 0.38, Al, 3-41, 3-59	Shunt, 2 Std Mtrs, Scrub 515, Yel (For Standard Motor), 2-57
Screw, Hex, M12 X 1.75 X 25, 8.8, 2-11, 2-25	Screw, Set, M06 X 1.0 X 8, NI, 2-74	Shunt, 2Hd Mtrs, Scrub 515, Red, 3-47, 3-65
Screw, Hex, M12 X 1.75 X 30, Ss, 2-67, 3-99, 3-101	Screw, Soc, M08 X 1.25 X 25, 12.9, 2-23, 3-31, 3-47, 3-65	Shunt, 3 Std Mtrs, Scrub 515, Yellow, 3-31
Screw, Hex, M12 X 1.75 X 40, 8.8, 2-29	Screw, Soc, M08 X 1.25 X 60, 12.9, 2-25	Skirt, Front, Scrub Head, 2-Brush, Ele, 2-3, 2-4, 2-49
Screw, Hex, M12 X 1.75 X 50, 8.8, 2-87	Screw, Soc, M08 X 1.25 X 80, 12.9, 2-25	Skirt, Front, Scrub Head, 3-Brush, Ele, 2-3, 3-23
Screw, Hex, M12 X 1.75 X 50, Ss, 3-49, 3-51, 3-67, 3-69	Screw, Soc, M10 X 1.5 X 25, 12.9, 2-87	Skirt, Lh, 2-3, 2-75
Screw, Hex, M12 X 1.75 X 80, 8.8, 2-71, 2-87, 3-19	Screw, Soc, M12 X 1.75 X 45, 2-19	Skirt, Rear, Scrub Head, 2-Brush, Ele, 2-3, 2-4, 2-49
Screw, Hex, M12 X 1.75 X 120, 8.8, 2-77	Screw, 4-3, 4-13, 4-16	Skirt, Rear, Scrub Head, 3-Brush, Ele, 2-3, 3-23
Screw, Hex, M16 X 2.0 X 20, 8.8, 2-75, 2-77	Seal connector, 4-13	Skirt, Recirculation, 2-3, 2-5, 2-83
Screw, Hex, M4 X 0.7 X 12, 8.8, 2-35	Seal kit, 4-13	Skirt, Rh, 2-3, 2-77
Screw, Hex, M5 X 0.8 X 16, Ss, 3-105	Seal, Bulb, [Sd-168], 12.50l, 2-25	Skirt, Side, Scrbr Head, Ele, 2-3, 2-4
Screw, Hex, M5 X 0.8 X 16, 8.8, 2-107	Seal, Bulb, [Sd-504], 15.52l, 2-25	Skirt, Side, Scrub Head, 2-Brush, Ele, 2-49
Screw, Hex, M5 X 0.8 X 20, 8.8, 2-33	Seal, Bulb, [Sd-504], 15.60l, 2-13	Skirt, 2-69, 3-21
Screw, Hex, M6 X 1.0 X 16, 8.8, 2-33, 2-35	Seal, Bulb, [Sd-504], 2.40l, 2-13	Sleeve Wldt, Lh, 2-29
Screw, Hex, M6 X 1.0 X 30, 8.8, 2-107	Seal, Bulb, [Sd-504], 21.70l, 2-13	Sleeve Wldt, Rh, 2-29
Screw, Hex, M6 X 1.0 X 12, Fmg, 3-81, 3-83	Seal, Bulb, [Sd-504], 25.00l, 2-13	Sleeve, .318B .589D .325Ss, 2-77
Screw, Hex, M6 X 1.00 X 35, 8.8, 2-101	Seal, Bulb, [Sd-504], 27.90l, 2-25	Sleeve, .335b X .62d X .52l, Sst, 3-33, 3-37
Screw, Hex, M6X1.0X16, Ss, NI, 2-19	Seal, Bulb, [Sd-504], 4.20l, 2-13	Sleeve, .38b X .75d X 1.5l, Bronze, 2-47
Screw, Hex, M6X1.0X20, Ss, 3-53, 3-71	Seal, Bulb, [Sd-504], 5.30l, 2-13	Sleeve, 0.62d 0.34b 1.19l Bnz, 3-99
Screw, Hex, M8 X 1.25 X 16, Ss, NI, 3-45, 3-63	Seal, Bulb, [Sd-504], 5.70l, 2-13	Sleeve, Nyl, #15 14.0l, 2-103, 2-105
Screw, Hex, M8 X 1.25 X 20, 8.8, 2-35	Seal, Bulb, [Sd-504], 13.80l, 2-13	Sleeve, P/M 0.625D 0.406B 0.38L 430Ss, 2-73
Screw, Hex, M8 X 1.25 X 25, Ss, 2-35	Seal, Cup, Lower, 4-15	Sleeve, P/M, 0.625d 0.335b 0.52l Ss, 2-59, 2-61
Screw, Hex, M8 X 1.25 X 20, Ss, 3-109	Seal, Cup, Upper, 4-15	Sleeve, P/M, 0.625D 0.406B 0.38L 430Ss, 3-21
Screw, Hex, M8 X 1.25 X 50, Ss, Fl, 2-91	Seal, Fan, 4-5	Sleeve, P/M, 0.745d 0.438b 0.50l 430ss, 2-65
Screw, Hex, M8X1.25 X 35, 8.8, 2-81	Seal, Horiz, 2-89	Sleeve, 2-15, 2-27, 2-41, 2-57, 2-59, 2-61, 2-65, 2-67, 2-71, 2-83, 3-19, 3-31, 3-33, 3-37, 3-47, 3-65, 3-99, 3-101
Screw, Mtg, 4-15	Seal, Hppr, Horiz, 2-3, 2-81	Snap Ring, 4-6, 4-8
Screw, Pan, .25-20 X 1.00, 2, 2-23	Seal, Hppr, Vertical, 2-3, 2-81	Solenoid, Filter Shaker, 2-89
Screw, Pan, .31-18 X 0.75, G1, 2-21	Seal, O-Ring, .072 X .35id, 4-17	
	Seal, O-Ring, .139 X 2.98id, 2-25	
	Seal, O-Ring,, 4-17	
	Seal, O-Ring, 2-25	
	Seal, Rbr, Clsd, 0.25th, 5.8d 03.3h, 2-3, 2-4, 2-5, 2-45	
	Seal, Vac Fan, 2-5, 2-91	
	Seal, Vacfan, [8010], 2-3	
	Seal, Vertical, 2-89	
	Seal, 2-5, 2-43, 3-79, 4-11	

Spacer, .41b .63d .13l, Ss 430pm, 2-63
 Spacer, Battery, Lh, 3-109, 3-111
 Spacer, Battery, Rear, 3-109, 3-111, 3-113, 3-115
 Spacer, Battery, Rh, 3-109, 3-111
 Spacer, Flanged, 2-73, 3-21
 Spacer, Fltr, Horiz, 2-89
 Spacer, Fltr, Vertical, 2-89
 Spacer, Idler .25 Lg, 2-79
 Spacer, Latch, Filter, 2-41
 Spacer, Plate, 3-25, 3-39, 3-57
 Spacer, Rod-End, 3-39, 3-57
 Spacer, Short, 2-83
 Spacer, Washer, 2-51, 3-25, 3-39, 3-57
 Spacer, 2-23, 2-83, 2-91, 4-3, 4-5, 4-16, 4-18
 Spring, Bearing, 4-9
 Spring, Brush, 4-10, 4-11, 4-19
 Spring, Cmpr, 0.36od .04wir 2.5l, 2-15
 Spring, Cmpr, 1.5 Od .75id X 2.5l, 2-47
 Spring, Cmpr, .87od .042wir 2.0l, 2-67, 3-99, 3-101
 Spring, Compression, 3-91
 Spring, Cover, 2-31
 Spring, Die, 1.00od 0.50id 1.25l, 2-71, 3-19
 Spring, Die, 1.00od 0.50id 2.00l, 2-63
 Spring, Extn, 0.25od X 0.03wir, 1.4l, 2-89
 Spring, Extn, 0.50Od X 0.04Wir, 3.0L, 2-79
 Spring, Extn, 0.75od X 0.09wir, 2.5l, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Spring, Extn, 1.00od X 0.11wir, 5.5l, 2-27
 Spring, Extn, 1.10od X 0.15wir, 3.2l, 2-71, 3-19
 Spring, Extn, 1.69od X 0.20wir, 9.5l, 2-65, 3-99
 Spring, load, 4-3
 Spring, Motor, 3-41, 3-59
 Spring, Retaining, Brush, 4-8
 Spring, Tors, .81ld .09W 3.0 Coil, 2-83
 Spring, Tors, 0.75id .06wir 02.8coil, 2-27
 Spring, Torsion, 2-19
 Spring, Wir, 0.16d, Brush Retaining, 2-7, 2-9
 Spring, 3-9, 4-5, 4-9, 4-15
 Sprocker, Timing, 4.26Pd, 68 Grv, Pl, 3-41
 Sprocket Wldt, #40, 96tooth, 7.00 B, 2-25
 Sprocket Wldt, 2-85
 Sprocket, #40 24-Tooth, 2-19
 Sprocket, Hopper, 2-85
 Sprocket, Idler, 2-87
 Sprocket, Timing, 23tooth, 0.625b, 3-41, 3-59
 Sprocket, Timing, 4.261Pd, 68Grv, Pl, 3-59
 Squeegee, Side, Ure, [7300/830], 3-102, 3-103
 Squeegee, Side, 2-3, 2-4, 2-59, 2-61, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69
 Stand-Off, 1.25, Metal, 2-106
 Stand-Off, 1.25, Plstc, 2-106
 Stationary Fan, 4-5

Steer-Control, Hyd (Replaced by 387653), 2-19
 Steer-Control, Hyd (See Breakdowns), 2-19
 Steer-Control, Hyd, 4-18
 Stop Wldt (Replaced by 398454), 3-105
 Stop Wldt, 3-105
 Stop, 2-11
 Strainer, Pump, Es, 3-77
 Strainer, Soltn, Switch Guard (Repl By 1019285), 3-77
 Strainer, Soltn, Switch Guard (Repl. By 387649), 2-41
 Strainer, Tank, Solution, 3-77
 Strap, 2-43, 3-79
 Strip, Flap, 2-83
 Strip, Nonslip, 2-67, 3-99, 3-101
 Strip, Recirculation Flap, 2-83
 Strip, Retainer, 3-91
 Strip, Stl, 0.05th X 00.75w, 07.80l, 2-23
 Strip, 2-69, 3-21
 Stud, .31-18 2.75l M8 X 1.25, Ss, 2-67, 3-99, 3-101
 Stud, Adj, 3-91
 Stud, Ball, .39d .31-16, Gasspring, 2-57, 3-31, 3-47, 3-65
 Support Wldt, 2-65
 Switch Assy, Dual Press, 14" Tube, 3-77
 Switch Assy, Press, 3 Inch, 8" Tube, 3-77
 Switch Assy, Press, 4 Inch, 2-41
 Switch Assy, Roller, No, 2-81
 Switch assy, 4-13
 Switch, Limit, No, 3-105
 Switch, No (Replaced by 398454), 3-105
 Switch, Rocker, 36vdc 05a Progressive, 2-107
 Switch, Rocker, 2-17, 3-5, 3-7, 3-95
 Switch, Seat, 2-21
 Switch, Start, 2-17
 Switch, Vacuum, Dual Level, 2-45
 Switch, 2-17

T

Tag, Operator, [8300], 2-129
 Taillight, 12vdc, 3.6 X 1.9, Rework 87277, 2-11
 Tank Kit, Recvy, W/ Label, Replmt [8300], 2-41
 Tank Kit, Soltn, W/ Label, Replmt [8300], 2-31
 Tank, Detergent, 3-87
 Tape, Foam, 2-106
 Terminal female, 4-13
 Terminal, [Metripk630], Fem 10, 4-9
 Terminal, Female, 4-5, 4-6, 4-7
 Terminal, female, 4-3
 Terminal, Qdc, [.25m, Tab,], 2-89
 Terminal, 4-10, 4-12, 4-19
 Thermostat, 2-89
 Tie, Cable, Nyl, 07.3l .19w 1.8 Max D, 2-21, 2-53, 2-55, 2-81, 2-89, 3-5, 3-9, 3-27, 3-29, 3-77, 3-95

Tie, Cable, Nyl, 07.3L .19W 1.8MaxD, 2-89
 Tie, Cable, Nyl, 11.4l .19w 3.0 Max D, 2-49, 3-23
 Tie, Cable, Nyl, 14.5l .30w 4.0 Max D, 2-53, 2-55, 3-27, 3-29
 Tie, Cable, Nyl, 28.5l .50w 8.0 Max D, 2-103, 2-105
 Timer, 36vdc, 5a [25hz Pwm, 70% Duty], 2-101
 Timer, 9-41vdc, Recycling, 2-107
 Tire Assy, 16 X 5 X 12.12 Non-Skid, 3-123
 Tire Assy, 16 X 5 X 12.12, 2-3, 2-29
 Tire Assy, Solid, 16.2X6.0 5.7Bc/5 Bolt, 2-25
 Tire Assy, Solid, 16.2x6.0 5.7bc/5bolt, 2-3
 Tire Assy, Solid, 16.3x6.0 5.7bc/5bolt, 3-122
 Tire, Non-Skid 16.25x6x11.25, 3-122
 Tire, Solid, 16.2X6.0X11.2, 2-25
 Tire, Solid, 16X5X12.12, 2-29
 Tray Wldt, Battery, 500ah, 750ah, 3-113
 Tray Wldt, Battery, 1000ah, 3-115
 Tray Wldt, Power Wand, 3-95
 Tray, Debris, 40.0l, 3-55
 Tray, Debris, 40L, W/Holes, 3-53
 Tray, Debris, 48.0l, 3-73
 Tray, Debris, 48L, W/Holes, 3-71
 Tread, Floor, 12.5 X 5.75, 3-25, 3-57
 Tread, Non Skid, 2.2w 11.5l, 2-23
 Tread, Non-Skid, 02.2 11.5, 2-23
 Tread, Non-Skid, 06.0w X 15.5l, 2-23
 Tread, Step, 3-25
 Tube Assy, 2 Inch, 2-41
 Tube Assy, Spray Bar 40" [7300/8300], 3-45
 Tube Wldt, Brush, 2-77
 Tube Wldt, Upper, 3-55, 3-73
 Tube Wldt, 3-35, 3-55, 3-73
 Tube, Guard, Oprtr, Pnt, Lh, 3-13
 Tube, Guard, Oprtr, Pnt, Rh, 3-13
 Tube, Pvc, Shc80, Clear, 4.0l, 2-37
 Tube, Wand, Vacuum, Metal, 3-97

V

Vacuum Fan, 4-5
 Valve Kit, Pump, 4-14
 Valve Stem, 4-17
 Valve, 1.50id, Rwk, 3-81, 3-83
 Valve, Check, 2 Gpm 0.5psi Bm04/Bm04, 2-35
 Valve, Check, 2 Gpm 3" 06bm/08bm, 2-33
 Valve, Flow Control, Hose Adapter, 3-77
 Valve, Hyd, Solenoid (See Breakdowns), 2-92
 Valve, Hyd, Solenoid, 4-17
 Valve, Solenoid, 36vdc, 3-75
 Valve, Stem, 4-17
 Valve, Water, 36vdc, 6.0mm, 04pf, 2-33
 Valve, Water, 2-39, 2-53, 2-55, 3-27, 3-29, 3-43, 3-45, 3-61, 3-63, 3-91
 Video, Operator, Vhs, Ntsc [8300], 3-125

CROSS REFERENCE

Video, Oprtr, Training, Dvd [8300], 3-125

W

Wand, Clean-Out, 3-77

Wand, 3-91

Washer, 0.25b 1.12d .12, Ss, 3-41, 3-59

Washer, .625 B, 2.50 Od, .211 T, Ss, 2-71, 3-19

Washer, 0.31b 0.88d .12, Rbr, 2-31, 3-77

Washer, 0.40B 1.12D .12, Stil, Pl, 3-39, 3-57

Washer, 0.40b 1.12d .12, Stil, Pl, 2-45

Washer, 0.53b 1.75d .12, Stil, Pl, 2-87

Washer, 0.53b 1.88d .12, Stil, Pl, 2-67, 3-99, 3-101

Washer, 0.60b 1.31d .10, Ss, 2-63

Washer, 0.81b 1.24d .03, Stil, Pl, 2-73, 3-21

Washer, Belleville, .31, 2-49, 3-23

Washer, Belleville, .38, 2-25

Washer, Finish, M06, Pl, 2-17

Washer, fl neo, 10.8x22x1.5, 4-3

Washer, Flat, .25 Fender, 2-13, 2-77

Washer, Flat, .31 Fender, 2-69, 3-21

Washer, Flat, .38 Ss, 2-71, 3-19

Washer, Flat, .38 Std, 2-65

Washer, Flat, .50 Sae, 3-21

Washer, Flat, #06, 2-35

Washer, Flat, #10 Ss, 2-101, 3-105

Washer, Flat, #10, 2-33

Washer, Flat, 0.25 Sae, 2-101, 3-35, 3-55, 3-73

Washer, Flat, 0.25 Ss, 2-71, 2-105, 3-53, 3-71

Washer, Flat, 0.25 Std, 2-33, 2-35, 2-71, 2-101, 2-105

Washer, Flat, 0.31 Sae, 2-101, 3-105

Washer, Flat, 0.31 Ss, 3-25, 3-57, 3-105

Washer, Flat, 0.31 Std, 2-35, 2-81, 2-101

Washer, Flat, 0.34b 0.75d 0.12, Viton, 2-33

Washer, Flat, 0.38 Std, 2-73, 3-21, 3-45, 3-63

Washer, Flat, 0.38b 0.88d .08, Ss, 3-109

Washer, Flat, 0.40b 1.12d .12, Stil, Pl, 2-47

Washer, Flat, 1.00 Sae Hard, 2-29

Washer, Flat, 1.00, Sae, 2-85

Washer, Flat, 1.50 Std Hard, 2-103, 2-105

Washer, Flat, M10, 10.5x21x2ss, 2-83

Washer, Flat, M12, 13x24x2.5ss, 3-49, 3-51, 3-67, 3-69

Washer, Flat, 2-65

Washer, Flt, .25 Sae, 2-17, 2-75, 2-81, 2-85, 2-89, 2-99, 2-103, 2-106, 3-9

Washer, Flt, .25 Ss, 2-7, 2-9, 2-11, 2-15, 2-39, 2-45, 2-47, 2-57, 2-59, 2-61, 2-65, 2-67, 2-71, 2-103, 3-19, 3-31, 3-33, 3-37, 3-41, 3-43, 3-45, 3-47, 3-49, 3-51, 3-55, 3-59, 3-61, 3-63, 3-65, 3-67, 3-69, 3-73, 3-75, 3-81, 3-83, 3-93, 3-101

Washer, Flt, .25 Std, 2-23, 2-27, 2-53, 2-55, 2-75, 2-81, 2-89, 2-99, 2-103, 3-27, 3-29

Washer, Flt, .31 Sae, 2-27, 2-69, 2-75, 2-77, 2-99, 3-5, 3-7, 3-21

Washer, Flt, .31 Ss, 2-15, 2-21, 2-27, 2-31, 2-41, 2-47, 2-49, 2-53, 2-55, 2-57, 2-59, 2-61, 2-65, 2-67, 2-71, 3-19, 3-23, 3-25, 3-27, 3-29, 3-31, 3-33, 3-37, 3-43, 3-45, 3-47, 3-61, 3-63, 3-65, 3-75, 3-77, 3-87, 3-93, 3-99, 3-101, 3-105, 3-111, 3-113, 3-115

Washer, Flt, .31 Std, 2-11, 2-13, 2-25, 2-39, 2-69, 2-71, 2-73, 2-75, 2-77, 2-79, 2-81, 2-83, 2-87, 2-89, 2-91, 2-92, 2-97, 2-99, 3-17, 3-19, 3-21, 3-25

Washer, Flt, .31, 3-95

Washer, Flt, .38 Sae, 2-23, 2-73, 2-75, 3-21

Washer, Flt, .38 Ss, 2-31, 2-41, 2-49, 2-51, 2-57, 2-59, 2-61, 2-63, 2-65, 3-11, 3-13, 3-23, 3-25, 3-31, 3-33, 3-37, 3-39, 3-41, 3-47, 3-49, 3-51, 3-57, 3-59, 3-65, 3-67, 3-69, 3-99

Washer, Flt, .38 Std, 2-73, 2-75, 2-81, 2-91, 3-13, 3-21, 3-81, 3-83

Washer, Flt, .50 Sae, 2-19, 2-23, 2-29, 2-71, 2-75, 2-77, 2-79, 2-87, 3-9, 3-19, 3-25

Washer, Flt, .50 Ss, 2-47, 2-67, 3-99, 3-101

Washer, Flt, .50 Std, 2-11, 2-47, 2-73, 3-15, 3-31, 3-39, 3-57

Washer, Flt, .75 Sae, 2-81

Washer, Flt, #06, 3-95, 3-97

Washer, Flt, #08 Ss, 2-7, 2-9, 3-87

Washer, Flt, #08, 2-89

Washer, Flt, #10 Ss, 2-23, 2-39, 2-41, 2-43, 2-47, 2-97, 2-99, 3-79

Washer, Flt, #10, 2-17, 2-81, 2-99, 2-101, 2-103, 2-105, 3-5, 3-9

Washer, Lock, Int, .25, 2-99, 2-101, 2-103

Washer, Lock, Int, .31, 2-35, 2-99, 2-101, 2-103, 2-105

Washer, Lock, Int, .38, 2-103, 2-105

Washer, Lock, Int, #06, Ss, 2-106

Washer, Lock, Int, #08, Ss, 2-101

Washer, Lock, Int, #08, 2-89

Washer, Lock, Int, #10, Ss, 2-101, 2-103, 2-105

Washer, Lock, Int, #10, 2-11, 2-23, 2-99, 2-101, 3-9

Washer, Neo., 4-5

Washer, Poly, 3-81, 3-83

Washer, Rbr, .12 0.66B 1.00D, 3-75

Washer, Rbr, .68idx1.00d, 3-77

Washer, Thrust, 0.61b 1.25d .06, Fgl, 2-59, 2-61, 2-65, 3-33, 3-37, 3-49, 3-51, 3-67, 3-69

Washer-Flt 8.4x17 X2 M8, 2-83

Washer, 2-21, 2-63, 4-3, 4-15

Wavy Washer, 4-6

Wheel, 3.0D 0.88W 0.50B, 2-83

Wheel, 3.0d 1.38w 0.50b, 2-3, 2-4, 2-63

Wheel, 3.0D 1.38W 0.50B, 2-4

Wheel, 4.0d 0.89w 0.64b, 3-99

Wheel, 4.0d 0.98w 0.78b, 2-81

Wheel, Steering, 14.0d, Taper Bore, 2-19

Wheel, 3-91

Wire Assy, 02ga 27.0l Blk .34h /.34h, 2-103, 2-105

Wire Assy, 02ga, 10.0l, Blk, 2-105

Wire Assy, Brush, 4-11

Wire Assy, Jumper Reverse, [515], 3-41, 3-59

Wire, 04ga 09.0l Blk .34ring /.28ring, 2-103

Wire, 04ga 32.0l Blk .31ring /.31ring, 2-103

Wire, 06ga 11.0l Blk .34ring /.28ring, 2-103

Wire, 06Ga 09.0L Blk .34 Ring/.34 Ring, 2-105



TENNANT COMPANY
Technical Publications #15
701 North Lilac Drive
P.O. Box 1452
Minneapolis, MN 55440-9947

POSTAGE WILL BE PAID BY ADDRESSEE

BUSINESS REPLY MAIL
FIRST CLASS MAIL PERMIT NO. 94 MINNEAPOLIS, MN

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES



Fold along dotted lines

Tape here



TENNANT COMPANY
Technical Publications #15
701 North Lilac Drive
P.O. Box 1452
Minneapolis, MN 55440-9947

POSTAGE WILL BE PAID BY ADDRESSEE

BUSINESS REPLY MAIL
FIRST CLASS MAIL PERMIT NO. 94 MINNEAPOLIS, MN

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES



Fold along dotted lines

Tape here